

IMS



Administration Guide: Database Manager

Version 9

IMS



Administration Guide: Database Manager

Version 9

Note

Before using this information and the product it supports, read the information in “Notices” on page 589.

This edition applies to IMS Version 9 (program number 5655-J38) and to all subsequent releases and modifications until otherwise indicated in new editions. This edition replaces SC18-7806-03.

© **Copyright IBM Corporation 1974, 2011.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures	xi
--------------------------	-----------

Tables	xvii
-------------------------	-------------

About This Book	xix
----------------------------------	------------

Prerequisite Knowledge	xix
IBM Product Names Used in This Information	xix
How to Read Syntax Diagrams	xxi
Accessibility Features for IMS Version 9	xxii
Accessibility Features	xxii
Keyboard Navigation	xxiii
Related Accessibility Information	xxiii
IBM and Accessibility	xxiii
How to Send Your Comments	xxiii

Summary of Changes	xxv
-------------------------------------	------------

Changes to the Current Edition of This Book for IMS Version 9	xxv
Changes to This Book for IMS Version 9	xxv
Library Changes for IMS Version 9	xxv
New and Revised Titles	xxvi
Organizational Changes	xxvi
Terminology Changes	xxvii

Part 1. General Information on IMS Database Administration 1

Chapter 1. Introduction to IMS Databases 3

Database Administration Overview	3
DL/I	3
CICS	4
DBCTL and DCCTL	4
Open Database Access (ODBA)	4
Database Administration Tasks	4
Concepts and Terminology	6
How Data Is Stored in a Database	6
The Hierarchy	8
The Database	11
The Database Record	12
The Segment	14
Optional Functions	17
How to Define Your Database to IMS	18
How Application Programs View the Database	18

Chapter 2. Standards and Procedures 19

Establishing Standards and Procedures	19
Naming Conventions	21
General Rules for Establishing Naming Conventions	21
Naming Conventions for HALDB	22

Chapter 3. Review Process 25

The Design Review	25
Role of the Database Administrator	25
General Information about Reviews	25
Design Review 1	26
Design Review 2	26
Design Review 3	27
Design Review 4	27
Code Inspection 1	28
Who Attends Code Inspection 1	28
Code Inspection 2	28
Security Inspection	29
Post-Implementation Review	29

Chapter 4. Security 31

Restricting the Scope of Data Access	31
Restricting Processing Authority	31
Restricting Access by Non-IMS Programs	33
Protecting Data with VSAM Passwords	33
Encrypting Your Database	33
Using the Dictionary to Help Establish Security	33

Part 2. Administering IMS Databases. 35

Chapter 5. Analyzing Data Requirements. 45

Local View	45
Local View 1. Current Roster	46
Local View 2. Schedule of Classes	47
Local View 3. Instructor Skills Report.	48
Local View 4. Instructor Schedules.	49
Designing a Conceptual Data Structure	49
Implementing the Structure with DL/I	51
Assigning Data Elements to Segments	51
Resolving Data Conflicts	52

Chapter 6. Choosing Full-Function Database Types 55

Sequential Storage Method	56
Direct Storage Method.	56
Databases Supported with DBCTL.	56
Databases Supported with DCCTL	57
Performance Considerations Overview	57
HSAM Databases	62
When to Use HSAM	63
How an HSAM Record Is Stored	63
DL/I Calls against an HSAM Database	64
HISAM Databases	66
When to Use HISAM	67
How a HISAM Record is Stored	67
Accessing Segments	70
Inserting Root Segments Using VSAM	70
Inserting Dependent Segments	72
Deleting Segments	74

Replacing Segments	76
Criteria for Selecting HISAM	76
SHSAM, SHISAM and GSAM Databases	76
Situation 1 - Converting from a non-database system to IMS	76
Situation 2 - Passing data.	77
SHSAM Databases	77
SHISAM Databases.	77
SHISAM IMS Symbolic Checkpoint Call.	78
GSAM Databases	78
GSAM IMS Symbolic Checkpoint Call	79
HDAM, PHDAM, HIDAM, and PHIDAM Databases	80
Maximum Sizes of HD Databases	82
DL/I Calls Issuable Against HD Databases	82
When to Use HDAM and PHDAM	83
When to Use HIDAM and PHIDAM	83
What You Need to Know About HD Databases	84
General Format of HD Databases and Use of Special Fields.	94
How HDAM and PHDAM Records Are Stored	97
When Not Enough Root Storage Room Exists	99
How HIDAM and PHIDAM Records Are Stored	99
Accessing Segments	102
Inserting Root Segments.	103
Inserting Dependent Segments	106
Deleting Segments.	107
Replacing Segments	107
How the HD Space Search Algorithm Works	107
Locking Protocols	109
Partitions in PHDAM, PHIDAM, and PSINDEX Databases	112
HALDB Partition Names and Numbers.	112
HALDB Partition Initialization.	115
HALDB Partition Data Sets.	115
HALDB Partition Selection	117
HALDB Partitions and Application Program Processing	118
Managing I/O Errors.	122

Chapter 7. Choosing Fast Path

Database Types 125

Data Entry Databases.	125
DEDB Functions	126
DEDB Areas.	126
Fixed- and Variable-Length Segments in DEDBs	132
Parts of a DEDB Area	133
Root Segment Storage	138
Direct Dependent Segment Storage	138
Sequential Dependent Segment Storage.	139
Enqueue Level of Segment CIs	139
DEDB Space Search Algorithm	141
DEDB Insert Algorithm	141
DEDB Free Space Algorithm	142
Managing Unusable Space with IMS Tools	143
DL/I Calls against a DEDB.	143
Mixed Mode Processing	143
Main Storage Databases (MSDBs).	144
When to Use an MSDB	145
MSDBs Storage.	145
MSDB Record Storage	146
Saving MSDBs for Restart	147

DL/I Calls against an MSDB	147
Rules for Using an SSA	147
Insertion and Deletion of Segments	148
Combination of Binary and Direct Access Methods	148
Position in an MSDB	149
The Field Call	150
Call Sequence Results	150
Fast Path Virtual Storage Option	151
Restrictions Using VSO DEDB Areas	151
Defining a VSO DEDB Area	152
Sharing of VSO DEDB Areas	154
Defining a VSO Cache Structure Name.	156
Acquiring and Accessing Data Spaces for VSO DEDB Areas.	159
Resource Control and Locking.	160
Preopen Areas and VSO Areas in a Data Sharing Environment	161
Input/Output Processing With VSO.	162
Checkpoint Processing	164
VSO Options Across IMS Restart	164
Emergency Restart Processing.	164
VSO Options with XRF	165
Fast Path Synchronization Points	165
Phase 1 - Build Log Record.	166
Phase 2 - Write Record to System Log	166
Managing I/O Errors and Long Wait Times	166
Registering Fast Path Databases in DBRC	167

Chapter 8. Choosing Optional

Database Functions 169

Logical Relationships.	169
Logical Relationship Types	170
Logical Relationship Pointer Types	174
Paths in Logical Relationships.	180
The Logical Child Segment.	181
Segment Prefix Information for Logical Relationships	181
Intersection Data	182
Recursive Structures: Same Database Logical Relationships	184
Defining Sequence Fields for Logical Relationships	188
Control Blocks for Logical Relationships	189
Specifying Logical Relationships in the Physical DBD	190
Specifying Logical Relationships in the Logical DBD	194
Choosing Replace, Insert, and Delete Rules for Logical Relationships.	199
Logical Relationships and HALDB Databases	201
Performance Considerations for Logical Relationships	201
Secondary Indexes.	204
Why Secondary Indexes?	204
Characteristics of Secondary Indexes	205
Segments Used for Secondary Indexes	206
How the Hierarchy Is Restructured	209
How a Secondary Index Is Stored	210
Format and Use of Fields in a Pointer Segment	211

Making Keys Unique Using System Related Fields	214	Using Field-Level Sensitivity When Path Calls Are Issued	242
Suppressing Index Entries: Sparse Indexing	216	Using Field-Level Sensitivity with Logical Relationships	242
How the Secondary Index Is Maintained	217	Using Field-Level Sensitivity with Variable-Length Segments	243
Processing a Secondary Index as a Separate Database	218	General Considerations for Using Field-Level Sensitivity	248
Sharing Secondary Index Databases	219	Multiple Data Set Groups	248
Using the INDICES= Parameter	219	Why Use Multiple Data Set Groups?	249
Using Secondary Indexes with Logical Relationships	221	HD Databases Using Multiple Data Set Groups	250
Using Secondary Indexes with Variable-Length Segments	222	VSAM KSDS CI Reclaim For Full-Function Databases	254
Considerations When Using Secondary Indexing	222	Integrated HALDB Online Reorganization Function	255
How to Specify Use of Secondary Indexing in the DBD	223	Storing XML Data in IMS Databases	255
HALDB Partitioned Secondary Indexes	225		
Choosing Secondary Indexes Versus Logical Relationships	226	Chapter 9. Designing Full-Function Databases	257
When to Use a Secondary Index	226	Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)	257
When to Use a Logical Relationship	226	Estimating the Size of the Root Addressable Area (HDAM or PHDAM Only)	258
Variable-Length Segments	227	Determining Which Randomizing Module to Use (HDAM and PHDAM Only)	259
How to Specify Variable-Length Segments	228	Write Your Own Randomizing Module	259
How Variable-Length Segments Are Stored and Processed	228	Assess the Effectiveness of the Randomizing Module	259
When to Use Variable-Length Segments	230	Choosing HDAM or PHDAM Options	260
What Application Programmers Need to Know about Variable-Length Segments	230	Minimizing I/O Operations	260
Adding or Converting to Variable-Length Segments	230	Maximizing Packing Density	261
Segment Edit/Compression Exit Routine	230	Choosing a Logical Record Length for a HISAM Database	261
Things to Consider Before Using the Segment Edit/Compression Exit Routine	232	Logical Record Length Considerations	261
How to Specify the Segment Edit/Compression Exit Routine	233	Rules to Observe	263
Converting to the Segment Edit/Compression Exit Routine	233	Calculating How Many Logical Records Are Needed to Hold a Database Record	264
Data Capture Exit Routines	233	Specifying Logical Record Length	264
DBD Parameters for Data Capture Exit Routines	234	Choosing a Logical Record Length for HD Databases	264
Call Sequence of Data Capture Exit Routines	235	Determining the Size of CIs and Blocks	264
Data Passed To and Captured By the Data Capture Exit Routine	236	Recommendations for Specifying Sizes for Blocks, CIs, and Records	265
Data Capture Call Functions	237	Buffering Options	265
Cascade Delete When Crossing Logical Relationships	237	Multiple Buffers in Virtual Storage	266
Data Capture Exit Routines and Logically Related Databases	238	Subpool Buffer Use Chain	266
Converting to Data Capture Exit Routines	238	The Buffer Handler	266
Field-Level Sensitivity	238	Background Write Option	266
Using Field-Level Sensitivity as a Mapping Interface	239	Shared Resource Pools	266
Using Field-Level Sensitivity with Variable-Length Segments	239	Using Separate Subpools	267
How to Specify Use of Field-Level Sensitivity in the DBD and PSB	239	Hiperspace Buffering	267
Retrieving Segments Using Field-Level Sensitivity	240	Buffer Size	267
Replacing Segments Using Field-Level Sensitivity	241	Buffer Numbers	267
Inserting Segments Using Field-Level Sensitivity	241	VSAM Buffer Sizes	268
Using Field-Level Sensitivity When Fields Overlap	242	OSAM Buffer Sizes	268
		Specifying Buffers	269
		OSAM Sequential Buffering	270
		Sequential Buffering Introduction	270
		Benefits of Sequential Buffering	271
		Flexibility of SB Use	271
		How SB Buffers Data	272
		Virtual Storage Considerations for SB	273

How to Request the Use of SB	274
VSAM Options	277
Optional Functions Specified in the OPTIONS Control Statement	277
Optional Functions Specified in the POOLID, DBD, and VSRBF Control Statements	279
Optional Functions Specified in the Access Method Services DEFINE CLUSTER Command	279
OSAM Options	281
Dump Option (DUMP Parameter)	281
Deciding Which FIELD Statements to Code in the DBD	281
Planning for Maintenance	281

Chapter 10. Designing Fast Path

Databases 283

Designing a Data Entry Database (DEDB)	283
DEDB Design Guidelines	283
DEDB Area Design Guidelines	284
Determining the Size of the CI	285
Determining the Size of the UOW	286
SDEP CI Preallocation and Reporting	286
Processing Option P (PROCOPT=P)	287
DEDB Randomizing Routine Design.	288
Multiple Copies of an Area Data Set.	288
Record Deactivation	289
Physical Child Last Pointers	289
Subset Pointers	289
Designing a Main Storage Database (MSDB)	290
Calculating Virtual Storage Requirements for an MSDB	290
Understanding Resource Allocation, a Key to Performance.	291
Designing to Minimize Resource Contention	292
Choosing MSDBs to Load and Page-Fix	294
Auxiliary Storage Requirements for an MSDB	295
High-Speed Sequential Processing (HSSP)	296
Why HSSP?	296
Limitations and Restrictions When Using HSSP	296
Using HSSP	297
HSSP Processing Option H (PROCOPT=H)	297
Image-Copy Option	298
UOW Locking	298
Private Buffer Pools	298
Designing a DEDB or MSDB Buffer Pool	298
Buffer Requirements	299
Normal Buffer Allocation (NBA)	299
Overflow Buffer Allocation (OBA)	299
Fast Path Buffer Allocation Algorithm	300
System Buffer Allocation (DBFX)	300
Determining the Fast Path Buffer Pool Size	300
Fast Path Buffer Performance Considerations	300
The NBA Limit and Sync Point	301
The DBFX Value and the Low Activity Environment	301
Designing a DEDB Buffer Pool in the DBCTL Environment	302
Buffer Requirements in a DBCTL Environment	302
Normal Buffer Allocation for BMPs	302
Normal Buffer Allocation for CCTL Regions and Threads	303

Overflow Buffer Allocation for BMPs	303
Overflow Buffer Allocation for CCTL Threads	303
Fast Path Buffer Allocation Algorithm for BMPs	303
Fast Path Buffer Allocation Algorithm for CCTL Threads	304
System Buffer Allocation (SBA)	304
Determining the Size of the Fast Path Buffer Pool for DBCTL	304
Fast Path Buffer Performance Considerations for DBCTL	305
The NBA/FPB Limit and Sync Point in a DBCTL Environment	305
Low Activity and the DBFX Value in a DBCTL Environment	305
A Note on Fast Path Buffer Allocation in IMS Regions	306

Chapter 11. Implementing Database

Design 307

Coding Database Descriptions as Input for the DBDGEN Utility	307
The DBD Statement	308
The DATASET Statement	308
The SEGM Statement.	309
The FIELD Statement.	309
The LCHILD Statement	309
The XDFLD Statement	310
The DBDGEN and END Statements	310
Implementing HALDB Design.	310
Creating HALDB databases with the HALDB Partition Definition Utility	310
Allocating an ILDS	316
Coding Program Specification Blocks as Input to the PSBGEN Utility	317
The Alternate PCB Statement	318
The Database PCB Statement	318
The SENSEG Statement	319
The SENFLD Statement	319
The PSBGEN Statement	320
The END Statement	320
Building the Application Control Blocks (ACBGEN)	320
Defining Generated Program Specification Blocks for SQL Applications	321

Chapter 12. Developing Test

Databases 323

Test Requirements	323
What Kind of Database?	324
What Kind of Sample Data?	324
What Kind of Application Program?	324
Designing, Creating, and Loading a Test Database	324
Using Testing Standards.	324
Using IBM Programs to Develop a Test Database	325

Chapter 13. Loading Databases . . . 327

Estimating the Minimum Size of the Database	327
Step 1. Calculate the Size of an Average Database Record	327

Step 2. Determine Overhead Needed for CI Resources	329
Step 3. Determine the Number of CIs or Blocks Needed	330
Step 4. Determine the Number of Blocks or CIs Needed for Free Space	333
Step 5. Determine the Amount of Space Needed for Bit Maps.	333
Allocating Data Sets	334
Allocating OSAM Data Sets	334
Example of Allocating Multi-Volume OSAM Data Sets on Non-SMS Managed DASD	335
Example of Allocating Multi-Volume OSAM Data Sets on SMS-Managed DASD	336
Cautions When Allocating OSAM Data Sets	337
Writing a Load Program.	338
The Load Process	338
Status Codes for Load Programs	340
Using SSAs in a Load Program	341
Loading a Sequence of Segments with the D Command Code	341
Two Types of Initial Load Program	341
JCL for the Initial Load Program	348
Loading a HISAM Database	348
Loading a SHISAM Database	349
Loading a GSAM Database.	349
Loading an HDAM or a PHDAM Database	349
Loading a HIDAM or a PHIDAM Database	349
Loading a Database with Logical Relationships or Secondary Indexes.	349
Loading Fast Path Databases	349
Loading an MSDB.	349
Loading a DEDB	350
Loading Sequential Dependent Segments	352

Chapter 14. Monitoring Databases . . . 353

IMS Monitor	353
Monitoring Fast Path Systems	355
Fast Path Log Analysis Utility	355
Interpreting Fast Path Analysis Reports.	357

Chapter 15. Tuning Databases 359

Reorganizing the Database	360
When You Should Reorganize	360
Reorganizing Databases Offline	360
Protecting Your Database During an Offline Reorganization	361
Offline Reorganization Utilities	361
Procedures for Offline Database Reorganizations	375
Reorganizing HALDBs	376
HALDB Offline Reorganization	377
HALDB Online Reorganization	382
The HALDB Self-Healing Pointer Process	401
Changing DL/I Access Methods	406
Changing the DL/I Access Method From HISAM to HIDAM	407
Changing the DL/I Access Method From HISAM to HDAM.	407
Changing the DL/I Access Method From HIDAM to HISAM	409

Changing the DL/I Access Method From HIDAM to HDAM	409
Changing the DL/I Access Method From HDAM to HISAM.	410
Changing the DL/I Access Method From HDAM to HIDAM	411
Changing the DL/I Access Method From HDAM to PHDAM and HIDAM to PHIDAM	413
Procedure for Changing to DEDBs	416
Changing the Hierarchic Structure	416
Changing the Sequence of Segment Types	416
Combining Segments.	417
Procedure for Changing the Hierarchic Structure	417
Changing Direct-Access Storage Devices	418
Tuning OSAM Sequential Buffering	418
Well-Organized Database	418
Badly-Organized Database	419
Ensuring a Well-Organized Database	419
Adjusting HDAM and PHDAM Options	419
Adjusting Buffers	420
VSAM Buffers	420
OSAM Buffers	422
Procedure for Adjusting VSAM and OSAM Database Buffers	422
OSAM Sequential Buffering	423
Procedure for Adjusting Sequential Buffers	423
Adjusting VSAM Options	423
Procedure for Adjusting VSAM Options Specified in the OPTIONS Control Statement.	424
Procedures for Adjusting VSAM Options Specified in the Access Method Service DEFINE CLUSTER Command.	424
Adjusting OSAM Options	425
Changing the Amount of Space Allocated	425
Changing Operating System Access Methods.	426
Changing the Number of Data Set Groups	426
Tuning Fast Path Systems	430
Transaction Volume to a Particular Fast Path Application Program	431
DEDB Structure Considerations	431
Usage of Buffers from a Buffer Pool	431
Contention for DEDB Control Interval (CI) Resources	433
Exhaustion of DEDB DASD Space	434
Utilization of Available Real Storage.	434
Synchronization Point Processing and Physical Logging	434
Contention for Output Threads	434
Overhead Resulting from Reprocessing.	435
Dispatching Priority of Processor-Dominant and I/O-Dominant Tasks	435
DASD Contention Due to I/O on DEDBs	435
Resource Locking Considerations with Block Level Sharing	435
Resource Name Hash Routine.	436

Chapter 16. Modifying Databases . . . 437

Modifying Record Segments	437
Adding Segment Types	438
Deleting Segment Types	439
Moving Segment Types	440

Changing Segment Size	440
Changing Data in a Segment (Except for Data at the End of a Segment)	441
Changing the Position of Data in a Segment	441
Changing the Name of a Segment	442
Adding Logical Relationships	442
Example 1. DBX Exists, DBY Is to Be Added	443
Example 2. DBX and DBY Exist, DBZ Is to Be Added	444
Example 3. DBX and DBY Exist, DBZ Is to Be Added	445
Example 4. DBX and DBY Exist, DBZ Is to Be Added	445
Example 5. DBX Exists, DBY Is to Be Added	445
Example 6. DBX and DBY Exist, DBZ Is to Be Added	446
Example 7. DBX and DBY Exist, DBZ Is to Be Added	448
Example 8. DBX and DBY Exist, DBZ Is to Be Added	450
Example 9. DBY Exists, DBZ Is to Be Added	450
Example 10. DBY Exists, DBZ Is to Be Added	451
Example 11. DBX and DBY Exist, DBZ Is to Be Added	452
Example 12. DBX and DBY Exist, DBZ Is to Be Added	452
Example 13. DBX and DBY Exist, Segment Y and DBZ Are to Be Added	453
Steps in Reorganizing a Database to Add a Logical Relationship	454
Some Restrictions on Modifying Existing Logical Relationships	457
Summary on Use of Utilities When Adding Logical Relationships	458
Adding a Secondary Index	459
Adding or Converting to Variable-Length Segments	459
Method 1. Converting Segments or a Database	459
Method 2. Converting Segments or a Database	460
Converting to the Segment Edit/Compression Exit Routine	460
Converting Databases for Data Capture Exit Routines and Asynchronous Data Capture	461
Converting a Logical Parent Concatenated Key from Virtual to Physical or Physical to Virtual	462
Using the Online Change Function	462
Online Change, DEDBs, and Availability of IFP and MPP Regions	463
Online Change and DEDB Randomizer and Exit Routines	465
Making Online Changes at the DEDB and Area Level	469
Extending DEDB Independent Overflow Online	472
Modifying HALDB Databases	474
What You Need to Know About Modifying HALDB Databases	475
Changing the High Key of a Partition	484
Adding Partitions to a HALDB	485
Disabling and Enabling HALDB Partitions	489
Deleting Partitions From a HALDB	491
Changing the Name of a HALDB Partition	496

Modifying the Number of Root Anchor Points in a PHDAM Partition	496
Modifying HALDB Segments	497
Modifying HALDB Partition Data Sets	497
Exit Routine Modifications and HALDBs	498
Adding a Secondary Index to a HALDB	500
Modifying a HALDB PSINDEX	501

Part 3. Appendixes 503

Appendix A. Meaning of Bits in the Delete Byte 505

Bits in the Delete Byte	505
Bits in the Prefix Descriptor Byte	505

Appendix B. Insert, Delete, and Replace Rules for Logical Relationships 507

Specifying Rules in the Physical DBD	507
Insert Rules	508
The Logical Child Insert Call	508
Status Codes	509
Insert Rules Summary	511
Replace Rules	511
The Replace Call	511
Replace Rule Status Codes	512
Replace Rules Summary	514
Using the DLET Call	516
Physical and Logical Deletion	516
Deleting Concatenated Segments	517
The Third Access Path	517
Use of the Delete Byte	518
Issuing the Delete Call	518
Status Codes	519
DASD Space Release	519
Delete Rules	519

Appendix C. Using OSAM as the Access Method 547

Appendix D. Correcting Bad Pointers 549

Appendix E. HALDB Partition Definition Utility 551

The Partitioned Databases Panel	552
Accessing Help Information	553
Exiting the Utility	553
Displaying the ISPF Member List	554
Opening HALDB Partitions	555
Automatic Partition Definition	561
Manual Partition Definition	562
Defining Data Set Group Information	567
Displaying the List of Defined Partitions	568
The Partition List Line Commands	572
The Partition List Action Bar	572
Change All Partitions	574
Opening Database Information	576
Deleting Database Information	577

Exporting Database Information	577	Attributes of Automatically-Created Output Data	
Importing Database Information	578	Sets	585
Displaying the IMS Concatenation	578		
Selecting an IMS Configuration Using the Partition			
Definition Utility	579		
Using Batch to Export or Import Partition			
Information	581		
DSPXRUN Command Syntax	582	Notices	589
DSPXRUN EXPORT Sample Output.	583	Programming Interface Information	591
DSPXRUN IMPORT Sample Output.	583	Trademarks	591
		Bibliography.	593
Appendix F. Output Data Set		IMS Version 9 Library	593
Requirements for HALDB Online		Supplementary Publications	594
Reorganization.	585	Publication Collections	594
HALDB Online Reorganization Requirements for		Accessibility Titles Cited in This Library	594
Existing Output Data Sets	585	Index	595

Figures

1. Segment Types in the School Database Record	7	38. A Logical View of a HIDAM and a PHIDAM	82
2. Segment Occurrences in a School Database Record	8	39. Example Database Record.	83
3. Hierarchic Sequence of Segment Types for School Database	9	40. Example Database Record for Illustrating Pointers.	85
4. Hierarchic Sequence of Segment Occurrences for School Database.	10	41. Hierarchic Forward Pointers	85
5. Levels in the Database	11	42. Hierarchic Forward and Backward Pointers	86
6. An Example of a Medical Database Record	12	43. Physical Child First Pointers	87
7. Example of Records That Can Be Stored in the School Database	13	44. Physical Child First and Last Pointers.	88
8. Records that Cannot be Stored in the School Database	13	45. Specifying PCF and PCL Pointers	89
9. Format of Fixed-Length Segments	14	46. Physical Twin Forward Pointers.	90
10. Format of Variable-Length Segments	14	47. Physical Twin Forward and Backward Pointers	91
11. Three Segment Occurrences and Three Data Elements of the STUDENT Segment	16	48. Mixing Pointers	93
12. Example of STUDENT Segments Stored in Alphabetic Order	16	49. Format of an HD Database and Special Fields in It	94
13. DBD for Payroll Database.	32	50. Bit Map for HD Databases	95
14. Payroll Database Record without a Mask	32	51. An FSEAP	96
15. PCB for Payroll Database	32	52. An FSE	96
16. Payroll Database Record with SALARY Segment Masked.	33	53. An HDAM or PHDAM Anchor Point Area	97
17. Current Roster Conceptual Data Structure	47	54. Two Example HD Database Records	97
18. Schedule of Classes Conceptual Data Structure	48	55. HDAM or PHDAM Database Records in Storage	98
19. Instructor Skills Report Conceptual Data Structure	48	56. HIDAM or PHIDAM Database Records in Storage	100
20. Instructor Schedules Conceptual Data Structure	49	57. Format of an Index Segment	101
21. Education Data Structures.	51	58. HIDAM or PHIDAM Index Databases	101
22. Education Hierarchies	53	59. Specifying PTR=T or PTR=H for Root Segments in a HIDAM Database	102
23. Bidirectional Logical Relationships	53	60. How Dependent Segments Are Found Using PCF and PTF Pointers	103
24. Example HSAM Database.	63	61. Inserting a Root Segment into a HIDAM or PHIDAM Database	104
25. Example HSAM Database Stored in Blocks	64	62. Updating the Space Management Fields in an HDAM or PHDAM Database	106
26. GU Calls against an HSAM Database	65	63. Defining a Variable-Length Segment	133
27. Updating an HSAM Database	66	64. Defining a Fixed-Length Segment.	133
28. Example HISAM Database	68	65. Parts of a DEDB Area in Storage	134
29. Example HISAM Database in Storage.	69	66. CI Format.	135
30. Format of a Logical Record in a HISAM Database	70	67. Root Segment Format (with Sequential and Direct Dependent Segments with Subset Pointers)	136
31. Inserting a Root Segment into a HISAM Database (Free Logical Record Exists in the CI)	71	68. Sequential Dependent Segment Format	137
32. Inserting a Root Segment into a HISAM Database (No Free Logical Record Exists in the CI)	72	69. Direct Dependent Segment Format	137
33. Inserting a Dependent Segment into a HISAM Database (Space Exists in the Logical Record)	73	70. DEDB Structure Example	140
34. Inserting a Dependent Segment into a HISAM Database (No Space Exists in the Logical Record)	74	71. Extending a UOW to Use Independent Overflow	142
35. The Hierarchic Segment Layout on the Database	75	72. MSDB Pointers	145
36. Accessing a HISAM Segment That Hierarchically Follows Deleted Segments.	75	73. MSDBINIT Record Format	146
37. A Logical View of an HDAM and a PHDAM Database	81	74. Sequence of the Four MSDB Organizations	147
		75. ECNT and MSDB Storage Layout.	149
		76. Example of Updating a Policy with New Structures.	157
		77. Defining a VSO Area Coupling Facility Structure Name in DBRC	158
		78. Examples of Defining Private Buffer Pools	158
		79. A Simple Logical Relationship	170
		80. Unidirectional Logical Relationship	171

81. Two Unidirectional Logical Relationships	172	118. Secondary Index Structure Indexed in	
82. Bidirectional Physically Paired Logical Relationship	172	Secondary Index on Segment G	210
83. Bidirectionally Virtually Paired Logical Relationship	173	119. Examples of Source Segments for Each Student	211
84. Direct Logical Parent (LP) Pointer.	175	120. Example of a Logical Record Containing a Pointer Segment	211
85. Symbolic Logical Parent (LP) Pointer	176	121. Secondary Index Entry for HALDB	211
86. Logical Child First (LCF) Pointer (Used in Virtual Pairing Only)	177	122. Examples of Several Source Segments for Each Student.	212
87. Physical Parent (PP) Pointer	178	123. Database Record Showing the Source and Target for Secondary Indexes	215
88. Logical Twin Forward (LTF) Pointer (Used in Virtual Pairing Only)	179	124. Concatenated Key of the STUDENT Segment	215
89. Self-healing Pointers	179	125. Databases for First Example of the INDICES= Parameter.	220
90. Defining a Physical Parent to Logical Parent Path in a Logical Database	180	126. PCB for the First Example of the INDICES= Parameter.	220
91. Defining a Logical Parent to Physical Parent Path in a Logical Database	180	127. Application Program Call Issued for the First Example of the INDICES= Parameter	220
92. Format of a Concatenated Segment Returned to User I/O Area	181	128. Databases for Second Example of the INDICES= Parameter	221
93. Fixed Intersection Data	183	129. PCB for the Second Example of the INDICES= Parameter	221
94. Variable Intersection Data	184	130. Application Program Call Issued for the Second Example of the INDICES= Parameter .	221
95. Model 1 Components and Subassemblies	186	131. Databases for Secondary Indexing Example	224
96. Database Records for the Model 1 Bicycle	187	132. EDUC DBD for Secondary Indexing	225
97. Extra Database Records Required for the Model 2 Bicycle.	188	133. SINDX DBD for Secondary Indexing	225
98. Relationship of Control Blocks When a Logical Relationship Is Used	190	134. Fields in the CUSTOMER Segment	226
99. Layouts of Segments Used in the Examples	191	135. Assembly and Parts as Examples to Demonstrate Segments Logical Relationship .	227
100. Physical DBDs for Unidirectional Relationship Using Symbolic Pointing.	191	136. Example of a Segment That Appears to Have Two Parents	227
101. Logical Data Structure for a Unidirectional Relationship Using Symbolic Pointing	194	137. How Variable-Length Segments Are Specified	228
102. Definition of Crossing a Logical Relationship	196	138. Format of HISAM Variable-Length Segments	228
103. The First Logical Relationship Crossed in a Hierarchic Path of a Logical Database	197	139. Format of HDAM, PHDAM, HIDAM or PHIDAM Variable-Length Segments	229
104. Logical Database Hierarchy Enabled by Crossing the First Logical Relationship	198	140. DBD and PSB Coding for Field-Level Sensitivity	240
105. Single Concatenated Segment Type Defined Multiple Times with Different Combinations of Key and Data Sensitivity.	199	141. DBD Example for Field-Level Sensitivity	240
106. Example of the Replace, Insert, and Delete Rules	200	142. PSB Example for Field-Level Sensitivity	240
107. Example of the Replace, Insert, and Delete Rules: Before and After	200	143. Example of a Retrieve Call	241
108. Example of a Unidirectional Logical Relationship	203	144. Example of a REPL Call	241
109. Example of a Logical Structure.	203	145. Example of an ISRT Call	242
110. Database Record in Educational Database	205	146. Example of a Missing Field on a Retrieve Call	244
111. Example of a Database Record Unique Key Field	205	147. DBD Example for Field-Level Sensitivity with Variable-Length Segments	244
112. Segments Used for Secondary Indexes	206	148. PSB Example for Field-Level Sensitivity with Variable-Length Segments	244
113. Format of Pointer Segments Contained in the Secondary Index Database	207	149. First Example of a Missing Field on a Replace Call.	245
114. Education Database Record	208	150. Second Example of a Missing Field on a Replace Call	246
115. How a Segment Is Accessed Using a Secondary Index	208	151. Example of a Missing Field on an Insert Call	246
116. Call an Application Issues When a Secondary Index Is Used	208	152. Example of a Partially Present Field on a Retrieval Call	247
117. Physical Database Structure with Target Segment G	209	153. Example of a Partially Present Field on a REPL Call.	248
		154. Hierarchy of Applications That Need to Access INSTR and LOC Segments	249
		155. Database Record Split into Two Database Groups	250

156. Example of How to Divide an HD Database Record	251	197. Steps for Reorganizing HALDB Partitions When Logical Relationships or Secondary Indexes Exist.	365
157. Connecting Segments in Multiple Data Set Groups Using Physical Child First Pointers	251	198. HISAM Reorganization Unload Utility (DFSURUL0).	365
158. HD Database Record in Storage When Multiple Data Set Groups Are Used	252	199. HISAM Reorganization Reload Utility (DFSURRL0).	366
159. First Example of Data Set Groups	253	200. HD Reorganization Unload Utility (DFSURGU0).	366
160. HDAM DBD for First Example of Data Set Groups	253	201. HD Reorganization Reload Utility (DFSURGL0).	367
161. PHDAM DBD for First Example of Data Set Groups	253	202. Database Prereorganization Utility (DFSURPR0).	368
162. Second Example of Data Set Groups	254	203. Database Scan Utility (DFSURGS0).	369
163. HDAM DBD for Second Example of Data Set Groups	254	204. Database Prefix Resolution Utility (DFSURG10).	370
164. PHDAM DBD for Second Example of Data Set Groups	254	205. Database Prefix Update Utility (DFSURGP0).	371
165. Specifying the RMNAME keyword	260	206. HISAM Reorganization Unload and Reload Utilities Used for Create, Merge, or Replace Secondary Indexing Operations	372
166. Database Record for Logical Record Examples	262	207. HISAM Reorganization Unload Utility Used for Extract Secondary Indexing Operations.	373
167. Short Logical Records	262	208. Database Surveyor Utility (DFSPRSUR).	374
168. Long Logical Records	262	209. Partial Database Reorganization Utility (DFSPRCT1).	375
169. Database Record for Logical Records Example	263	210. Offline Reorganization of a HALDB database	378
170. Logical Records Example with Two Read Operations	263	211. Example: The HD Reorganization Unload Utility Control Statement to Unload One Partition	379
171. First Example MSDB Record Held in Exclusive Mode	293	212. Example: The HD Reorganization Unload Utility Control Statement to Unload Multiple Partitions	379
172. Second Example MSDB Record Held in Exclusive Mode	293	213. Example: Sample JCL to Unload a HALDB Partition	380
173. The DBD Generation Process	308	214. Example: IEC161I message during reload	380
174. Structure of DBD Generation Input	308	215. Example: JCL to Reload a HALDB Partition	381
175. Example of a Date Field within a Segment Defined as Three 2-Byte Fields and One 6-Byte Field	309	216. Example RECON Listing: DB Record for a HALDB in Cursor-Active Status	384
176. Partition Default Information	312	217. The Relationship between Input Data Sets and Output Data Sets during the Online Reorganization of a HALDB Partition	385
177. Change Partition Panel	314	218. Normal Processing Steps of HALDB Online Reorganization	387
178. Sample Command to Define an ILDS	317	219. Processing Steps for an Interrupted Online Reorganization of a HALDB Partition	394
179. The PSB Generation Process	318	220. HALDB Pointer Before a Reorganization	401
180. Structure of PSB Generation Input	318	221. HALDB Pointer After a Reorganization	403
181. Example of a SENSEG Relationship	319	222. HALDB Pointer After the Self-Healing Process.	404
182. The ACB Generation Process	320	223. HDAM and HIDAM Databases Before and After Changing to PHDAM and PHIDAM.	413
183. Segment Sizes and Average Segment Occurrences	329	224. Utility Sequence of Execution When Making Database Changes during Reorganization	428
184. JCL allocating a multi-volume OSAM data set on non-SMS managed DASD	336	225. Where Segment Types Can Be Added in a Database Record	438
185. Example JCL for Allocating a Multi-Volume OSAM Data Set on SMS-Managed DASD	336	226. DBX Exists, DBY Is to Be Added	443
186. Example of ALLOCATE Command for Allocating a Multi-Volume OSAM Data Set on SMS-Managed DASD.	337	227. DBX and DBY Exist, DBZ Is to Be Added	444
187. The Load Process	338	228. DBX and DBY Exist, DBZ Is to Be Added	445
188. Loading a Database Using Existing Files	339	229. DBX and DBY Exist, DBZ Is to Be Added	445
189. Basic Initial Load Program Logic	343	230. DBX Exists and DBY Is to Be Added	445
190. Sample Load Program	344	231. DBX and DBY Exist, DBZ Is to Be Added	446
191. Restartable Initial Load Program Logic	346		
192. Sample Restartable Initial Load Program	347		
193. JCL used to initially load a database	348		
194. IMS Monitor Works	354		
195. Fast Path Transaction Event Timings	356		
196. Steps in Reorganizing When Logical Relationships or Secondary Indexes Exist	364		

232.	DBX and DBY Exist, DBZ Is to Be Added	449	271.	Logical Parent, Physical Pairing—Physical Delete Rule Example: Calls and Status Codes	522
233.	DBX and DBY Exist, DBZ Is to Be Added	450	272.	Logical Parent, Virtual Pairing—Logical Delete Rule Example	522
234.	DBY Exists, DBZ Is to Be Added	451	273.	Logical Parent, Virtual Pairing—Logical Delete Rule Example: Before and After	523
235.	DBY Exists, DBZ Is to Be Added	452	274.	Logical Parent, Virtual Pairing—Logical Delete Rule Example: Calls and Status Codes	523
236.	DBX and DBY Exist, DBZ Is to Be Added	452	275.	Logical Parent, Physical Pairing—Logical Delete Rule Example	524
237.	DBX and DBY Exist, DBZ Is to Be Added	453	276.	Logical Parent, Physical Pairing—Logical Delete Rule Example: Before and After	524
238.	DBX and DBY Exist, Segment Y and DBZ Are to Be Added	453	277.	Logical Parent, Physical Pairing—Logical Delete Rule Example: Calls and Status Codes	524
239.	The Change in Pairing from Virtual to Physical	458	278.	Logical Parent, Virtual Pairing—Virtual Delete Rule Example	525
240.	The Position Change of a Real Logical Child from One Logically Related Database to Another	458	279.	Logical Parent, Virtual Pairing—Virtual Delete Rule Example: Before and After	525
241.	Adding a Database Using Online Change	469	280.	Logical Parent, Virtual Pairing—Virtual Delete Rule Example: Calls and Status Codes	525
242.	Changing a high key with key range partitioning	479	281.	Logical Parent, Physical Pairing—Virtual Delete Rule Example	526
243.	Partition IDs after deleting and redefining a partition	483	282.	Logical Parent, Physical Pairing—Virtual Delete Rule Example: Before and After	526
244.	Adding a partition with key range partitioning	486	283.	Logical Parent, Physical Pairing—Virtual Delete Rule Example: Calls and Status	526
245.	Adding a higher key partition with key range partitioning	488	284.	Physical Parent, Virtual Pairing—Bidirectional Virtual Example.	527
246.	Deleting a partition with key range partitioning	493	285.	Physical Parent, Virtual Pairing—Bidirectional Virtual Example: Before and After	527
247.	Deleting the lowest key partition with key range partitioning	494	286.	Deleting Last Logical Child Deletes Physical Parent	527
248.	Insert, Delete, and Replace Rules in the DBD	507	287.	Logical Child, Virtual Pairing—Physical Delete Rule Example	528
249.	Physical Insert Rule Example	509	288.	Logical Child, Virtual Pairing—Physical Delete Rule Example: Deleting the Logical Child	528
250.	Paths for Physical Insert Rule Example	509	289.	Logical Child, Virtual Pairing—Physical Delete Rule Example: Before and After	529
251.	ISRT and Status Codes for Physical Insert Rule Example	509	290.	Logical Child, Virtual Pairing—Logical Delete Rule Example	529
252.	Logical Insert Rule Example	510	291.	Logical Child, Virtual Pairing—Logical Delete Rule Example: Calls and Status	530
253.	ISRT and Status Codes for Logical Insert Rule Example	510	292.	Logical Child, Virtual Pairing—Logical Delete Rule Example: Before and After	530
254.	Virtual Insert Rule Example.	510	293.	Logical Child, Physical Pairing—Physical or Logical Delete Rule Example	531
255.	ISRT and Status Codes for Virtual Insert Rule Example	511	294.	Logical Child, Physical Pairing—Physical or Logical Delete Rule Example: Calls and Status	531
256.	Physical Replace Rule Example	512	295.	Logical Child, Physical Pairing—Physical or Logical Delete Rule Example: Before and After	532
257.	Calls and Status Codes for Physical Replace Rule Example	512	296.	Logical Child, Virtual Pairing—Virtual Delete Rule Example	532
258.	Logical Replace Rule Example	513	297.	Logical Child, Virtual Pairing—Virtual Delete Rule Example: Calls and Status	533
259.	Calls and Status Codes for Logical Replace Rule Example	513	298.	Logical Child, Virtual Pairing—Virtual Delete Rule Example: Before and After	533
260.	Virtual Replace Rule Example	513	299.	Logical Child, Physical Pairing—Virtual Delete Rule Example	534
261.	Calls and Status Codes for Virtual Replace Rule Example	514			
262.	Physical Databases for Replace Rules Tables	514			
263.	Logical Views for Replace Rules Table	514			
264.	Concatenated Segment Relationships	517			
265.	Third Access Path Example	518			
266.	Logical Parent, Virtual Pairing—Physical Delete Rule Example	521			
267.	Logical Parent, Physical Pairing—Physical Delete Rule Example: Before and After	521			
268.	Logical Parent, Physical Pairing—Physical Delete Rule Example: Database Calls.	521			
269.	Logical Parent, Physical Pairing—Physical Delete Rule Example	521			
270.	Logical Parent, Physical Pairing—Physical Delete Rule Example: Before and After	522			

300. Logical Child, Physical Pairing—Virtual Delete Rule Example: Calls and Status	534		318. Partitioned Database Information (DSPXPOA)	556
301. Logical Child, Physical Pairing—Virtual Delete Rule Example: Before and After	535		319. Partition Default Information (DSPXPCA)	558
302. (Part 1 of 5). Example of Deleted Segments Accessibility	536		320. Automatic Definition Status.	562
303. (Part 2 of 5). Example of Deleted Segments Accessibility	537		321. Change Partition (DSPXPPA)	564
304. (Part 3 of 5). Example of Deleted Segments Accessibility	537		322. Selection String Editor (DSPXPKE)	566
305. (Part 4 of 5). Example of Deleted Segments Accessibility: Database Calls	538		323. Change Data Set Groups, Part 1 (DSPXPGA)	567
306. (Part 5 of 5). Example of Deleted Segments Accessibility	538		324. Change Data Set Groups, Part 2 (DSPXPGB)	568
307. Example of Abnormal Termination	539		325. Change a Data Set Group (DSPXPGC)	568
308. Example of Violation of the Physical Delete Rule	540		326. Database Partitions Panel, Sorted by Partition ID (DSPXPLA)	569
309. Example of Violation of the Physical Delete Rule: Database Calls	540		327. Database Partitions Panel, Sorted by Key (DSPXPLB)	570
310. Example of Treating the Physical Delete Rule as Logical.	541		328. Database Partitions Panel, Sorted by Name (DSPXPLC)	571
311. Example of Treating the Physical Delete Rule as Logical: Database Calls	541		329. File Action Bar Choices	572
312. Insert, Delete, and Replace Rules Summary	544		330. Edit Action Bar Choices	573
313. Partitioned Databases panel (DSPXPAA)	552		331. Searching the Partition List	574
314. Help Action Bar Choices	553		332. View Action Bar Choices	574
315. Exit Confirmation Panel	554		333. Change Partition Panel (DSPXPPB)	575
316. ISPF Member List Display (DSPXPAM)	554		334. Change Data Set Groups, Part 1 (DSPXPGA)	576
317. File Action Bar Choices	555		335. Partitioned Database Information (DSPXPOA)	576
			336. Delete a Database (DSPXPDA)	577
			337. Export a Database (DSPXPEA)	577
			338. Import a Database (DSPXPIA)	578
			339. The IMS Concatenation (ISRDDN)	579
			340. User Configurations (DSPXPMB)	580
			341. Configuration Details Panel (DSPXPMC)	580
			342. Sample JCL for Batch Import	581

Tables

1. Licensed Program Full Names and Short Names	xix	21. File Names and Data Sets to Allocate	311
2. Types of IMS Databases and the z/OS Access Methods They Can Use	11	22. Minimum and maximum number of data sets for HALDB partitions.	315
3. Example of Naming Conventions	22	23. Required Fields and Pointers in a Segment's Prefix	328
4. Suffixes for HALDB Ddnames by Data Set Type	23	24. Calculating the Average Database Record Size	329
5. Combined Mappings for Local Views	50	25. VSAM Control Fields	330
6. Keys and Associated Data Elements	51	26. Monitor Data for Fast Path Transactions	357
7. Summary of Database Characteristics and Options for Database Types	61	27. IMS Versions that Can Access HALDBs that Are Capable of Being Reorganized Online	388
8. Comparison of SHSAM, SHISAM, and GSAM Databases	80	28. Data Set Name Examples for HALDB Online Reorganization	391
9. Maximum Sizes for HDAM, HIDAM, PHDAM, and PHIDAM Databases	82	29. Mapping Startup Tasks to Commands for HALDB Online Reorganization	391
10. CI Format.	136	30. Mapping Monitoring Tasks to Commands for HALDB Online Reorganization	392
11. Root Segment Format.	136	31. Mapping Modifying and Tuning Tasks to Commands for HALDB Online Reorganization	392
12. Sequential Dependent Segment Format	137	32. Steps in Reorganizing a Database to Add a Logical Relationship	455
13. Direct Dependent Segment Format	137	33. Examples of HALDB modifications, where you specify them, and what their scope is	476
14. MSDBINIT Record Format	146	34. Replace Rules for Logical View 1	515
15. Required CFRM List Structure Storage Sizes for CFLEVEL=12	167	35. Replace Rules for Logical View 2	515
16. Parts List for the Model 1 Bicycle Example	185	36. Specifying Insert, Delete, and Replace Rules	544
17. Delete Rule Restrictions for Logically Related Databases Using Data Capture Exit Routines	238	37. Length and Format of an OSAM DEB	547
18. Examples of Multiple Data Set Grouping	250		
19. Levels of Enqueue of an MSDB Record	291		
20. Example of MSDB Record Status: Shared (S) or Owned Exclusively (E)	291		

About This Book

This book describes how to design, implement, and maintain different types of IMS™ databases and is divided into two parts:

- Part 1, “General Information on IMS Database Administration,” on page 1 describes important concepts to keep in mind throughout the database administration process.
- Part 2, “Administering IMS Databases,” on page 35 describes the steps in the database administration process.

With IMS Version 9, you can reorganize HALDB partitions online, either by using the integrated HALDB Online Reorganization function or by using an external product. In this information, the term HALDB Online Reorganization refers to the integrated HALDB Online Reorganization function that is part of IMS Version 9, unless otherwise indicated.

This information is available as part of the Information Management Software for z/OS® Solutions Information Center at <http://publib.boulder.ibm.com/infocenter/imzic>. A PDF version of this information is available in the information center.

Prerequisite Knowledge

Before using this book, you should understand basic IMS concepts and your installation's IMS system. IMS can run in the following environments: DB Batch, DCCTL, TM Batch, DB/DC, DBCTL. You should understand the environments that apply to your installation. The IMS concepts explained here pertain only to administering the IMS database. You should know how to use DL/I calls and languages such as assembler, COBOL, PL/I, and C.

IMS Version 9: Application Programming: Design Guide describes how to design and code an application program.

For definitions of terms used in this manual and references to related information in other IMS manuals, see *IMS Version 9: Master Index and Glossary*.

IBM Product Names Used in This Information

In this information, the licensed programs shown in Table 1 are referred to by their short names.

Table 1. Licensed Program Full Names and Short Names

Licensed program full name	Licensed program short name
IBM® Application Recovery Tool for IMS and DB2®	Application Recovery Tool
IBM CICS® Transaction Server for OS/390®	CICS
IBM CICS Transaction Server for z/OS	CICS
IBM DB2 Universal Database™	DB2 Universal Database
IBM DB2 Universal Database for z/OS	DB2 UDB for z/OS
IBM Enterprise COBOL for z/OS	Enterprise COBOL

Table 1. Licensed Program Full Names and Short Names (continued)

Licensed program full name	Licensed program short name
IBM Enterprise COBOL for z/OS and OS/390	Enterprise COBOL
IBM Enterprise PL/I for z/OS and OS/390	Enterprise PL/I
IBM High Level Assembler for MVS™ & VM & VSE	High Level Assembler
IBM IMS Advanced ACB Generator	IMS Advanced ACB Generator
IBM IMS Batch Backout Manager	IMS Batch Backout Manager
IBM IMS Batch Terminal Simulator	IMS Batch Terminal Simulator
IBM IMS Buffer Pool Analyzer	IMS Buffer Pool Analyzer
IBM IMS Command Control Facility for z/OS	IMS Command Control Facility
IBM IMS Connect for z/OS	IMS Connect
IBM IMS Connector for Java	IMS Connector for Java
IBM IMS Database Control Suite	IMS Database Control Suite
IBM IMS Database Recovery Facility for z/OS	IMS Database Recovery Facility
IBM IMS Database Repair Facility	IMS Database Repair Facility
IBM IMS DataPropagator for z/OS	IMS DataPropagator
IBM IMS DEDB Fast Recovery	IMS DEDB Fast Recovery
IBM IMS Extended Terminal Option Support	IMS ETO Support
IBM IMS Fast Path Basic Tools	IMS Fast Path Basic Tools
IBM IMS Fast Path Online Tools	IMS Fast Path Online Tools
IBM IMS Hardware Data Compression-Extended	IMS Hardware Data Compression-Extended
IBM IMS High Availability Large Database (HALDB) Conversion Aid for z/OS	IBM IMS HALDB Conversion Aid
IBM IMS High Performance Change Accumulation Utility for z/OS	IMS High Performance Change Accumulation Utility
IBM IMS High Performance Load for z/OS	IMS HP Load
IBM IMS High Performance Pointer Checker for OS/390	IMS HP Pointer Checker
IBM IMS High Performance Prefix Resolution for z/OS	IMS HP Prefix Resolution
IBM z/OS Language Environment®	Language Environment
IBM Tivoli® NetView® for z/OS	Tivoli NetView for z/OS
IBM WebSphere® Application Server for z/OS and OS/390	WebSphere Application Server for z/OS
IBM WebSphere MQ for z/OS	WebSphere MQ
IBM WebSphere Studio Application Developer Integration Edition	WebSphere Studio
IBM z/OS	z/OS
IBM z/OS C/C++	C/C++

How to Read Syntax Diagrams

The following rules apply to the syntax diagrams that are used in this information:

- Read the syntax diagrams from left to right, from top to bottom, following the path of the line. The following conventions are used:
 - The >>--- symbol indicates the beginning of a syntax diagram.
 - The ---> symbol indicates that the syntax diagram is continued on the next line.
 - The >--- symbol indicates that a syntax diagram is continued from the previous line.
 - The --->< symbol indicates the end of a syntax diagram.
- Required items appear on the horizontal line (the main path).




- Optional items appear below the main path.




If an optional item appears above the main path, that item has no effect on the execution of the syntax element and is used only for readability.




- If you can choose from two or more items, they appear vertically, in a stack. If you *must* choose one of the items, one item of the stack appears on the main path.



If choosing one of the items is optional, the entire stack appears below the main path.




If one of the items is the default, it appears above the main path, and the remaining choices are shown below.



- An arrow returning to the left, above the main line, indicates an item that can be repeated.



If the repeat arrow contains a comma, you must separate repeated items with a comma.




A repeat arrow above a stack indicates that you can repeat the items in the stack.

- Sometimes a diagram must be split into fragments. The syntax fragment is shown separately from the main syntax diagram, but the contents of the fragment should be read as if they are on the main path of the diagram.



fragment-name:



- In IMS, a b symbol indicates one blank position.
- Keywords, and their minimum abbreviations if applicable, appear in uppercase. They must be spelled exactly as shown. Variables appear in all lowercase italic letters (for example, *column-name*). They represent user-supplied names or values.
- Separate keywords and parameters by at least one space if no intervening punctuation is shown in the diagram.
- Enter punctuation marks, parentheses, arithmetic operators, and other symbols, exactly as shown in the diagram.
- Footnotes are shown by a number in parentheses, for example (1).

Accessibility Features for IMS Version 9

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use information technology products successfully.

Accessibility Features

The following list includes the major accessibility features in z/OS products, including IMS Version 9. These features support:

- Keyboard-only operation.
- Interfaces that are commonly used by screen readers and screen magnifiers.
- Customization of display attributes such as color, contrast, and font size.

The information center is accessibility-enabled for the IBM Home Page Reader. You can operate all features by using the keyboard instead of the mouse.

Keyboard Navigation

You can access IMS Version 9 ISPF panel functions by using a keyboard or keyboard shortcut keys.

For information about navigating the IMS Version 9 ISPF panels using TSO/E or ISPF, refer to the *z/OS TSO/E Primer*, the *z/OS TSO/E User's Guide*, and the *z/OS ISPF User's Guide*. These guides describe how to navigate each interface, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

Related Accessibility Information

Online documentation for IMS Version 9 is available in the information center.

IBM and Accessibility

See the *IBM Accessibility Center* at www.ibm.com/able for more information about the commitment that IBM has to accessibility.

How to Send Your Comments

Your feedback helps us provide the most accurate and highest quality information. The documentation for this version is provided as-is and is no longer being updated. However, we welcome your feedback and will review your comments to see if we can use them to improve versions of the product that are still in service.

Send your comments by email to imspubs@us.ibm.com.

Summary of Changes

This section summarizes the significant improvements or enhancements for Administration Guide: Database Manager and refers you to relevant sections of this book for more information.

Changes to the Current Edition of This Book for IMS Version 9

This edition includes technical and editorial changes.

In particular, this edition contains a significant amount of new general information about HALDB databases, including:

- Two new pages listing the distinguishing characteristics of the three types of IMS HALDB databases: PHDAM, PHIDAM, and PSINDEX. See “Performance Considerations Overview” on page 57.
- A new nine-page section about the fundamental concepts of IMS HALDB partitions. See “Partitions in PHDAM, PHIDAM, and PSINDEX Databases” on page 112.
- A new 26-page section about modifying existing IMS HALDB databases and partitions. See “Modifying HALDB Databases” on page 474.

Changes to This Book for IMS Version 9

This book contains new information on the following subjects:

- The topic “Fast Path Virtual Storage Option” on page 151 contains new information about DEDB multi-area structures.
- The topic “Opening and Preopening DEDB Areas” on page 127 contains new information about enhancements to your ability to control the opening of DEDB areas during restart and after an IRLM reconnect.
- A new topic, “Reorganizing HALDBs” on page 376, discusses reorganizing HALDB databases online with the integrated HALDB Online Reorganization function. This topic also includes additional information about reorganizing HALDB databases offline.
- The existing topic Appendix E, “HALDB Partition Definition Utility,” on page 551 has been updated to reflect the improvements that have been made to the Partition Definition utility for IMS Version 9.

Library Changes for IMS Version 9

Changes to the IMS Library for IMS Version 9 include the addition of one title, a change of one title, organizational changes, and a major terminology change. Changes are indicated by a vertical bar (|) to the left of the changed text.

The IMS Version 9 information is now available in the Information Management Software for z/OS Solutions Information Center, which is available at <http://publib.boulder.ibm.com/infocenter/imzic>. The Information Management Software for z/OS Solutions Information Center provides a graphical user interface for centralized access to the product information for IMS, IMS Tools, DB2 Universal Database (UDB) for z/OS, DB2 Tools, and DB2 Query Management Facility (QMF™).

There are known limitations with BookManager output. If you encounter problems in the BookManager information with Web addresses, syntax diagrams, wide examples, or tables, refer to the information in the information center or in a PDF book.

New and Revised Titles

The following list details the major changes to the IMS Version 9 library:

- *IMS Version 9: IMS Connect Guide and Reference*

The library includes new information: *IMS Version 9: IMS Connect Guide and Reference*. This information is available in softcopy format only, as part of the Information Management Software for z/OS Solutions Information Center, and in PDF and BookManager® formats.

IMS Version 9 provides an integrated IMS Connect function, which offers a functional replacement for the IMS Connect tool (program number 5655-K52). In this information, the term *IMS Connect* refers to the integrated IMS Connect function that is part of IMS Version 9, unless otherwise indicated.

- The information formerly titled *IMS Version 8: IMS Java User's Guide* is now titled *IMS Version 9: IMS Java Guide and Reference*. This information is available in softcopy format only, as part of the Information Management Software for z/OS Solutions Information Center, and in PDF and BookManager formats.
- To complement the IMS Version 9 library, a retail book, *An Introduction to IMS* by Dean H. Meltz, Rick Long, Mark Harrington, Robert Hain, and Geoff Nicholls (ISBN # 0-13-185671-5), is available from IBM Press. Go to the IMS Web site at www.ibm.com/ims for details.

Organizational Changes

Organization changes to the IMS Version 9 library include changes to:

- *IMS Version 9: Customization Guide*
- *IMS Version 9: IMS Connect Guide and Reference*
- *IMS Version 9: IMS Java Guide and Reference*
- *IMS Version 9: Messages and Codes, Volume 1*
- *IMS Version 9: Utilities Reference: System*

A new appendix has been added to the *IMS Version 9: Customization Guide* that describes the contents of the ADFSSMPL (also known as SDFSSMPL) data set.

The IMS Connect messages that were in *IMS Version 9: IMS Connect Guide and Reference* have moved to *IMS Version 9: Messages and Codes, Volume 1*.

The IMS Connect commands that were in *IMS Version 9: IMS Connect Guide and Reference* have moved to *IMS Version 9: Command Reference*.

The chapter titled "DLIModel Utility" has moved from *IMS Version 9: IMS Java Guide and Reference* to *IMS Version 9: Utilities Reference: System*.

The DLIModel utility messages that were in *IMS Version 9: IMS Java Guide and Reference* have moved to *IMS Version 9: Messages and Codes, Volume 1*.

To ease the transition of your security support from the Security Maintenance Utility (SMU) to RACF, new SMU to RACF conversion utilities have been introduced. These utilities are documented in a new part in the *IMS Version 9: Utilities Reference: System*.

Terminology Changes

IMS Version 9 introduces new terminology for IMS commands:

type-1 command

A command, generally preceded by a leading slash character, that can be entered from any valid IMS command source. In IMS Version 8, these commands were called *classic* commands.

type-2 command

A command that is entered only through the OM API. Type-2 commands are more flexible than type-1 commands and can have a broader scope. In IMS Version 8, these commands were called *IMSplex* commands or *enhanced* commands.

Part 1. General Information on IMS Database Administration

Chapter 1. Introduction to IMS Databases	3	Chapter 4. Security	31
Database Administration Overview	3	Restricting the Scope of Data Access	31
DL/I	3	Restricting Processing Authority	31
CICS	4	Restricting Access by Non-IMS Programs	33
DBCTL and DCCTL	4	Protecting Data with VSAM Passwords	33
Open Database Access (ODBA)	4	Encrypting Your Database	33
Database Administration Tasks	4	Using the Dictionary to Help Establish Security	33
Concepts and Terminology	6		
How Data Is Stored in a Database	6		
Root Segment	7		
Parent and Child Segment	7		
Segment Type and Occurrence	7		
Relationship Between Segments	8		
The Hierarchy	8		
Numbering Sequence in a Hierarchy: Top to Bottom	8		
Numbering Sequence in a Hierarchy: Movement and Position	10		
Numbering Sequence in a Hierarchy: Level	11		
The Database	11		
The Database Record	12		
The Segment	14		
Segment Code	14		
Delete Byte	15		
Pointer and Counter Area	15		
The Data Portion	15		
The Three Data Portion Field Types	15		
Optional Functions	17		
How to Define Your Database to IMS	18		
How Application Programs View the Database	18		
Chapter 2. Standards and Procedures	19		
Establishing Standards and Procedures	19		
Naming Conventions	21		
General Rules for Establishing Naming Conventions	21		
Naming Conventions for HALDB	22		
Naming Convention for HALDB Partitions	23		
Naming Convention for HALDB Data Definition Names (ddnames)	23		
Naming Convention for HALDB Data Sets	24		
Chapter 3. Review Process	25		
The Design Review	25		
Role of the Database Administrator	25		
General Information about Reviews	25		
Design Review 1	26		
Design Review 2	26		
Design Review 3	27		
Design Review 4	27		
Code Inspection 1	28		
Who Attends Code Inspection 1	28		
Code Inspection 2	28		
Security Inspection	29		
Post-Implementation Review	29		

Chapter 1. Introduction to IMS Databases

This chapter describes the tasks of database administration and discusses the key concepts and terms used when administering IMS Database Manager.

In this Chapter:

- “Database Administration Overview”
- “Open Database Access (ODBA)” on page 4
- “Database Administration Tasks” on page 4
- “Concepts and Terminology” on page 6
- “Optional Functions” on page 17
- “How to Define Your Database to IMS” on page 18
- “How Application Programs View the Database” on page 18

Database Administration Overview

The task of database administration is to design, implement, and maintain databases. This book describes the tasks involved in administering the Information Management System Database Manager (IMS DB). IMS is composed of two parts: IMS Database Manager and IMS Transaction Manager. IMS Database Manager manages the physical storage of records in the database. IMS Transaction Manager manages the terminal network, the input and output of messages, and online system resources. The administration of IMS Transaction Manager is covered in the *IMS Version 9: Administration Guide: System* and the *IMS Version 9: Administration Guide: Transaction Manager*.

This book presents the database administration tasks in the order in which you normally perform the tasks. You perform some tasks in a specific sequence in the database development process while other tasks are ongoing. It is important for you to grasp not only what the tasks are (see “Database Administration Tasks” on page 4), but also how they interrelate.

This first part of the book provides important concepts and procedures for the entire database administration process. The second part contains the chapters corresponding to particular tasks of database administration.

DL/I

Data Language/I (DL/I) is the IMS data manipulation language, which provides a common high-level interface between user application programs and IMS.

DL/I calls are invoked from application programs written in languages such as PL/I, COBOL, VS Pascal, C, and Ada. It can also be invoked from assembler language application programs by subroutine calls. IMS lets the user define data structures, relate structures to the application, load structures, and reorganize structures.

Related Reading: For detailed information about how application programs use DL/I, see *IMS Version 9: Application Programming: Database Manager* and *IMS Version 9: Application Programming: EXEC DLI Commands for CICS and IMS*.

CICS

Customer Information Control System (CICS) accesses IMS databases through the database resource adapter (DRA). CICS or other transaction management subsystems (excluding IMS Transaction Manager) can access IMS full-function databases and data entry databases (DEDBs) in a DB/DC or DBCTL environment through the DRA.

Whenever tasks differ for CICS users, a brief description about the differences is included.

DBCTL and DCCTL

Database Control (DBCTL) supports non-message-driven batch message processing (BMP) programs. DBCTL has its own log and participates in database recovery. Locking is provided by IMS program isolation (PI) or the internal resource lock manager (IRLM).

Data Communications Control (DCCTL) is a transaction management subsystem that does not support full-function DEDBs or MSDBs (main storage databases), but does support GSAM databases in BMP regions. To access databases in a DCCTL environment, DCCTL must connect to an external subsystem that provides database support.

Open Database Access (ODBA)

Any program that runs in a z/OS address space can access IMS DB through the Open Database Access (ODBA) callable interface. Any z/OS application program running in a z/OS address space that is managed by the z/OS Resource Recovery Service (RRS/MVS) can access IMS full-function databases and data entry databases (DEDBs). z/OS application programs that use the ODBA interface are called ODBA applications.

Related Reading: For a description of RRS and its uses, see the information on RRS Distributed Sync Point in *IMS Version 9: Administration Guide: Transaction Manager*.

From the perspective of IMS, the z/OS address space involved appears to be another region called the z/OS application region.

Types of programs that can call the ODBA interface include:

- DB2 for z/OS stored procedures, including COBOL, PL/I, and Java procedures
- WebSphere for z/OS and OS/390 Enterprise Java Beans
- Other z/OS applications

Database Administration Tasks

Participating in design reviews. Design reviews are a series of formal meetings you attend in which the design and implementation of the database are examined. Design reviews are an ongoing task during the design and implementation of a database system. They are also held when new applications are added to an existing system.

Analyzing data requirements. After the users at your installation identify their data processing requirements, you will construct data structures. These structures show what data will be in your database and how it will be organized. This task precedes the actual design of the database.

Designing your database. After data structures are identified, the next step is to design your database. Database design involves:

- Choosing how to physically organize your data
- Deciding which IMS processing options you need to use
- Making a series of decisions about design that determine how well your database performs and uses available space

Developing a test database. Before the applications that will use your database are cut over to production status, they should be tested. Depending on the form of your existing data, you can use one or more of the IMS Database Design Aids to design, create, load, and test your test database.

Implementing your database design. After your database is designed, implement the design by describing the database's characteristics and how application programs will use it to IMS. This task consists of coding database descriptions (DBDs) and program specification blocks (PSBs), both of which are a series of macro statements. Another part of implementing the database design is determining whether to have the application control blocks (ACBs) of the database prebuilt or built dynamically.

Loading your database. After database characteristics are defined, write an initial load program to put your data into the database. After you load the database, application programs can be run against it.

Monitoring your database. When the database is running, routinely monitor its performance. A variety of tools for monitoring the IMS system are available.

Tuning your database. Tune your database when performance degrades or utilization of external storage is not optimum. Routine monitoring helps you determine when the system needs to be tuned and what type of tuning needs to be done. Like monitoring, the task of tuning the database is ongoing.

Modifying your database. As new applications are developed or the needs of your users change, you might need to make changes to your database. For example, you can change database organization, database hierarchies (or the segments and fields within them), and you can add or delete one or more partitions. Like monitoring and tuning, the task of modifying the database is ongoing.

Recovering your database. Database recovery involves restoring a database to its original condition after it is rendered invalid by some failure. The task of developing recovery procedures and performing recovery is an important one. However, because it is difficult to separate data recovery from system recovery, the task of recovery is treated separately in *IMS Version 9: Operations Guide*.

You can use Database Recovery Control (DBRC) in recovering your databases. If your databases are registered in RECON, DBRC gains control during execution of these IMS utilities:

- Database Image Copy
- Online Database Image Copy
- Database Image Copy 2
- Change Accumulation
- Database Recovery
- Log Recovery
- Log Archive
- DEDB area data set create
- HD and HISAM Reorganization Unload and Reload
- HALDB Index/ILDS Rebuild

Database Administration Tasks

You must ensure that all database recoveries use the current IMS utilities, rather than those of earlier releases.

Related Reading: For more information on using these database utilities, see the *IMS Version 9: Utilities Reference: System* and the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Establishing security. You can keep unauthorized persons from accessing the data in your database by using program communication blocks (PCBs). With PCBs, you can control how much of the database a given user can see, and what can be done with that data. In addition, you can take steps to keep non-IMS programs from accessing your database.

Setting up standards and procedures. It is important to set standards and procedures for application and database development. This is especially true in an environment with multiple applications. If you have guidelines and standards, you will save time in application development and avoid problems later on such as inconsistent naming conventions or programming standards.

Concepts and Terminology

This topic discusses the terms and concepts you need to understand to perform the administration tasks just outlined.

To understand this topic, you must know what a DL/I call is and how to code it. You must understand function codes and Segment Search Arguments (SSAs) in DL/I calls and know what is meant when a call is referred to as qualified or unqualified (explained in *IMS Version 9: Application Programming: Database Manager*).

How Data Is Stored in a Database

The data in a database is grouped into a series of *database records*. Each database record is composed of smaller groups of data called *segments*. A segment is the smallest piece of data IMS can store. Segments, in turn, are made up of one or more *fields*.

Figure 1 on page 7 shows a record in a school database. Each of the boxes is a segment or separate group of data in the database record. The segments in the database record contain the following information:

COURSE	The name of the course
INSTR	The name of the teacher of the course
REPORT	A report the teacher needs at the end of the course
STUDENT	The names of students in the course
GRADE	The grade a student received in the course
PLACE	The room in which the course is taught

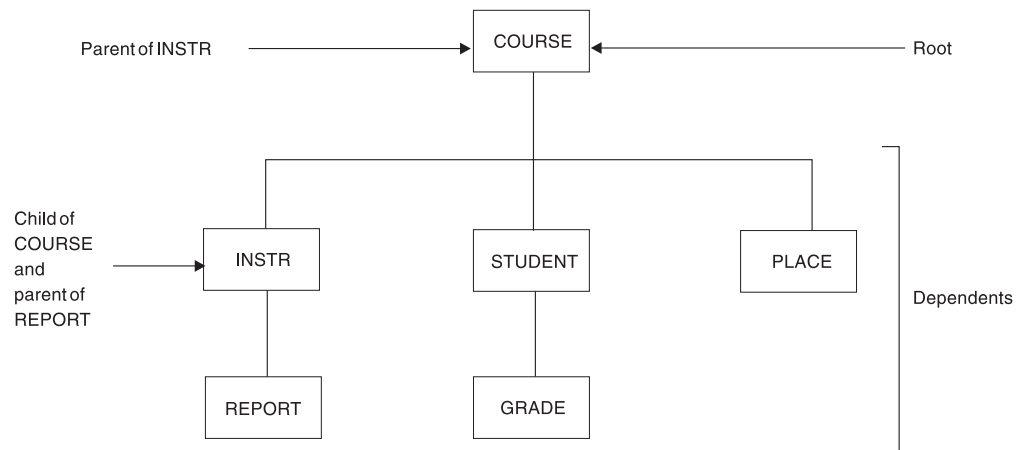


Figure 1. Segment Types in the School Database Record

The segments within a database record exist in a *hierarchy*. A hierarchy is the order in which segments are arranged. The order implies something. The school database is storing data about courses that are taught. The COURSE segment is at the top of the hierarchy. The other types of data in segments in the database record would be meaningless if there was no COURSE.

Root Segment

The COURSE segment is called the *root segment*. Only one root segment exists within a database record. All other segments in the database record (such as: INSTR, REPORT, STUDENT, GRADE, and PLACE) are called *dependent segments*. The existence of dependent segments hinges on the existence of a root segment. For example, without the root segment COURSE, there would be no reason for having a PLACE segment stating in which room the course was held.

The third level of dependent segments, REPORT and GRADE, is subject to the existence of second level segments INSTR and STUDENT. For example, without the second level segment STUDENT, there would be no reason for having a GRADE segment indicating the grade the student received in the course.

Parent and Child Segment

Another set of words used to refer to how segments relate to each other in a hierarchy is *parent segment* and *child segment*. A parent segment is any segment that has a dependent segment beneath it in the hierarchy. COURSE is the parent of INSTR, and INSTR is the parent of REPORT. A child segment is any segment that is a dependent of another segment above it in the hierarchy. REPORT is the child of INSTR, and INSTR is the child of COURSE. Note that INSTR is both a parent segment in its relationship to REPORT and a child segment in its relationship to COURSE.

Segment Type and Occurrence

The terms used to describe segments thus far (root, dependent, parent, and child) describe the *relationship* between segments. The terms *segment type* and *segment occurrence*, however, distinguish between a type of segment in the database (the COURSE segment or the INSTR segment) and a specific segment (the course segment for a math course).

The previous database is actually the design of the database. It shows the segment types for the database. Figure 2 on page 8 shows the actual database record with the segment occurrences.

Concepts and Terminology

A segment occurrence is a single specific segment. Math is a single occurrence of the COURSE segment type. Baker and Coe are multiple occurrences of the STUDENT segment type.

Relationship Between Segments

One final term for describing segments is *twin segment*. Twin (like root, dependent, parent, and child) describes a relationship between segments. Twin segments are multiple occurrences of the same segment type under a single parent. In Figure 2, the segments Baker and Coe are twins. They have the same parent (Math), and are of the same segment type (STUDENT). Pass and Inc are not twins. Although Pass and Inc are the same segment type (GRADE), they do not have the same parent. Pass is the child segment of Baker, and Inc is the child segment of Coe.

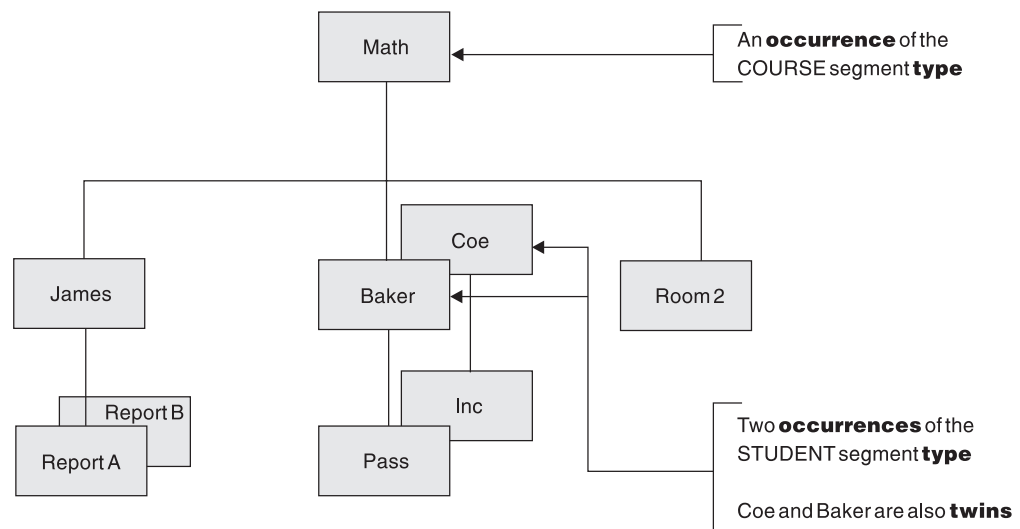


Figure 2. Segment Occurrences in a School Database Record

The following topic discusses the hierarchy in more detail. Subsequent topics describe the objects in a database, what they consist of and the rules governing their existence and use. These objects are:

- The database record
- The segments in a database record
- The fields within a segment

The Hierarchy

A database is composed of a series of database records, records contain segments, and segments are arranged in a hierarchy in the database record.

Numbering Sequence in a Hierarchy: Top to Bottom

When a database record is stored in the database, the hierarchic arrangement of segments in the database record is the order in which segments are stored. Starting at the top of a database record (at the root segment), segments are stored in the database in the sequence shown by the numbers in Figure 3 on page 9.

The sequence goes from the top of the hierarchy to the bottom in the first (left most) *path* or leg of the hierarchy. When the bottom of the database is reached, the sequence is from left to right. When all segments have been stored in that path of the hierarchy, the sequencing begins in the next path to the right, again proceeding

from top to bottom and then left to right. (In the second leg of the hierarchy there is nothing to go to at the right.) The sequence in which segments are stored is loosely called *"top to bottom, left to right."*

Figure 3 shows sequencing of segment types for the school database shown in Figure 1 on page 7. The sequence of segment types are stored in the following order:

1. COURSE (top to bottom)
2. INSTR
3. REPORT
4. STUDENT (left to right)
5. GRADE (top to bottom)
6. PLACE (left to right)

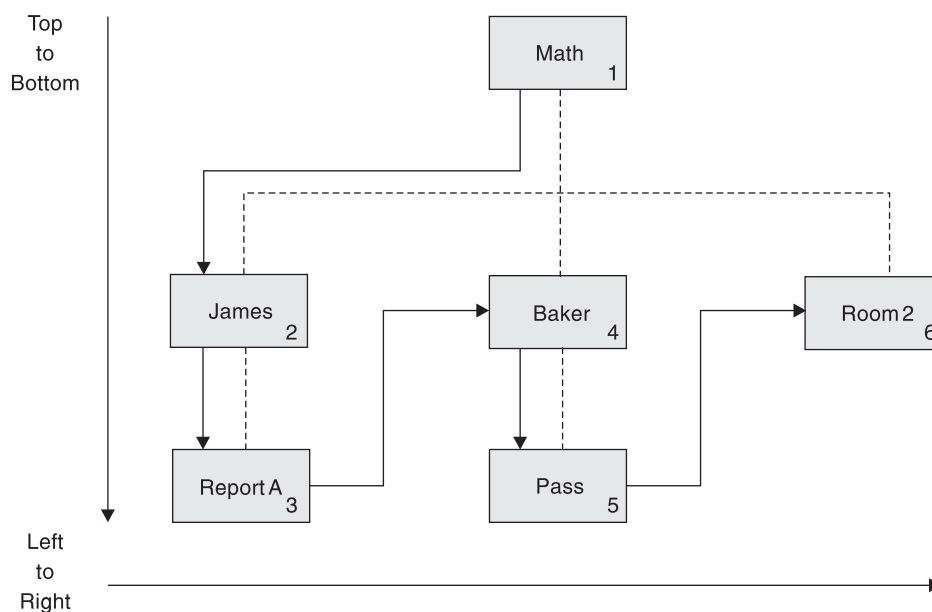


Figure 3. Hierarchic Sequence of Segment Types for School Database

Figure 4 on page 10 shows the segment occurrences for the school database record as shown in Figure 2 on page 8. Because there are multiple occurrences of segment types, segments are read "front to back" in addition to "top to bottom, left to right." The segment occurrences for the school database are stored in the following order:

1. Math (top to bottom)
2. James
3. ReportA
4. ReportB (front to back)
5. Baker (left to right)
6. Pass (top to bottom)
7. Coe (front to back)
8. Inc (top to bottom)
9. Room2 (left to right)

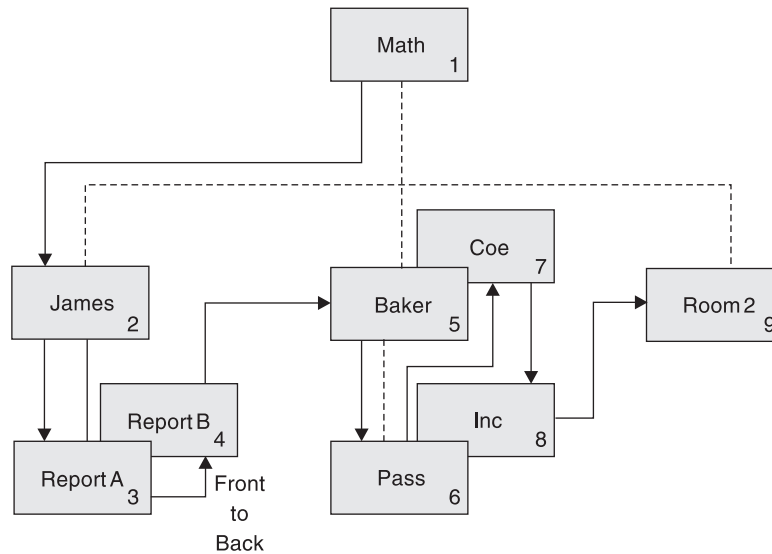


Figure 4. Hierarchic Sequence of Segment Occurrences for School Database

Note that the numbering sequence is still initially from top to bottom. At the bottom of the hierarchy, however, observe that there are two occurrences of the REPORT segment.

Because you are at the bottom of the hierarchy, both segment occurrences are picked up before you move to the right in this path of the hierarchy. Both reports relate to the instructor segment James; therefore it makes sense to keep them stored together in the database. In the second path of the hierarchy, there are also two segment occurrences in the student segment. You are not at the bottom of the hierarchic path until you reach the grade segment Pass. Therefore, sequencing is not “interrupted” by the two occurrences of the student segment Baker and Coe. This makes sense because you are keeping student and grade Baker and Pass together.

Note that the grade Inc under student Coe is not considered another occurrence under Baker. Coe and Inc become a separate path in the hierarchy. Only when you reach the bottom of a hierarchic path is the “top to bottom, left to right” sequencing interrupted to pick up multiple segment occurrences. You can refer to sequencing in the hierarchy as “top to bottom, front to back, left to right”, but “front to back” only occurs at the bottom of the hierarchy. Multiple occurrences of a segment at any other level are sequenced as separate paths in the hierarchy.

As noted before, this numbering of segments represents the sequence in which segments are stored in the database. If an application program requests all segments in a database record in hierarchic sequence or issues Get-Next (GN) calls, this is the order in which segments would be presented to the application program.

Numbering Sequence in a Hierarchy: Movement and Position

Other terms that show the numbering sequence in a hierarchy are: *movement* and *position*. When talking about movement through the hierarchy, it always means moving in the sequence implied by the numbering scheme. Movement can be forward or backward. When talking about position in the hierarchy, it means being located (positioned) at a specific segment. The terms movement and position are used when talking about how segments are accessed when an application program issues a call.

A segment is the smallest piece of data IMS can store. If an application program issues a Get-Unique (GU) call for the student segment BAKER (see Figure 4 on page 10), the current position is immediately after the BAKER segment occurrence. If an application program then issues an unqualified GN call, IMS moves forward in the database and returns the PASS segment occurrence.

Numbering Sequence in a Hierarchy: Level

A final term you need to know about hierarchies is: *level*. Level is the position of a segment in the hierarchy in relation to the root segment. The root segment is always on level one. Figure 5 illustrates levels of the database record shown in Figure 2 on page 8.

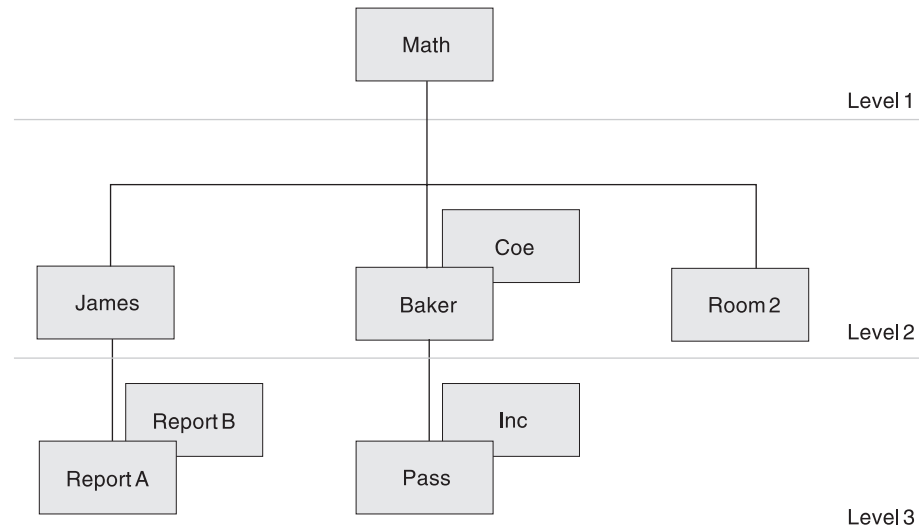


Figure 5. Levels in the Database

The Database

IMS allows you to define many different database types. You define the database type that best suits your application's processing requirements. You need to know that each IMS database has its own access method, because IMS runs under control of the z/OS operating system. The operating system does not know what a segment is because it processes logical records, not segments. IMS access methods therefore manipulate segments in a database record. When a logical record needs to be read, operating system access methods (or IMS) are used.

Table 2 lists the IMS database types you can define, the IMS access methods they use and the operating system access methods you can use with them. Although each type of database varies slightly in its access method, they all use database records.

Table 2. Types of IMS Databases and the z/OS Access Methods They Can Use

Type of IMS Database	Full Name of Database Type	IMS or Operating System Access Methods that Can Be Used
HSAM	Hierarchical Sequential Access Method	BSAM or QSAM
SHSAM	Simple Hierarchical Sequential Access Method	BSAM or QSAM
HISAM	Hierarchical Indexed Sequential Access Method	VSAM

Table 2. Types of IMS Databases and the z/OS Access Methods They Can Use (continued)

Type of IMS Database	Full Name of Database Type	IMS or Operating System Access Methods that Can Be Used
SHISAM	Simple Hierarchical Indexed Sequential Access Method	VSAM
GSAM	Generalized Sequential Access Method	QSAM/BSAM or VSAM
HDAM	Hierarchical Direct Access Method	VSAM or OSAM
PHDAM	Partitioned Hierarchical Direct Access Method	VSAM or OSAM
HIDAM	Hierarchical Indexed Direct Access Method	VSAM or OSAM
PHIDAM	Partitioned Hierarchical Indexed Direct Access Method	VSAM or OSAM
DEDB ¹	Data Entry Database	Media Manager
MSDB ²	Main Storage Database	N/A

Notes:

1. For DBCTL, only available to BMPs
2. Not applicable to DBCTL

The Database Record

A database consists of a series of database records, and a database record consists of a series of segments. Another thing to understand is that a specific database can only contain one kind of database record. In the school database, for example, you can place as many school records as desired. You could not, however, create a different type of database record, such as the medical database record shown in Figure 6, and put it in the school database.


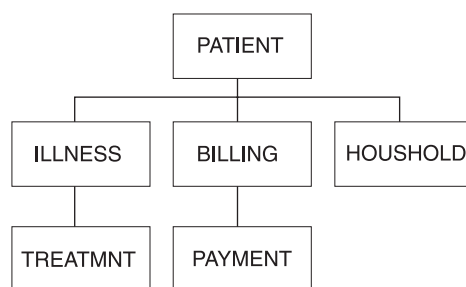



Figure 6. An Example of a Medical Database Record

The only other thing to understand is that a specific database record, when stored in the database, does not need to contain all the segment types you originally designed. To exist in a database, a database record need only contain an occurrence of the root segment. In the school database, all four of the records shown in Figure 7 on page 13 can be stored.


Database Record 1

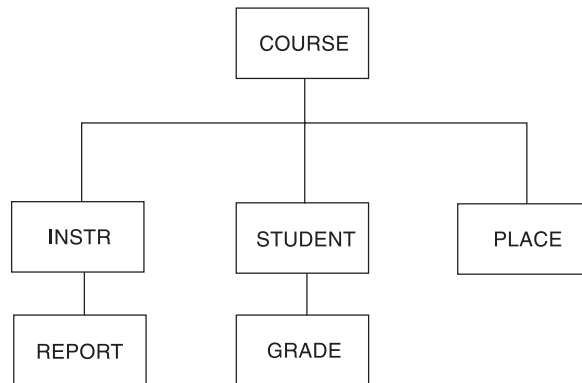

Database Record 2



Database Record 3

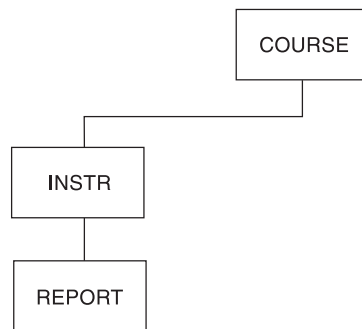

Database Record 4




Figure 7. Example of Records That Can Be Stored in the School Database

However, no segment can be stored unless its parent is also stored. For example, you could *not* store the records shown in Figure 8.

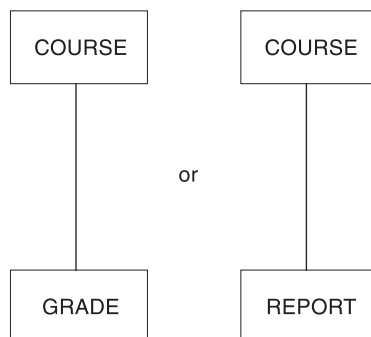


Figure 8. Records that Cannot be Stored in the School Database

Occurrences of any of the segment types can later be added to or deleted from the database.

The Segment

A database record consists of one or more segments, and the segment is the smallest piece of data IMS can store. Here are some additional facts you need to know about segments:

- A database record can contain a maximum of 255 segment types. The space you allocate for the database limits the number of segment occurrences.
- You determine the length of a segment; however, a segment cannot be larger than the physical record length of the device on which it is stored.
- The length of segments is specified by segment type. A segment type can be either variable or fixed in length.

Figure 9 shows the format of a fixed-length segment. Figure 10 shows the format of a variable-length segment. Segments consist of two parts (a prefix and the data), except when using a SHSAM or SHISAM database. In SHSAM and SHISAM databases, the segment consists of only the data. In a GSAM database, segments do not exist (see “GSAM Databases” on page 78 for more information about GSAM databases).

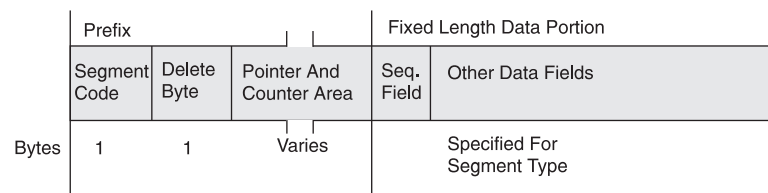


Figure 9. Format of Fixed-Length Segments

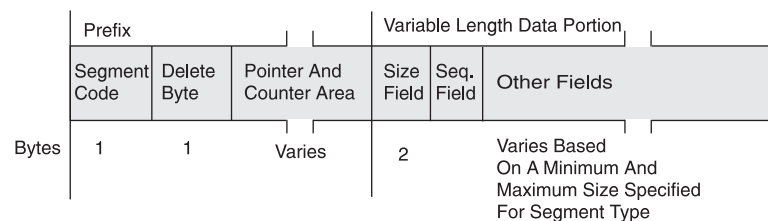


Figure 10. Format of Variable-Length Segments

IMS uses the prefix portion of the segment to “manage” the segment. The prefix portion of a segment consists of: segment code, delete byte, and in some databases, a pointer and counter area. Application programs do not “see” the prefix portion of a segment. The data portion of a segment contains your data, arranged in one or more fields.

Related Reading: For information on MSDB and DEDB segments, see “Main Storage Databases (MSDBs)” on page 144 and “Data Entry Databases” on page 125.

Segment Code

IMS needs a way to identify each segment type stored in a database. It uses the segment code field for this purpose. When loading a segment type, IMS assigns it a unique identifier (an integer from 1 to 255). IMS assigns numbers in ascending sequence, starting with the root segment type (number 1) and continuing through all dependent segment types in hierarchic sequence.

Delete Byte

When an application program deletes a segment from a database, the space it occupies might or might not be immediately available to reuse. Deletion of a segment is described in the discussions of the individual database types. For now, know that IMS uses this prefix byte to track the status of a deleted segment.

Related Reading: For information on the meaning of each bit in the delete byte, see Appendix A, “Meaning of Bits in the Delete Byte,” on page 505.

Pointer and Counter Area

The pointer and counter area exists in HDAM, PHDAM, HIDAM, and PHIDAM databases, and, in some special circumstances, HISAM databases. The pointer and counter area can contain two types of information:

- Pointer information consists of one or more addresses of segments to which a segment points.
- Counter information is used when logical relationships, an optional function of IMS, are defined.

The length of the pointer and counter area depends on how many addresses a segment contains and whether logical relationships are used. These topics are covered in more detail later in this book.

The Data Portion

The data portion of a segment contains one or more data elements. The data is processed and unlike the prefix portion of the segment, seen by an application program.

The application program accesses segments in a database using the name of the segment type. If an application program needs to reference part of a segment, a field name can be defined to IMS for that part of the segment. Field names are used in segment search arguments (SSAs) to qualify calls. An application program can see data even if you do not define it as a field. But an application program cannot qualify an SSA on the data unless it is defined as a field.

The maximum number of fields that you can define for a segment type is 255. The maximum number of fields that can be defined for a database is 1000. Note that 1000 refers to *types* of fields in a database, not occurrences. The number of occurrences of fields in a database is limited only by the amount of storage you have defined for your database.

The Three Data Portion Field Types

You can define three field types in the data portion of a segment: a sequence field, data fields, and for variable-length segments, a size field stating the length of the segment. The first two field types contain your data, and an application program can use both to qualify its calls. However, the sequence field has some other uses besides that of containing your data.

You can use a sequence field, often referred to as a key, to keep occurrences of a segment type in key sequence under a given parent. For example, in the database record shown in Figure 11 on page 16, there are three segment occurrences of the STUDENT segment, and the STUDENT segment has three data elements.

Concepts and Terminology

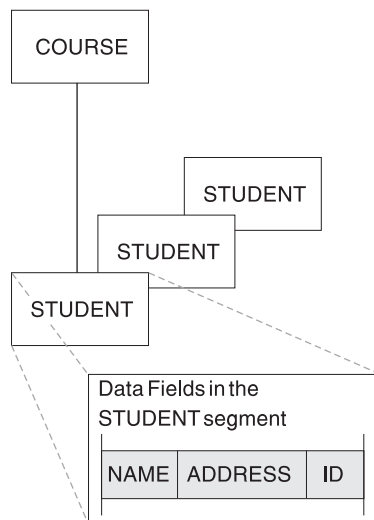


Figure 11. Three Segment Occurrences and Three Data Elements of the STUDENT Segment

Suppose you need the STUDENT segment, when stored in the database, to be in alphabetic order by student name. If you define a field on the NAME data as a *unique* sequence field, IMS stores STUDENT segment occurrences in alphabetical sequence. Figure 12 shows three occurrences of the STUDENT segment in alphabetical sequence.




Figure 12. Example of STUDENT Segments Stored in Alphabetical Order

When you define a sequence field in a root segment of a HISAM, HDAM, PHDAM, HIDAM, or PHIDAM database, an application program can use it to access a specific root segment, and thus a specific database record. By using a sequence field, an application program does not need to search the database sequentially to find a specific database record, but can retrieve records sequentially (for HISAM, HIDAM, and PHIDAM databases).

You can also use a sequence field in other ways when using the IMS optional functions of logical relationships or secondary indexing. These other uses are discussed in detail later in this book.

The important things to know now about sequence fields are that:

- You do not always need to define a sequence field. This book describes cases where a sequence field is necessary.
- The sequence field value can be defined as unique or non-unique.
- The data or value in the sequence field is called the “key” of the segment.

Optional Functions

IMS has several optional functions you can use for your database. These are discussed briefly below and described in detail in Chapter 8, “Choosing Optional Database Functions,” on page 169. You need a cursory understanding of these functions before reading this book because they may be referred to before they are actually described.

The functions are as follows:

Logical relationships is a function you can use to let an application program access a logical database record. A logical database record can consist of segments from one or more physical database records. Physical database records can be stored in one or more databases. Thus, a logical database record lets an application program view a database structure that is different from the physical database structure.

For example, if a logical data structure contains segments from two different physical databases, a segment can be accessed from two different paths:

- A segment can be physically stored in the path where it is most frequently used and where the most urgent response time is required.
- A pointer containing the location of the segment can be physically stored in the alternate path needed by another application program.

Secondary indexing is a function you can use to access segments in a database in a sequence other than the one defined in the sequence field.

Variable-length segments is a function you can use to make the data portion of a segment type variable in length. Use variable-length segments when the size of the data portion of a segment type varies greatly from one segment occurrence to the next. With variable-length segments, you define the minimum and maximum length of a segment type. Defining both minimum and maximum length saves space in the database whenever a segment is shorter than the maximum length.

Field-level sensitivity is a function you can use to:

- Deny an application program access to selected fields in a segment for security purposes.
- Allow an application program to use a subset of the fields that make up a segment (and not process fields it does not use) or use fields in a segment in a different order. Use field-level sensitivity in this way to accommodate the differing needs of your application programs.

Segment edit/compression is a function you can use with segments to:

- Encode or “scramble” segment data when it is on the device so only application programs with access to the segment receive the data in decoded form.
- Edit data so application programs can receive data in a format other than the one in which it is stored.
- Compress data when writing a segment to the device, so the Direct Access Storage Device (DASD) is better used.

A *Data Capture exit routine* is used to capture segment data when an application program updates IMS databases with an insert, replace, or delete call. This is a synchronous activity that happens within the unit of work or application update. Captured data is used for data propagation to DB2 UDB for z/OS databases. You can also use Data Capture exit routines to perform tasks other than data propagation.

Optional Functions

Asynchronous Data Capture is a function you use to capture segment data when an application program updates IMS databases with an insert, replace, or delete call. This is an asynchronous activity that happens outside of the unit of work or application update. Captured data is used for data propagation to DB2 UDB for z/OS databases asynchronously. You can also use Asynchronous Data Capture to perform tasks other than data propagation.

IMS DataPropagator allows you to propagate the changed data to or from IMS and DB2 UDB for z/OS both synchronously and asynchronously.

Related Reading: For more information on IMS DataPropagator see *IMS DataPropagator for z/OS: An Introduction*.

Multiple data set groups is a function you can use to put some segments in a database record in data sets other than the primary data set. This can be done without destroying the hierarchic sequence of segments in a database record.

One reason to use multiple data set groups is to accommodate the differing needs of your applications. By using multiple data set groups, you can give an application program fast access to the segments in which it is interested. The application program simply bypasses the data sets containing unnecessary segments. Another reason for using multiple data set groups is to improve performance by, for example, separating high-use segments from low-use segments. You might also use multiple data set groups to save space by putting segment types whose size varies greatly from the average in a separate data set group.

How to Define Your Database to IMS

Define the characteristics of your database to IMS by coding and generating a DBD (database description). A DBD is a series of macro instructions that describes a database's organization and access method, the segments and fields in a database record, and the relationship between types of segments.

If you have the IBM DB/DC (database/data communication) Data Dictionary, you can use it to define your database (except for DEDBs and MSDBs). The DB/DC Data Dictionary may contain all the information you need to produce a DBD.

How Application Programs View the Database

You control how an application program views your database. An application program might not need use of all the segments or fields in a database record. And an application program may not need access to specific segments for security or integrity purposes. An application program may not need to perform certain types of operations on some segments or fields. For example, an application program needs read access to a SALARY segment but not update access. You control which segments and fields an application can view and which operations it can perform on a segment by coding and generating a PSB (program specification block).

A PSB is a series of macro instructions that describe an application program's access to segments in the database. A PSB consists of one or more program communication blocks (PCB), and each PCB describes the application program's ability to read and use the database. For example, an application program can have different views and uses of the same database. An application program can access several different databases and can have several PCBs in its PSB.

If you have the IBM DB/DC Data Dictionary, you can use it to define an application program's access to the database. It can contain all the information needed to produce a PSB.

Chapter 2. Standards and Procedures

This chapter examines the following areas:

- “Establishing Standards and Procedures”
- “Naming Conventions” on page 21

Establishing Standards and Procedures

You should give careful thought to developing standards and procedures for your database system. Providing standards and procedures results in:

- Improved quality of application systems (because setting up and following standards and procedures gives you greater control over your entire application development process)
- Improved productivity in application and database design (because guidelines for design decisions exist)
- Improved productivity of application coding (because coding standards and procedures exist)
- Better communication between you and application developers (because both of you have clearly defined responsibilities)
- Improved reliability and recoverability in operations (because you have clear and well-understood operating procedures)

You must set up and test procedures and standards for database design, application development, application programs' use of the database, application design, and for batch operation. These standards are guidelines that change when installation requirements change.

In the area of database design, for example, you can establish standard practices for handling the following items:

- Database structure and segmentation
 - Number of segments within a database
 - Placement of segments
 - Size of segments
 - Use of variable-length segments
 - When to use segment edit/compression
 - When to use secondary data set groups
 - Number of databases within an application
 - When and how to use field-level sensitivity
 - Database size
- Access methods
 - When to use HISAM
 - Choice of record size for HISAM
 - HISAM organization using VSAM
 - When to use GSAM
 - Use of physical child/physical twin pointers
 - Use of twin backward pointers

Establishing Standards and Procedures

- Use of child last pointers
- HIDAM or PHIDAM index organization using VSAM
- HIDAM or PHIDAM pointer options at the root level
- Sequencing twin chains
- Use of HD free space
- When to use HDAM or PHDAM
- Processing an HDAM or a PHDAM database sequentially
- Use of the “byte limit count” for HDAM or PHDAM
- Use of twin backward pointer for HDAM or PHDAM roots
- Use of free space with HDAM or PHDAM
- When to use DEDBs
- Processing DEDBs sequentially
- Use of DEDB parameters
- Use of subset pointers
- Use of multiple area data sets
- Secondary indexing
 - For sequential processing
 - On volatile segments
 - In HISAM databases
 - Use of unique secondary indexes
 - Use of sparse indexing
 - Processing of the secondary index as a separate database
- Logical relationships
 - Use of direct pointers versus symbolic pointers
 - Avoidance of long logical twin chains
 - Sequencing of the logical twin chain
 - Placement of the real logical child segment

In the area of application programs use of the database, establish standards for the following:

- Putting update and read functions in separate programs
- How many transaction types to allow per application program
- When applications are to issue a deliberate abnormal termination and the range of abend codes permitted applications
- Whether application programs are permitted to issue messages to the master terminal
- The method of referencing data in the IOAREA, and referencing IMS variables (such as PCBs and SSAs)
- Use of predefined structures (PCB masks, SSAs, or database segment formats) by applications
- Use of GU calls to the message queue
- Re-usability of MPP and BMP programs
- Use of qualified calls and SSAs
- Use of path calls
- Use of the CHANGE call
- Use of the “system” calls (PURG, LOG, STAT, SNAP, GCMD, and CMD)

In the area of application design, establish procedures to govern the following:

- The interaction between you and the application designer
- Use of the dictionary or COPY or STRUCTURE libraries for data elements and structures
- The holding of design reviews and inspections

In the area of batch operations, you can consider developing:

- Procedures to limit access to computer facilities
- A control point to ensure that:
 - Jobs contain complete and proper submittal documentation
 - Jobs are executed successfully on schedule
 - Correct input/output volumes are used, and output is properly distributed
 - Test programs are executed only in accordance with a defined test plan
 - An incident report is maintained to ensure all problems are recorded and reported to the responsible parties
- Normal operating procedures. These operating procedures include operations schedules, cold start, warm start, shutdown procedures, and scheduling and execution of batch programs.
- Procedures for emergency situations. During an emergency, the environment is one of stress. Documented procedures provide step-by-step guidance to resolve such situations. These procedures should include emergency restart, database backout, database recovery, log recovery, and batch program restart.

Related Reading: For a more complete treatment of recovery procedures, see *IMS Version 9: Operations Guide*.

- A master terminal operator's guide for the installation. This guide should be supplemented by *IMS Version 9: Command Reference*.
- A master operations log. This log could contain a record of system availability, time and type of failure, and cause of the failure, recovery steps taken, and type of system termination if normal.
- A system maintenance log. This log could contain a record of all release and modification levels, release dependencies, program temporary fixes (PTFs) applied, status of APARs and date submitted, and bypass solutions.

Naming Conventions

This topic contains information about:

- “General Rules for Establishing Naming Conventions”
- “Naming Conventions for HALDB” on page 22

General Rules for Establishing Naming Conventions

Good naming conventions are mandatory in a data processing project, especially in an environment with multiple applications.

A good naming convention includes the following general rules:

- Each name must be unique. If names are not unique, unpredictable errors can occur.
- Each name must be meaningful and identify the type of resource being referred to by the name.

Establishing Naming Conventions

Table 3 is an example of minimal naming conventions. They are presented only as an example, and you can establish your own naming conventions.

Table 3. Example of Naming Conventions

CATEGORY	CONVENTION
SYSTEM	S as first letter
JOB	J as first letter
PROGRAM	P as first letter if IMS program (to match PSB) G as first letter otherwise
MODULE	M as first letter
COPY	C as first letter for member containing the segment structure A as first letter for member containing all the SSAs for the segment Remainder must be the same as the segment name
TRANSACTION	T as first letter
PSB	P as first letter
PCB	Same name as PSB Note: Occurrence number indicates position in PSB
DATABASE	Dtaaann Where Indicates t Database type. The database can be one of the following types: P Physical L Logical X Primary index Y Secondary index aaa A unique database identifier common to all logical and index databases based on the same physical database nn A unique identifier, if there are multiple logical or secondary index databases
SEGMENT	Saaabbbb aaa A unique database identifier; same as the physical database in which the segment occurs Note: Concatenated segments should have an aaa value corresponding to the aaa of the logical child segment. bbbb An identifier for the user name R First letter for 'segments' that are non-DL/I file record definitions O First letter for any other data areas, for example, terminal I/O areas, control blocks, report lines, and so on.
ELEMENT	E as first letter

Naming Conventions for HALDB

HALDB naming conventions for partitions, ddnames, and data set names simplify the management of numerous partitions and data sets in HALDB PHDAM, PHIDAM, and PSINDEX databases.

Subsections:

- “Naming Convention for HALDB Partitions”
- “Naming Convention for HALDB Data Definition Names (ddnames)”
- “Naming Convention for HALDB Data Sets” on page 24

Naming Convention for HALDB Partitions

You assign names to each partition. Partition names are 1–7 bytes in length. These names must be unique among the database names, partition names, and Fast Path area names that are registered in the RECON data set. You can use partition names to describe the data in the partition, but choose such names carefully. If you add or delete partitions or modify their boundaries, data might move from one partition to another. This movement can make the assignment of meaningful names difficult. You cannot change the name of an existing partition without deleting it and redefining it as a new partition.

Naming Convention for HALDB Data Definition Names (ddnames)

IMS defines HALDB data definition names (ddnames) by appending a 1-byte suffix to the partition name. The suffix indicates the type of data set and, if you use multiple data set groups, differentiates the data sets within the group.

Table 4 shows the HALDB data set types and the corresponding ddname suffixes.

Table 4. Suffixes for HALDB Ddnames by Data Set Type

Data Set type	Ddname Suffix	Additional Suffixes if HALDB Online Reorganization is used
Database data set	A–J	M–V
Primary index (PHIDAM only)	X	Y
Indirect list data set (PHDAM and PHIDAM only)	L	L (the suffix for the ILDS does not change)

If you use multiple data set groups, the A through J suffixes are the values that you would specify for the DSGROUP parameter in the SEGM statements. The letter A identifies the first data set, the letter B identifies the second, and so forth, until the letter J, which identifies the last data set. If you do not use multiple data set groups, you do not specify the DSGROUP parameter and the only ddname has the suffix A.

The suffixes M–V and Y are created automatically for the integrated HALDB Online Reorganization function of IMS. You do not need to specify them in the DBD. If you have never used the HALDB Online Reorganization function to reorganize a given partition, the suffixes M–V and Y are not used in that partition.

In PSINDEX databases, each partition contains only one data set. The suffix A is used for the ddname that corresponds to that data set.

For example, a PHIDAM database partition named PART1 would have ddnames of PART1A for its first DBDS, PART1B for the second DBDS, up to PART1J for the tenth DBDS. The ILDS and the primary index of partition PART1 would have ddnames of PART1L and PART1X, respectively. And a PSINDEX database partition named PARSI would have a ddname of PARSIA for its data set.

Establishing Naming Conventions

When reorganizing a partition, the integrated HALDB Online Reorganization function of IMS uses an additional data set for each data set that is active prior to starting the online reorganization process. For example, a ddname of PART1M is created to correspond to the active data set PART1A. A PART1N is created for PART1B, and so on, up to PART1V for PART1J, if it exists.

Important: The ddnames must be unique. The ddnames are not case sensitive and can result in JCL errors if specified in lowercase in batch jobs.

Naming Convention for HALDB Data Sets

When you define a partition, you define a data set name prefix of up to 37 characters for the partition. IMS appends a 7-character suffix to the prefix that you define to form the data set name. The first character of the IMS-supplied suffix is an alphabetic character: either A–J, L, and X, or M–V, L, and Y. The 7-character suffix is separated from the preceding data set name qualifiers by a period.

The first character of the data set name suffix matches the character that is used as the suffix in the ddname. The remaining five digits of the suffix represent the partition ID number. For example:

- A suffix of A00001 indicates the first or only DBDS in a partition with partition ID 1
- A suffix of J00004 indicates the tenth DBDS in a partition with partition ID 4
- A suffix of L00007 indicates the ILDS in a partition with partition ID 7
- A suffix of X00011 indicates the primary index in a PHIDAM partition with partition ID 11

There is no required correlation between the partition name and the names of its data sets. You can use the same data set name prefix for every partition in a database. Because partition IDs are unique, the suffix that IMS appends to the data set name prefix that you define makes the data set names in different partitions unique.

Chapter 3. Review Process

One of the best ways to make sure a good database design is developed and effectively implemented is to review the design at various stages in its development. The sections in this chapter describe the reviews typically conducted during development of a database system. The types of reviews are:

- Design reviews 1, 2, 3, and 4
- Code inspections 1 and 2
- Security inspection
- Post-implementation review

In this Chapter:

- “The Design Review”
- “Design Review 1” on page 26
- “Design Review 2” on page 26
- “Design Review 3” on page 27
- “Design Review 4” on page 27
- “Code Inspection 1” on page 28
- “Who Attends Code Inspection 1” on page 28
- “Code Inspection 2” on page 28
- “Security Inspection” on page 29
- “Post-Implementation Review” on page 29

The Design Review

Design Reviews ensure that the functions being developed are adequate, the performance is acceptable, the installation standards met, and the project is understood and under control. Hold reviews during development of the initial database system and, afterward, whenever a program or set of programs is being developed to run against it.

Role of the Database Administrator

The role of database administration in the review process is an important one. Typically, a member of the database administration staff, someone not associated with the specific system being developed, moderates the reviews. The moderator does more than just conduct the meeting. The moderator also looks to see what impact development of this system has on existing or future systems. You, the database administrator responsible for developing the system, need to participate in all reviews.

Your role in the review process is to ensure that a good database design is developed and then effectively implemented. The role is ongoing and provides a supporting framework for the other database administration tasks described in this book.

General Information about Reviews

The sections of this chapter describe reviews typically held during system development. (For purposes of simplicity, “system” describes the object under

The Design Review

review. In actuality, the “system” could be a program, set of programs, or an entire database system.) The number of reviews, who attends them, and their specific role in the review will differ slightly from one installation to the next. What you need to understand is the importance of the reviews and the tasks performed at them. Here is some general information about reviews:

- People attending all reviews (in addition to database administrators) include a review team and the system designer. The review team generally has no responsibility for developing the system. The review team consists of a small group of people whose purpose is to ensure continuity and objectivity from one review to the next. The system designer writes the initial functional specifications.
- At the end of each review, make a list of issues raised during the review. These issues are generally change requirements. Assign each issue to a specific person for resolution, and set a target date for resolution. If certain issues require major changes to the system, schedule other reviews until you resolve all major issues.
- If you have a data dictionary, update it at the end of each review to reflect any decisions that you made. The dictionary is an important aid in keeping information current and available especially during the first four reviews when you make design decisions.

Design Review 1

The first design review takes place after initial functional specifications for the system are complete. Its purpose is to ensure that all user requirements have been identified and that design assumptions are consistent with objectives. No detailed design for the system is or should be available at this point. The review of the specifications will determine whether the project is ready to proceed to a more detailed design. When design review 1 concludes successfully, its output is an approved set of initial *functional* specifications.

People who attend design review 1, in addition to the regular attendees, include someone from the organization that developed the requirement and anyone participating in the development of detailed design. You are at the review primarily for information. You also look at:

- The relationship between data elements
- Whether any of the needed data already exists

Design Review 2

The second design review takes place after final *functional* specifications for the system are complete. This means the overall logic for each program in the system is defined, as well as the interface and interactions between programs. Audit and security requirements are defined at this point, along with most data requirements. When design review 2 is successfully concluded, its output is an approved set of final functional specifications.

Everyone who attended design review 1 should attend design review 2. People from test and maintenance groups attend as observers to begin getting information for test case design and maintenance. Those concerned with auditing and security can also attend.

Your role in this review is still primarily to gather information. You also look at:

- Whether the specifications meet user requirements
- Whether the relationship between data items is correct

- Whether any of the required data already exists
- Whether audit and security requirements are consistent with user requirements
- Whether audit and security requirements can be implemented

Design Review 3

The third design review takes place after initial *logic* specifications for the system are complete. At this point, high level pseudo code or flowcharts are complete. These can only be considered complete when major decision points in the logic are defined, calls or references to external data and modules are defined, and the general logic flow is known. All modules and external interfaces are defined at this point, definition of data requirements is complete, and database and data files are designed. Initial test and recovery plans are available; however, no code has been written. When design review 3 concludes successfully, its output is an approved set of initial logic specifications.

Everyone who attended design review 2 should attend design review 3. If the project is large, those developing detailed design need only be present during the review of their portion of the project.

It is possible now that logic specifications are available.

Your role in this review is to ensure that the flow of transactions is consistent with the database design you are creating.

At this point in the design review process, you are designing hierarchies and starting to design the database. These tasks are described in Chapter 5, “Analyzing Data Requirements,” on page 45, Chapter 6, “Choosing Full-Function Database Types,” on page 55, Chapter 8, “Choosing Optional Database Functions,” on page 169, and Chapter 9, “Designing Full-Function Databases,” on page 257.

Design Review 4

The fourth design review takes place after design review 3 is completed and all interested parties are satisfied that system design is essentially complete. No special document is examined at this review, although final functional specifications and either initial or final logic specifications are available. The primary objective of this review is to make sure that system performance will be acceptable.

At this point in the development process, sufficient flexibility exists to make necessary adjustments to the design, since no code exists but detailed design is complete. Although some design changes undoubtedly occur once coding is begun; these changes should not impact the entire system. Although no code exists at this point, you can and should run tests to check that the database you have designed will produce the results you expect.

When design review 4 concludes successfully, database design is considered complete.

The people who attend all design reviews (moderator, review team, database administrator, and system designer) should attend design review 4. Others attend only as specific detail is required.

At this point in the review process, you are almost finished with the database administration tasks along with designing and testing your database. These tasks are described in Chapter 5, “Analyzing Data Requirements,” on page 45, Chapter 6, “Choosing Full-Function Database Types,” on page 55, and Chapter 12, “Developing Test Databases,” on page 323.

Code Inspection 1

The first code inspection takes place after final logic specifications for the system are complete.

At this point, no code is written but the final functional specifications have been interpreted. Both pseudo code and flowcharts have a statement or logic box for every 5 to 25 lines of assembler language code, 5 to 15 lines of COBOL code, or 5 to 15 lines of PL/I code that needs writing. In addition, module prologues are written, and entry and exit logic along with all data areas are defined.

The objective of this review is to ensure that the correctly developed logic interprets the functional specification. Code inspection 1 also provides an opportunity to review the logic flow for any performance implications or problems. When code inspection 1 successfully concludes, its output is an approved set of final logic specifications.

Who Attends Code Inspection 1

Code inspection 1 is attended primarily by those doing the coding. People who attend all design reviews (moderator, review team, database administrator, and system designer) also attend the code inspection 1. Testing people present the test cases that will be used to validate the code, while maintenance people are there to learn and evaluate maintainability of the database.

Your role in this review is now a less active one than it has been. You are there to ensure that everyone adheres to the use of data and access sequences defined in the previous reviews.

At this point in the review process, you are starting the database administration tasks defined in Chapter 12, “Developing Test Databases,” on page 323, Chapter 11, “Implementing Database Design,” on page 307, and Chapter 13, “Loading Databases,” on page 327.

Code Inspection 2

The code inspection 2 takes place after coding is complete and before testing by the test organization begins. The objective of the second code inspection is to make sure module logic matches pseudo code or flowcharts. Interface and register conventions along with the general quality of the code are checked. Documentation and maintainability of the code are evaluated.

Everyone who attended code inspection 1 should attend code inspection 2.

Your role in this review is the same as your role in code inspection 1.

At this point in the review process, you are almost finished with the database administration tasks of developing a test database, implementing the database design, and loading the database.

During your testing of the database, you should run the DB monitor (described in Chapter 14, “Monitoring Databases,” on page 353) to make sure your database still meets the performance expectations you have established.

Security Inspection

The security inspection is optional but highly recommended if security is a significant concern. Security inspections can take place at any appropriate point in the system development process. Define security strategy early, and check its implementation during design reviews. This particular security inspection takes place after all unit and integration testing is complete. The purpose of the review is to look for any code that violates the security of system interfaces, secured databases, tables, or other high-risk items.

People who attend the security inspection review include the moderator, system designer, designated security officer, and database administrator. Because the database administrator is responsible for implementing and monitoring the security of the database, you might, in fact, be the designated security officer. If security is a significant concern, you might prefer that the review team not attend this inspection.

During this and other security inspection, you are involved in the database administration task of establishing security defined in Chapter 4, “Security,” on page 31.

Post-Implementation Review

It is highly recommended that you conduct a post-implementation review. The post-implementation review is typically held about six months after the database system is running. Its objective is to make sure the system is meeting user requirements.

Everyone who has been involved in design and implementation of the database system should attend the post-implementation review. If the system is not meeting user requirements, the output of this review should be a plan to correct design or performance problems to meet user requirements.

Chapter 4. Security

The two aspects of database security are as follows:

- *User verification* (how you establish that the person using an online database is in fact the person you have authorized)
- *User authority* (once you have verified the user's identity, how you control what is seen—and what can be done with what is seen)

This chapter deals primarily with how you can control a user's view of data and the user's actions with respect to the data.

This chapter examines the following areas:

- “Restricting the Scope of Data Access”
- “Restricting Processing Authority”
- “Restricting Access by Non-IMS Programs” on page 33
- “Using the Dictionary to Help Establish Security” on page 33

Related Reading: If you use CICS, see *CICS RACF Security Guide* for information on establishing security.

Restricting the Scope of Data Access

The PCB defines a program's (and therefore the user's) view of the database. The PCB can be thought of as a “mask” over the data structure defined by the DBD, hiding certain parts of it. Therefore, it is possible, simply by limiting the scope of the PCB, to limit the user's access to (and even knowledge of) elements of the database you need to restrict.

Figure 14 on page 32 shows an example. The top of the figure shows the hierarchical structure for a PAYROLL database as seen by you and defined by the DBD. For certain applications, it is not necessary (nor desirable) to access the SALARY segment. By omitting SENSEG statement in the DB PCB for the SALARY segment, you can make it seem that this segment simply does not exist. By doing this, you have denied unauthorized users access to the segment, and you have denied users knowledge of its very existence.

For this method to be successful, the segment being masked off must not be in the search path of an accessed segment. If it is, then the application is made aware of at least the key of the segment to be “hidden.”

With field-level sensitivity, you can achieve the same masking effect at the *field* level. If SALARY and NAME were in the same segment, you could still restrict access to the SALARY field without denying access to other fields in the segment.

Restricting Processing Authority

After you have controlled the scope of data a user has access to, you can also control authority within that scope. Controlling authority allows you to decide what processing actions against the data a given user is permitted. For example, you could give some application programs authority only to read segments in a database, while you give others authority to update or delete segments. You can

Restricting Processing Authority

do this through the PROCOPT parameter of the SENSEG statement and through the PCB statement. The PROCOPT statement tells IMS what actions you will permit against the database. A program can do what is declared in the PROCOPT.

In addition to restricting access and authority, the number of sensitive segments and the processing option specified can have an impact on data availability. To achieve maximum data availability, the PSB should be sensitive only to the segments required and the processing option should be as restrictive as possible.

For example, the DBD in Figure 13 describes a payroll database that stores the name, address, position, and salary of employees. The hierarchical structure of the database record is shown in Figure 14.

```
DBD  NAME=PAYROLL,...  
DATASET ...  
SEGM  NAME=NAME,PARENT=0...  
FIELD NAME=  
SEGM  NAME=ADDRESS,PARENT=NAME,...  
FIELD NAME=  
SEGM  NAME=POSITION,PARENT=NAME,...  
FIELD NAME=  
SEGM  NAME=SALARY,PARENT=NAME,...  
FIELD NAME=  
:  
:
```

Figure 13. DBD for Payroll Database

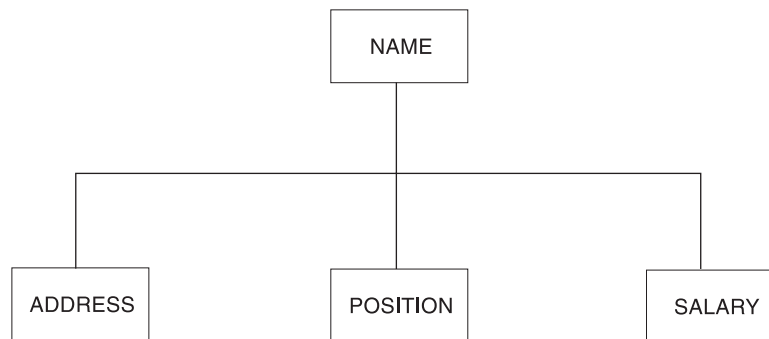


Figure 14. Payroll Database Record without a Mask

If an application needs access to the name, address, and position of employees, but not the salary, use the SENSEG statement of the DB PCB to make the application sensitive to only the name, address, and position segments. The SENSEG statements on the DB PCB creates a mask over the database record hiding segments from application. Figure 15 shows the DB PCB that masks the SALARY segment of the payroll database from the application.

```
PCB TYPE=DB.DBDNAME=PAYROLL,...  
SENSEG NAME=NAME,PARENT=0,...  
SENSEG NAME=ADDRESS,PARENT=NAME,...  
SENSEG NAME=POSITION,PARENT=NAME,...  
:  
:
```

Figure 15. PCB for Payroll Database

Figure 16 on page 33 shows what the payroll database record looks like to the application based on the DB PCB. It looks just like the database record in Figure 14 except that the SALARY segment is hidden.

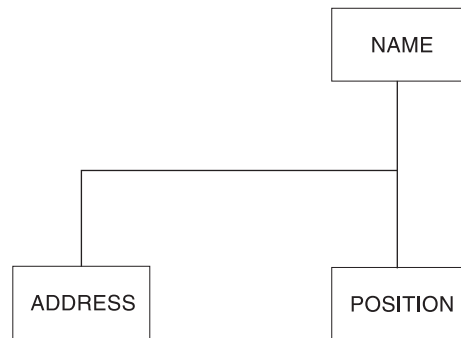


Figure 16. Payroll Database Record with SALARY Segment Masked

Restricting Access by Non-IMS Programs

One potential security exposure is from people attempting to access IMS data sets with non-IMS programs. Two methods of protecting against this exposure are data set password protection and database encryption.

Protecting Data with VSAM Passwords

You can take advantage of VSAM password protection to prevent non-IMS programs from reading VSAM data sets on which you have your IMS databases. To protect data with VSAM passwords, specify password protection for your VSAM data sets and code `PASSWD=YES` on the DBD statement. IMS then passes the DBD name as the password. If you specify `PASSWD=NO` on the DBD statement, the console operator is prompted to provide a password to VSAM each time the data set is opened.

This method is only useful in the batch environment, and VSAM password checking is bypassed entirely in the online system. (If you have RACF® installed, you can use it to protect VSAM data sets.)

Details of the `PASSWD` parameter of the DBD statement can be found in *IMS Version 9: Utilities Reference: System*.

Encrypting Your Database

Another precaution you can take against non-IMS programs reading DL/I databases is to encrypt the databases. You can encrypt DL/I segments using your own encryption routine, entered at the segment edit/compression exit. Before segments are written on the database, IMS passes control to your routine, which encrypts them. Then, each time they are retrieved, they are decrypted by your routine before presentation to the application program.

Do not change the key or the location of the key field in index databases or in root segments of HISAM data bases.

You can learn more about segment edit/compression routines in “Segment Edit/Compression Exit Routine” on page 230.

Using the Dictionary to Help Establish Security

The dictionary monitors relationships among entities in your computing environment (such as, which programs use which data elements). This ability makes the dictionary the ideal tool to administer security.

Using the Dictionary to Help Establish Security

You can use the dictionary to define your authorization matrixes. Through the extensibility feature, you can define terminals, programs, users, data, and their relationships to each other. In this way, you can produce reports that show: dangerous trends, who uses what from which terminal, and which user gets what data. For each user, the dictionary could be used to list the following information:

- Programs that can be used
- Types of transactions that can be entered
- Data sets that can be read
- Data sets that can be modified
- Categories of data within a data set that can be read
- Categories of data that can be modified

Part 2. Administering IMS Databases

Chapter 5. Analyzing Data Requirements	45	HDAM, PHDAM, HIDAM, and PHIDAM Databases	80
Local View	45	Maximum Sizes of HD Databases	82
Local View 1. Current Roster	46	DL/I Calls Issuable Against HD Databases	82
List of Current Roster Data Elements	46	When to Use HDAM and PHDAM	83
Current Roster Mappings	47	When to Use HIDAM and PHIDAM	83
Local View 2. Schedule of Classes	47	What You Need to Know About HD Databases	84
List of Schedule of Classes Data Elements	47	Types of Pointers You Can Specify	84
Schedule of Classes Mappings	48	Hierarchic Forward Pointers	85
Local View 3. Instructor Skills Report	48	Hierarchic Forward and Backward Pointers	86
List of Instructor Skills Report Data Elements	48	Physical Child First Pointers	87
Instructor Skills Report Mappings	48	Physical Child First and Last Pointers	88
Local View 4. Instructor Schedules	49	Physical Twin Forward Pointers	89
List of Instructor Schedules Data Elements	49	Physical Twin Forward and Backward	
Instructor Schedules Mappings	49	Pointers	90
Designing a Conceptual Data Structure	49	Mixing Pointers	91
Implementing the Structure with DL/I	51	Sequence of Pointers in a Segment's Prefix	93
Assigning Data Elements to Segments	51	General Format of HD Databases and Use of	
Resolving Data Conflicts	52	Special Fields	94
Analyzing Requirements for Secondary		How HDAM and PHDAM Records Are Stored	97
Indexes	52	When Not Enough Root Storage Room Exists	99
Analyzing Requirements for Logical		How HIDAM and PHIDAM Records Are Stored	99
Relationships	52	How a HIDAM or PHIDAM Database Is	
Chapter 6. Choosing Full-Function Database		Loaded	100
Types	55	Creating an Index Segment	101
Sequential Storage Method	56	Use of RAPs in a HIDAM Database	102
Direct Storage Method	56	Accessing Segments	102
Databases Supported with DBCTL	56	Qualified Calls	103
Databases Supported with DCCTL	57	Unqualified Calls	103
Performance Considerations Overview	57	Inserting Root Segments	103
HSAM Databases	62	Inserting Root Segments into an HDAM or	
When to Use HSAM	63	PHDAM Database	103
How an HSAM Record Is Stored	63	Inserting Root Segments Into a HIDAM or	
DL/I Calls against an HSAM Database	64	PHIDAM Database	103
No Sequence Field Defined	65	Updating the Space Management Fields	
Sequence Field Defined	65	When a Root Segment Is Inserted	104
HISAM Databases	66	Inserting Dependent Segments	106
When to Use HISAM	67	Deleting Segments	107
How a HISAM Record is Stored	67	Replacing Segments	107
Accessing Segments	70	How the HD Space Search Algorithm Works	107
Inserting Root Segments Using VSAM	70	Root Segment	108
A Free Logical Record Exists	70	Dependent Segment	108
No Free Logical Record Exists	71	Second-Most Desirable Block	108
Inserting Dependent Segments	72	Locking Protocols	109
Deleting Segments	74	Locking to Provide Program Isolation	109
Replacing Segments	76	Locking for Q Command Codes	110
Criteria for Selecting HISAM	76	Resource Locking Considerations with Block	
SHSAM, SHISAM and GSAM Databases	76	Level Sharing	110
Situation 1 - Converting from a non-database		Data Sharing Impact on Locking	111
system to IMS	76	Locking in HDAM, PHDAM, HIDAM, and	
Situation 2 - Passing data	77	PHIDAM Databases	111
SHSAM Databases	77	Locking for Secondary Indexes	111
SHISAM Databases	77	Backup and Recovery of HIDAM and	
SHISAM IMS Symbolic Checkpoint Call	78	PHIDAM primary indexes	111
GSAM Databases	78	Partitions in PHDAM, PHIDAM, and PSINDEX	
GSAM IMS Symbolic Checkpoint Call	79	Databases	112
		HALDB Partition Names and Numbers	112

HALDB Partition Names	113	Combination of Binary and Direct Access Methods	148
HALDB Partition ID Numbers.	113	Position in an MSDB	149
HALDB Change Version Numbers	113	The Field Call	150
HALDB Partition Reorganization Numbers	114	Call Sequence Results	150
HALDB Partition Initialization.	115	Fast Path Virtual Storage Option	151
HALDB Partition Data Sets.	115	Restrictions Using VSO DEDB Areas	151
Indirect List Data Sets and HALDB Partitions	116	Defining a VSO DEDB Area	152
Recovery of HALDB Partition Data Sets	116	VSO DEDB Areas and the PREOPEN and NOPREO Keywords	154
HALDB Partition Selection	117	Sharing of VSO DEDB Areas	154
Partition Selection Using High Keys.	117	The Coupling Facility and Shared Storage	155
Partition Selection Using a Partition Selection Exit Routine.	117	Duplexing Structures.	155
HALDB Partitions and Application Program Processing	118	Automatic Altering of Structure Size	155
Unmodified Application Program Processing of HALDB Databases.	118	System-Managed Rebuild	156
HALDB Selective Partition Processing	118	Private Buffer Pools	156
Managing I/O Errors.	122	Defining a VSO Cache Structure Name.	156
Chapter 7. Choosing Fast Path Database Types	125	Coupling Facility Structure Naming Convention	156
Data Entry Databases.	125	Examples of Defining Coupling Facility Structures	157
DEDB Functions	126	Registering a Cache Structure Name with DBRC	157
DEDB Areas.	126	Defining a Private Buffer Pool Using the DFSVMxx IMS.PROCLIB Member	158
Areas and the DEDB Format	126	Defining a Private Buffer Pool for a Multi-Area Structure	159
Opening and Preopening DEDB Areas	127	Acquiring and Accessing Data Spaces for VSO DEDB Areas.	159
Stopping and Starting DEDBs and DEDB Areas	128	Acquiring a Data Space	159
Restarting and Reopening Areas After an IRLM Failure	128	Accessing a Data Space	160
Read and Write Errors in DEDB Areas	129	Resource Control and Locking.	160
Record Deactivation	130	Preopen Areas and VSO Areas in a Data Sharing Environment	161
Non-Recovery Option	130	Input/Output Processing With VSO.	162
Area Data Set Replication	131	Input Processing	162
DEDBs and Data Sharing	132	Output Processing.	162
Fixed- and Variable-Length Segments in DEDBs	132	The PRELOAD Option	163
Examples of Defining Segments	132	I/O Error Processing	163
Parts of a DEDB Area	133	Checkpoint Processing	164
Root Addressable Part	135	VSO Options Across IMS Restart	164
Independent Overflow Part.	135	Emergency Restart Processing	164
Sequential Dependent Part	135	VSO Options with XRF	165
CI and Segment Formats	135	Fast Path Synchronization Points	165
Root Segment Storage	138	Phase 1 - Build Log Record.	166
Direct Dependent Segment Storage	138	Phase 2 - Write Record to System Log	166
Sequential Dependent Segment Storage.	139	Managing I/O Errors and Long Wait Times	166
Enqueue Level of Segment CIs	139	Registering Fast Path Databases in DBRC	167
DEDB Space Search Algorithm	141	Chapter 8. Choosing Optional Database Functions	169
DEDB Insert Algorithm	141	Logical Relationships.	169
DEDB Free Space Algorithm	142	Logical Relationship Types	170
Reorganization	142	Unidirectional Logical Relationships.	171
Segment Deletion	143	Bidirectional Physically Paired Logical Relationship.	172
Managing Unusable Space with IMS Tools	143	Bidirectional Virtually Paired Logical Relationship.	173
DL/I Calls against a DEDB.	143	Logical Relationship Pointer Types	174
Mixed Mode Processing.	143	Logical Parent Pointer	174
Main Storage Databases (MSDBs).	144	Logical Child Pointer.	176
When to Use an MSDB	145		
MSDBs Storage.	145		
MSDB Record Storage	146		
Saving MSDBs for Restart	147		
DL/I Calls against an MSDB	147		
Rules for Using an SSA	147		
Insertion and Deletion of Segments	148		

Physical Parent Pointer	177	Suppressing Index Entries: Sparse Indexing	216
Logical Twin Pointer	178	Advantages of Sparse Indexing	216
Indirect Pointers	179	How to Specify a Sparse Index	216
Paths in Logical Relationships	180	How the Secondary Index Is Maintained	217
The Logical Child Segment	181	Inserting a Source Segment	217
Segment Prefix Information for Logical Relationships	181	Deleting a Source Segment	217
Sequence of Pointers in a Segment's Prefix Counter Used in Logical Relationships	182	Replacing a Source Segment	217
Intersection Data	182	Processing a Secondary Index as a Separate Database	218
Fixed Intersection Data	183	Sharing Secondary Index Databases	219
Variable Intersection Data	183	Using the INDICES= Parameter	219
FID, VID, and Physical Pairing	184	Compare Process and Performance	220
Recursive Structures: Same Database Logical Relationships	184	Using Secondary Indexes with Logical Relationships	221
Defining Sequence Fields for Logical Relationships	188	Using Secondary Indexes with Variable-Length Segments	222
Logical Parent Sequence Fields	188	Considerations When Using Secondary Indexing	222
Real Logical Children Sequence Fields	189	How to Specify Use of Secondary Indexing in the DBD	223
Virtual Logical Children Sequence Fields	189	DBD for the EDUC Database	223
Control Blocks for Logical Relationships	189	DBD for the SINDX Database	225
Specifying Logical Relationships in the Physical DBD	190	HALDB Partitioned Secondary Indexes	225
Specifying Bidirectional Logical Relationships	193	Choosing Secondary Indexes Versus Logical Relationships	226
Checklist of Rules for Defining Logical Relationships in Physical Databases	193	When to Use a Secondary Index	226
Specifying Logical Relationships in the Logical DBD	194	When to Use a Logical Relationship	226
Checklist of Rules for Defining Logical Databases	195	Variable-Length Segments	227
Choosing Replace, Insert, and Delete Rules for Logical Relationships	199	How to Specify Variable-Length Segments	228
Logical Relationships and HALDB Databases	201	How Variable-Length Segments Are Stored and Processed	228
Performance Considerations for Logical Relationships	201	When to Use Variable-Length Segments	230
Logical Parent Pointers	202	What Application Programmers Need to Know about Variable-Length Segments	230
KEY/DATA Considerations	202	Adding or Converting to Variable-Length Segments	230
Sequencing Logical Twin Chains	203	Segment Edit/Compression Exit Routine	230
Placement of the Real Logical Child in a Virtually Paired Relationship	204	Things to Consider Before Using the Segment Edit/Compression Exit Routine	232
Secondary Indexes	204	Preventing Split Segments from Impacting Performance	232
Why Secondary Indexes?	204	How to Specify the Segment Edit/Compression Exit Routine	233
Characteristics of Secondary Indexes	205	Converting to the Segment Edit/Compression Exit Routine	233
Segments Used for Secondary Indexes	206	Data Capture Exit Routines	233
How the Hierarchy Is Restructured	209	DBD Parameters for Data Capture Exit Routines	234
Secondary Data Structure	210	The EXIT= Parameter	234
Secondary Processing Sequence	210	The VERSION= Parameter	235
How a Secondary Index Is Stored	210	Call Sequence of Data Capture Exit Routines	235
Format and Use of Fields in a Pointer Segment	211	Data Passed To and Captured By the Data Capture Exit Routine	236
Delete Byte	212	Data Capture Call Functions	237
Pointer Field	212	Cascade Delete When Crossing Logical Relationships	237
Constant Field	212	Data Capture Exit Routines and Logically Related Databases	238
Search Field	212	Converting to Data Capture Exit Routines	238
Subsequence Field	212	Field-Level Sensitivity	238
Duplicate Data Field	213	Using Field-Level Sensitivity as a Mapping Interface	239
Concatenated Key Field	213		
User Data in Pointer Segments	214		
Making Keys Unique Using System Related Fields	214		
Using the /SX Operand	214		
Using the /CK Operand	214		

Using Field-Level Sensitivity with Variable-Length Segments	239	Buffering Options	265
How to Specify Use of Field-Level Sensitivity in the DBD and PSB	239	Multiple Buffers in Virtual Storage	266
Retrieving Segments Using Field-Level Sensitivity	240	Subpool Buffer Use Chain	266
Replacing Segments Using Field-Level Sensitivity	241	The Buffer Handler	266
Inserting Segments Using Field-Level Sensitivity	241	Background Write Option	266
Using Field-Level Sensitivity When Fields Overlap	242	Shared Resource Pools	266
Using Field-Level Sensitivity When Path Calls Are Issued	242	Using Separate Subpools	267
Using Field-Level Sensitivity with Logical Relationships	242	Hiperspace Buffering	267
Using Field-Level Sensitivity with Variable-Length Segments	243	Buffer Size	267
Retrieving Missing Fields	243	Buffer Numbers	267
Replacing Missing Fields	244	VSAM Buffer Sizes	268
Inserting Missing Fields	246	OSAM Buffer Sizes	268
Retrieving Partially Present Fields	247	Specifying Buffers	269
Replacing Partially Present Fields	247	OSAM Sequential Buffering	270
General Considerations for Using Field-Level Sensitivity	248	Sequential Buffering Introduction	270
Multiple Data Set Groups	248	Benefits of Sequential Buffering	271
Why Use Multiple Data Set Groups?	249	Programs That Can Benefit from SB	271
HD Databases Using Multiple Data Set Groups	250	Typical Productivity Benefits of SB	271
How HD Records Are Stored in Multiple Data Set Groups	251	Flexibility of SB Use	271
Specifying Use of Multiple Data Set Groups in HD and PHD Databases	252	How SB Buffers Data	272
VSAM KSDS CI Reclaim For Full-Function Databases	254	What SB Buffers	272
Integrated HALDB Online Reorganization Function	255	Conditional Activation and Periodical Evaluation of SB	272
Storing XML Data in IMS Databases	255	Role of the SB Buffer Handler	273
Chapter 9. Designing Full-Function Databases	257	Virtual Storage Considerations for SB	273
Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)	257	How to Request the Use of SB	274
Estimating the Size of the Root Addressable Area (HDAM or PHDAM Only)	258	Requesting SB During PSB Generation	274
Determining Which Randomizing Module to Use (HDAM and PHDAM Only)	259	Requesting SB With SB Control Statements	274
Write Your Own Randomizing Module	259	Requesting SB with an SB Initialization Exit Routine	275
Assess the Effectiveness of the Randomizing Module	259	SB Options or Parameters Provided by Several Sources	276
Choosing HDAM or PHDAM Options	260	Using SB in an Online System	276
Minimizing I/O Operations	260	Disallowing the Use of SB	276
Maximizing Packing Density	261	VSAM Options	277
Choosing a Logical Record Length for a HISAM Database	261	Optional Functions Specified in the OPTIONS Control Statement	277
Logical Record Length Considerations	261	Using Background Write (BGWRT Parameter)	277
Rules to Observe	263	Choosing an Insert Strategy (INSERT Parameter)	278
Calculating How Many Logical Records Are Needed to Hold a Database Record	264	Using the IMS Trace Parameters	278
Specifying Logical Record Length	264	Determining Which Dump Option to Use (DUMP Parameter)	279
Choosing a Logical Record Length for HD Databases	264	Deciding Whether to Fix VSAM Database Buffers and IOBs in Storage (VSAMFIX Parameter)	279
Determining the Size of CIs and Blocks	264	Using Local Shared Resources (VSAMPLS Parameter)	279
Recommendations for Specifying Sizes for Blocks, CIs, and Records	265	Optional Functions Specified in the POOLID, DBD, and VSRBF Control Statements	279
		Optional Functions Specified in the Access Method Services DEFINE CLUSTER Command	279
		Specifying that 'Fuzzy' Image Copies Can be Taken with the Database Image Copy 2 utility (DFSUDMT0)	280
		Specifying Free Space for a KSDS (FREESPACE Parameter)	280
		Specifying Whether Data Set Space Is Pre-formatted for Initial Load (SPEED RECOVERY Parameter)	280
		OSAM Options	281

Dump Option (DUMP Parameter)	281
Deciding Which FIELD Statements to Code in the DBD	281
Planning for Maintenance	281
Chapter 10. Designing Fast Path Databases	283
Designing a Data Entry Database (DEDB)	283
DEDB Design Guidelines	283
DEDB Area Design Guidelines	284
Determining the Size of the CI	285
Determining the Size of the UOW	286
SDEP CI Preallocation and Reporting	286
Processing Option P (PROCOPT=P)	287
DEDB Randomizing Routine Design.	288
Multiple Copies of an Area Data Set.	288
Record Deactivation	289
Physical Child Last Pointers	289
Subset Pointers	289
Designing a Main Storage Database (MSDB)	290
Calculating Virtual Storage Requirements for an MSDB	290
Calculating Buffer Requirements	290
Calculating the Storage for an Application I/O Area	291
Understanding Resource Allocation, a Key to Performance.	291
Designing to Minimize Resource Contention	292
Choosing MSDBs to Load and Page-Fix	294
Auxiliary Storage Requirements for an MSDB	295
High-Speed Sequential Processing (HSSP)	296
Why HSSP?	296
Limitations and Restrictions When Using HSSP	296
Using HSSP	297
HSSP Processing Option H (PROCOPT=H)	297
Image-Copy Option	298
UOW Locking	298
Private Buffer Pools	298
Designing a DEDB or MSDB Buffer Pool	298
Buffer Requirements	299
Normal Buffer Allocation (NBA)	299
Overflow Buffer Allocation (OBA)	299
Fast Path Buffer Allocation Algorithm	300
System Buffer Allocation (DBFX)	300
Determining the Fast Path Buffer Pool Size	300
Fast Path Buffer Performance Considerations	300
The NBA Limit and Sync Point	301
The DBFX Value and the Low Activity Environment	301
Designing a DEDB Buffer Pool in the DBCTL Environment	302
Buffer Requirements in a DBCTL Environment	302
Normal Buffer Allocation for BMPs	302
Normal Buffer Allocation for CCTL Regions and Threads	303
Overflow Buffer Allocation for BMPs	303
Overflow Buffer Allocation for CCTL Threads	303
Fast Path Buffer Allocation Algorithm for BMPs	303
Fast Path Buffer Allocation Algorithm for CCTL Threads	304
System Buffer Allocation (SBA)	304

Determining the Size of the Fast Path Buffer Pool for DBCTL	304
Fast Path Buffer Performance Considerations for DBCTL	305
The NBA/FPB Limit and Sync Point in a DBCTL Environment	305
Low Activity and the DBFX Value in a DBCTL Environment	305
A Note on Fast Path Buffer Allocation in IMS Regions	306
Chapter 11. Implementing Database Design	307
Coding Database Descriptions as Input for the DBDGEN Utility	307
The DBD Statement	308
The DATASET Statement	308
The SEGM Statement.	309
The FIELD Statement.	309
The LCHILD Statement	309
The XDFLD Statement	310
The DBDGEN and END Statements	310
Implementing HALDB Design.	310
Creating HALDB databases with the HALDB Partition Definition Utility	310
Creating Partitions With the HALDB Partition Definition Utility	311
Adding HALDB Partitions to an Existing HALDB	314
Finding, Viewing, Sorting, Copying, Modifying, Deleting, and Printing HALDB Partitions.	314
Defining and Modifying Data Set Groups	315
Number of Data Sets in a HALDB Partition	315
Exporting Database Definitions	315
Importing Database Definitions	315
Viewing IMS DDNAME Concatenation.	315
Choosing IMS RECON and DBDLIB Libraries	316
Deleting Database Information	316
Allocating an ILDS	316
Coding Program Specification Blocks as Input to the PSBGEN Utility	317
The Alternate PCB Statement	318
The Database PCB Statement	318
The SENSEG Statement	319
The SENFLD Statement	319
The PSBGEN Statement	320
The END Statement	320
Building the Application Control Blocks (ACBGEN)	320
Defining Generated Program Specification Blocks for SQL Applications	321
Chapter 12. Developing Test Databases.	323
Test Requirements.	323
What Kind of Database?.	324
What Kind of Sample Data?	324
What Kind of Application Program?.	324
Designing, Creating, and Loading a Test Database	324
Using Testing Standards.	324
Using IBM Programs to Develop a Test Database	325

Using the Data Extraction, Processing, and Restructuring System	325
Using IBM VisualAge Generator	325
IMS Application Development Facility II	325
File Manager for z/OS for IMS Data	326
Using the DL/I Test Program, DFSDDLTO	326
Chapter 13. Loading Databases	327
Estimating the Minimum Size of the Database	327
Step 1. Calculate the Size of an Average Database Record	327
Determining Segment Size	327
Determining Segment Frequency	328
Determining Average Database Record Size	329
Step 2. Determine Overhead Needed for CI Resources	329
Step 3. Determine the Number of CIs or Blocks Needed	330
HISAM: Determining the Number of CIs or Blocks Needed	330
HIDAM or PHIDAM: Determining the Number of CIs or Blocks Needed.	331
HIDAM or PHIDAM Index: Calculating the Space Needed	331
HDAM or PHDAM: Determining the Amount of Space Needed	332
Secondary Index: Determining the Amount of Space Needed	333
Step 4. Determine the Number of Blocks or CIs Needed for Free Space	333
Step 5. Determine the Amount of Space Needed for Bit Maps.	333
Allocating Data Sets	334
Allocating OSAM Data Sets	334
Example of Allocating Multi-Volume OSAM Data Sets on Non-SMS Managed DASD	335
Example of Allocating Multi-Volume OSAM Data Sets on SMS-Managed DASD	336
Cautions When Allocating OSAM Data Sets	337
Writing a Load Program.	338
The Load Process	338
Status Codes for Load Programs	340
Using SSAs in a Load Program	341
Loading a Sequence of Segments with the D Command Code	341
Two Types of Initial Load Program	341
Basic Initial Load Program	341
Restartable Initial Load Program	344
JCL for the Initial Load Program	348
Loading a HISAM Database	348
Loading a SHISAM Database	349
Loading a GSAM Database.	349
Loading an HDAM or a PHDAM Database	349
Loading a HIDAM or a PHIDAM Database	349
Loading a Database with Logical Relationships or Secondary Indexes.	349
Loading Fast Path Databases	349
Loading an MSDB.	349
Loading a DEDB	350
Loading Sequential Dependent Segments	352

Chapter 14. Monitoring Databases	353
IMS Monitor	353
Monitoring Fast Path Systems	355
Fast Path Log Analysis Utility	355
Fast Path Log Reduction.	356
Fast Path Transaction Timings	356
Monitored Events for Fast Path	357
Selecting Transactions	357
Interpreting Fast Path Analysis Reports.	357

Chapter 15. Tuning Databases	359
Reorganizing the Database	360
When You Should Reorganize	360
Reorganizing Databases Offline	360
Protecting Your Database During an Offline Reorganization	361
Offline Reorganization Utilities	361
Partial Offline Reorganization	362
Offline Reorganization Using UCF	362
Offline Reorganization Without UCF	362
HISAM Reorganization Unload Utility (DFSURUL0)	365
HISAM Reorganization Reload Utility (DFSURRL0).	366
HD Reorganization Unload Utility (DFSURGU0)	366
HD Reorganization Reload Utility (DFSURGL0)	367
Database Prereorganization Utility (DFSURPR0).	368
Database Scan Utility (DFSURGS0)	369
Database Prefix Resolution Utility (DFSURG10).	369
Database Prefix Update Utility (DFSURGP0)	370
Using HISAM Unload and Reload Utilities for Secondary Indexing Operations	371
Utility Control Facility (DFSUCF00)	373
Database Surveyor Utility (DFSPRSUR).	373
Partial Database Reorganization Utility (DFSPRCT1).	374
Procedures for Offline Database Reorganizations	375
Reorganizing a HISAM Database (No Secondary Indexes)	376
Reorganizing an HD (HDAM or HIDAM) Database (No Logical Relationships or Secondary Indexes)	376
Reorganizing a Primary or Secondary Index	376
Reorganizing HALDBs	376
HALDB Offline Reorganization	377
Overview of HALDB Offline Reorganization	377
Options for Offline Reorganization of HALDBs	378
Unloading HALDB Partitions and Databases for Offline Reorganization	379
Reallocating HALDB Database Data Sets for Offline Reorganization	380
Reloading HALDB Partitions and Databases for Offline Reorganization	381
HALDB Online Reorganization	382
The Initialization Phase for HALDB Online Reorganization	383

The Copying Phase for HALDB Online Reorganization	385	Performing the Migration Unload	414
The Termination Phase for HALDB Online Reorganization	386	Performing the Migration Reload	414
Migration and Coexistence Considerations for HALDB Online Reorganization	387	Changing the DL/I Access Method From PHDAM and PHIDAM to HDAM and HIDAM	415
Fallback Considerations for HALDB Online Reorganization	388	Procedure for Changing to DEDBs	416
Restrictions for HALDB Online Reorganization	389	Changing the Hierarchic Structure	416
Data Set Naming Conventions for HALDB Online Reorganization	390	Changing the Sequence of Segment Types	416
Output Data Set Requirements for HALDB Online Reorganization	391	Combining Segments	417
Starting HALDB Online Reorganization	391	Procedure for Changing the Hierarchic Structure	417
Monitoring HALDB Online Reorganization	392	Changing Direct-Access Storage Devices	418
Modifying and Tuning HALDB Online Reorganization	392	Tuning OSAM Sequential Buffering	418
How a HALDB Online Reorganization Impacts IMS Logging	395	Well-Organized Database	418
Controlling the Overall System Impact of a HALDB Online Reorganization	395	Badly-Organized Database	419
IMS Restart and XRF Processing for HALDB Online Reorganization	395	Ensuring a Well-Organized Database	419
IMS Restart and Fast Database Recovery Processing for HALDB Online Reorganization	396	Adjusting HDAM and PHDAM Options	419
IMS Remote Site Recovery Processing for HALDB Online Reorganization	396	Adjusting Buffers	420
Locking Impacts of HALDB Online Reorganization	397	VSAM Buffers	420
Using IMS Utilities with HALDB Online Reorganization	397	Monitoring VSAM Buffers	420
Recovery for HALDB Online Reorganization	398	When to Adjust VSAM Buffers	421
Offline Reorganizations after HALDB Online Reorganizations	400	VSAM Buffer Adjustment Options	421
Activating Sequential Buffering to Improve the Performance of HALDB Online Reorganization	400	OSAM Buffers	422
The HALDB Self-Healing Pointer Process	401	Procedure for Adjusting VSAM and OSAM Database Buffers	422
How the Self-Healing Pointer Process Works	401	OSAM Sequential Buffering	423
Finding Target Segments	402	Procedure for Adjusting Sequential Buffers	423
Healing Pointers	403	Adjusting VSAM Options	423
Performance of the Self-Healing Process	404	Procedure for Adjusting VSAM Options Specified in the OPTIONS Control Statement	424
Changing DL/I Access Methods	406	Procedures for Adjusting VSAM Options Specified in the Access Method Service DEFINE CLUSTER Command	424
Changing the DL/I Access Method From HISAM to HIDAM	407	Changing the FREESPACE Parameter	424
Changing the DL/I Access Method From HISAM to HDAM	407	Changing the SPEED / RECOVERY Parameter	424
Changing the DL/I Access Method From HIDAM to HISAM	409	Adjusting OSAM Options	425
Changing the DL/I Access Method From HIDAM to HDAM	409	Changing the Amount of Space Allocated	425
Changing the DL/I Access Method From HDAM to HISAM	410	Changing Operating System Access Methods	426
Changing the DL/I Access Method From HDAM to HIDAM	411	Changing the Number of Data Set Groups	426
Changing the DL/I Access Method From HDAM to PHDAM and HIDAM to PHIDAM	413	Tuning Fast Path Systems	430
Secondary Index Considerations	414	Transaction Volume to a Particular Fast Path Application Program	431
Determining the Database Name	414	DEDB Structure Considerations	431
		Usage of Buffers from a Buffer Pool	431
		Contention for DEDB Control Interval (CI) Resources	433
		Exhaustion of DEDB DASD Space	434
		Utilization of Available Real Storage	434
		Synchronization Point Processing and Physical Logging	434
		Contention for Output Threads	434
		Overhead Resulting from Reprocessing	435
		Dispatching Priority of Processor-Dominant and I/O-Dominant Tasks	435
		DASD Contention Due to I/O on DEDBs	435
		Resource Locking Considerations with Block Level Sharing	435
		Resource Name Hash Routine	436
		Chapter 16. Modifying Databases	437
		Modifying Record Segments	437

Adding Segment Types	438	Adding or Converting to Variable-Length Segments	459
Unloading and Reloading Using the		Method 1. Converting Segments or a Database	459
Reorganization Utilities	438	Method 2. Converting Segments or a Database	460
Without Unloading or Reloading	439	Converting to the Segment Edit/Compression Exit	
Using Your Own Unload and Reload		Routine	460
Program	439	Converting Databases for Data Capture Exit	
Deleting Segment Types	439	Routines and Asynchronous Data Capture.	461
Moving Segment Types	440	Converting a Logical Parent Concatenated Key	
Changing Segment Size	440	from Virtual to Physical or Physical to Virtual	462
Changing Data in a Segment (Except for Data at		Using the Online Change Function	462
the End of a Segment)	441	Online Change, DEDBs, and Availability of IFP	
Changing the Position of Data in a Segment	441	and MPP Regions	463
Changing the Name of a Segment	442	Online Change and DEDB Randomizer and Exit	
Adding Logical Relationships	442	Routines	465
Example 1. DBX Exists, DBY Is to Be Added	443	Introducing a New DEDB Randomizing	
Example 1 Procedure.	443	Routine Using Online Change.	465
Example 2. DBX and DBY Exist, DBZ Is to Be		Changing DEDB Randomizing Routines	
Added	444	Using Online Change.	466
Example 2 Procedure.	444	Deleting a DEDB Randomizing Routine	
Example 3. DBX and DBY Exist, DBZ Is to Be		Using Online Change.	466
Added	445	Online Change and DEDB Segment	
Example 4. DBX and DBY Exist, DBZ Is to Be		Compression Routines	466
Added	445	Online Change and DEDB Data Capture Exit	
Example 5. DBX Exists, DBY Is to Be Added	445	Routines	467
Procedure	446	Changing DEDB Root Addressable Space	
Example 6. DBX and DBY Exist, DBZ Is to Be		with Two Stage Randomizer Using Online	
Added	446	Change	468
Procedure When Reorganizing DBY (Segment		Changing the DEDB AREA UOW Structural	
B Contains a Symbolic Pointer)	447	Definition Using Online Change	468
Procedure When Reorganizing DBY and		Making Online Changes at the DEDB and Area	
Scanning DBX (Segment B Contains a Direct		Level	469
Pointer)	447	Adding or Deleting DEDBs Using Online	
Procedure When Reorganizing DBX and DBY		Change	469
Added	448	Adding or Deleting DEDB Segments Using	
Procedure Using Scan	449	Online Change	470
Procedure When Reorganizing DBX and DBY		Adding or Deleting DEDB Areas Using	
Added	449	Online Change	471
Example 8. DBX and DBY Exist, DBZ Is to Be		Changing DEDB Root Addressable Space	
Added	450	Allocation Using Online Change	471
Example 9. DBY Exists, DBZ Is to Be Added	450	Online Change and DEDB Dependent and	
Procedure	451	Independent Overflow Space Allocation	472
Example 10. DBY Exists, DBZ Is to Be Added		Changing DEDB CI Size Using Online	
Added	451	Change	472
Example 11. DBX and DBY Exist, DBZ Is to Be		Extending DEDB Independent Overflow Online	472
Added	452	Modifying HALDB Databases	474
Example 12. DBX and DBY Exist, DBZ Is to Be		What You Need to Know About Modifying	
Added	452	HALDB Databases.	475
Example 13. DBX and DBY Exist, Segment Y		The Scope of Changes for HALDB Databases	475
and DBZ Are to Be Added	453	Record Distribution and Partition Boundaries	
Procedure	453	in HALDBs	477
Steps in Reorganizing a Database to Add a		Online Partition Structures and Partition	
Logical Relationship	454	Definitions in DBRC	480
Some Restrictions on Modifying Existing Logical		Partition ID Numbers	481
Relationships	457	Automatic Update of HALDB Secondary	
Example 1: Changing from Bidirectional		Index and Logical Relationship Pointers	483
Virtual to Bidirectional Physical Pairing	457	Online Change with HALDB	484
Example 2: Changing the Location of the		Changing the High Key of a Partition	484
Real Logical Child in a Bidirectional Logical		Adding Partitions to a HALDB	485
Relationship.	458	Adding a Partition to a HALDB that Uses	
Summary on Use of Utilities When Adding		High Key Partition Selection	486
Logical Relationships	458		
Adding a Secondary Index	459		

	Adding a Partition That Defines a New	
	Highest High Key	487
	Adding a Partition When Using a Partition	
	Selection Exit Routine	488
	Disabling and Enabling HALDB Partitions . .	489
	About Disabled Partitions	489
	Disabling HALDB Partitions	490
	About Enabling Partitions	491
	Enabling HALDB Partitions	491
	Deleting Partitions From a HALDB	491
	Deleting a Partition	493
	Deleting the Lowest Key Partition and All of	
	Its Records	494
	Deleting a Partition that Uses a Secondary	
	Index	494
	Deleting a Partition When Using a Partition	
	Selection Exit Routine	494
	Restoring Deleted Partitions	495
	Changing the Name of a HALDB Partition . .	496
	Modifying the Number of Root Anchor Points	
	in a PHDAM Partition	496
	Modifying HALDB Segments	497
	Modifying HALDB Partition Data Sets	497
	Changing HALDB Data Set Name Prefixes	497
	Changing the Free Space Parameters for a	
	Database Data Set	498
	Changing the OSAM Block Size for a	
	HALDB Database Data Set	498
	Changing the VSAM CI Size for a HALDB	
	Database Data Set	498
	Exit Routine Modifications and HALDBs . . .	498
	Adding or Changing a HALDB Partition	
	Selection Exit Routine (DFSPSE00)	499
	Changing the Randomizing Module or the	
	Randomization Parameters for a PHDAM	
	Partition	500
	Adding a Secondary Index to a HALDB . . .	500
	Modifying a HALDB PSINDEX	501

Chapter 5. Analyzing Data Requirements

One of the early steps of database design is developing a conceptual data structure that satisfies your end user's processing requirements. So, before you can develop a conceptual data structure, familiarize yourself with your end user's processing and data requirements.

Developing a data structure is a process of combining the data requirements of each of the tasks to be performed, into one or more data structures that satisfy those requirements. The method explained here describes how to use the local views developed for each business process to develop a data structure.

A business process, in an application, is one of the tasks your end user needs done. For example, in an education application, printing a class roster is a business process.

A local view describes a conceptual data structure and the relationships between the pieces of data in the structure for one business process.

To understand the method explained in this chapter, you need to be familiar with the terminology and examples explained in the introductory chapter on application design in *IMS Version 9: Application Programming: Design Guide*. The chapter of the design guide explains how to develop local views for the business processes in an application.

Included in this chapter are the following topics:

- “Local View,” which introduces you to the local view examples and explains the information that makes up a local view.
- “Designing a Conceptual Data Structure” on page 49, which explains how you can develop a conceptual data structure based on the local views for the business processes in an application.
- “Implementing the Structure with DL/I” on page 51, which explains how you implement the structure you have developed with DL/I. The considerations explained are: assigning data elements to segments and resolving data conflicts with DL/I.

Local View

Designing a structure that satisfies the data requirements of the business processes in an application requires an understanding of the requirements for each of those business processes. A local view of the business process describes these requirements because the local view provides:

- A list of all the data elements the process requires and their controlling keys
- The conceptual data structure developed for each process, showing how the data elements are grouped into data aggregates
- The mappings between the data aggregates in each process

This chapter uses a company that provides technical education to its customers as an example. The education company has one headquarters, called HQ, and several local education centers, called Ed Centers. HQ develops the courses offered at each

Local View

of the Ed Centers. Each Ed Center is responsible for scheduling classes it will offer and for enrolling students for those classes.

A class is a single offering of a course on a specific date at an Ed Center. There might be several offerings of one course at different Ed Centers, and each of these offerings is a separate class.

The local views used in this chapter are for the following business processes in an education application:

- Current Roster
- Schedule of Classes
- Instructor Skills Report
- Instructor Schedules

The information in the subtopics of this topic summarizes the local views developed in the introductory chapter on application design in *IMS Version 9: Application Programming: Design Guide*.

Notes for local views:

- The asterisks (*) in the data structures for each of the local views indicate the data elements that identify the data aggregate. This is the data aggregate's key; some data aggregates require more than one data element to uniquely identify them.
- The mappings between the data aggregates in each process are given in mapping notation. A one-to-many mapping means for each *A* aggregate there are one or more *B* aggregates; shown like this: \longleftrightarrow
A many-to-many relationship means that for each *A* aggregate there are many *B* aggregates, and for each *B* aggregate, there are many *A* aggregates; shown as follows: \longleftrightarrow

Local View 1. Current Roster

This topic describes the elements, the data structure, the data aggregates, and the mapping of the relationships between the data aggregates used to satisfy the data requirements of the Current Roster business process.

List of Current Roster Data Elements

The following is a list of the data elements and their descriptions for our technical education provider example.

Data Element	Description
CRSNAME	Course name
CRSCODE	Course code
LENGTH	Length of class
EDCNTR	Ed Center offering class
DATE	Date class is offered
CUST	Customer that sent student
LOCTN	Location of customer
STUSEQ#	Student's sequence number
STUNAME	Student's name

STATUS	Student's enrollment status
ABSENCE	Student's absences
GRADE	Student's grade for class
INSTRS	Instructors for class

Figure 17 shows the conceptual data structure for the current roster.


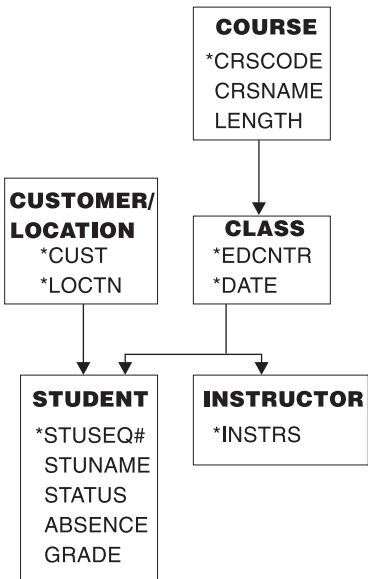


Figure 17. Current Roster Conceptual Data Structure

Current Roster Mappings

The mappings for the current roster are:

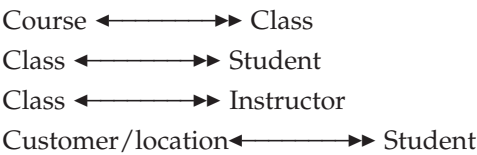

Local View 2. Schedule of Classes

This topic describes the elements, the data structure, the data aggregates, and the mapping of the relationships between the data aggregates used to satisfy the data requirements of the Schedule of Classes business process.

List of Schedule of Classes Data Elements

The following is a list of the schedule of classes and their descriptions for our example.

Data Element	Description
CRSCODE	Course code
CRSNAME	Course name
LENGTH	Length of course
PRICE	Price of course
EDCNTR	Ed Center where class is offered

Local View

DATE Dates when class is offered at a particular Ed Center

Figure 18 shows the conceptual data structure for the class schedule.




Figure 18. Schedule of Classes Conceptual Data Structure

Schedule of Classes Mappings

The only mapping for this local view is:

Course \longleftrightarrow Class

Local View 3. Instructor Skills Report

This topic describes the elements, the data structure, the data aggregates, and the mapping of the relationships between the data aggregates used to satisfy the data requirements of the Instructor Skills Report business process.

List of Instructor Skills Report Data Elements

The following is a list of the instructor skills report data elements and their descriptions for our technical education provider example.

Data Element	Description
INSTR	Instructor
CRSCODE	Course code
CRSNAME	Course name

Figure 19 shows the conceptual data structure for the instructor skills report.




Figure 19. Instructor Skills Report Conceptual Data Structure

Instructor Skills Report Mappings

The only mapping for this local view is:

Instructor \longleftrightarrow Course

Local View 4. Instructor Schedules

|
|
|

This topic describes the elements, the data structure, the data aggregates, and the mapping of the relationships between the data aggregates used to satisfy the data requirements of the Instructor Schedules business process.

List of Instructor Schedules Data Elements

The following is a list of the instructor schedules data elements and their descriptions for our example.

Data Element	Description
INSTR	Instructor
CRSNAME	Course name
CRSCODE	Course code
EDCNTR	Ed Center
DATE	Date when class is offered

Figure 20 shows the conceptual data structure for the instructor schedules.

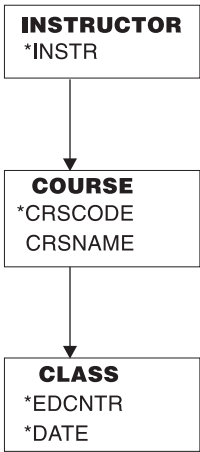


Figure 20. Instructor Schedules Conceptual Data Structure

Instructor Schedules Mappings

The mappings for this local view are:



Designing a Conceptual Data Structure

Analyzing the mappings from all the local views is one of the first steps in designing a conceptual data structure. Two kinds of mappings affect the segments: one-to-many and many-to-many.

A one-to-many mapping means that for each segment *A* there are one or more segment *B*s; shown like this: *A* \longleftrightarrow *B*. For example, in the Current Roster (Figure 17 on page 47), there is a one-to-many relationship between course and class. For each course, there can be several classes scheduled, but a class is

Designing a Conceptual Data Structure

associated with only one course. A one-to-many relationship can be represented as a dependent relationship: In the course/class example, the classes are dependent on a particular course.

A many-to-many mapping means that for each segment *A* there are many segment *B*s, and for each segment *B* there are many segment *A*s. This is shown like this: *A* \longleftrightarrow *B*. A many-to-many relationship is not a dependent relationship, since it usually occurs between data aggregates in two separate data structures and indicates a conflict in the way two business processes need to process that data.

When you implement a data structure with DL/I, there are three strategies you can apply to solve data conflicts:

- Defining logical relationships

- Establishing secondary indexes

- Storing the data in two places (also known as carrying duplicate data).

Related Reading: “Resolving Data Conflicts” on page 52 explains the kinds of data conflicts that secondary indexes and logical relationships can resolve.

The first step in designing a conceptual data structure is to combine the mappings of all the local views. To do this, go through the mappings for each local view and make a consolidated list of mappings (see Table 5). As you review the mappings:

- Do not record duplicate mappings. At this stage you need to cover each variation, not each occurrence.
- If two data aggregates in different local views have opposite mappings, use the more complex mapping. This will include both mappings when they are combined. For example, if local view #1 has the mapping *A* \longleftrightarrow *B*, and local view #2 has the mapping *A* \longleftarrow *B*, use a mapping that includes both these mappings. In this case, this is *A* \longleftrightarrow *B*.

Table 5. Combined Mappings for Local Views

Mapping	Local View
Course \longleftrightarrow Class	1, 2, 4
Class \longleftrightarrow Student	1
Class \longleftrightarrow Instructor	1
Customer/location \longleftrightarrow Student	1
Instructor \longleftrightarrow Course	3, 4

Using the combined mappings, you can construct the data structures shown in Figure 21.

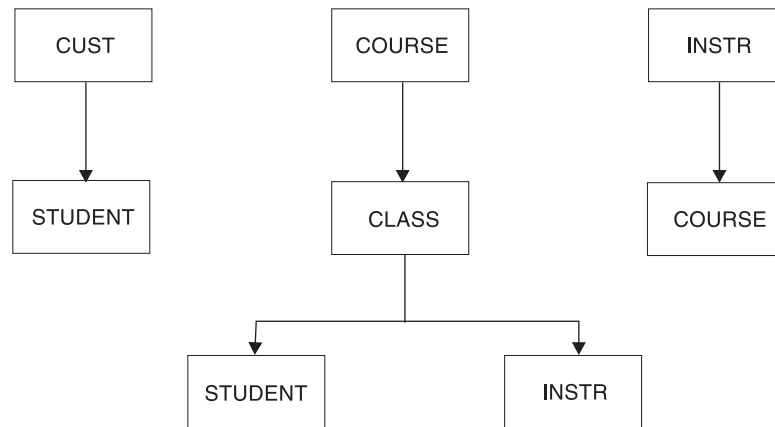


Figure 21. Education Data Structures

Two conflicts exist in these data structures. First, STUDENT is dependent on both CUST and CLASS. Second, there is an opposite mapping between COURSE and INSTR, and INSTR and COURSE. If you implemented these structures with DL/I, you could use logical relationships to resolve the conflicts. “Analyzing Requirements for Logical Relationships” on page 52 explains how.

Implementing the Structure with DL/I

When you implement a data structure with DL/I, you implement it as a hierarchy. A hierarchy is made up of segments. In a hierarchy, a one-to-many relationship is called a parent/child relationship. In a hierarchy, each segment can have one or more children, but it can have only one parent.

When you use DL/I, consider how each of the data elements in the structure you have developed should be grouped into segments. Also, consider how DL/I can solve any existing data conflicts in the structure. The topics “Assigning Data Elements to Segments” and “Resolving Data Conflicts” on page 52 in this chapter explain how you assign data elements to segments, and how DL/I can resolve data conflicts.

Assigning Data Elements to Segments

Once you determine how data elements are related in a hierarchy, associate each of the data elements with a segment. To do this, construct a list of all the keys and their associated data elements. If a key and its associated data element appear in several local views, only record the association once.

List the data elements next to their keys, as shown in Table 6. The key and its associated data elements become the segment content.

Table 6. Keys and Associated Data Elements

Data Aggregate	Key	Data Elements
COURSE	CRSCODE	CRSNAME, LENGTH, PRICE
CUSTOMER/LOCATION	CUST, LOCTN	
CLASS	EDCNTR, DATE	
STUDENT	STUSEQ#	STUNAME, ABSENCE, STATUS, GRADE
INSTRUCTOR	INSTR	

If a data element is associated with different keys in different local views, then you must decide which segment will contain the data element. The other thing you can do is to store duplicate data. To avoid doing this, store the data element with the key that is highest in the hierarchy. For example, if the keys ALPHA and BETA were both associated with the data element XYZ (one in local view 1 and one in local view 2), and ALPHA were higher in the hierarchy, store XYZ with ALPHA to avoid having to repeat it.

Resolving Data Conflicts

The data structure you design can fall short of the application's processing requirements. For example, one business process might need to retrieve a particular segment by a field other than the one you have chosen as the key field. Another business process might need to associate segments from two or more different data structures. Once you have identified these kinds of conflicts in a data structure and are using DL/I, you can look at two DL/I options that can help you resolve the conflicts: secondary indexing and logical relationships.

Analyzing Requirements for Secondary Indexes

Secondary indexing allows a segment to be identified by a field other than its key field.

Suppose that you are part of our technical education company and need to determine (from a terminal) whether a particular student is enrolled in a class. If you are unsure about the student's enrollment status, you probably do not know the student's sequence number. The key of the STUDENT segment, however, is STUSEQ#. Let's say you issue a request for a STUDENT segment, and identify the segment you need by the student's name (STUNAME). Instead of the student's sequence number (STUSEQ#), IMS searches through all STUDENT segments to find that one. Assuming the STUDENT segments are stored in order of student sequence numbers, IMS has no way of knowing where the STUDENT segment is just by having the STUNAME.

Using a secondary index in this example is like making STUNAME the key field of the STUDENT segment for this business process. Other business processes can still process this segment with STUSEQ# as the key.

To do this, you can index the STUDENT segment on STUNAME in the secondary index. You can index any field in a segment. When you index a field, indicating to IMS that you are using a secondary index for that segment, IMS processes the segment as though the indexed field were the key.

Analyzing Requirements for Logical Relationships

When a business process needs to associate segments from different hierarchies, logical relationships can make that possible.

Defining logical relationships lets you create a hierarchic structure that does not exist in storage but can be processed as though it does. You can relate segments in separate hierarchies. The data structure created from these logical relationships is called a logical structure. To relate segments in separate hierarchies, store the segment in the path by which it is accessed most frequently. Store a pointer to the segment in the path where it is accessed less frequently.

In the hierarchy shown in Figure 21 on page 51, two possible parents exist for the STUDENT segment. If the CUST segment is part of an existing database, you can define a logical relationship between the CUST segment and the STUDENT segment. You would then have the hierarchies shown in Figure 22 on page 53. The

CUST/STUDENT hierarchy would be a logical structure.

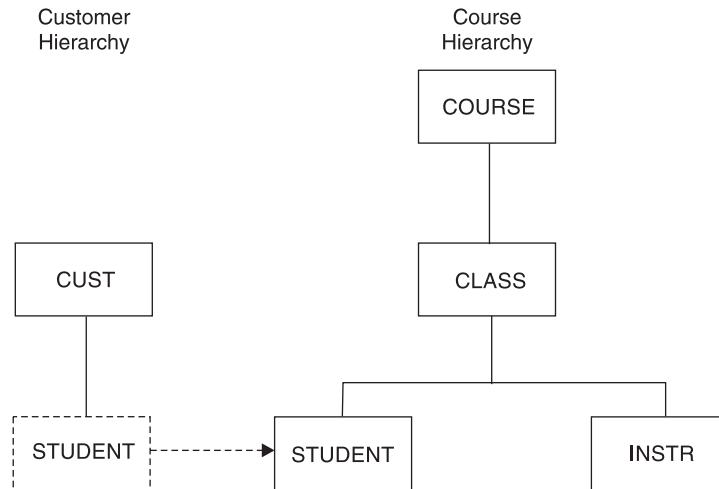


Figure 22. Education Hierarchies

This kind of logical relationship is called unidirectional, because the relationship is “one way.”

The other conflict you can see in Figure 21 on page 51, is the one between COURSE and INSTR. For one course there are several classes, and for one class there are several instructors (COURSE \longleftrightarrow CLASS \longleftrightarrow INSTR), but each instructor can teach several courses (INSTR \longleftrightarrow COURSE). You can resolve this conflict by using a bidirectional logical relationship. You can store the INSTR segment in a separate hierarchy, and store a pointer to it in the INSTR segment in the course hierarchy. You can also store the COURSE segment in the course hierarchy, and store a pointer to it in the COURSE segment in the INSTR hierarchy. This bidirectional logical relationship would give you the two hierarchies shown in Figure 23, eliminating the need to carry duplicate data.

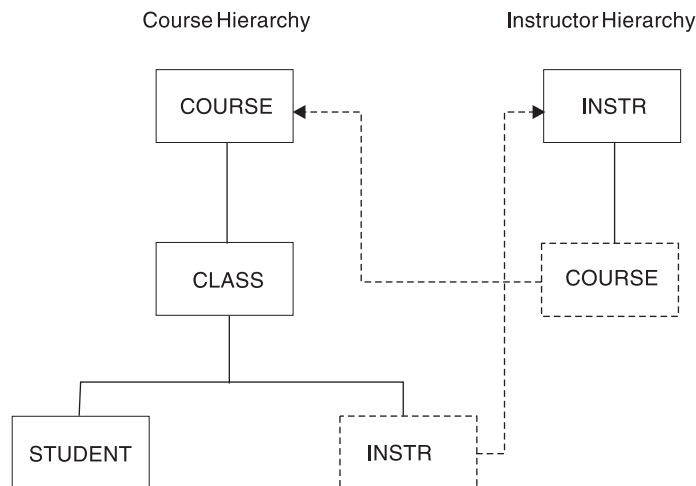


Figure 23. Bidirectional Logical Relationships

Chapter 6. Choosing Full-Function Database Types

IMS databases are hierarchic databases that are accessed through DL/I calls. IMS makes it possible for application programs to retrieve, replace, delete, and add segments to IMS databases.

IMS allows you to define twelve database types. Each type has different organization processing characteristics. Except for DEDB and MSDB, all the database types are discussed in this chapter.

In this Chapter:

- “Sequential Storage Method” on page 56
- “Direct Storage Method” on page 56
- “Databases Supported with DBCTL” on page 56
- “Databases Supported with DCCTL” on page 57
- “Performance Considerations Overview” on page 57
- “HSAM Databases” on page 62
- “HISAM Databases” on page 66
- “SHSAM, SHISAM and GSAM Databases” on page 76
- “HDAM, PHDAM, HIDAM, and PHIDAM Databases” on page 80
- “Partitions in PHDAM, PHIDAM, and PSINDEX Databases” on page 112
- “Managing I/O Errors” on page 122

Related Reading: For information on DEDBs and MSDBs see, “Data Entry Databases” on page 125 and “Main Storage Databases (MSDBs)” on page 144.

Understanding how the database types differ enables you to pick the type that best suits your application's processing requirements.

Each database type has its own access method. The following figure lists each type and the access method it uses:

Type of Database	Access Method
HSAM	Hierarchical Sequential Access Method
HISAM	Hierarchical Indexed Sequential Access Method
SHSAM	Simple Hierarchical Sequential Access Method
SHISAM	Simple Hierarchical Indexed Sequential Access Method
GSAM	Generalized Sequential Access Method
	<u>Restriction:</u> GSAM does not apply to CICS applications.
HDAM	Hierarchical Direct Access Method
PHDAM	Partitioned Hierarchical Direct Access Method
HIDAM	Hierarchical Indexed Direct Access Method
PHIDAM	Partitioned Hierarchical Indexed Direct Access Method

PSINDEX	Partitioned Secondary Index Database
DEDB	Data Entry Database (Hierarchical Direct Access)
MSDB	Main Storage Database (Hierarchical Direct Access)

Based on the access method used, the various databases can be classified into two groups: sequential storage and direct storage.

Sequential Storage Method

HSAM, HISAM, SHSAM, and SHISAM use the sequential method of accessing data. With this method, the hierarchic sequence of segments in the database is maintained by putting segments in storage locations that are physically adjacent to each other. GSAM databases also use the sequential method of accessing data, but no concept of hierarchy, database record, or segment exists in GSAM databases.

Direct Storage Method

HDAM, PHDAM, HIDAM, DEDB, MSDB, and PHIDAM databases use the direct method of accessing data. With this method, the hierarchic sequence of segments is maintained by putting direct-address pointers in each segment's prefix.

For quick reference, see Table 7 on page 61 for a summary of HSAM, HISAM, HDAM, PHDAM, HIDAM, PHIDAM, DEDB, and MSDB database characteristics.

Databases Supported with DBCTL

	Database Control (DBCTL) configuration of IMS supports all IMS full-function
	databases:
	HSAM
	HISAM
	SHSAM
	SHISAM
	HDAM
	PHDAM
	HIDAM
	PHIDAM
	PSINDEX

Databases can be accessed through DBCTL from IMS BMP regions, as well as from independent transaction-management subsystems. Only batch-oriented BMP programs are supported because DBCTL provides no message or transaction support.

CICS online programs can access the same IMS database concurrently; however, an IMS batch program must have exclusive access to the database (if you are not participating in IMS data sharing).

If you have batch jobs that currently access IMS databases through IMS data sharing, you can convert them to run as BMPs directly accessing databases through DBCTL, thereby improving performance. You can additionally convert current batch programs to BMPs to access DEDBs.

Related Reading: For more information on converting a batch job to a BMP, see *IMS Version 9: Application Programming: Design Guide* and *IMS Version 9: Administration Guide: System*.

Databases Supported with DCCTL

The DCCTL configuration of IMS supports the following database and dependent region combinations:

- GSAM databases for BMP regions
- DB2 UDB for z/OS databases for BMP, MPP, and IFP regions through the External Subsystem attachment facility (ESAF)
- DB2 UDB for z/OS databases for JMP and JBP regions through the DB2 Recoverable Resource Manager Services attachment facility (RRSAF)

Restriction: DCCTL does not support full-function or Fast Path databases.

Related Reading:

- For more information on ESAF, see *IMS Version 9: Customization Guide*
- For more information on RRSAF, see *DB2 Universal Database for z/OS Administration Guide*

Performance Considerations Overview

All databases are not created equal. You will want to make an informed decision regarding the type of database organizations which will best serve your purposes. The following lists briefly summarize the performance characteristics of the various database types, highlighting efficiencies and deficiencies of hierarchic sequential, hierarchic direct and general sequential databases.

Related Reading: For information on DEDBs and MSDBs, see “Data Entry Databases” on page 125 and “Main Storage Databases (MSDBs)” on page 144.

General Sequential (GSAM)

- Supported by DCCTL
- No hierarchy, database records, segments, or keys
- No DLET or REPL
- ISRT adds records at end of data set
- GN and GU processed in batch or BMP applications only
- Allows IMS symbolic checkpoint calls and restart from checkpoint (except VSAM-loaded databases)
- Good for converting data to IMS and for passing data
- Not accessible from an MPP or JMP region
- Space efficient
- Not time efficient

VSAM

- Fixed- or variable-length records are usable
- VSAM ESDS DASD stored
- IMS symbolic checkpoint call allowed
- Restart from checkpoint not allowed

BSAM/QSAM

Performance Considerations Overview

- Fixed-, variable-, or undefined-length records are usable
- BSAM/QSAM DS tape or DASD stored
- Allows IMS symbolic checkpoint calls and restart from checkpoint

Hierarchic Sequential

Segments are linked by physical contiguity

HSAM

- Supported by DBCTL
- Physical sequential access to roots and dependents stored on tape or DASD
- ISRT allowed only when database is loaded
- GU, GN, and GNP allowed
- Database update done by merging databases and writing new database
- QSAM and BSAM accessible
- Space efficient but not time efficient
- Sequential access

HISAM

- Supported by DBCTL
- Hierarchic indexed access to roots
- Sequential access to dependents
- Stored on DASD
- VSAM accessible
- All DL/I calls allowed
- Index is on root segment sequence field
- Good for databases not updated often
- Not space efficient with many updates
- Time efficient with SSA-qualified calls

SHSAM

- Supported by DBCTL
- Simple hierarchic sequential access method to root segments only
- ISRT allowed only when database is loaded
- GU, GN, and GNP allowed
- Database update done by reloaded database
- QSAM and BSAM accessible
- Allows IMS symbolic checkpoint calls and restart from checkpoint (except VSAM-loaded databases)
- Good for converting data to IMS and for passing data
- Not accessible from an MPP or JMP region
- Space efficient
- Not time efficient

SHISAM

- Supported by DBCTL
- Simple hierarchic indexed access to roots only

- Stored on DASD
- VSAM accessible
- All DL/I calls allowed
- Good for converting data to IMS and for passing data
- Not space efficient
- Time efficient

Hierarchic Direct

Segments are linked by pointers

HDAM

- Supported by DBCTL
- Hashing access to roots
- Sequential access by secondary index to segments
- All DL/I calls allowed
- Stored on DASD in VSAM ESDS or OSAM data set
- Good for direct access to records
- Hierarchic pointers allowed
 - Hierarchic sequential access to dependent segments
 - Better performance than child and twin pointers
 - Less space required than child and twin pointers
- Child and twin pointers allowed
 - Direct access to pointers
 - More space required by additional index VSAM ESDS database

HIDAM

- Supported by DBCTL
- Indexed access to roots
- Pointer access to dependent segments
- All DL/I calls allowed
- Stored on DASD in VSAM ESDS or OSAM data set
- Good for random and sequential access to records
- Good for random access to segment paths
- Hierarchic pointers allowed
 - Hierarchic sequential access to dependent segments
 - Better performance than child and twin pointers
 - Less space required than child and twin pointers
- Child and twin pointers allowed
 - Direct access to pointers
 - More space required by additional index VSAM ESDS database

HALDB Partitioned Hierarchic Direct

Segments are linked by pointers. HALDB databases contain one to 1 001 partitions. HALDB databases are the best choice for large databases

PHDAM

- Supported by DBCTL
- Supports up to 1 001 partitions

Performance Considerations Overview

- Partitions support up to 10 database data sets and one indirect list data set (ILDS)
- Maximum size for both OSAM and VSAM data sets is 4 GB each
- Partitions within the database can be allocated, authorized, processed, reorganized, and recovered independently of the other partitions in the database
- Parallel processing of partitions reduces reorganization times
- Each partition can have a different root addressable area (RAA[®])
- Indirect pointers are used for logical relationships and secondary indexes, which:
 - Allow for the automatic update, or *self healing*, of indirect pointers after database reorganizations
 - Require an ILDS for each partition
- Hashing access to roots
- Sequential access by secondary index to segments
- All DL/I calls allowed
- Stored on DASD in VSAM ESDS or OSAM data sets
- Good for direct access to records
- Direct pointers are used in logical relationships, and symbolic pointers are not supported
- No hierarchic pointers
- Child and twin pointers allowed
 - Direct access to pointers
 - More space required by additional index VSAM ESDS database

PHIDAM

- Supported by DBCTL
- Supports up to 1 001 partitions
- Partitions support up to 10 database data sets, one primary index data set, and one indirect list data set (ILDS)
- Maximum size of both OSAM and VSAM data sets is 4 GB
- Partitions within the database can be allocated, authorized, processed, reorganized, and recovered independently of the other partitions in the database
- Parallel processing of partitions reduces reorganization times
- Indirect pointers are used for logical relationships and secondary indexes, which:
 - Allow for the automatic update, or *self healing*, of indirect pointers after database reorganizations
 - Require an ILDS for each partition
- Indexed access to roots
- Primary index is a non-recoverable database, so database update logs are smaller, even before they are compressed when moved to the SLDS
- Record keys are stored in sequence within each partition; whether the sequence of records is maintained across partitions depends on the method of partition selection used

- Pointer access to dependent segments
- All DL/I calls allowed
- Stored on DASD in VSAM ESDS or OSAM data set; both OSAM and VSAM data sets are restricted to 4 GB
- Good for random and sequential access to records
- Good for random access to segment paths
- Direct pointers are used in logical relationships and symbolic pointers are not supported
- No hierarchic pointers
- Child and twin pointers allowed
 - Direct access to pointers
 - More space required by additional index VSAM ESDS database

HALDB partitioned secondary index

PSINDEX

- Supported by DBCTL
- Supports up to 1 001 partitions
- Partitions support only a single data set
- Do not need to rebuild after reorganizations of the indexed database because of the HALDB self-healing pointer process
- Partitions within the partitioned secondary index (PSINDEX) can be allocated, authorized, processed, reorganized, and recovered independently of the other partitions in the database
- Segments have a larger prefix than non-partitioned secondary indexes to accommodate both a 28-byte extended pointer set (EPS) and the length of the root key of the secondary index target segment
- Does not support shared secondary indexes
- Does not support symbolic pointers
- Requires the secondary index record segments to have unique keys

Table 7 gives a summary of database characteristics, functions, and options for the different database types.

Table 7. Summary of Database Characteristics and Options for Database Types

Characteristic	HSAM	HISAM	HDAM	PHDAM	HIDAM	PHIDAM	DEDB	MSDB
Hierarchical Structures	Y	Y	Y	Y	Y	Y	Y	N
Direct Access Storage	Y	Y	Y	Y	Y	Y	Y	N
Multiple Data Set Groups	N	N	Y	Y	Y	Y	N	N
Logical Relationships	N	Y	Y	Y	Y	Y	N	N
Variable-Length Segments	N	Y	Y	Y	Y	Y	Y	N
Segment Edit/Compression	N	Y	Y	Y	Y	Y	Y	N
Data Capture Exit Routines	N	Y	Y	Y	Y	Y	Y	N
Field-Level Sensitivity	Y	Y	Y	Y	Y	Y	N	N
Primary Index	N	Y	N	N	Y	Y	N	N
Secondary Index	N	Y	Y	Y	Y	Y	N	N

Performance Considerations Overview

Table 7. Summary of Database Characteristics and Options for Database Types (continued)

Characteristic	HSAM	HISAM	HDAM	PHDAM	HIDAM	PHIDAM	DEDB	MSDB
Logging, Recovery, Offline Reorganization	N	Y	Y	Y	Y	Y	Y	Y
VSAM	N	Y	Y	Y	Y	Y	Y	N/A
OSAM	N	N	Y	Y	Y	Y	N	N/A
QSAM/BSAM	Y	N	N	N	N	N	N	N/A
Boolean Operators	Y	Y	Y	Y	Y	Y	Y	N
Command Codes	Y	Y	Y	Y	Y	Y	Y	N
Subset Pointers	N	N	N	N	N	N	Y	N
Uses Main Storage	N	N	N	N	N	N	N	Y
High Parallelism (field call)	N	N	N	N	N	N	N	Y
Compaction	Y	Y	Y	Y	Y	Y	Y	N
DBRC Support	Y	Y	Y	Y	Y	Y	Y	N/A
Partitioning Support	N	N	N	Y	N	Y	Y	N
Data Sharing	Y	Y	Y	Y	Y	Y	Y	N
Partition Sharing	N	N	N	Y	N	Y	Y	N
Block Level Sharing	Y	Y	Y	Y	Y	Y	Y	N
Area Sharing	N/A	N/A	N/A	N/A	N/A	N/A	Y	N/A
Record Deactivation	N	N	N	N	N	N	Y	N/A
Database Size	med	med	med	lg	med	lg	lg	sml
Online Utilities	N	N	N	N	N	N	Y	N
Online Reorganization	N	N	N	Y	N	Y	Y	N
Batch	Y	Y	Y	Y	Y	Y	N	N

HSAM Databases

Hierarchical sequential access method (HSAM) databases use the sequential method of accessing data. All database records and all segments within each database record are physically adjacent in storage. An HSAM database can be stored on tape or on a direct-access storage device. They are processed using either basic sequential access method (BSAM) or queued sequential access method (QSAM) as the operating system access method. Specify your access method on the PROCOPT= parameter in the PCB. If you specify PROCOPT=GS, QSAM is always used. If you specify PROCOPT=G, BSAM is used.

HSAM data sets are loaded with root segments in ascending key sequence (if keys exist for the root) and dependent segments in hierarchic sequence. You do not need to define a key field in root segments. You must, however, present segments to the load program in the order in which they must be loaded. HSAM data sets use a fixed-length, unblocked record format (RECFM=F), which means that the logical record length is the same as the physical block size.

HSAM databases can only be updated by rewriting them. Delete (DLET) and replace (REPL) calls are not allowed, and insert (ISRT) calls are only allowed when the database is being loaded. Although the field-level sensitivity option can be used with HSAM databases the following options *cannot* be used with HSAM databases:

- Multiple data set groups
- Logical relationships
- Secondary indexing
- Variable-length segments
- Segment edit/compression exit routine
- Data Capture exit routines
- Asynchronous data capture
- Logging, recovery, or reorganization

Multiple positioning and multiple PCBs cannot be used in HSAM databases.

When to Use HSAM

Although the uses of HSAM are limited because of its processing characteristics, it is used for applications requiring sequential processing only. Typically, HSAM is used for low-use files. These are files containing, for example, audit trails, statistical reports or files containing historical or archive data that has been purged from the main database.

How an HSAM Record Is Stored

Segments in an HSAM database are loaded in the order in which you present them to the load program. You should present all segments within a database record in hierarchic sequence. If a sequence field has been defined for root segments, you should present database records to the load program in ascending root key sequence.

Figure 24 shows an example HSAM database.

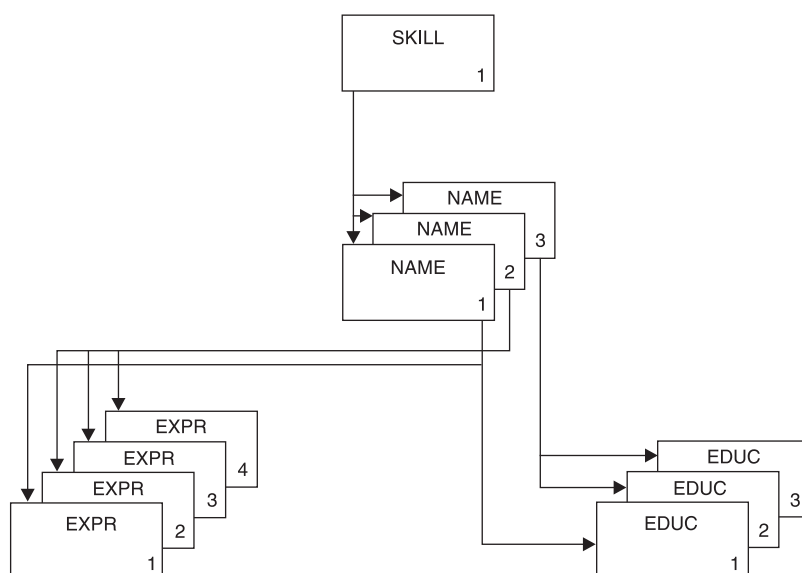


Figure 24. Example HSAM Database

Figure 25 on page 64 shows how the example HSAM database, shown in Figure 24, would be stored in blocks.

HSAM Databases

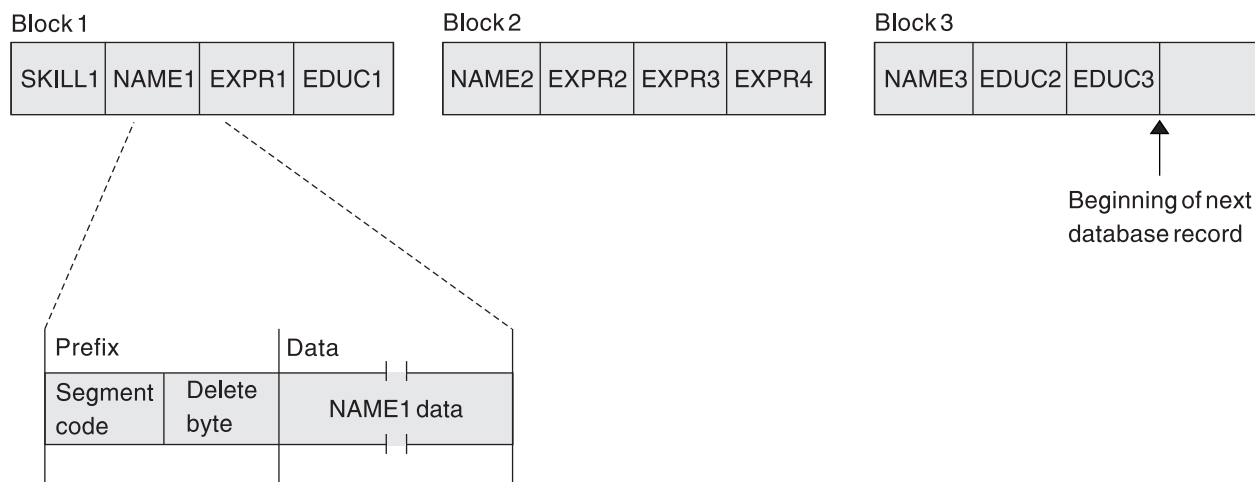


Figure 25. Example HSAM Database Stored in Blocks

In the data set, a database record is stored in one or more consecutive blocks. You define what the block size will be. Each block is filled with segments of the database record until there is not enough space left in the block to store the next segment. When this happens, the remaining space in the block is padded with zeros and the next segment is stored in the next consecutive block. When the last segment of a database record has been stored in a block, any unused space, if sufficient, is filled with segments from the next database record.

In storage, an HSAM segment consists of a 2-byte prefix followed by user data. The first byte of the prefix is the segment code, which identifies the segment *type* to IMS. This number can be from 1 to 255. The segment code is assigned to the segment by IMS in ascending sequence, starting with the root segment and continuing through all dependents in hierarchic sequence. The second byte of the prefix is the delete byte. Because DLET calls cannot be used against an HSAM database, the second byte is not used.

DL/I Calls against an HSAM Database

Initial entry to an HSAM database is through GU or GN calls. When the first call is issued, the search for the desired segment starts at the beginning of the database and passes sequentially through all segments stored in the database until the desired segment is reached. After the desired segment is reached, its position is used as the starting position for any additional calls that process the database in a forward direction.

After position in an HSAM database has been established, the way in which GU calls are handled depends on whether a sequence field is defined for the root segment and what processing options are in effect. Figure 26 shows a flow chart of the actions taken based on whether a sequence field is defined and what processing options are in effect.

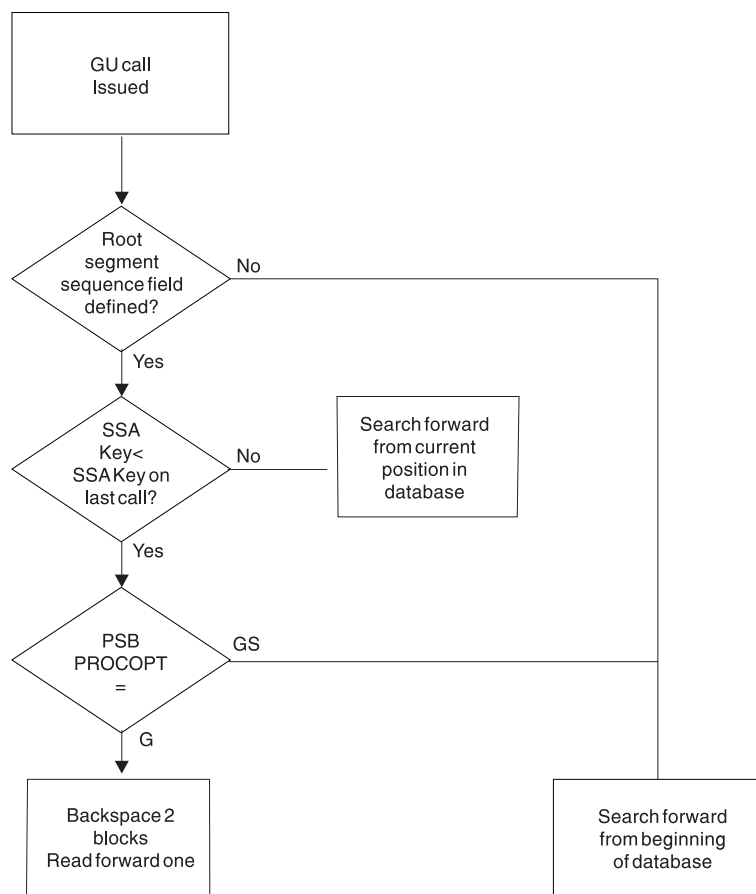


Figure 26. GU Calls against an HSAM Database

No Sequence Field Defined

If no sequence field has been defined, each GU call causes the search for the desired segment to start at the beginning of the database regardless of current position. This allows direct processing of the HSAM database. The processing, however, is restricted to one volume.

Sequence Field Defined

If a sequence field has been defined and the GU call retrieves a segment that is forward in the database, the search starts from the current position and moves forward to the desired segment. If access to the desired segment requires backward movement in the database, the PROCOPT= parameters G or GS (specified during PSBGEN) determine how backward movement is accomplished. If you specify PROCOPT=GS, (that is, the database is read using QSAM), the search for the desired segment starts at the beginning of the database and moves forward. If you specify PROCOPT=G, (that is, the database is read using BSAM), the search moves backward in the database. This is accomplished by backspacing over the block just read and the block previous to it, then reading this previous block forward until the desired segment is found.

Because of the way in which segments are accessed in an HSAM database, it is most practical to access root segments sequentially and dependent segments in

HSAM Databases

hierarchical sequence within a database record. Other methods of access, involving backspacing, rewinding of the tape, or scanning the data set from the beginning, can be time consuming.

As stated previously, DLET and REPL calls cannot be issued against an HSAM database. ISRT calls are allowed only when the database is being loaded. To update an HSAM database, you must write a program that merges the current HSAM database and the update data. The update data can be in one or more files. The output data set created by this process is the new updated HSAM database. Figure 27 illustrates this process.

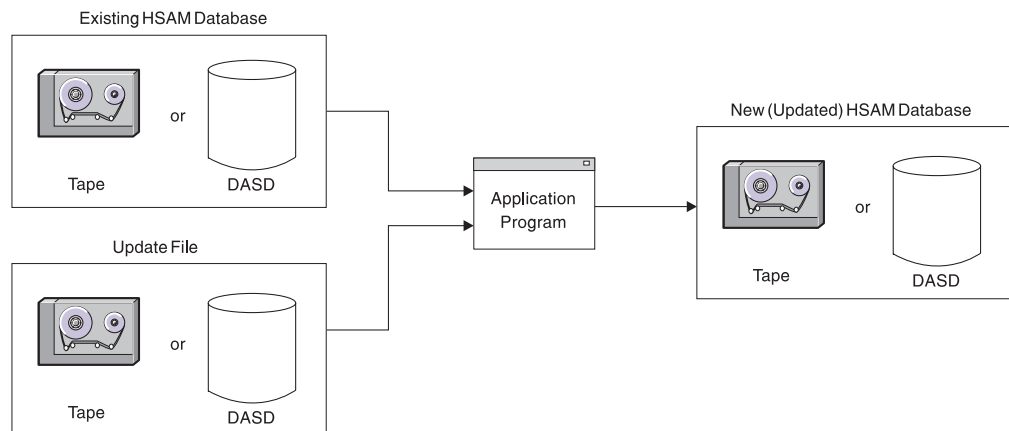


Figure 27. Updating an HSAM Database

HISAM Databases

In a hierarchical indexed sequential access method (HISAM) database, as with an HSAM database, segments in each database record are related through physical adjacency in storage. Unlike HSAM, however, each HISAM database record is indexed, allowing direct access to a database record. In defining a HISAM database, you must define a unique sequence field in each root segment. These sequence fields are then used to construct an index to root segments (and therefore database records) in the database.

HISAM databases are stored on direct-access devices. They can be processed using the virtual storage access method (VSAM) utility. Unlike HSAM, all DL/I calls can be issued against a HISAM database. In addition, the following options are available for HISAM databases:

- Logical relationships
- Secondary indexing
- Variable-length segments
- Segment edit/compression exit routine
- Data Capture exit routines
- Field-level sensitivity
- Logging, recovery, and reorganization

Except for logging and recovery, each of these options is discussed in detail in later parts of this book. For detailed discussions of logging and recovery, see the *IMS Version 9: Operations Guide*.

When to Use HISAM

HISAM is typically used for databases that require direct access to database records and sequential processing of segments in a database record. It is a good candidate for databases with the following characteristics:

- Most database records are about the same size.
- The database does not consist of relatively few root segments and a large number of dependent segments.
- Applications do not depend on a heavy volume of root segments being inserted after the database is initially loaded.
- Deletion of database records is minimal.

More detailed information on the uses of HISAM, requiring a working knowledge of how a HISAM database is organized and processed, is under “Variable-Length Segments” on page 227.

How a HISAM Record is Stored

HISAM database records are stored in two data sets. The first data set, called the *primary data set*, contains an index and all segments in a database record that can fit in one logical record. The index provides direct access to the root segment (and therefore to database records). The second data set, called the *overflow data set*, contains all segments in the database record that cannot fit in the primary data set. A key-sequenced data set (KSDS) is the primary data set and an entry-sequenced data set (ESDS) is the overflow data set.

There are several things you need to know about storage of HISAM database records:

- You define the logical record length of both the primary and overflow data set (subject to the rules listed in this chapter). The logical record length can be different for each data set. This allows you to define the logical record length in the primary data set as large enough to hold an “average” database record or the most frequently accessed segments in the database record. Logical record length in the overflow data set can then be defined (subject to some restrictions) as whatever is most efficient given the characteristics of your database records.
- Logical records are grouped into control intervals (CIs). A control interval is the unit of data transferred between an I/O device and storage. You define the size of CIs.
- Each database record starts at the beginning of a logical record in the primary data set. A database record can only occupy one logical record in the primary data set, but overflow segments of the database record can occupy more than one logical record in the overflow data set.
- Segments in a database record cannot be split and stored across two logical records. Because of this and because each database record starts a new logical record, unused space exists at the end of many logical records. When the database is initially loaded, IMS inserts a root segment with a key of all X'FF's as the last root segment in the database.

Figure 29 on page 69 shows four HISAM database records (shown in Figure 28 on page 68) as they are initially stored on the primary and overflow data sets.

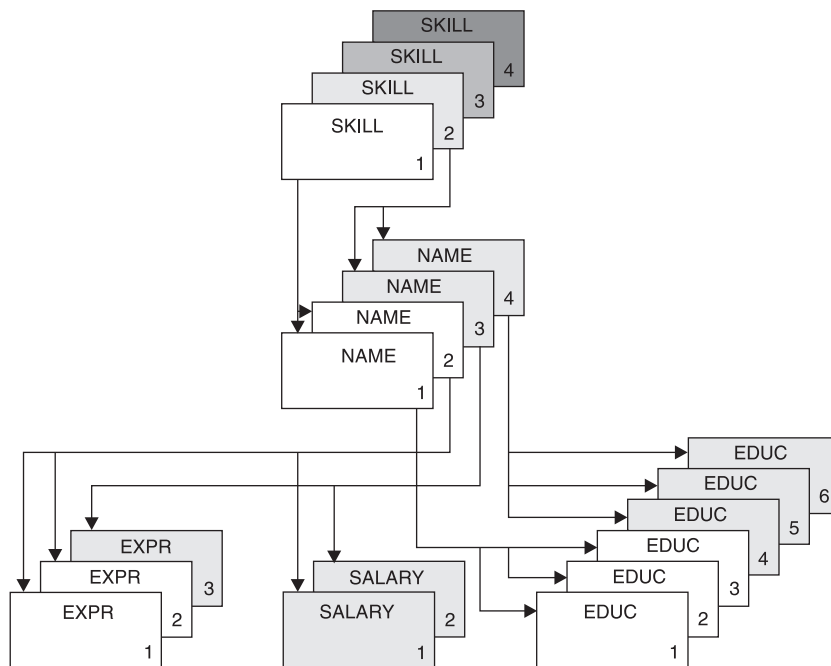


Figure 28. Example HISAM Database

In storage, a HISAM segment (see Figure 29) consists of a 2-byte prefix followed by user data. The first byte of the prefix is the segment code, which identifies the segment *type* to IMS. This number can be from 1 to 255. The segment code is assigned to the segment by IMS in ascending sequence, starting with the root segment and continuing through all dependents in hierarchic sequence. The second byte of the prefix is the delete byte.

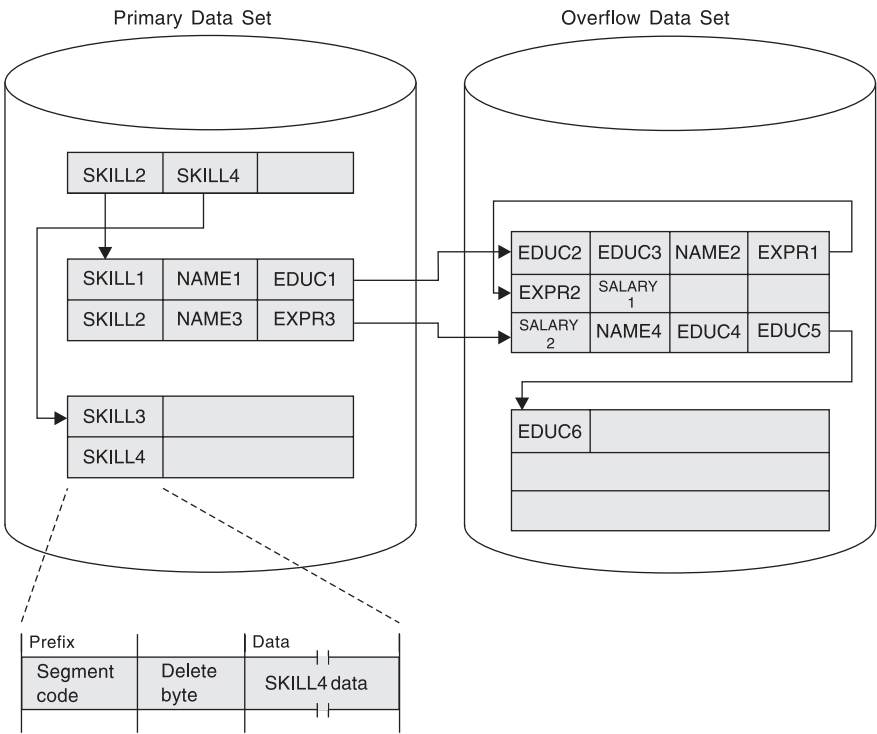


Figure 29. Example HISAM Database in Storage

Each logical record in the primary data set contains the root plus all dependents of the root (in hierarchic sequence) for which there is enough space. The remaining segments of the database record are put in the overflow data set (again in hierarchic sequence). The two “parts” of the database record are chained together with a direct-address pointer. When overflow segments in a database record use more than one logical record in the overflow data set (the case for the first and second database record in Figure 29), the logical records are also chained together with a direct-address pointer. Note in the figure that HISAM indexes do not contain a pointer to each root segment in the database. Rather, they point to the highest root key in each block or CI.

Diagnosis, Modification or Tuning Information

Figure 30 on page 70 illustrates the following points regarding the structure of a logical record in a HISAM database:

- In a logical record, the first 4 bytes are a direct-address pointer to the next logical record in the database record. This pointer maintains all logical records in a database record in correct sequence. The last logical record in a database record contains zeros in this field.
- Following the pointer are one or more segments of the database record in hierarchic sequence.
- Following the segments is a 1-byte segment code of 0. It says that the last segment in the logical record has been reached.

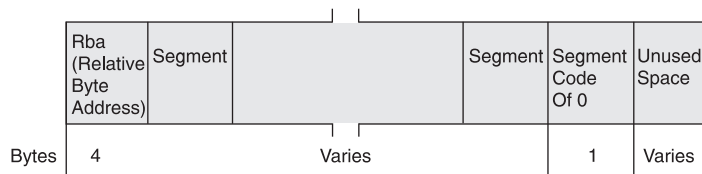


Figure 30. Format of a Logical Record in a HISAM Database

_____ End of Diagnosis, Modification or Tuning Information _____

Accessing Segments

In HISAM, when an application program issues a call with a segment search argument (SSA) qualified on the key of the root segment, the segment is found by:

1. Searching the index for the first pointer with a value greater than or equal to the specified root key (the index points to the highest root key in each CI)
2. Following the index pointer to the correct CI
3. Searching this CI for the correct logical record (the root key value is compared with each root key in the CI)
4. When the correct logical record (and therefore database record) is found, searching sequentially through it for the specified segment

If an application program issues a GU call with an unqualified SSA for a root segment or with an SSA qualified on other than the root key, the HISAM index cannot be used. The search for the segment starts at the beginning of the database and proceeds sequentially until the specified segment is found.


Inserting Root Segments Using VSAM

After an initial load, root segments inserted into a HISAM database are stored in the primary data set in ascending key sequence. The CI might or might not contain a free logical record into which the new root can be inserted. Both situations are described next.

A Free Logical Record Exists

Figure 31 on page 71 shows how insertion takes place when a free logical record exists. The new root is inserted into the CI in root key sequence. If there are logical records in the CI containing roots with higher keys, they are “pushed down” to create space for the new logical record.

BEFORE

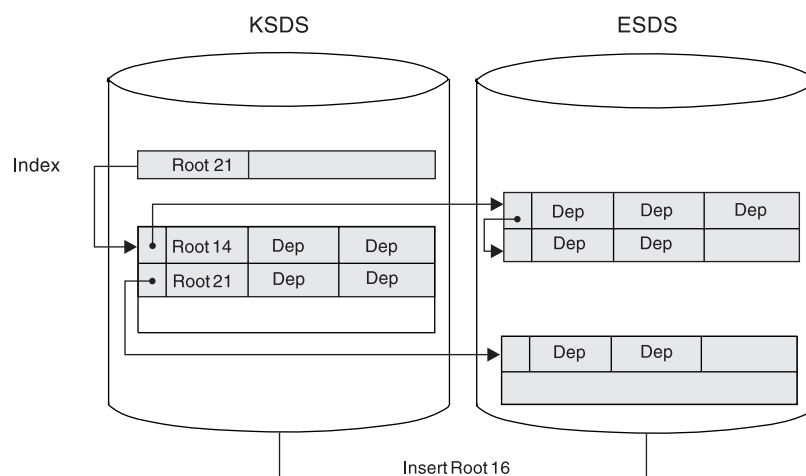

AFTER

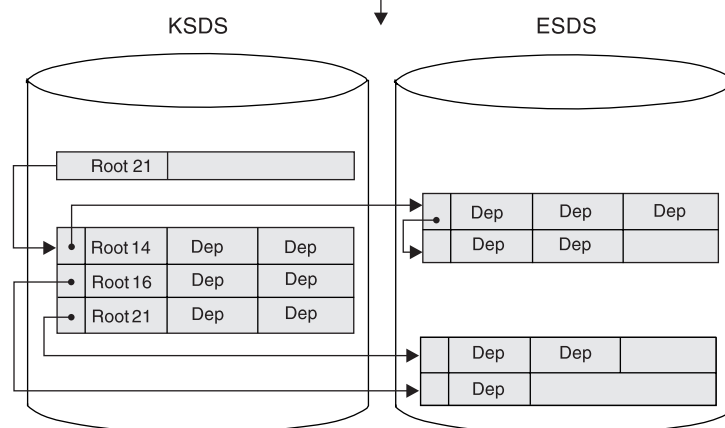


Figure 31. Inserting a Root Segment into a HISAM Database (Free Logical Record Exists in the CI)

No Free Logical Record Exists

Figure 32 on page 72 shows how insertion takes place when no free logical record exists in the CI. The CI is split forming two new CIs, both equal in size to the original one. Where the CI is split depends on what you have coded in the INSERT=parameter on the OPTIONS statement for the DFSVSAMP data set.

Related Reading: For information on the OPTIONS statement, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring* and Chapter 9, “Designing Full-Function Databases,” on page 257.

The split can occur at the point at which the root is inserted or midpoint in the CI. After the CI is split, free logical records exist in each new CI and the new root is inserted into the proper CI in root key sequence. If, as was the case in Figure 31, logical records in the new CI contained roots with higher keys, those logical records would be “pushed down” to create space for the new logical record.

When adding new root segments to a HISAM database, performance can be slightly improved if roots are added in ascending key sequence.

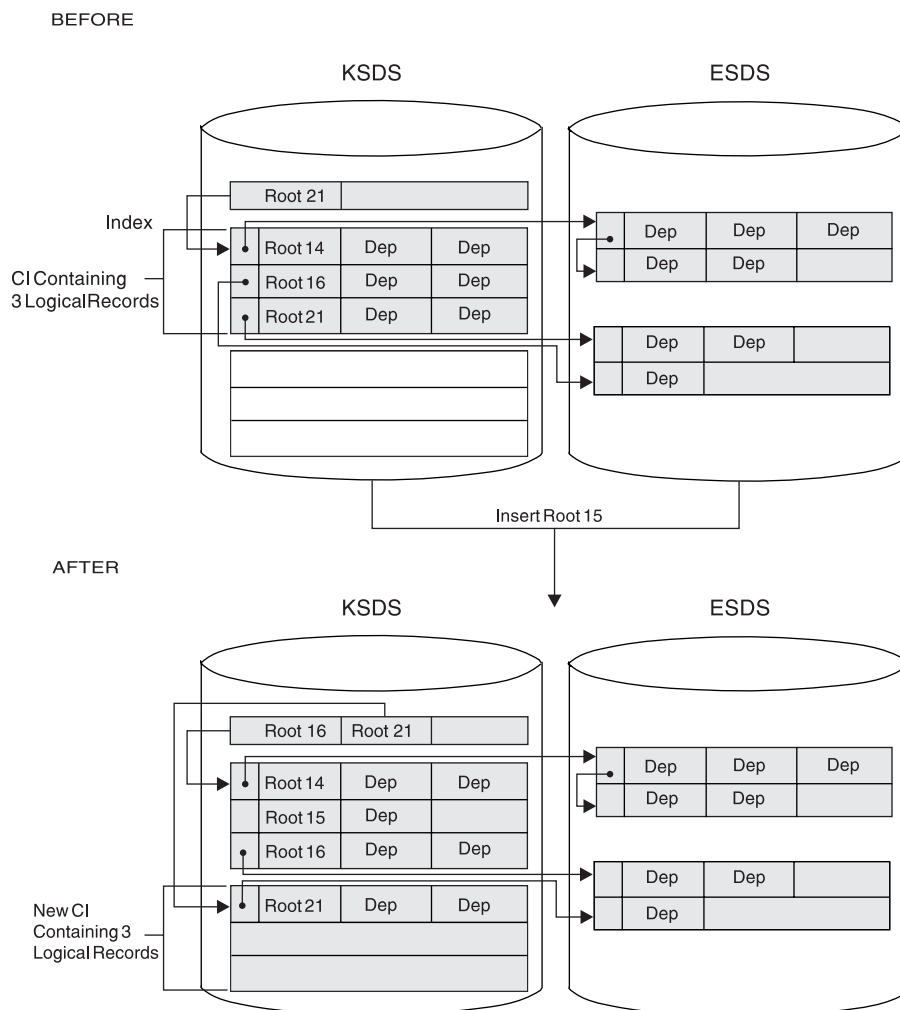


Figure 32. Inserting a Root Segment into a HISAM Database (No Free Logical Record Exists in the CI)

Inserting Dependent Segments

Dependent segments inserted into a HISAM database after initial load are inserted in hierarchic sequence. IMS decides where in the appropriate logical record the new dependent should be inserted. Two situations are possible. Either there is enough space in the logical record for the new dependent or there is not.

Figure 33 on page 73 shows how segment insertion takes place when there is enough space in the logical record. The new dependent is stored in its proper hierarchic position in the logical record by shifting the segments that hierarchically follow it to the right in the logical record.


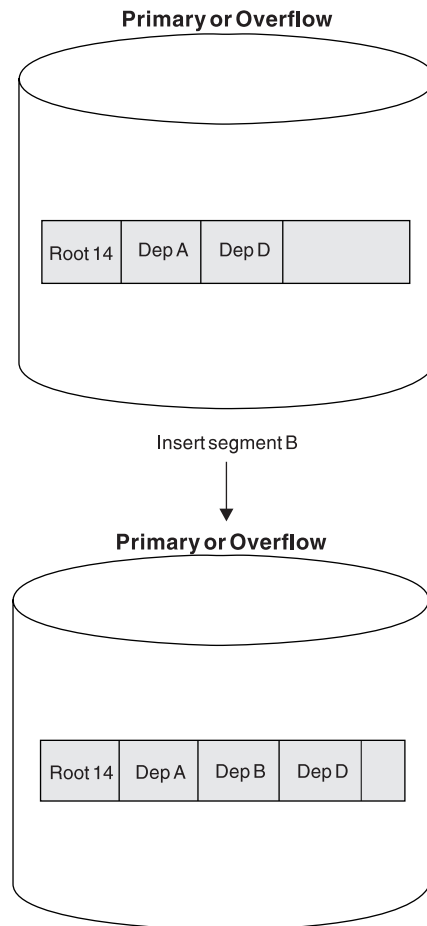


Figure 33. Inserting a Dependent Segment into a HISAM Database (Space Exists in the Logical Record)

Figure 34 on page 74 shows how segment insertion takes place when there is not enough space in the logical record. As in the previous case, new dependents are always stored in their proper hierarchic sequence in the logical record. However, all segments to the right of the new segment are moved to the first empty logical record in the overflow data set.

BEFORE

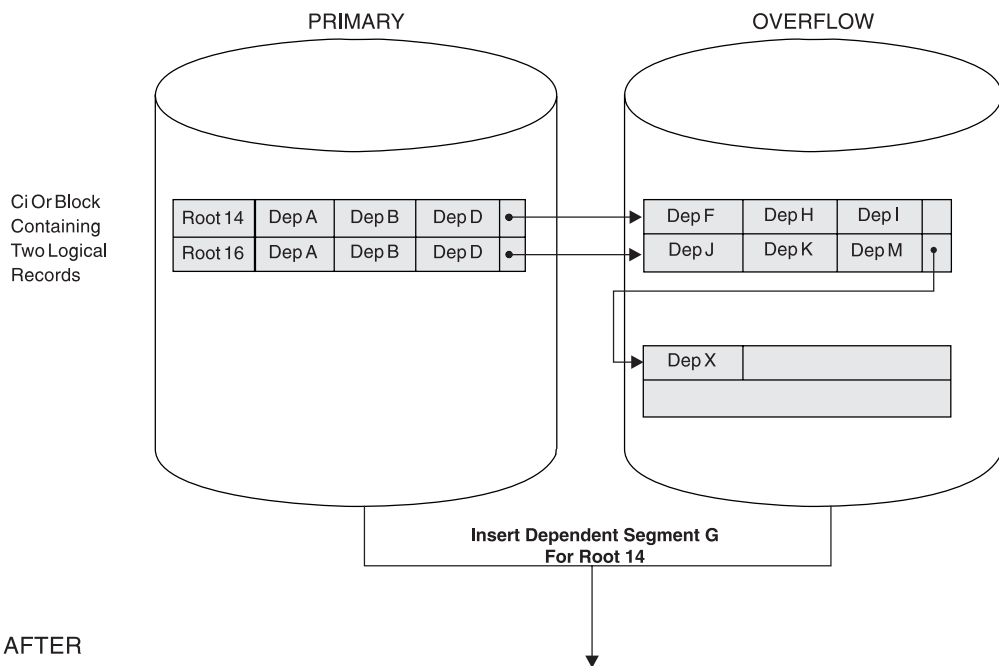

AFTER

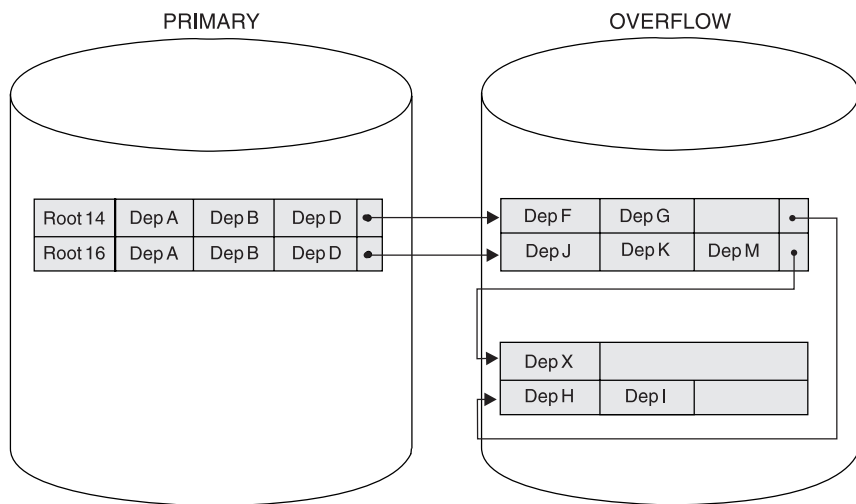


Figure 34. Inserting a Dependent Segment into a HISAM Database (No Space Exists in the Logical Record)

Deleting Segments

When segments are deleted from a HISAM database, they are marked as deleted in the delete byte in their prefix. They are not physically removed from the database; the one exception to this is discussed later in this topic. Dependent segments of the deleted segment are not marked as deleted, but because their parent is, the dependent segments cannot be accessed. These unmarked segments (as well as segments marked as deleted) are deleted when the database is reorganized.

One thing you should note is that when a segment is accessed that hierarchically follows deleted segments in a database record, the deleted segments must still be "searched through". This concept is shown in Figure 35 and in Figure 36.

Segment B2 is deleted from this database record. This means that segment B2 and its dependents (C1, C2, and C3) can no longer be accessed, even though they still exist in the database.

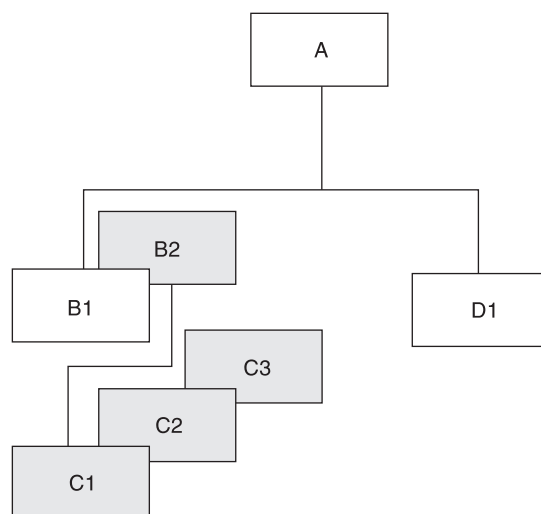


Figure 35. The Hierarchic Segment Layout on the Database

A request to access segment D1 is made. Although segments B2, C1, C2, and C3 cannot be accessed, they still exist in the database. Therefore they must still be “searched through” even though they are inaccessible as shown in Figure 36.




Figure 36. Accessing a HISAM Segment That Hierarchically Follows Deleted Segments

In one situation, deleted segments are physically removed from the database. If the deleted segment is a root, the logical record containing the root is erased, provided neither the root nor any of its dependents is involved in a logical relationship. The default is ERASE=YES, and no “mark buffer altered” takes place. Thus a PROCOPT=G read job will not have to wait for locks after another job has set the delete byte, and will return a segment not found condition. To be consistent with other DB types, use ERASE=NO to cause a wait for physical delete prior to attempted read.

Related Reading: For more information on the ERASE parameter of the DBD statement, see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

After the logical record is removed, its space is available for reuse. However, any overflow logical record containing dependents of this root is not available for reuse. Except for this special condition, you must unload and reload a HISAM database to regain space occupied by deleted segments.

Replacing Segments

Replacing segments in a HISAM database is straightforward as long as fixed length segments are being used. The data in the segment, once changed, is returned to its original location in storage. The key field in a segment cannot be changed.

The implications of replacing segments when variable-length segments are used is discussed under “Variable-Length Segments” on page 227.

Criteria for Selecting HISAM

You should use HISAM when you need sequential or direct access to roots and sequential processing of dependent segments in a database record. HISAM is a good choice of data organization when your database has most, or all, of the following characteristics.

- Each root has few dependents.
Root segment access is indexed, and is therefore fast. Dependent segment access is sequential, and is therefore slower.
- You have a small number of delete operations against the database.
Except for deleting root segments, all delete operations result in the creation of space that is unusable until the database is reorganized.
- Your applications depend on a small volume of root segments being inserted within a narrow key range (VSAM).
Root segments inserted after initial load are inserted in root key sequence in the appropriate CI in the KSDS. If many roots have keys within a narrow key range, many CI splits can occur. This will degrade performance.
- Most of your database records are about the same size.
The similar sizes allow you to pick logical record lengths and CI sizes so most database records fit on the primary data set. You want most database records to fit on the primary data set, because additional read and seek operations are required to access those parts of a database record on the overflow data set. Additional reads and seeks degrade performance. If, however, most of the processing you do against a database record occurs on segments in the primary data set (in other words, your high-use segments fit on the primary data set), these considerations might not be as important.
Having most of your database records the same size also saves space. Each database record starts at the beginning of a logical record. All space in the logical records not used by the database record is unusable. This is true of logical records in both the primary and overflow data set. If the size of your database records varies tremendously, large gaps of unused space can occur at the end of many logical records.

SHSAM, SHISAM and GSAM Databases

You typically use simple hierarchical sequential access method (SHSAM), simple hierarchical indexed sequential access method (SHISAM), and generalized sequential access method (GSAM) databases in two situations.

Situation 1 - Converting from a non-database system to IMS

SHSAM, SHISAM, and GSAM databases allow existing programs, using z/OS access methods, to remain usable during the conversion to IMS. This is possible because the format of the data in these databases is the same as in the z/OS data sets.

Situation 2 - Passing data

When a database (or non-database) application program passes data to a database (or non-database) application program, it first puts the data in a SHSAM, SHISAM, or GSAM database. The database (or non-database) application program then accesses the data from these databases.

The following topics describe each of the three database types:

- “SHSAM Databases”
- “SHISAM Databases”
- “GSAM Databases” on page 78

Table 8 on page 80 is a chart comparing SHSAM, SHISAM, and GSAM.

SHSAM Databases

A simple HSAM (SHSAM) database is an HSAM database containing only one type of segment, a root segment. The segment has no prefix, because no need exists for a segment code (there is only one segment type) or for a delete byte (deletes are not allowed).

SHSAM databases can be accessed by z/OS BSAM and QSAM because SHSAM segments contain user data only (no IMS prefixes). The ISRT, DLET, and REPL calls cannot be used to update. However, ISRT can be used to load an SHSAM database. Only GET calls are valid for processing an SHSAM database. These allow retrieval only of segments from the database. To update an SHSAM database, it must be reloaded. The situations in which SHSAM is typically used are explained in the introduction to this topic. Before deciding to use SHSAM, read the topic on GSAM databases, because GSAM has many of the same functions as SHSAM. Unlike SHSAM, however, GSAM files cannot be accessed from a message processing region. GSAM does allow you to take checkpoints and perform restart, though.

Although SHSAM databases can use the field-level sensitivity option, they *cannot* use any of the following options:

- Logical relationships
- Secondary indexing
- Multiple data set groups
- Variable-length segments
- Segment edit/compression exit routine
- Data Capture exit routines
- Logging, recovery, or reorganization

SHISAM Databases

A simple HISAM (SHISAM) database is a HISAM database containing only one type of segment, a root segment. The segment has no prefix, because no need exists for a segment code (there is only one segment type) or for a delete byte (deletes are done using a VSAM erase operation). SHISAM databases must be KSDSs; they are accessed through VSAM. Because SHISAM segments contain user data only (no IMS prefixes), they can be accessed by VSAM macros and DL/I calls. All the DL/I calls can be issued against SHISAM databases.

SHISAM IMS Symbolic Checkpoint Call

In addition to those situations described in the introduction to this topic, SHISAM is useful if you need an application program that accesses z/OS data sets to use the IMS symbolic checkpoint call.

The IMS symbolic checkpoint call makes restart easier than the z/OS basic checkpoint call. If the z/OS data set the application program is using is converted to a SHISAM database data set, the symbolic checkpoint call can be used. This allows application programs to take checkpoints during processing and then restart their programs from a checkpoint. The primary advantage of this is that, if the system fails, application programs can recover from a checkpoint rather than lose all processing that has been done. One exception applies to this: An application program for initially loading a database that uses VSAM as the operating system access method cannot be restarted from a checkpoint. Application programs using GSAM databases can also issue symbolic checkpoint calls. Application programs using SHSAM databases cannot.

Before deciding to use SHISAM, you should read the next topic on GSAM databases. GSAM has many of the same functions as SHISAM. Unlike SHISAM, however, GSAM files cannot be accessed from a message processing region.

SHISAM databases can use field-level sensitivity and Data Capture exit routines, but they *cannot* use any of the following options:

- Logical relationships
- Secondary indexing
- Multiple data set groups
- Variable-length segments
- Segment edit/compression exit routine

GSAM Databases

GSAM databases are sequentially organized databases designed to be compatible with z/OS data sets. GSAM databases can be on a data set previously created or one later accessed by the z/OS access methods VSAM or QSAM/BSAM. GSAM data sets can use fixed-length or variable-length records when VSAM is used, or fixed-length, variable-length or undefined-length records when QSAM/BSAM is used. If VSAM is used to process a GSAM database, the VSAM data set must be entry sequenced and on a DASD. If QSAM/BSAM is used, the physical sequential (DSORG=PS) data set can be placed on a DASD or tape unit. GSAM is designed to be compatible with z/OS data sets. The GSAM database has no hierarchy, database records, segments or keys.

GSAM supports DFSMS striped extended-format data sets for both VSAM and QSAM/BSAM.

For more information about GSAM data sets and access methods, including information about the GSAM use of striped extended-format data sets, see “Processing GSAM databases” in the *IMS Version 9: Application Programming Database Manager*.

For more information about z/OS data sets, see *z/OS DFSMS: Using Data Sets*, as well as the *z/OS DFSMSHsm*, *DFSMSdss*, and *DFSMSdftp* storage administration guides and references.

GSAM IMS Symbolic Checkpoint Call

In addition to those situations described in the introduction to this topic, GSAM is useful if you need an application program that accesses z/OS data sets to use the IMS symbolic checkpoint call. The IMS symbolic checkpoint call makes restart easier than the z/OS basic checkpoint call. This IMS symbolic checkpoint call allows application programs to take checkpoints during processing, thereby allowing programs to restart from a checkpoint. A checkpoint call forces any GSAM buffers with inserted records to be written as short blocks. The primary advantage of taking checkpoints is that, if the system fails, the application programs can recover from a checkpoint rather than lose all your processed data. However, any application program that uses VSAM as an operating system access method and initially loads the database cannot be restarted from a checkpoint.

In general, always use DISP=OLD for GSAM data sets when restarting from a checkpoint even if you used DISP=MOD on the original execution of the job step. If you use DISP=OLD, the data set is positioned at its beginning. If you use DISP=MOD, the data set is positioned at its end.

Because GSAM databases are supported in a DCCTL environment, you may use them when you need to process sequential non-IMS data sets using a BMP program.

GSAM databases are loaded in the order in which you present records to the load program. You cannot issue DLET and REPL calls against GSAM databases; however, you can issue ISRT calls after the database is loaded but only to add records to the end of the data set. Records are not randomly added to a GSAM data set.

Although random processing of GSAM and SHSAM databases is possible, random processing of a GSAM database is done using a GU call qualified with a record search argument (RSA). This processing is primarily useful for establishing position in the database before issuing a series of GN calls.

Although SHSAM and SHISAM databases can be processed in any processing region, GSAM databases can only be processed in a batch or batch message processing region.

The following IMS options do not apply to GSAM databases:

- Logical relationships
- Secondary indexing
- Segment edit/compression exit routine
- Field-level sensitivity
- Data Capture exit routines
- Logging or reorganization
- Multiple data set groups

If you have application programs that need access to both IMS and z/OS data sets, you can use SHSAM, SHISAM, or GSAM. Which one you use depends on what functions you need. Table 8 on page 80 compares the characteristics and functions available for each of the three types of databases.

SHSAM, SHISAM, and GSAM Databases

Table 8. Comparison of SHSAM, SHISAM, and GSAM Databases

Characteristics and Functions	SHSAM	SHISAM	GSAM
Hierarchic structure applicable?	NO	NO	NO
Segment prefix exist?	NO	NO	NO
Variable-length records used?	NO	NO	YES
Checkpoint/restart possible?	NO	YES ¹	YES ¹
Compatible with non-IMS data sets?	YES	YES	YES
Can VSAM be used as the operating system access method?	NO	YES	YES
Can BSAM be used as the operating system access method?	YES	NO	YES
Accessible from a batch region?	YES	YES	YES
Accessible from a batch message processing region?	YES	YES	YES
Accessible from a message processing region?	YES	YES	NO
Logging available?	NO	YES	NO
GET calls allowed?	YES	YES	YES
ISRT calls allowed?	YES ²	YES	YES ³
Supported for CICS-DBCTL?	YES	YES	NO
Supported for DCCTL?	NO	NO	YES

Note:

1. Using symbolic checkpoints
2. To load database only
3. Allowed only at the end of the data set

HDAM, PHDAM, HIDAM, and PHIDAM Databases

A database that uses a direct method of storing data and that maintains the hierarchic sequence of its segments by having segments point to one another (instead of by physically storing the segments in the hierarchical sequence) is referred to as a hierarchic direct (HD) database.

HD databases are stored on direct-access devices in either a VSAM ESDS or an OSAM data set.

Except for a few special cases, each segment in an HD database has one or more direct-address pointers in its prefix. When direct-address pointers are used, database records and segments can be stored anywhere in the database. Their position, once stored, is fixed, and they do not “move around” in the database when subsequent processing takes place. Instead, pointers are updated to reflect processing changes.

HD databases also differ from sequentially organized ones in that space in HD databases can be reused. If part or all of a database record is deleted, the deleted space can be reused when new database records or segments are inserted.

HD databases access the root segments that they contain in one of two ways: by using a randomizing module or a primary index. HD databases that use a randomizing module are referred to as *hierarchic direct access method (HDAM)*

databases. HD databases that use a primary index are referred to as *hierarchical indexed direct access method (HIDAM)* databases.

HD databases can also be partitioned. A partitioned HD database that uses a randomizing module to access its root segments is referred to as a *partitioned HDAM (PHDAM)* database. A partitioned HD database that uses a primary index to access its root segments is referred to as a *partitioned HIDAM (PHIDAM)* database. PHDAM and PHIDAM databases, along with *partitioned secondary index (PSINDEX)* databases, are collectively referred to as *High Availability Large Database (HALDB)* type databases.

The storage organization in HD databases that use a randomizing module and in HD databases that use a primary index is basically the same. Their primary difference is in the way their root segments are accessed. In HDAM or PHDAM databases, the randomizing module examines the root's key to determine the address of a pointer to the root segment. In HIDAM or PHIDAM databases, each root segment's storage location is found by searching the index. In HIDAM databases, the primary index is a database that IMS loads and maintains. In PHIDAM databases, the primary index is a data set that IMS loads and maintains. The advantage of a randomizing module is that the I/O operations required to search an index are eliminated.

In PHDAM and PHIDAM databases, before IMS uses either the randomizing module or the primary index, IMS must determine which partition the root segments are stored in by using a process called partition selection. You can have IMS perform partition selection by assigning a range of root keys to a partition or by using a Partition Selection exit routine. For more information about partition selection, see "HALDB Partition Selection" on page 117.

Figure 37 compares a logical view of an HDAM database with the logical view of a PHDAM database.

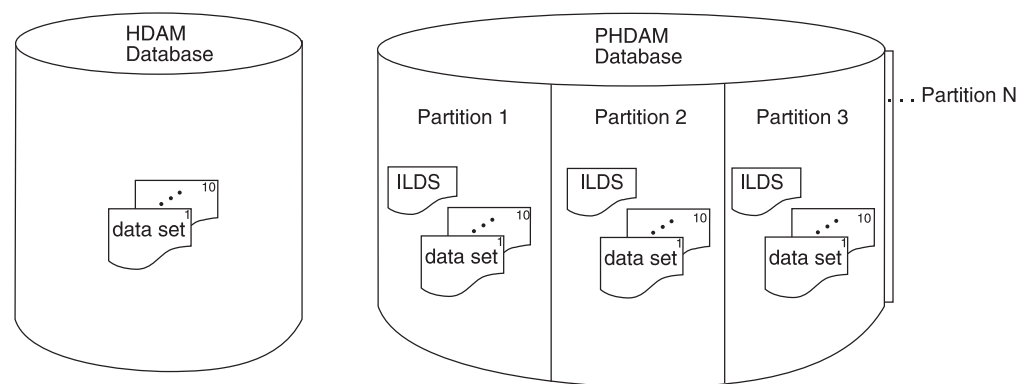


Figure 37. A Logical View of an HDAM and a PHDAM Database

Figure 38 on page 82 compares a logical view of a HIDAM database with the logical view of a PHIDAM database.

HDAM, PHDAM, HIDAM, and PHIDAM

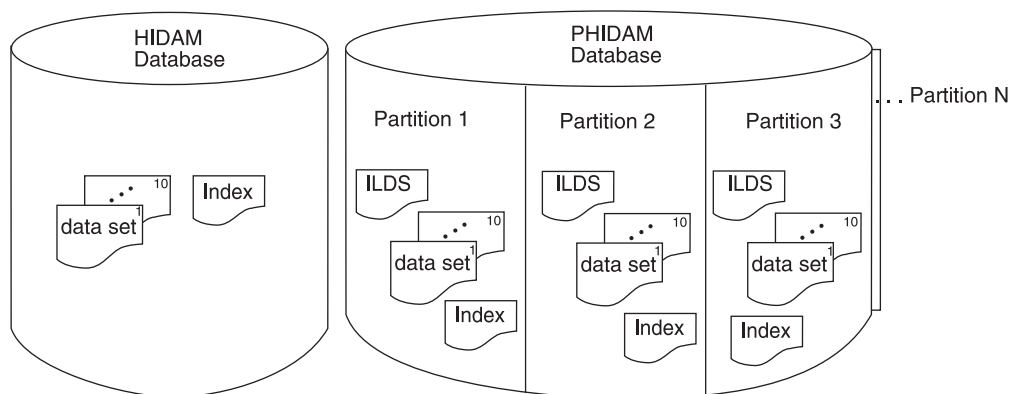


Figure 38. A Logical View of a HIDAM and a PHIDAM

Maximum Sizes of HD Databases

The maximum possible size of HDAM, PHDAM, HIDAM, and PHIDAM databases is based on the number of data sets the database can hold and the size of the data sets. The maximum possible size of a data set differs depending on whether VSAM or OSAM is used and whether the database is partitioned. Table 9 lists the maximum data set size, maximum number of data sets, and maximum database size for HDAM, PHDAM, HIDAM, and PHIDAM databases.

Table 9. Maximum Sizes for HDAM, HIDAM, PHDAM, and PHIDAM Databases

Data Set Type	Maximum Data Set Size	Maximum Number of Data Sets	Maximum Database Size
OSAM HDAM or HIDAM Database	8 GB	10 data sets	80 GB
VSAM HDAM or HIDAM Database	4 GB	10 data sets	40 GB
OSAM PHDAM or PHIDAM Database	4 GB	10 010 data sets (10 data sets per partition; 1001 partitions per database)	40 040 GB
VSAM PHDAM or PHIDAM Database	4 GB	10 010 data sets (10 data sets per partition; 1001 partitions per database)	40 040 GB

Related Reading: For information on OSAM data sets, see Appendix C, “Using OSAM as the Access Method,” on page 547.

DL/I Calls Issuable Against HD Databases

All DL/I calls can be issued against HD databases. In addition, the following options are available:

- Multiple data set groups
- Logical relationships
- Secondary indexing

- Variable-length segments
- Segment edit/compression exit routine
- Data Capture exit routines
- Field-level sensitivity
- Logging, recovery, and offline reorganization
- Online reorganization for HALDB partitions

Related Reading:

- Except for logging and recovery, each of these options is discussed in detail in the topics of this chapter. For information on logging and recovery, see *IMS Version 9: Operations Guide*.
- For information on the online reorganization of HALDB partitions, see “HALDB Online Reorganization” on page 382.

When to Use HDAM and PHDAM

HDAM and PHDAM databases are typically used for direct access to database records. The randomizing module provides fast access to the root segment (and therefore the database record). HDAM and PHDAM databases also give you fast access to paths of segments as specified in the DBD in a database record. For example, in Figure 39, if physical child pointers are used, they can be followed to reach segments B, C, D, or E. A hierarchic search of segments in the database record is bypassed. Segment B does not need to be accessed to get to segments C, D, or E. And segment D does not need to be accessed to get to segment E. Only segment A must be accessed to get to segment B or C. And only segments A and C must be accessed to get to segments D or E.

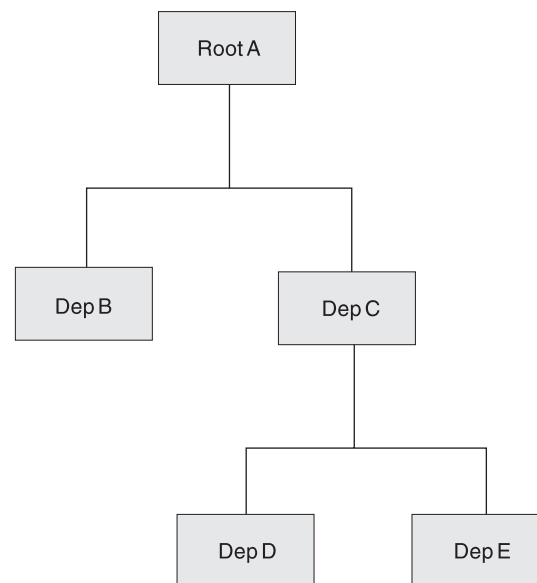


Figure 39. Example Database Record

When to Use HIDAM and PHIDAM

HIDAM and PHIDAM databases are typically used when you need both random and sequential access to database records and random access to paths of segment in a database record. Access to root segments (and therefore database records) is not as fast as with HDAM (or PHDAM), because the HIDAM (or PHIDAM) index

database has to be searched for a root segment's address. However, because the index keeps the address of root segments stored in key sequence, database records can be processed sequentially.

What You Need to Know About HD Databases

Before looking in detail at how HD databases are stored and processed, you need to become familiar with:

- The various types of pointers you can specify for a HD database
- The general format of the database
- The use of special fields in the database

Types of Pointers You Can Specify

The hierarchic sequence of segments in a database record using the sequential access methods is maintained by keeping segments physically adjacent to each other in storage. In the HD access methods, segments in a database record are kept in hierarchic sequence using direct-address pointers. Except for a few special cases, each prefix in an HD segment contains one or more pointers. Each pointer is 4 bytes long and consists of the relative byte address of the segment to which it points. Relative, in this case, means relative to the beginning of the data set.

Several different types of direct-address pointers exist, and you will see how each works in the topics that follow in this section. However, there are three basic types:

- Hierarchic pointers, which point from one segment to the next in either forward or forward and backward hierarchic sequence
- Physical child pointers, which point from a parent to each of its first or first and last children, for each child segment type
- Physical twin pointers, which point forward or forward and backward from one segment occurrence of a segment type to the next, under the same parent

When segments in a database record are typically processed in hierarchic sequence, use hierarchic pointers. When segments in a database record are typically processed randomly, use a combination of physical child and physical twin pointers. One thing to keep in mind while reading about pointers is that the different types, subject to some rules, can be mixed within a database record. However, because pointers are specified by segment type, all occurrences of the same segment type have the same type of pointer.

Each type of pointer is examined separately in this topic. The topic "Mixing Pointers" on page 91, discusses how pointers can be mixed. In the subtopics in this topic, each type of pointer is illustrated, and the database record on which each illustration is based is shown in Figure 40 on page 85.

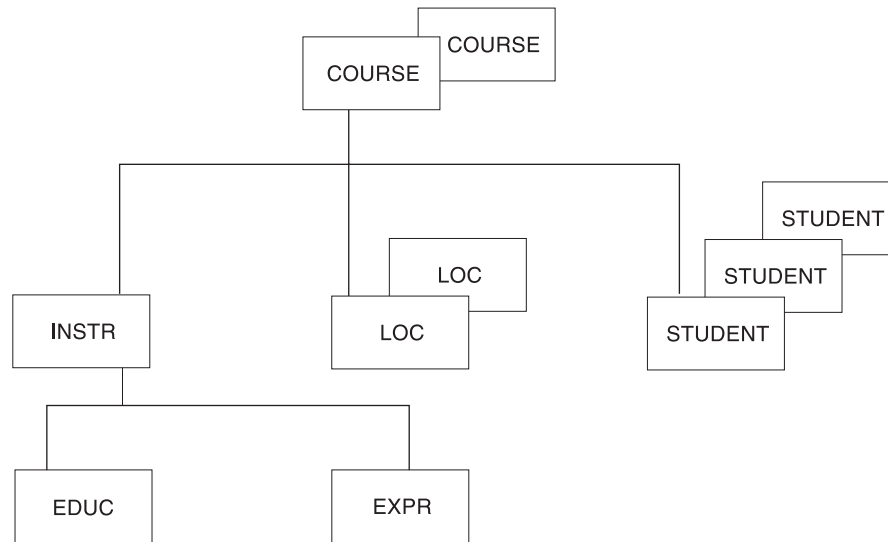


Figure 40. Example Database Record for Illustrating Pointers

Hierarchic Forward Pointers

With hierarchic forward (HF) pointers, each segment in a database record points to the segment that follows it in the hierarchy.

Figure 41 shows hierarchic forward pointers:

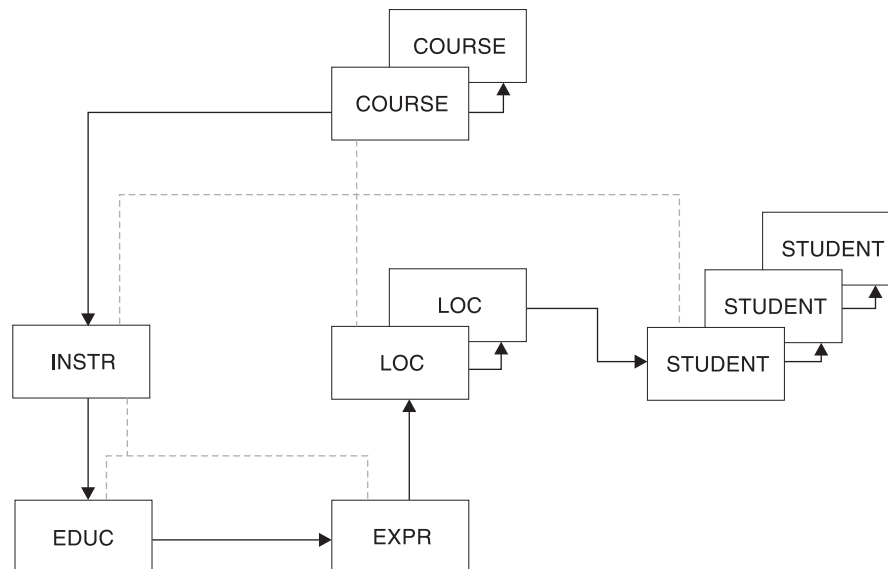


Figure 41. Hierarchic Forward Pointers

When an application program issues a call for a segment, HF pointers are followed until the specified segment is found. In this sense, the use of HF pointers in an HD database is similar to using a sequentially organized database. In both, to reach a dependent segment all segments that hierarchically precede it in the database record must be examined. HF pointers should be used when segments in a database record are typically processed in hierarchic sequence and processing does

not require a significant number of delete operations. If there are a lot of delete operations, hierarchic forward and backward pointers (explained next) might be a better choice.

Four bytes are needed in each dependent segment's prefix for the HF pointer. Eight bytes are needed in the root segment. More bytes are needed in the root segment because the root points to both the next root segment and first dependent segment in the database record. HF pointers are specified by coding PTR=H in the SEGM statement in the DBD.

Restriction: HALDBs do not support HF pointers.

Hierarchic Forward and Backward Pointers

With hierarchic forward and backward pointers (HF and HB), each segment in a database record points to both the segment that follows and the one that precedes it in the hierarchy (except dependent segments do not point back to root segments). HF and HB pointers must be used together, since you cannot use HB pointers alone. Figure 42 shows how HF and HB pointers work.

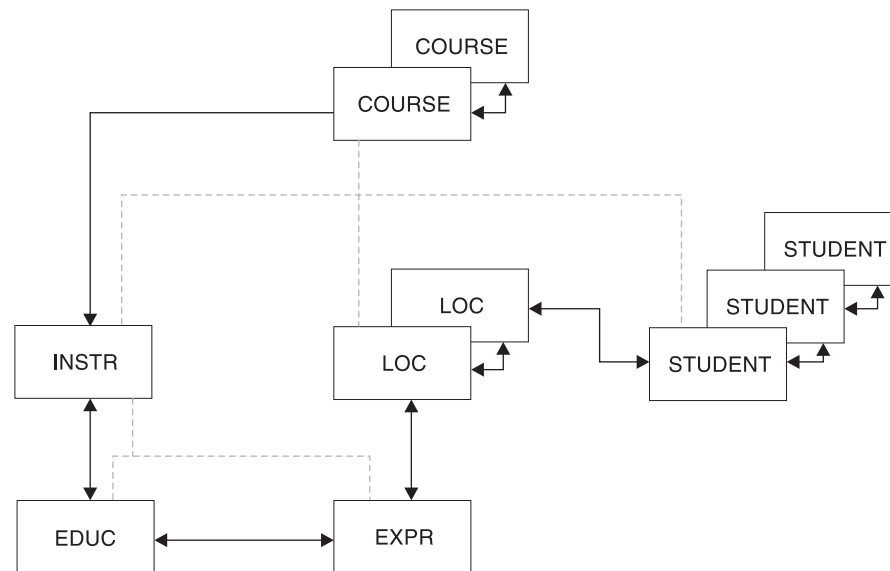


Figure 42. Hierarchic Forward and Backward Pointers

HF pointers work in the same way as the HF pointers described in “Hierarchic Forward Pointers” on page 85.

HB pointers point from a segment to one immediately preceding it in the hierarchy. In most cases, HB pointers are not required for delete processing. IMS saves the location of the previous segment retrieved on the chain and uses this information for delete processing. The backward pointers are useful for delete processing if the previous segment on the chain has not been accessed. This happens when the segment to be deleted is entered by a logical relationship.

The backward pointers are useful only when all of the following are true:

- Direct pointers from logical relationships or secondary indexes point to the segment being deleted or one of its dependent segments.
- These pointers are used to access the segment.
- The segment is deleted.

Eight bytes are needed in each dependent segment's prefix to contain HF and HB pointers. Twelve bytes are needed in the root segment. More bytes are needed in the root segment because the root points:

- Forward to a dependent segment
- Forward to the next root segment in the database
- Backward to the preceding root segment in the database

HF and HB pointers are specified by coding PTR=HB in the SEGM statement in the DBD.

Restriction: HALDBs do not support HF and HB pointers.

Physical Child First Pointers

With physical child first (PCF) pointers, each parent segment in a database record points to the first occurrence of each of its immediately dependent child segment types. Figure 43 shows PCF pointers:

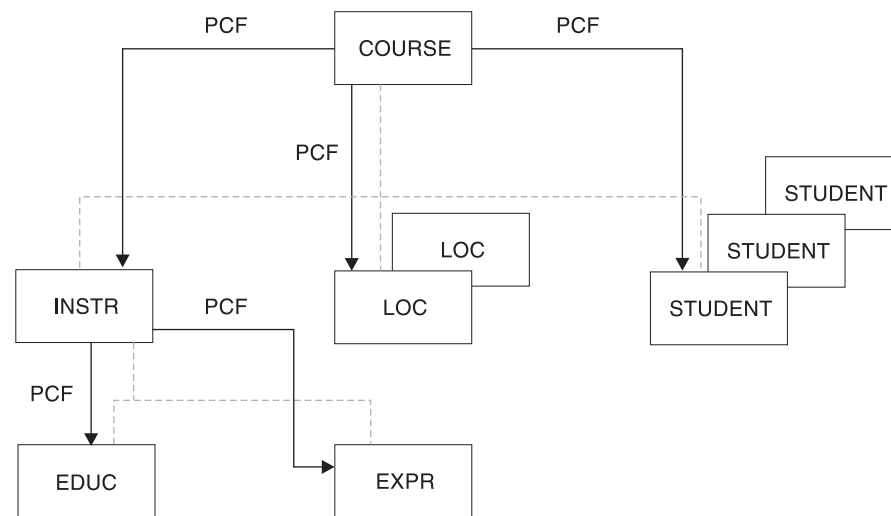


Figure 43. Physical Child First Pointers

With PCF pointers, the hierarchy is only partly connected. No pointers exist to connect occurrences of the same segment type under a parent. Physical twin pointers (explained in “Types of Pointers You Can Specify” on page 84) can be used to form this connection. Use PCF pointers when segments in a database record are typically processed randomly and either sequence fields are defined for the segment type, or if not defined, the insert rule is FIRST or HERE. If sequence fields are not defined and new segments are inserted at the end of existing segment occurrences, the combination of PCF and physical child last (PCL) pointers (explained next) can be a better choice.

Related Reading:

- For more information on insert rules, see *IMS Version 9: Application Programming: Database Manager*.
- For information on specifying insert rules using the RULES= parameter of the SEGM segment definition statement, see *IMS Version 9: Utilities Reference: System*.

Four bytes are needed in each parent segment for each PCF pointer. PCF pointers are specified by coding PARENT=((name,SNGL)) in the SEGM statement in the

DBD. This is the SEGM statement for the child being pointed to, not the SEGM statement for the parent. Note, however, that the pointer is stored in the parent segment.

Physical Child First and Last Pointers

With physical child first and last pointers (PCF and PCL), each parent segment in a database record points to both the first and last occurrence of its immediately dependent child segment types. PCF and PCL pointers must be used together, since you cannot use PCL pointers alone. Figure 44 shows PCF and PCL pointers:

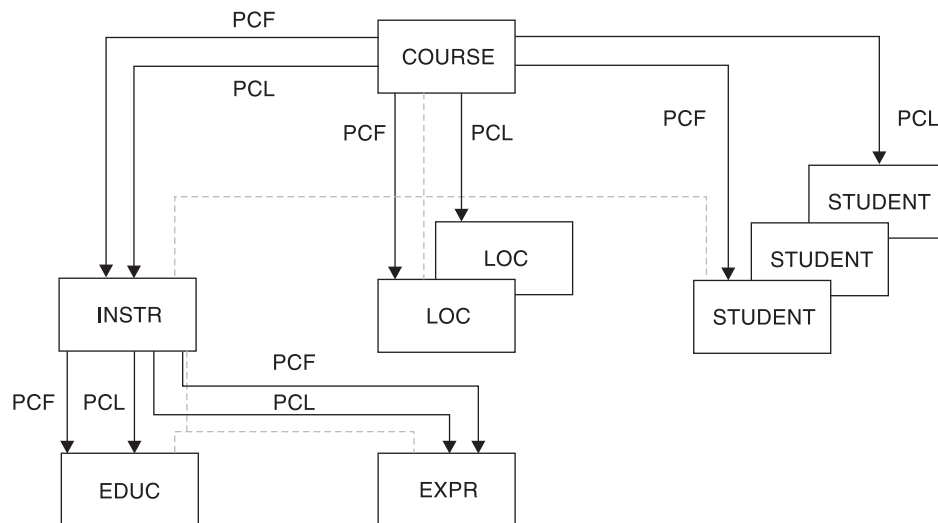


Figure 44. Physical Child First and Last Pointers

Note that if only one physical child of a particular parent segment exists, the PCF and PCL pointers both point to the same segment. As with PCF pointers, PCF and PCL pointers leave the hierarchy only partly connected, and no pointers exist to connect occurrences of the same segment type under a parent. Physical twin pointers (explained in “Types of Pointers You Can Specify” on page 84) can be used to form this connection.

PCF and PCL pointers (as opposed to just PCF pointers) are typically used when:

- No sequence field is defined for the segment type.
- New segment occurrences of a segment type are inserted at the end of all existing segment occurrences.

On insert operations, if the ISRT rule of LAST has been specified, segments are inserted at the end of all existing segment occurrences for that segment type. When PCL pointers are used, fast access to the place where the segment will be inserted is possible. This is because there is no need to search forward through all segment occurrences stored before the last occurrence. PCL pointers also give application programs fast retrieval of the last segment in a chain of segment occurrences. Application programs can issue calls to retrieve the last segment by using an unqualified SSA with the command code L. When a PCL pointer is followed to get the last segment occurrence, any further movement in the database is forward.

A PCL pointer does not enable you to search from the last to the first occurrence of a series of dependent child segment occurrences.

Four bytes are needed in each parent segment for each PCF and PCL pointer. PCF and PCL pointers are specified by coding the PARENT= operand in the SEGM statement in the DBD as PARENT=((name,DBLE)). This is the SEGM statement for the child being pointed to, not the SEGM statement for the parent. Note, however, that the pointers are stored in the parent segment.

A parent segment can have SNGL specified on one immediately dependent child segment type and DBLE specified on another.

Figure 45 shows the result of specifying PCF and PCL pointers in the following DBD.

```
DBD
SEGM A
SEGM B PARENT=((name.SNGL)) (specifies PCF pointer only)
SEGM C PARENT=((name.DBLE)) (specifies PCF and PCL pointers)
```

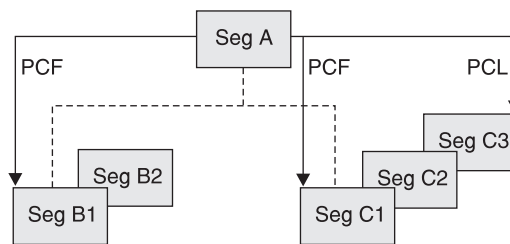


Figure 45. Specifying PCF and PCL Pointers

Physical Twin Forward Pointers

With physical twin forward (PTF) pointers, each segment occurrence of a given segment type under the same parent points forward to the next segment occurrence. Figure 46 on page 90 illustrates this.

Note that, except in PHIDAM databases, PTF pointers can be specified for root segments. When this is done in an HDAM or PHDAM database, the root segment points to the next root in the database chained off the same root anchor points (RAP). If no more root segments are chained from this RAP, the PTF pointer is zero.

Related Reading: For more information on RAPs, see “General Format of HD Databases and Use of Special Fields” on page 94.

When PTF pointers are specified for root segments in a HIDAM database, the root segment does *not* point to the next root in the database. For an explanation of where the root segment points, see “Use of RAPs in a HIDAM Database” on page 102.

If you specify PTF pointers on a root segment in a HIDAM database, the HIDAM index must be used for all sequential processing of root segments. Using only PTF pointers increases access time. You can eliminate this overhead by specifying PTF and physical twin backward (PTB) pointers (discussed in “Physical Twin Forward and Backward Pointers” on page 90).

You cannot use PTF pointers for root segments in a PHIDAM database. PHIDAM databases only support PTF pointers for dependent segments.

HDAM, PHDAM, HIDAM, and PHIDAM

With PTF pointers, the hierarchy is only partly connected. No pointers exist to connect parent and child segments. Physical child pointers can be used to form this connection. PTF pointers should be used when segments in a database record are typically processed randomly, and you do not need sequential processing of database records.

Four bytes are needed for the PTF pointer in each segment occurrence of a given segment type. PTF pointers are specified by coding PTR=T in the SEGM statement in the DBD. This is the SEGM statement for the segment containing the pointer. The combination of PCF and PTF pointers is used as the default when pointers are not specified in the DBD. Figure 46 show PTF pointers:

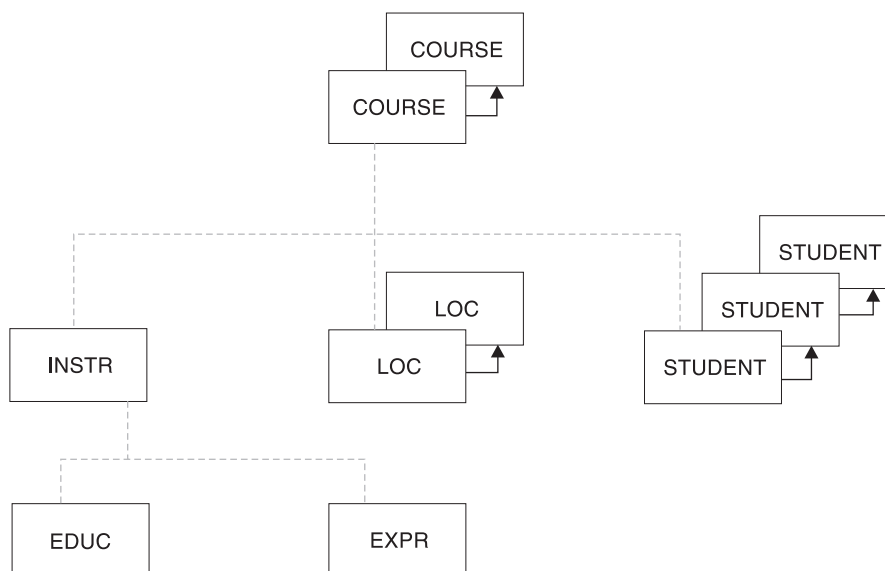


Figure 46. Physical Twin Forward Pointers

Physical Twin Forward and Backward Pointers

With physical twin forward and backward (PTF and PTB) pointers, each segment occurrence of a given segment type under the same parent points both forward to the next segment occurrence and backward to the previous segment occurrence. PTF and PTB pointers must be used together, since you cannot use PTB pointers alone. Figure 47 on page 91 illustrates how PTF and PTB pointers work.

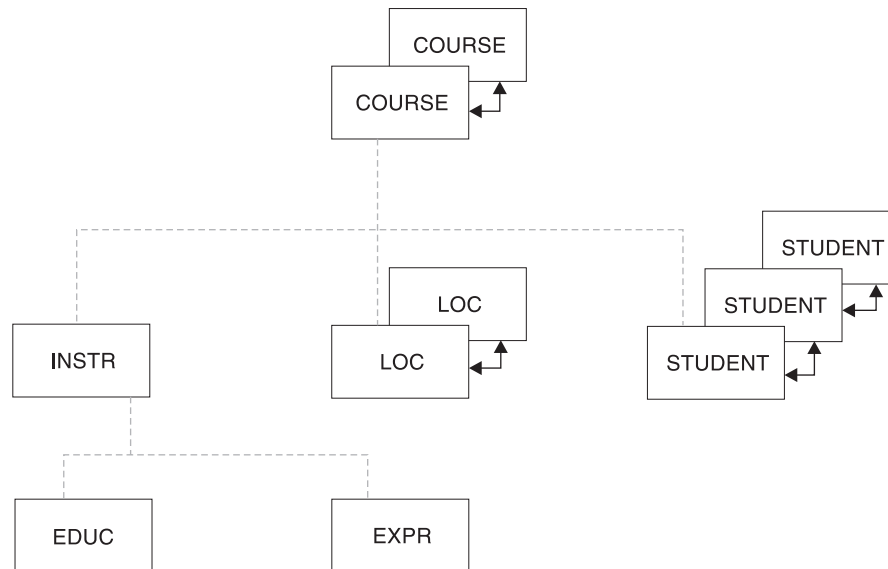


Figure 47. Physical Twin Forward and Backward Pointers

Note that PTF and PTB pointers can be specified for root segments. When this is done, the root segment points to both the next and the previous root segment in the database. As with PTF pointers, PTF and PTB pointers leave the hierarchy only partly connected. No pointers exist to connect parent and child segments. Physical child pointers (explained previously) can be used to form this connection.

PTF and PTB pointers (as opposed to just PTF pointers) should be used on the root segment of a HIDAM or a PHIDAM database when you need fast sequential processing of database records. By using PTB pointers in root segments, an application program can sequentially process database records without IMS' having to refer to the HIDAM or PHIDAM index. For HIDAM databases, PTB pointers improve performance when deleting a segment in a twin chain accessed by a virtually paired logical relationship. Such twin-chain access occurs when a delete from the logical access path causes DASD space to be released.

Eight bytes are needed for the PTF and PTB pointers in each segment occurrence of a given segment type. PTF and PTB pointers are specified by coding PTR=TB in the SEGM statement in the DBD.

Mixing Pointers

Because pointers are specified by segment type, the various types of pointers can be mixed within a database record. However, only hierarchic or physical, but not both, can be specified for a given segment type. The types of pointers that can be specified for a segment type are:

HF	Hierarchic forward
HF and HB	Hierarchic forward and backward
PCF	Physical child first
PCF and PCL	Physical child first and last
PTF	Physical twin forward
PTF and PTB	Physical twin forward and backward

HDAM, PHDAM, HIDAM, and PHIDAM

Figure 48 on page 93 shows a database record in which pointers have been mixed. Note that, in some cases, for example, dependent segment B, many pointers exist even though only one type of pointer is or can be specified. Also note that if a segment is the last segment in a chain, its last pointer field is set to zero (the case for segment E1, for instance). One exception is noted in the rules for mixing pointers. Figure 48 has a legend that explains what specification in the PTR= or PARENT= operand causes a particular pointer to be generated.

The rules for mixing pointers are:

- If PTR=H is specified for a segment, no PCF pointers can exist from that segment to its children. For a segment to have PCF pointers to its children, you must specify PTR=T or TB for the segment.
- If PTR=H or PTR=HB is specified for the root segment, the first child will determine if an H or HB pointer is used. All other children must be of the same type.
- If PTR=H is specified for a segment other than the root, PTR=TB and PTR=HB cannot be specified for any of its children. If PTR=HB is specified for a segment other than the root, PTR=T and PTR=H cannot be specified for any of its children.

That is, the child of a segment that uses hierarchic pointers must contain the same number of pointers (twin or hierarchic) as the parent segment.

- If PTR=T or TB is specified for a segment whose immediate parent used PTR=H or PTR=HB, the last segment in the chain of twins does not contain a zero. Instead, it points to the first occurrence of the segment type to its right on the same level in the hierarchy of the database record. This is true even if no twin *chain* yet exists, just a single segment for which PTR=T or TB is specified (dependent segment B and E2 in the figure illustrate this rule).
- If PTR=H or HB is specified for a segment whose immediate parent used PTR=T or TB, the last segment in the chain of twins contains a zero (dependent segment C2 in the figure illustrates this rule).

Figure 48 shows an example of mixing pointers in a database record.

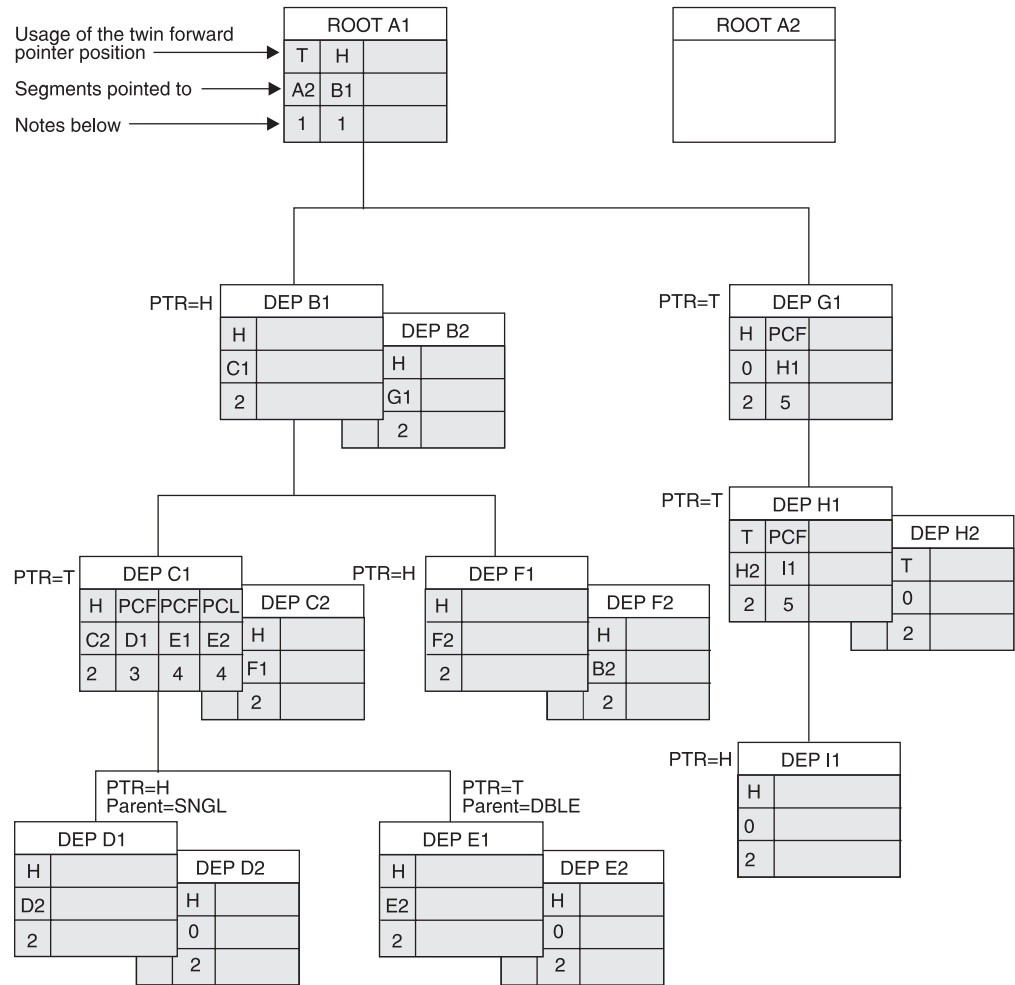


Figure 48. Mixing Pointers

Notes for Figure:

1. These pointers are generated when you specify PTR=H on the root segment.
2. If you specify PTR=H, usage is hierarchical (H); otherwise usage is twin (T).
3. These pointers are generated when you specify PTR=T on segment type C and PARENT=SNGL on segment type D.
4. These pointers are generated when you specify PTR=T on segment type C and PARENT=DBLE on segment type E.
5. These pointers are generated when you specify PTR=T on this segment type.

Sequence of Pointers in a Segment's Prefix

When a segment contains more than one type of pointer, pointers are put in the segment's prefix in the following sequence:

1. HF
2. HB

Or:

1. PF
2. PTB
3. PCF
4. PCL

General Format of HD Databases and Use of Special Fields

The way in which an HD database is organized is not particularly complex, but some of the special fields in the database used for things like managing space make HD databases seem quite different from sequentially organized databases. This topic looks at the general layout of the database special fields.

The databases referred to here are the HDAM or PHDAM and the HIDAM or PHIDAM databases. HIDAM and PHIDAM each have an additional database, the primary index database; for HIDAM, you allocate it; for PHIDAM, IMS allocates it; for both, IMS maintains the index. This topic examines the index database when dealing with the storage of HIDAM records. Figure 49 shows the general format of an HD database and some of the special fields used in it.

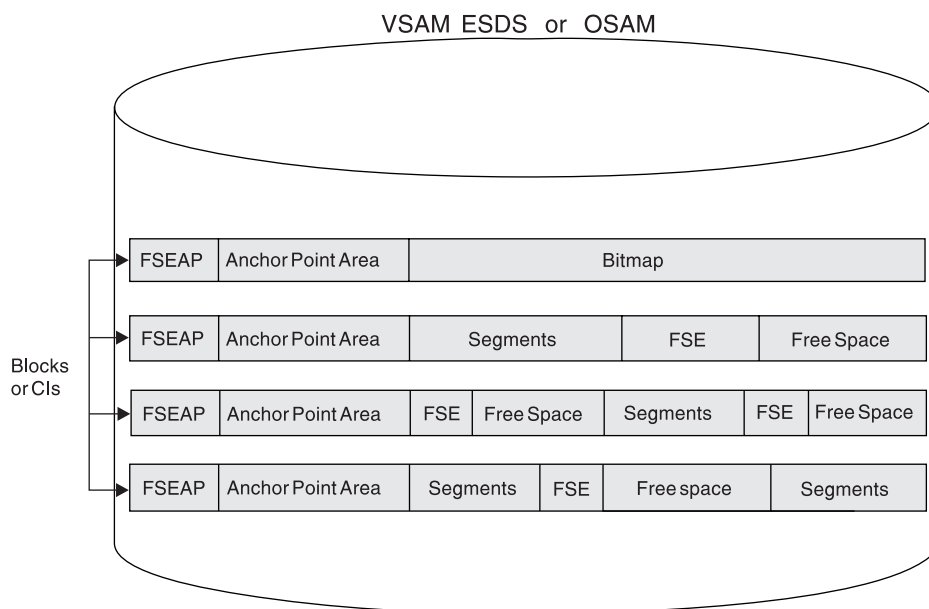


Figure 49. Format of an HD Database and Special Fields in It

HD databases use a single data set, that is either a VSAM ESDS or an OSAM data set. The data set contains one or more CIs (VSAM ESDS) or blocks (OSAM). Database records in the data set are in unblocked format. Logical record length is the same as the block size when OSAM is used. When VSAM is used, logical record length is slightly less than CI size. (VSAM requires some extra control information in the CI.) You can either specify logical record length yourself or have it done by the Database Description Generation (DBDGEN) utility. The utility generates logical record lengths equal to a quarter, third, half, or full track block.

All segments in HD Databases begin on a halfword boundary. If a segment's total length is an odd number, the space used in an HD database will be one byte longer than the segment. The extra byte is called a "slack byte".

Note that the database in Figure 49 contains areas of free space. This free space could be the result of delete or replace operations done on segments in the data set. Remember, space can be reused in HD databases. Or it could be free space you set aside when loading the database. HD databases allow you to set aside free space by specifying that periodic blocks or CIs be left free or by specifying that a percentage of space in each block or CI be left free.

Examine the four fields illustrated in Figure 49. Three of the fields are used to manage space in the database. The remaining one, the anchor point area, contains the addresses of root segments. The fields are:

- *Bit map*. Bit maps contain a string of bits. Each bit describes whether enough space is available in a particular CI or block to hold an occurrence of the longest segment defined in the data set group. The first bit says whether the CI or block that the bit map is in has free space. Each consecutive bit says whether the next consecutive CI or block has free space. When the bit value is one, it means the CI or block has enough space to store an occurrence of the longest segment type you have defined in the data set group. When the bit value is zero, not enough space is available.

The first bit map in an OSAM data set is in the first block of the first extent of the data set. In VSAM data sets, the second CI is used for the bit map and the first CI is reserved. The first bit map in a data set contains n bits that describe space availability in the next $n-1$ consecutive CIs or blocks in the data set. After the first bit map, another bit map is stored at every n th CI or block to describe whether space is available in the next group of CIs or blocks in the data set.

For a HALDB partition, the first bit map block stores the partition ID (2 bytes) and the reorganization number (2 bytes). These are stored before the FSEAP at the beginning of the block.

An example bit map is shown in Figure 50.

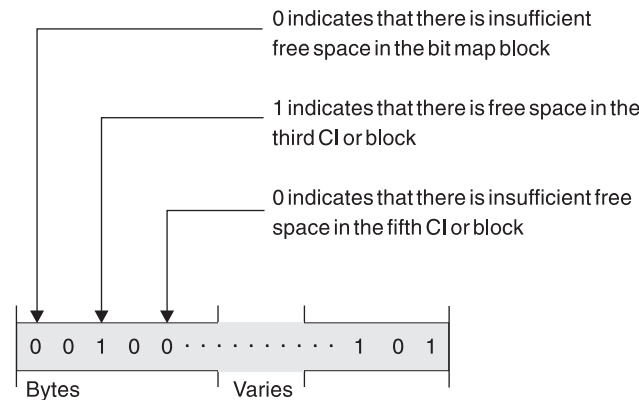


Figure 50. Bit Map for HD Databases

- *Free space element anchor point (FSEAP)*. FSEAPs are made up of two 2-byte fields. The first contains the offset, in bytes, to the first free space element (FSE) in the CI or block. FSEs describe areas of free space in a block or CI. The second field identifies whether this block or CI contains a bit map. If the block or CI does not contain a bit map, the field is zeros. One FSEAP exists at the beginning of every CI or block in the data set. IMS automatically generates and maintains FSEAPs.

An FSEAP is shown in Figure 51 on page 96.

HDAM, PHDAM, HIDAM, and PHIDAM

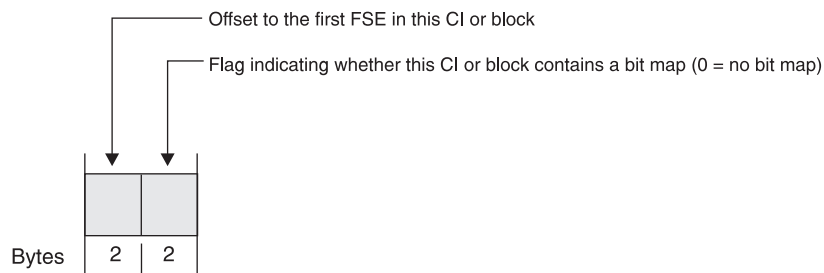


Figure 51. An FSEAP

The FSEAP in the first bit map block in an OSAM data set has a special use. It is used to contain the DBRC usage indicator for the database. The DBRC usage indicator is used at database open time for update processing to verify usage of the correct DBRC RECON data set.

- *Free space element (FSE).* An FSE describes each area of free space in a CI or block that is 8 or more bytes in length. IMS automatically generates and maintains FSEs. FSEs occupy the first 8 bytes of the area that is free space. FSEs consist of three fields:
 - Free space chain pointer (CP) field. This field contains, in bytes, the offset from the beginning of this CI or block to the next FSE in the CI or block. This field is 2 bytes long. The CP field is set to zero if this is the last FSE in the block or CI.
 - Available length (AL) field. This field contains, in bytes, the length of the free space identified by this FSE. The value in this field includes the length of the FSE itself. The AL field is 2 bytes long.
 - Task ID (ID) field. This field contains the task ID of the program that freed the space identified by the FSE. The task ID allows a given program to free and reuse the same space during a given scheduling without contending for that space with other programs. The ID field is 4 bytes long.

An FSE is shown in Figure 52.

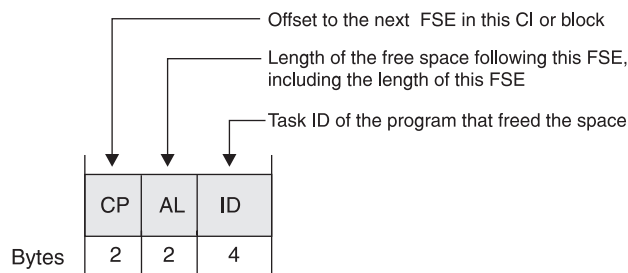


Figure 52. An FSE

- *Anchor point area.* The anchor point area is made up of one or more 4-byte root anchor points (RAPs). Each RAP contains the address of a root segment. For HDAM, you specify the number of RAPs you need on the RMNAME parameter in the DBD statement. For PHDAM, you specify the number of RAPs you need on the RMNAME parameter in the DBD statement, or by using the HALDB Partition Definition utility, or on the DBRC INIT.PART command. For HIDAM (but not PHIDAM), you specify whether RAPs exist by specifying PTR=T or PTR=H for a root segment type. Only one RAP per block or CI is generated. How RAPs are used in HDAM, PHDAM, and HIDAM differs. Therefore RAPs will be examined further in the following topics:

- “How HDAM and PHDAM Records Are Stored”
- “How HIDAM and PHIDAM Records Are Stored” on page 99

An anchor point area in an HDAM or PHDAM database is shown in Figure 53.

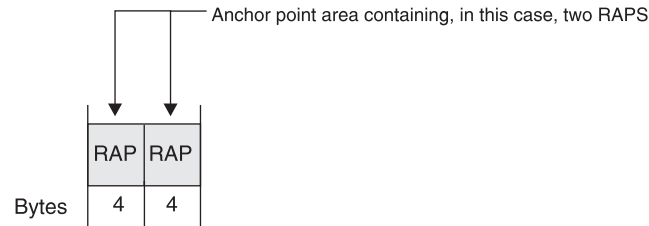


Figure 53. An HDAM or PHDAM Anchor Point Area

How HDAM and PHDAM Records Are Stored

HDAM or PHDAM databases consist of two parts: a root addressable area and an overflow area. The root addressable area contains root segments and is the primary storage area for dependent segments in a database record. The overflow area is for the storage of segments that do not fit in the root addressable area. You specify the size of the root addressable area in the relative block number (RBN) operand of the RMNAME parameter in the DBD statement. For PHDAM, you can also use the HALDB Partition Definition utility to specify the size of the root addressable area. You also specify the maximum number of bytes of a database record to be stored in the root addressable area by using the BYTES operand of the RMNAME parameter in the DBD statement. For PHDAM databases, you can use the HALDB Partition Definition utility to specify the maximum number of bytes in the root addressable area.

Figure 54 shows sample Skills database records. Figure 55 on page 98 shows how these records are stored in a HDAM or PHDAM database.

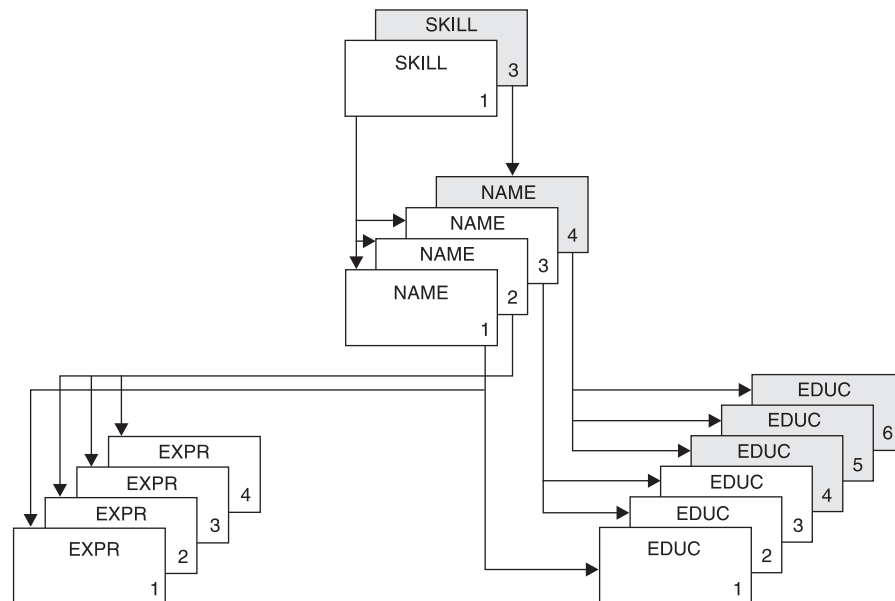


Figure 54. Two Example HD Database Records

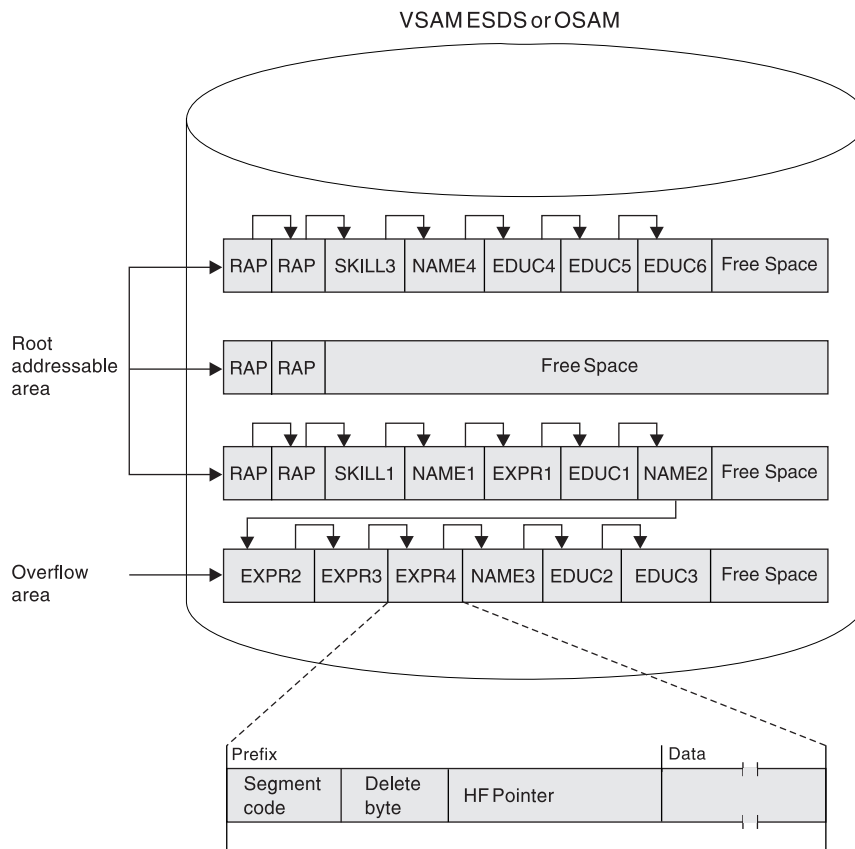


Figure 55. HDAM or PHDAM Database Records in Storage

When the database is initially loaded, the root and each dependent segment are put in the root addressable area until the next segment to be stored will cause the total space used to exceed the amount of space you specified in the BYTES operand. At this point, all remaining dependent segments in the database record are stored in the overflow area.

In an HDAM or a PHDAM database, the order in which you load database records does not matter. The user randomizing module determines where each root is stored. However, as with all types of databases, when the database is loaded, all dependents of a root must be loaded in hierarchic sequence following the root.

To store an HDAM or a PHDAM database record, the randomizing module takes the root's key and, by hashing or some other arithmetic technique, computes an RBN or CI number and a RAP number within the block or CI. The module gives these numbers to IMS, and IMS determines where in the root addressable area to store the root. The RBN or CI tells IMS in which CI or block (relative to the beginning of the data set) the RAP will be stored. The RAP number tells which RAP in the CI or block will contain the address of the root. During load, IMS stores the root and as many of its dependent segments that will fit (based on the bytes operand) in the root addressable area.

When the database is initially loaded, it puts the root and segments in the first available space in the specified CI or block, if this is possible. IMS then puts the 4-byte address of the root in the RAP of the CI or block designated by the randomizing module. RAPs only exist in the root addressable area. If space is not

available in the root addressable area for a root, it is put in the overflow area. The root, however, is chained from a RAP in the root addressable area.

When Not Enough Root Storage Room Exists

If the CI or block specified by the randomizing module does not contain enough room to store the root, IMS uses the HD space search algorithm to find space. This algorithm is explained in “How the HD Space Search Algorithm Works” on page 107. When insufficient space exists in the specified CI or block to store the root, the algorithm finds the closest available space to the specified CI or block. When space is found, the address of the root is still stored in the specified RAP in the original block or CI generated by the randomizing module.

If the randomizing module generates the same relative block and RAP number for more than one root, the RAP points to a single root and all additional roots with the same relative block and RAP number are chained to each other using physical twin pointers. Roots are always chained in ascending key sequence. If non-unique keys exist, the ISRT rules of FIRST, LAST, and HERE determine the sequence in which roots are chained (These ISRT rules are explained in *IMS Version 9: Application Programming: Database Manager*). All roots chained like this from a single anchor point area are called *synonyms*.

Figure 55 on page 98 shows two HDAM or PHDAM database records and how they appear in storage after initial load. In this example, enough space exists in the specified block or CI to store the roots, and the unique relative block and RAP numbers for each root generated by the randomizing module. The bytes parameter specifies enough space for five segments of the database record to fit in the root addressable area. All remaining segments are put in the overflow area. When HDAM or PHDAM database records are initially loaded, dependent segments that cannot fit in the root addressable area are simply put in the first available space in the overflow area.

Note how segments in the database record are chained together. In this case, hierarchic pointers are used instead of the combination of physical child/physical twin pointers. Each segment points to the next segment in hierarchic sequence. Also note that two RAPs were specified per CI or block and each of the roots loaded is pointed to by a RAP. For simplicity, Figure 55 on page 98 does not show the various space management fields.

An HDAM or PHDAM segment in storage (see Figure 55 on page 98) consists of a prefix followed by user data. The first byte of the prefix is the segment code, which identifies the segment type to IMS. This number can be from 1 to 255. The segment code is assigned to the segment type by IMS in ascending sequence, starting with the root segment and continuing through all dependents in hierarchic sequence. The second byte of the prefix is the delete byte. The third field in the prefix contains the one or more addresses of segments to which this segment is pointing. In this example, hierarchic forward pointers are used. Therefore, the EXPR4 segment contains only one address, the address of the NAME3 segment.

How HIDAM and PHIDAM Records Are Stored

A HIDAM database is actually composed of two databases. One database contains the database records and the other database contains the HIDAM index. HIDAM uses the index to get to a specific root segment rather than the root anchor points that HDAM and PHDAM use.

How a HIDAM or PHIDAM Database Is Loaded

Root segments in a HIDAM or PHIDAM database must have a unique key field, because an index entry exists for each root segment based on the root's key.

When initially loading a HIDAM or a PHIDAM database, you should present all root segments to the load program in ascending key sequence, with all dependents of a root following in hierarchic sequence. Figure 56 shows how the two Skills database records shown in Figure 54 on page 97 appear in storage after initial load. Note that HIDAM or PHIDAM, unlike HDAM or PHDAM, have no root addressable or overflow area, just a series of blocks or CIs.

Restriction: PHIDAM databases cannot be loaded with a DBB region type. Attempts to do so result in an S0C4 abend. HIDAM databases do not have this restriction.

When database records are initially loaded, they are simply loaded one after another in the order in which they are presented to the load program. The space in Figure 56 at the end of each block or CI is free space specified when the database was loaded. In this example, 30% free space per block or CI was specified.

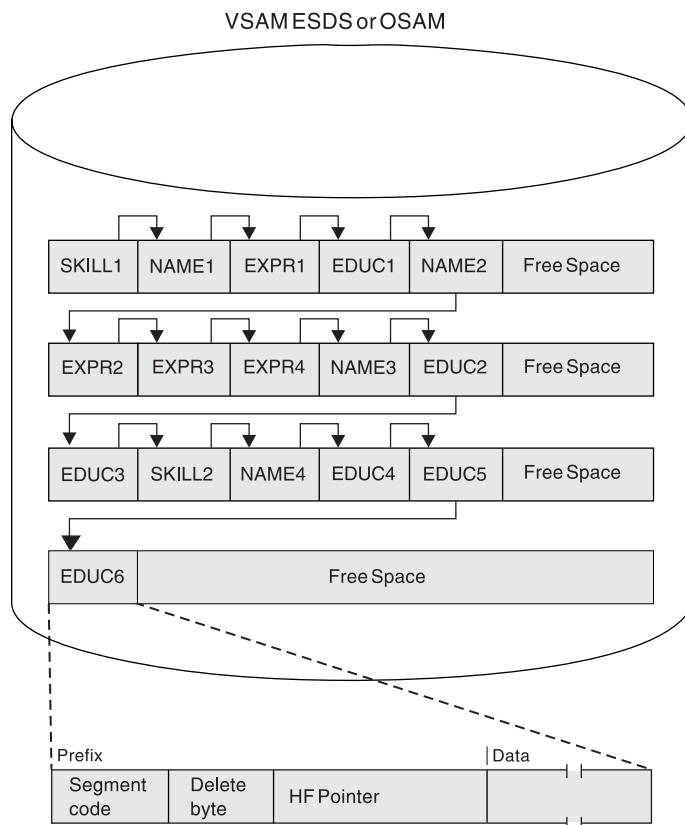


Figure 56. HIDAM or PHIDAM Database Records in Storage

Note how segments in a database record are chained together. In this case, hierarchic pointers were used instead of the combination of physical child/physical twin pointers. Each segment points to the next segment in hierarchic sequence. No RAPs exist in Figure 56. Although HIDAM databases can have RAPs, you probably do not need to use them. The reason for not using RAPs is explained in “Use of RAPs in a HIDAM Database” on page 102.

In storage, a HIDAM or PHIDAM segment (see Figure 56) consists of a prefix followed by user data. The first byte of the prefix is the segment code, which identifies the segment type to IMS. This number can be from 1 to 255. The segment code is assigned to the segment by IMS in ascending sequence, starting with the root segment and continuing through all dependents in hierarchic sequence. The second byte of the prefix is the delete byte. The third field in the prefix contains the one or more addresses of segments to which this segment is pointing. In this example, hierarchic forward pointers are used. The EDUC6 segment contains only one address, the address of the root segment of the next database record (not shown here) in the database.

Creating an Index Segment

As each root is stored in a HIDAM or PHIDAM database, IMS creates an index segment for the root and stores it in the index database or data set. The index database consists of a VSAM KSDS. The KSDS contains an index segment for each root in the database or HALDB partition. When initially loading a HIDAM or PHIDAM database, IMS will insert a root segment with a key of all X'FF's as the last root in the database or partition.

The format of an index segment is shown in Figure 57.




Figure 57. Format of an Index Segment

The prefix portion of the index segment contains the delete byte and the root's address. The data portion of the index segment contains the key field of the root being indexed. This key field identifies which root segment the index segment is for and remains the reason why root segments in a HIDAM or PHIDAM database must have unique sequence fields. Each index segment is a separate logical record. Figure 58 shows the index database that IMS would generate when the two database records in Figure 54 on page 97 were loaded.

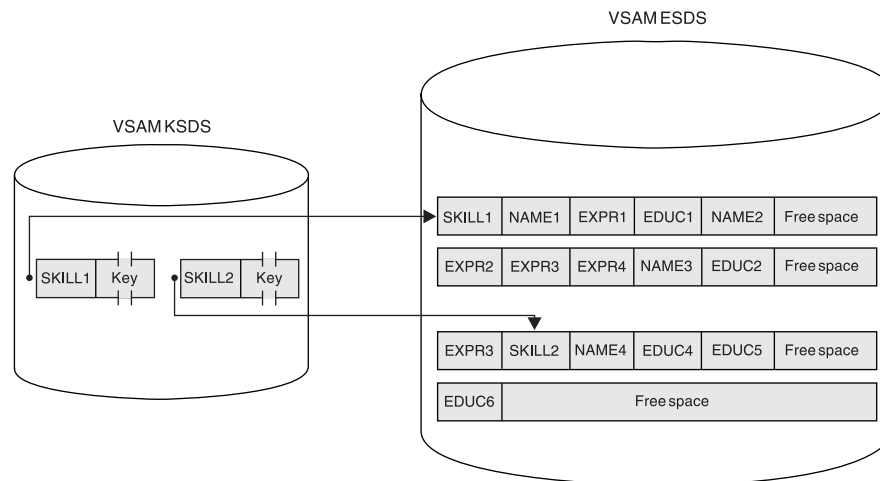


Figure 58. HIDAM or PHIDAM Index Databases

Use of RAPs in a HIDAM Database

RAPs are used differently in HIDAM databases than they are in HDAM or PHDAM databases. In HDAM or PHDAM, RAPs exist to point to root segments. When the randomizing module generates roots with the same relative block and RAP number (synonyms), the RAP points to one root and synonyms are chained together off that root.

In HIDAM databases, RAPs are generated only if you specify PTR=T or PTR=H for a root segment. When either of these is specified, one RAP is put at the beginning of each CI or block, and root segments within the CI or block are chained from the RAP in reverse order based on the time they were inserted. By this method, the RAP points to the last root inserted into the block or CI, and the hierarchic or twin forward pointer in the first root inserted into the block or CI is set to zero. The hierarchic or twin forward pointer in each of the other root segments in the block points to the previous root inserted in the block. Figure 59 shows what happens if you specify PTR=T or PTR=H for root segments in a HIDAM database.

Figure 59 uses the following abbreviations:

- FSE** Free space element
- RAP** Root anchor point
- SC** Segment code
- DB** Delete byte
- TF** Twin forward
- H** Hierarchic forward

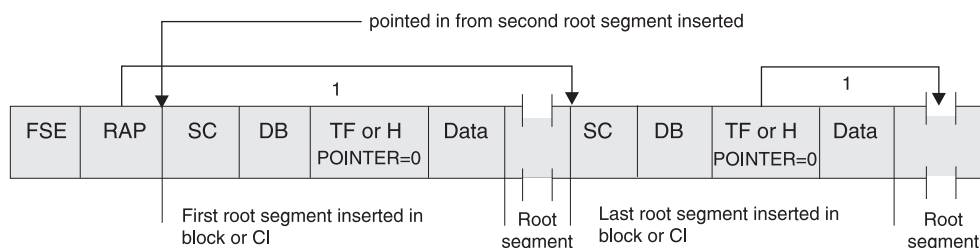


Figure 59. Specifying PTR=T or PTR=H for Root Segments in a HIDAM Database

Note that if you specify PTR=H for a PHIDAM root, you get an additional hierarchic pointer to the first dependent in the hierarchy. In Figure 59, a "1" indicates where this additional hierarchic pointer would appear.

The implication of using PTR=T or PTR=H is that the pointer from one root to the next cannot be used to process roots sequentially. Instead, the HIDAM index must be used for all sequential root processing, and this increases access time. Specify PTR=TB or PTR=HB for root segments in a HIDAM database. Then no RAP is generated, and GN calls against root segments proceed along the normal physical twin forward chain. If no pointers are specified for HIDAM root segments, the default is PTR=T.

Accessing Segments

The way in which a segment in an HD database is accessed depends on whether the DL/I call for the segment is qualified or unqualified.

Qualified Calls

When a call is issued for a root segment and the call is qualified on the root segment's key, the way in which the database record containing the segment is found depends on whether the database is HDAM, PHDAM, HIDAM, or PHIDAM. In an HDAM or a PHDAM database, the randomizing module generates the root segment's (and therefore the database record's) location. In a HIDAM or a PHIDAM database, the HIDAM or PHIDAM index is searched until the index segment containing the root's key is found.

Once the root segment is found, if the qualified call is for a dependent segment, IMS searches for the dependent by following the pointers in each dependent segment's prefix. The exact way in which the search proceeds depends on the type of pointers you are using. Figure 60 shows how a dependent segment is found when PCF and PTF pointers are used.

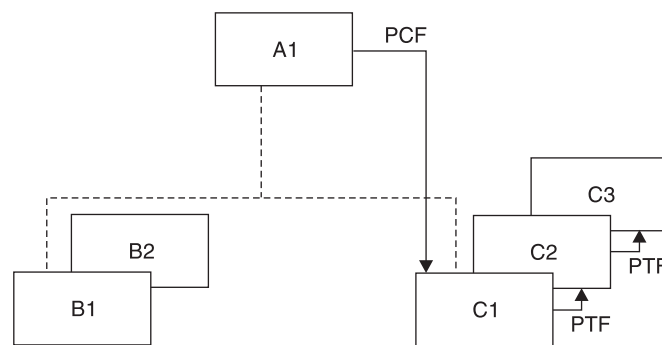


Figure 60. How Dependent Segments Are Found Using PCF and PTF Pointers

Unqualified Calls

When an unqualified call is issued for a segment, the way in which the search proceeds depends on:

- Whether the database is HDAM, PHDAM, HIDAM, or PHIDAM
- Whether a root or dependent segment is being accessed
- Where position in the database is currently established
- What type of pointers are being used
- Where parentage is set (if the call is a GNP)

Because of the many variables, it is not practical to generalize on how a segment is accessed.

Inserting Root Segments

The way in which a root segment is inserted into an HD database depends on whether the database is HDAM, PHDAM, HIDAM, or PHIDAM. For PHDAM or PHIDAM databases, partition selection is first performed based on the key of the root segment.

Inserting Root Segments into an HDAM or PHDAM Database

After initial load, root segments are inserted into an HDAM or PHDAM database in exactly the same way they are inserted during initial load. This process is explained in "How HDAM and PHDAM Records Are Stored" on page 97.

Inserting Root Segments Into a HIDAM or PHIDAM Database

After initial load, root segments are inserted into a HIDAM or PHIDAM database as follows (see Figure 61 on page 104):

HDAM, PHDAM, HIDAM, and PHIDAM

1. The HIDAM or PHIDAM index is searched for an index segment with a root key greater than the key of the root to be inserted.
2. The new index segment is inserted in ascending root sequence.
3. Once the index segment is created, the root segment is stored in the database at the location specified by the HD space search algorithm. How this algorithm works is described in “How the HD Space Search Algorithm Works” on page 107.

The following figure shows the insertion of a root segment, SKILL2, into the database shown in Figure 58 on page 101.

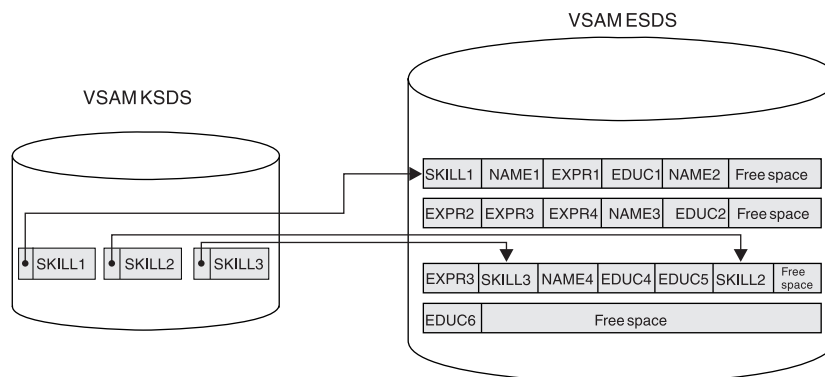


Figure 61. Inserting a Root Segment into a HIDAM or PHIDAM Database

Updating the Space Management Fields When a Root Segment Is Inserted

When a root segment is inserted into an HD database, the space management fields need to be updated. Figure 62 on page 106 illustrates this process. The figure makes several assumptions so real values could be put in the space management fields. These assumptions are:

- The database is HDAM or PHDAM (and therefore has a root addressable area).
- VSAM is the access method; therefore there are CIs (not blocks) in the database. Because VSAM is used, each logical record has 7 bytes of control information.
- Logical records are 512 bytes long.
- One RAP exists in each CI.
- The root segment to be inserted (SKILL1) is 32 bytes long.

The “before” picture shows the CI containing the bit map (in VSAM, the bit map is always in the second CI in the database). The second bit in the bit map is set to 1, which says there is free space in the next CI. In the next CI (CI #3):

- The FSEAP says there is an FSE (which describes an area of free space) 8 bytes from the beginning of this CI.
- The anchor point area (which has one RAP in this case) contains zeros because no root segments are currently stored in this CI.
- The FSE AL field says there is 497 bytes of free space available starting at the beginning of this FSE.

The SKILL1 root segment to be inserted is only 32 bytes long; therefore CI #3 has plenty of space to store SKILL1.

The “after” picture shows how the space management fields in CI #3 are updated when SKILL1 is inserted.

- The FSEAP now says there is an FSE 40 bytes from the beginning of this CI.
- The RAP points to SKILL1. The pointer value in the RAP is derived using the following formula:

Pointer value = (CI size)(CI number - 1) + Offset within the CI to the root segment*

In this case, the pointer value is 1032 (pointer value = 512 × 2 + 8).

- The FSE has been “moved” to the beginning of the remaining area of free space. The FSE AL field says there is 465 bytes (497 - 32) of free space available, starting at the beginning of this FSE.

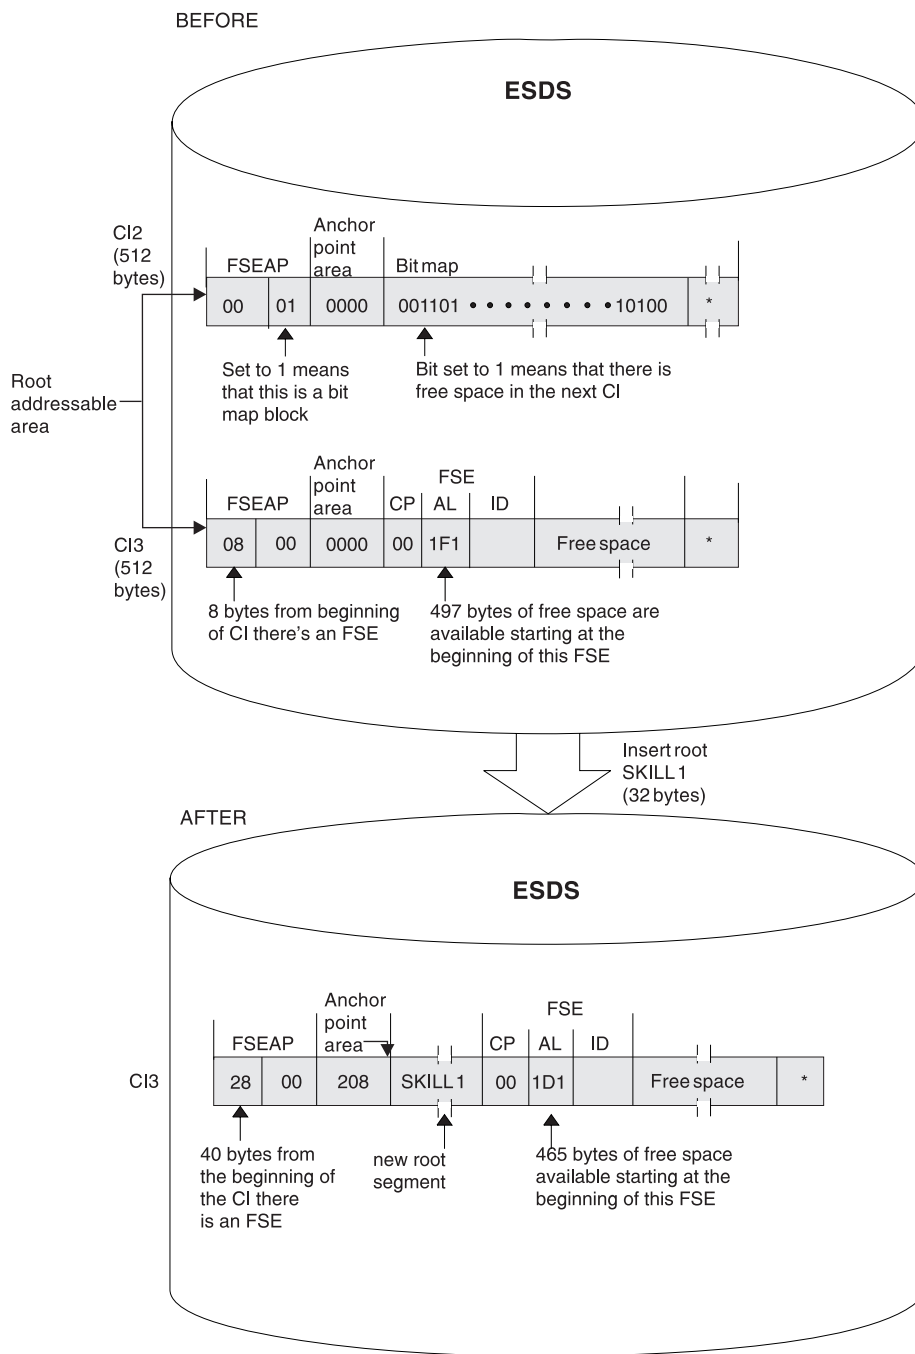


Figure 62. Updating the Space Management Fields in an HDAM or PHDAM Database

Inserting Dependent Segments

After initial load, dependent segments are inserted into HD databases using the HD space search algorithm. How this algorithm works is described in “How the HD Space Search Algorithm Works” on page 107.

As with the insertion of root segments into an HD database, the various space management fields in the database need to be updated (This process was explained and illustrated in “Updating the Space Management Fields When a Root Segment Is Inserted” on page 104).

Deleting Segments

When a segment is deleted in an HD database, it is physically removed from the database. The space it occupied can be reused when new segments are inserted. As with the insertion of segments into an HD database, the various space management fields need to be updated (This process was explained and illustrated in “Updating the Space Management Fields When a Root Segment Is Inserted” on page 104).

- The bit map needs to be updated if the block or CI from which the segment is deleted now contains enough space for a segment to be inserted. (Remember, the bit map says whether enough space exists in the block or CI to hold a segment of the longest type defined. Thus, if the deleted segment did not free up enough space for the longest segment type defined, the bit map is not changed.)
- The FSEAP needs to be updated to show where the first FSE in the block or CI is now located.
- When a segment is deleted, a new FSE might be created or the AL field value in the FSE that immediately precedes the deleted segment might need to be updated.
- If the deleted segment is a root segment in an HDAM or a PHDAM database, the value in its PTF pointer is put in the RAP or in the PTF pointer that pointed to it. This maintains the chain off the RAP and removes the deleted segment from the chain.

If a deleted segment is next to an already available area of space, the two areas are combined into one unless they are created by an online task that has not yet reached a sync point.

Replacing Segments

Replacing segments in HD databases is straightforward as long as fixed-length segments are used. The segment data, once changed, is simply returned to its original location in storage. The key field in a segment cannot be replaced.

Provided sufficient adjacent space is available, the segment data is returned to its original location when a variable-length segment is replaced with a longer segment. If adjacent space is unavailable, space is obtained from the overflow area for the lengthened data portion of the segment. This segment is referred to as a “separated data segment.” It has a 2-byte prefix consisting of a 1-byte segment code and a 1-byte delete flag, followed by the segment data. The delete byte of the separated data segment is set to X'FF', indicating that this is a separated data segment. A pointer is built immediately following the original segment to point to the separated data. Bit 4 of the delete byte of the original segment is set ON to indicate that the data for this segment is separated. The unused remaining space in the original segment is available for reuse.

How the HD Space Search Algorithm Works

The general rule for inserting a segment into an HD database is to store the segment (whether root or dependent) in the most desirable block or CI.

Root Segment

The most desirable block depends on the access method. For HDAM or PHDAM roots, the most desirable block is the one containing either the RAP or root segment that will point to the root being inserted. For HIDAM or PHIDAM roots, if the root does not have a twin backward pointer, the most desirable block is the one containing the root with the next higher key. If the root has a twin backward pointer, the most desirable block is the root with the next lower key.

Dependent Segment

The most desirable block is the one containing the segment that points to the inserted segment. If both physical child and physical twin pointers are used, the most desirable block is the one containing either the parent or the immediately-preceding twin. If hierarchic pointers are used, the most desirable block is the one containing the immediately-preceding segment in the hierarchy.

Second-Most Desirable Block

When it is not possible to store one or more segments in the most desirable block (space is not available), the HD space search algorithm searches for the second-most desirable block or CI. (This search is done only if the block is in the buffer pool or contains free space according to the bit map). The second-most desirable block or CI is a block or CI that was left free when the database was loaded or reorganized. Every *n*th block or CI can be left free by specifying the FRSPC= keyword in the DATASET macro of the DBDGEN utility. If you do not specify in the FRSPC= keyword that every *n*th block or CI be left free, the HD space search algorithm will not search for the second-most desirable block or CI.

Related Reading: For more information on the FRSPC= and SEARCHA= keywords, see *IMS Version 9: Utilities Reference: System*.

All search ranges defined in the HD space search algorithm, excluding steps 9 and 10, are limited to the physical extent that includes the most desirable block. When the most desirable block is in the overflow area, the search ranges, excluding steps 9 and 10, are restricted to the overflow area.

The steps in the HD space search algorithm follow. They are arranged in the sequence in which they are performed. The first time any one of the steps in the list results in available space, the search is ended and the segment is stored.

Look for space:

1. In the most desirable block (this block or CI is in the buffer pool).
2. In the second-most desirable block or CI.
3. In any block or CI in the buffer pool on the same cylinder.
4. In any block or CI on the same track, as determined by consulting the bit map. (The bit map says whether space is available for the longest segment type defined.)
5. In any block or CI on the same cylinder, as determined by consulting the bit map.
6. In any block or CI in the buffer pool within plus or minus *n* cylinders. Specify *n* in the SCAN= keyword in the DATASET statement in the DBD.
7. In any block or CI plus or minus *n* cylinders, as determined by consulting the bit map.
8. In any block or CI in the buffer pool at the end of the data set.

9. In any block or CI at the end of the data set, as determined by consulting the bit map. The data sets will be extended as far as possible before going to the next step.
10. In any block or CI in the data set where space exists, as determined by consulting the bit map. (This step is not used when a HIDAM or PHIDAM database is loaded.)

Some of the above steps are skipped in load mode processing.

If the dependent segment being inserted is at the highest level in a secondary data set group, the place and the way in which space is found differ:

- First, if the segment has no twins, steps 1 through 8 in the HD space search algorithm are skipped.
- Second, if the segment has a twin that precedes it in the twin chain, the most desirable block is the one containing that twin.
- Third, if the segment has only twins that follow it in the twin chain, the most desirable block is the one containing the twin to which the new segment is chained.

Locking Protocols

IMS uses locks to isolate the database changes made by concurrently executing programs. Locking is accomplished by using either the Program Isolation (PI) lock manager or the IRLM. The PI lock manager provides only four locking levels and the IRLM supports eleven lock states.

The IRLM also provides support for “feedback only” and “test” locking required, and it supplies feedback on lock requests compatible with feedback supplied by the PI lock manager.

Locking to Provide Program Isolation

For all database organizations, the basic item locked is the database record. The database record is locked when position is first obtained in it. The item locked is the root segment, or for HDAM or PHDAM, the anchor point. Therefore, for HDAM or PHDAM, all database records chained from the anchor are locked. The processing option of the PCB determines whether or not two programs can concurrently access the same database record. If the processing option permits updates, then no other program can concurrently access the database record. The database record is locked until position is changed to a different database record or until the program reaches a commit point.

When a program updates a segment with an INSERT, DELETE, or REPLACE call, the segment, not the database record, is locked. On an INSERT or DELETE call, at least one other segment is altered and locked.

Because data is always accessed hierarchically, when a lock on a root (or anchor) is obtained, IMS determines if any programs hold locks on dependent segments. If no program holds locks on dependent segments, it is not necessary to lock dependent segments when they are accessed.

The following locking protocol allows IMS to make this determination. If a root segment is updated, the root lock is held at update level until commit. If a dependent segment is updated, it is locked at update level. When exiting the database record, the root segment is demoted to read level. When a program enters the database record and obtains the lock at either read or update level, the lock manager provides feedback indicating whether or not another program has the

lock at read level. This determines if dependent segments will be locked when they are accessed. For HISAM, the primary logical record is treated as the root, and the overflow logical records are treated as dependent segments.

Related Reading: For a special case involving the HISAM delete byte with parameter ERASE=YES, see “Deleting Segments” on page 74.

These lock protocols apply when the PI lock manager is used; however, if the IRLM is used, no lock is obtained when a dependent segment is updated. Instead, the root lock is held at single update level when exiting the database record. Therefore, no additional locks are required if a dependent segment is inserted, deleted, or replaced.

Locking for Q Command Codes

When a Q command code is issued for a root or dependent segment, a Q command code lock at share level is obtained for the segment. This lock is not released until a DEQ call with the same class is issued, or until commit time.

If a root segment is returned in hold status, the root lock obtained when entering the database record prevents another user with update capability from entering the database record. If a dependent segment is returned in hold status, a Q command code test lock is required. An indicator is turned on whenever a Q command code lock is issued for a database. This indicator is reset whenever the only application scheduled against the database ends. If the indicator is not set, then no Q command code locks are outstanding and no test lock is required to return a dependent segment in hold status.

Resource Locking Considerations with Block Level Sharing

Resource locking can occur either locally in a non-sysplex environment or globally in a sysplex environment.

In a non-sysplex environment, local locks can be granted in one of three ways:

- **Immediately** because of one of the following reasons:
 - IMS was able to get the required IRLM locks, and there is no other interest on this resource.
 - The request is compatible with other holders or waiters.
- **Asynchronously** because the request could not get the required IRLM latches and was suspended. (This can also occur in a sysplex environment.) The lock is granted when latches become available and one of three conditions exist:
 - No other holders exist.
 - The request is compatible with other holders or waiters.
 - The request is not compatible with the holders or waiters and was granted after their interest was released. (This could also occur in a sysplex environment.)

In a sysplex environment, global locks can be granted in one of three ways:

- **Locally by the IRLM** because of one of the following reasons:
 - There is no other interest for this resource.
 - This IRLM has the only interest, this request is compatible with the holders or waiters on this system, and XES already knows about the resource.
- **Synchronously on the XES CALL** because of one of the following reasons:
 - XES shows no other interest for this resource.
 - XES shows only SHARE interest for the hash class.

- **Asynchronously on the XES CALL** because of one of three conditions:
 - Either XES shows EXCLUSIVE interest on the hash class by an IRLM, but the resource names do not match (FALSE CONTENTION by RMF™).
 - Or XES shows EXCLUSIVE interest on the hash class by an IRLM and the resource names match, but the IRLM CONTENTION EXIT grants it anyway because the STATES are compatible (IRLM FALSE CONTENTION).
 - Or the request is incompatible with the other HOLDERS and is granted by the CONTENTION Exit after their interest is released (IRLM REAL CONTENTION).

Data Sharing Impact on Locking

When you use block-level data sharing, the IRLM must obtain the concurrence of the sharing system before granting global locks. Root locks are global locks, and dependent segment locks are not. When you use block-level data sharing, locks prevent the sharing systems from concurrently updating the same buffer. The buffer is locked before making the update, and the lock is held until after the buffer is written during commit processing. No buffer locks are obtained when a buffer is read.

If a Q command code is issued on any segment, the buffer is locked. This prevents the sharing system from updating the buffer until the Q command code lock is released.

Locking in HDAM, PHDAM, HIDAM, and PHIDAM Databases

If you access a HIDAM or PHIDAM root through the index, a lock is obtained on the index, using the RBA of the root segment as the resource name. Consequently, a single lock request locks both the index and the root.

When NOTWIN pointers are specified on a PHIDAM root, a lock on the next higher non-deleted root is required to provide data integrity. IMS obtains the additional lock by reading the index until a non-deleted index entry is found and then locking the RBA of the root segment as the resource name.

When you access an HDAM or a PHDAM database, the anchor of the desired root segment is locked as long as position exists on any root chained from that anchor. Therefore, if an update PCB has position on an HDAM or PHDAM root, no other user can access that anchor. When a segment has been updated and the IRLM is used, no other user can access the anchor until the user that is updating commits. If the PI lock manager is used and an uncommitted unit of work holds the anchor, locks are needed to access all root and dependent segments chained from the anchor until the user that is updating commits.

Locking for Secondary Indexes

When a secondary index is inserted, deleted or replaced, it is locked with a root segment lock. When the secondary index is used to access the target of the secondary index, depending on what the index points to, it might be necessary to lock the secondary index.

Backup and Recovery of HIDAM and PHIDAM primary indexes

The backup and recovery of HD primary indexes differs depending on whether the database is a HIDAM or a PHIDAM database.

You back up and recover HIDAM primary indexes in the same way as you do for most other database data sets, by using image copies and database change records from the logs. Create image copies of the primary index data sets as often as you create image copies of the database data sets of the indexed HIDAM database.

During recovery, after you restore the primary index from image copies, you apply the database change records from the logs by using the Database Recovery utility (DFSURDB0). If you do not create image copies of the primary index, your only recovery alternative is to rebuild the HIDAM primary index by using a separately priced index builder tool, such as the IBM IMS Index Builder for z/OS.

You do not back up or recover PHIDAM primary indexes. PHIDAM primary indexes are rebuilt after the recovery of the indexed database data sets by using the HALDB Index/ILDS Rebuild utility (DFSPREC0).

Related reading:

- For more information about the backup and recovery process, see *IMS Version 9: Operations Guide*.
- For more information about the backup and recovery utilities, see the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Partitions in PHDAM, PHIDAM, and PSINDEX Databases

A partition is a subset of a HALDB database. You can view a HALDB database, whether it is a PHDAM, PHIDAM, or a PSINDEX database, as a single database whose records are divided into manageable sections called partitions. Each partition has the capacity of 4 GB and in many cases can be administered independently from the other partitions in the database. The division of records across partitions in a HALDB database is transparent to application programs, unless you choose to process partitions selectively.

HALDB partitions include unique features that allow IMS to manage them and that make them easier for you to use, as well. The HALDB partition structure also offers unique functions that are unavailable with non-partitioned databases, such as selective partition processing.

Subsections:

- “HALDB Partition Names and Numbers”
- “HALDB Partition Initialization” on page 115
- “HALDB Partition Data Sets” on page 115
- “HALDB Partition Selection” on page 117
- “HALDB Partitions and Application Program Processing” on page 118

HALDB Partition Names and Numbers

Each HALDB partition has a name, an ID number, a change version number, and a reorganization number. You define the partition name and IMS assigns and manages the numbers.

The partition ID numbers, change version numbers, and reorganization numbers are critical to the management of HALDB partitions by IMS and to the integrity of the data that the partitions contain.

In addition to being stored in each partition record in the RECON data set, these numbers are also stored in the HALDB master database record. IMS uses the numbers in the HALDB master database record to help manage the partitions and to access that data the partitions contain.

If you delete a HALDB master database record, the partition numbers it contains are lost and the partitions associated with the deleted HALDB master database

record can no longer be accessed. The partition numbers cannot be reproduced by redefining the HALDB master database record.

Deleting a HALDB master database record can also result in the loss of access to data in logically related HALDB databases, because the EPS of the logically related segments becomes invalid when the partition ID and reorganization number of the target segments are lost.

For these reasons, never delete a HALDB master database record from the RECON data set unless you are permanently deleting the HALDB database and all of its data.

Subsections:

- “HALDB Partition Names”
- “HALDB Partition ID Numbers”
- “HALDB Change Version Numbers”
- “HALDB Partition Reorganization Numbers” on page 114

HALDB Partition Names

The partition name is a unique, 7-character alphanumeric identifier that you define and control. The partition name does not change unless you change it. The partition name does not necessarily correspond to the records that the partition contains.

Tip: If you want the partition names in a HALDB database to reflect the record keys that each partition contains, and if you would like to keep the partition names in sequence over the life of the database, assign names to your partitions that provide room for new partitions to be added to the database without breaking the naming sequence.

For example, you could define the following partition names: ABC100, ABC200, ABC300, ABC400, ABC500, and so forth, to conform to the key range sequence of the records they contain. If partition ABC300 later becomes too large and you need to split its records by adding a new partition, you can name the new partition ABC250 without breaking the naming sequence.

You can specify a partition name instead of a master database name in many commands to restrict the command to the specified partition only.

HALDB Partition ID Numbers

IMS assigns a partition ID number to each new partition when you first define the partition. IMS generates each new partition ID number by incrementing by one the last partition ID number assigned. Because you do not have any control over the partition ID numbers, you cannot assume that the partition IDs in a database will stay in order.

For example, if you defined the partitions ABC100, ABC200, ABC300 in order, partition ABC100 would have partition ID number 1 and partition ABC300 would have partition ID number 3. Later, if you define a new partition ABC250, IMS will assign to it partition ID number 4.

HALDB Change Version Numbers

IMS assigns a *change version number* to each partition and to the HALDB master database. IMS uses the change version number to ensure that the online HALDB structures match the HALDB definitions stored in the RECON data set.

You do not have any control over the change version numbers, although they are displayed in some reports that are generated by the DBRC LIST command. Every time you change the definitions of a HALDB partition, DBRC increments the change version numbers that are stored in the RECON data set for both the partition and the HALDB master database. When IMS detects that DBRC has incremented the number, IMS updates the online structures of the HALDB database to reflect the new changes.

HALDB Partition Reorganization Numbers

IMS assigns and maintains a *reorganization number* for each partition to ensure the integrity of data across database reorganizations. IMS also uses the reorganization number in the HALDB self-healing pointer process after reorganizations of HALDB databases that use either logical relationships or secondary indexes.

The reorganization number is stored in the following places in each partition:

- In the first block of the first database data set in each partition
- In the indirect list key (ILK) included in every segment in the partition
- In the extended pointer set (EPS) of each secondary index entry and each logical child segment
- In each indirect list entry (ILE) in the ILDS for each secondary index target segment and each logical parent segment

If the reorganization number of a partition becomes corrupted, future reorganizations or modifications of the partitions in the HALDB database might produce duplicate segment ILKs and data will be lost. Reorganization numbers can become corrupt if the HALDB reorganization number verification function is not enabled and either a reorganization fails to increment the reorganization number of a partition correctly or a segment that has a low reorganization number in its EPS is moved into a partition and lowers the reorganization number of the destination partition.

A corrupt reorganization number is difficult to detect and if you don't use logical relationships or secondary indexes, a corrupt reorganization number does not cause any immediate problems. However, if you later add either logical relationships or secondary indexes to a HALDB database that has a corrupt reorganization number, you are likely to lose data.

To ensure the consistency of partition reorganization numbers, enable the *HALDB reorganization number verification* function. The HALDB reorganization number verification function records the reorganization number of each partition in the RECON data set and ensures that reorganization numbers are always incremented properly. When enabled, the HALDB reorganization number verification function applies to all HALDB databases recorded in the RECON data set.

To enable the HALDB reorganization number verification function:

- Issue either DBRC command `INIT.RECON REORGV` or `CHANGE.RECON REORGV`
- Run a program that accesses at least one record in each partition in each HALDB registered in the RECON data set.

When you enable the HALDB reorganization number verification function, the reorganization numbers for all HALDB partitions in the RECON data set will be reset to zero. Accessing a record in each partition updates the RECON data set with the current reorganization number stored in each partition.

Related Reading:

- For more information about the self-healing pointer process, see “The HALDB Self-Healing Pointer Process” on page 401.
- For more information about DBRC commands, see *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.
- For more information about the RECON data set, see *IMS Version 9: Administration Guide: System*.

HALDB Partition Initialization

After you define a partition and allocate its data sets, you must initialize the partition. The initialization process makes a partition usable, but does not place any database segments in the partition. After the initialization process, a partition is empty.

You can use either the HALDB Partition Data Set Initialization utility (DFSUPNT0) or the Database Prereorganization utility (DFSURPR0) to initialize HALDB partitions.

Partition initialization writes the partition ID number and the initial reorganization number in PHDAM and PHIDAM partitions. The initial reorganization number is set to one, unless HALDB reorganization number verification is enabled, in which case the reorganization number is incremented by one from the existing reorganization number that is stored in the RECON data set.

The partition ID number and the reorganization numbers are written in the first 4 bytes of the first block of the first data set. This first block is called the *bit map block*.

For PHDAM partitions, partition initialization writes and deletes a dummy record.

For PHIDAM partitions, partition initialization writes a high key record of all X'FF's in each partition.

For PSINDEX partitions, partition initialization writes and deletes a dummy record, which makes the high-used-RBA non-zero.

HALDB Partition Data Sets

The number of data sets per partition depends on the database organization:

PHDAM

A PHDAM database can contain 1 to 1 001 partitions. Each partition has an ILDS and 1 to 10 data sets for data set groups, so a partition has 2 to 11 data sets and a PHDAM database can have 2 to 11 011 data sets.

PHIDAM

A PHIDAM database can contain 1 to 1 001 partitions. Each partition has an ILDS, a primary index data set, and 1 to 10 data sets for data set groups, so a partition has 3 to 12 data sets and a PHIDAM database can have 3 to 12 012 data sets.

PSINDEX

A PSINDEX can contain 1 to 1 001 partitions. Each partition contains only one data set, so a PSINDEX can have 1 to 1 001 data sets.

The data sets for data set groups are called the *database data sets*. These data sets contain the segment data for PHDAM and PHIDAM databases.

Indirect List Data Sets and HALDB Partitions

Every HALDB PHDAM and PHIDAM partition that uses a secondary index or logical relationships must have an ILDS. The HALDB self-healing pointer process uses the ILDS to update secondary index pointers and logical relationship pointers after database reorganizations. In a batch environment, even the partitions in a PHDAM or PHIDAM database that do not use secondary indexes or logical relationships must have an ILDS allocated. In an online environment, IMS does not need to allocate an ILDS for partitions that do not use a secondary index or logical relationships.

When you convert a database to HALDB, reorganize the database data sets in a partition, or perform a recovery of the database data sets in a partition, the ILDS is updated or rebuilt to reflect the changes to the physical location of the target segments of the ILEs in the ILDS. The IMS utilities that can update or rebuild the ILDS are:

- The HD Reorganization Reload utility (DFSURGL0)
- The HALDB Index/ILDS Rebuild utility (DFSPREC0)

Both of these utilities provide options for rebuilding the ILDS by using either VSAM update mode or VSAM load mode. VSAM load mode, which adds the free space called for in the VSAM DEFINE statement that defines the ILDS, can improve the performance of both the current execution of the utility and of subsequent reorganizations and recoveries.

The DFSURGL0 utility can rebuild the ILDS to reflect the current state of the database. The DFSPREC0 utility rebuilds the ILDS only up to the most recent reorganization. Any ILEs for segments created after the last reorganization are not inserted into the ILDS by the DFSPREC0 utility.

For more information about the utilities that rebuild the ILDS and about the options that the utilities provide, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Recovery of HALDB Partition Data Sets

You recover HALDB databases by recovering the database data sets in each partition as you would in a non-HALDB database and then rebuilding the primary index, if it exists, and the ILDS. HALDB primary indexes and ILDSs are not backed up or recovered.

To rebuild HALDB primary indexes and ILDSs, use the HALDB Index/ILDS Rebuild utility, which provides options for building the ILDS by using either VSAM update mode or VSAM load mode. VSAM load mode, which includes the free space called for in the VSAM KSDS DD statement that defines the ILDS, can improve the performance of both the current execution of the utility and of subsequent reorganizations and recoveries.

For more information about database recovery, see *IMS Version 9: Operations Guide*.

For more information about the HALDB Index/ILDS Rebuild utility and about your performance options when using the utility, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

HALDB Partition Selection

When retrieving or inserting a database record, IMS must select the correct HALDB partition. This process is called *partition selection*. Partition selection determines which partitions root segments are placed in and the order in which partitions are processed.

IMS performs partition selection by using either *key range partitioning*, which is based on the high keys of the partitions, or by using a partition selection exit routine, which is based on a key defined by the user.

IMS assigns database records to partitions based on the key of the root segment.

For batch, BMP, and JBP programs, a PCB can be restricted to access one or more partitions.

Partition Selection Using High Keys

If you use high key partitioning, high keys define the partition boundaries and determine how the records are distributed across your partitions.

IMS performs partition selection based on the high key defined for each partition. The high key of a partition also defines the range keys that the partition contains. A root segment is assigned to the partition with the lowest high key in the HALDB database that is greater than or equal to the key of the root segment. For example, if there are three partitions with high keys of 1000, 2000, and 3000. Root segment keys of 1001 through 2000 are in the partition with a high key of 2000. Partitions are ordered in the order of their high keys.

Key range partitioning is the simpler method to implement because you do not have to write an exit routine. You only need to assign a high key to each partition. In PHIDAM and PSINDEX databases that use key range partitioning, the records are in key sequence across the entire database, just as they are in HIDAM and non-HALDB secondary index databases. In PHIDAM or PSINDEX databases that use a partition selection exit routine, records are in key sequence within a partition, but not necessarily across partitions, which makes these databases inconsistent with HIDAM and non-HALDB secondary index databases. Applications that require database records to be in key sequence across partitions do not function correctly when a partition selection exit routine is used.

When you use key range partitioning, it's recommended that you specify a high key value of X'FF' for the partition that has the highest high key in the database, which ensures that all keys can be assigned to a partition. If the last partition (the partition with the highest key specified) has a key value other than X'FF's, any attempt to access or insert a database record with a key higher than the high key specified results in an FM status code for the call. Application programs written for non-HALDB databases are unlikely to expect this status code.

Partition Selection Using a Partition Selection Exit Routine

If you prefer to select partitions by some criteria other than key ranges, you can use a partition selection exit routine. IMS provides a sample HALDB Partition Selection exit routine (DFSPSE00). The exit routine assigns records to partitions based on the key of the root segment. The exit routine also determines the order in which sequential processing accesses the partitions. You can write your own partition selection exit routine.

For a PHIDAM database, a partition selection exit routine can distribute the records in a key sequence within a partition that is out of sequence with the key

sequences of the other partitions in the database. For example, a partition selection exit routine that uses the lower values of a key to select the partition can conform to the characteristics of a HDAM database on data retrieval calls. Partition PARTA might include records in the following sequence: A001, B001, C001, D001. Partition PARTB might include records in this sequence: A010, B010, C010, D010. As in a HDAM database, a call to find a segment with a key of C010 fails if partition PARTA is selected.

Another use of a partition selection exit routine is to isolate some database records because of their special characteristics. For example, the sizes of most records in a PHDAM database might be fairly uniform, but some might be much larger. These unusually large records can cause space use problems within partitions. If the keys of these large records are known, an exit routine could recognize their keys and place them in a partition with different space characteristics. The partition might have many fewer records spread across the same amount of space. It might even have its own specialized randomization routine.

The IBM IMS HALDB Conversion and Maintenance Aid for z/OS product includes the IHCPSEL0 exit routine that can perform this type of partition selection. If you use the IHCPSEL0 exit routine, you do not need to write the exit routine. You only need to specify the part of the key that is to be used and the values for each partition.

For more information about the HALDB Partition Selection exit routine (DFSPSE00), see the *IMS Version 9: Operations Guide*.

HALDB Partitions and Application Program Processing

Application programs process partitioned HALDB databases in the same way that they process non-partitioned full-function databases. The application programs do not need to be aware of the partitions in which the data is stored. You can, however, choose to restrict the processing of your application programs to a single partition or a subset of partitions.

Attention: If a PSB allows a BMP application to insert, replace, or delete segments in databases, ensure that the BMP application does not update a combined total of more than 300 databases and HALDB partitions without committing the changes.

All full-function database types, including logically related databases and secondary indexes, that have uncommitted updates count against the limit of 300. When designing HALDB databases, you should use particular caution because the number of partitions in HALDB databases is the most common reason for approaching the 300 database limit for uncommitted updates.

Unmodified Application Program Processing of HALDB Databases

Application programs process data in a HALDB database without regard to the partitions in which the data is stored. Application programs that process data sequentially pass through the partitions in a HALDB database in partition selection order. Application programs that process data randomly access the partitions in a HALDB database randomly as well. Application programs and the PCBs they use to access HALDB databases are not required to account for the partitions in the HALDB database that they access.

HALDB Selective Partition Processing

You can restrict BMP, JBP, and batch application programs to a single HALDB partition or a subset of HALDB partitions. This allows multiple instances of an

application program to process HALDB partitions in parallel independently from the other application programs. Processing partitions independently is similar to the independent processing of partitions by utilities.

To restrict processing to a subset of partitions, restrict the database PCB to the partition by specifying in a DFSHALDB DD statement the partition name and either the label name of the database PCB or the *n*th position of the database PCB.

For more information about the DFSHALDB DD statement, see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

The following topics provide additional information:

- “Logical Relationships and Selective Partition Processing”
- “Secondary Indexes and Selective Partition Processing”
- “Partition Selection When Processing is Restricted to a Single Partition” on page 120
- “Partition Selection When Processing is Restricted to a Range of Partitions” on page 121
- “Parallel Partition Processing” on page 122

Logical Relationships and Selective Partition Processing: BMP, JBP, and batch-processing applications can selectively process a subset of one or more contiguous partitions that have logical relationships. If a logical child is in a partition to which an application program's processing has been restricted and the logical parent is in another partition that the application does not normally have access to, the application can still process the logical parent. Because of a logical relationship, an application with restricted access can process a partition that it does not have direct access to.

Secondary Indexes and Selective Partition Processing: You can restrict BMP, JBP, and batch-processing applications programs to a subset of one or more contiguous partitions of a HALDB partitioned secondary index (PSINDEX) by specifying the name of the PSINDEX partition in the DFSHALDB statement.

You can use selective partition processing with a PSINDEX regardless of whether your application program processes your PSINDEX as a standalone database or as an alternate processing sequence for a PHDAM or PHIDAM database.

The partitions in a PSINDEX do not correspond to the partitions in the PHDAM or PHIDAM database that the PSINDEX indexes. Consequently, when you specify selective partition processing for a PSINDEX, selective partition processing applies only to the PSINDEX partition, not to the partitions of the PHDAM or PHIDAM database. The target segments can be in any partition in the indexed PHDAM or PHIDAM database.

Similarly, if you specify selective partition processing for a PHDAM or PHIDAM database, the selective partition processing does not apply to the partitions in any associated PSINDEXs.

Regardless of whether you are using selective partition processing with a PSINDEX or with an indexed PHDAM or PHIDAM database, selective partition processing does not affect the internal updating of a secondary index by IMS when a target segment is updated. For example, if an application program is restricted to a single partition of the PSINDEX and inserts a segment into the indexed PHDAM or PHIDAM database, the corresponding new index entry can be inserted in any partition of the PSINDEX.

Partition Selection When Processing is Restricted to a Single Partition: If you use high key partitioning, IMS selects partitions by using the root key used in the DL/I call and the high key defined for the partition. When access is restricted to a single partition and the root key is outside of the key range of the partition, IMS returns an FM or GE status code.

If you use a partition selection exit routine to select partitions, the routine is called when the DL/I call provides a specific root key. The exit routine selects a partition based on the root key given. If the partition that is selected is different than the one that the application has access to, IMS returns an FM or GE status code.

When access is restricted to a single partition, the first partition is always the partition to which access is restricted, and the next partition does not exist. The exit routine is not called to select a first partition or next partition.

Recommendation: When restricting processing to a single partition, include in the SSA only the root keys that are in the key range of the partition.

Examples of Single Partition Processing: For the following examples, the DB PCB usage is restricted to HALDB partition 2, which contains the records with root keys 201 through 400.

GU rootkey=110

The root key 110 is outside the range of root keys for the partition. FM status code is returned.

GU rootkey=240 GN rootkey=110

Moves forward from root key 240 to find a key that is equal to 110. Because 110 is lower than 240, a GE status code is returned.

GU rootkey=240 GN rootkey>=110

Moves forward from root key 240 to find a key that is equal to or greater than 110. If a key is not found before reaching the end of the partition, a GB status code is returned.

GN rootkey>=110

Attempts to start the search at key 110. Because the key is outside of the root key range of the partition, an FM status code is returned.

Examples of Single Partition Processing of a PSINDEX: For the following examples, the DB PCB usage is restricted to HALDB partition 2 of a partitioned secondary index (PSINDEX), which contains the records with secondary index keys 201 through 400, using the selective partition processing statements. Partition 2 of the PSINDEX references multiple partitions in the indexed HALDB database.

GU xdfldkey=110

The root key 110 is outside the range of root keys for the partition. FM status code is returned.

GU xdfldkey=240 GN xdfldkey=110

Moves forward from root key 240 to find key equal to 110. Because 110 is lower than 240, GE status code is returned.

GU xdfldkey=240 GN xdfldkey>=110

Moves forward from root key 240 to find key equal to or greater than 110. If key not found before reaching end of partition, GB status code is returned.

GN xdfldkey>=110

Attempts to start search at key 110. Because key is outside root key range of partition, FM status code is returned.

Partition Selection When Processing is Restricted to a Range of Partitions: A partition is selected by using the root key for the DL/I call and the high key defined for the partition. When access is restricted to a range of consecutive partitions and the root key is outside the key range of any of the partitions, status code FM or GE is returned.

If you use a partition selection exit routine, the routine is called when the DL/I call provides a specific root key. The exit routine selects a partition based on the root key given. If the partition selected is not one that the application has access to, status code FM or GE is returned. The exit routine is not called to select a first partition or next partition.

When access is restricted to a range of partitions, the first partition is always the partition named in the DFSHALDB statement and the next partition selected depends on the partition selection order as defined by either the partition high keys or the partition selection exit routine.

Recommendation: If restricting processing to a range of partitions, the SSA should include only the root keys that are in the key ranges of the partitions.

Examples of Selectively Processing a Range of Partitions: For the following examples, the DB PCB usage is restricted to a range of 3 HALDB partitions: A, B, and C. The DFSHALDB statement specifies partition A and NUM=3.

Partition A contains the records with the root keys 201 through 400. Partition B contains the records with root keys 401 through 600. Partition C contains the records with root keys 601 through 800.

GU rootkey=110

The root key 110 is outside the range of root keys for the partition. FM status code is returned.

GU rootkey=240 GN rootkey=110

Moves forward from root key 240 to find key equal to 110. Because 110 is lower than 240, GE status code is returned.

GU rootkey=240 GN rootkey>=110

Moves forward from root key 240 to find key equal to or greater than 110. If key not found before reaching the end of the partition, GB status code is returned.

GN rootkey>=110

Attempts to start search at key 110. Because key is outside root key range of partitions, FM status code is returned.

GU rootkey=810

The root key 810 is outside of the range of root keys for the range of partitions. FM status code is returned.

GU rootkey=440 GN rootkey>=110

Moves forward from root key 440 to find key equal to or greater than 110. If key not found before reaching the end of the partition, a GB status code is returned.

PHDAM, PHIDAM, and PSINDEX Partitions

Parallel Partition Processing: Using selective partition processing, different instances of your application programs can process different partitions of a database in parallel in both the batch environment and the online environment. DBRC authorizes application programs to process individual partitions rather than the entire HALDB database. Processing partitions in parallel can reduce the time that is required for the processing.

In the batch environment, batch application programs are authorized to process individual partitions one at a time, rather than the entire HALDB database. IRLM is not required.

In the online environment, multiple dependent regions can process records in the same or in different partitions. Data sharing is not required.

If you use block-level data sharing, you can easily process different partitions in parallel with multiple subsystems. The subsystems can be online systems or batch jobs. To use block-level data sharing, you must use IRLM and you must register the databases in DBRC as allowing block level data sharing. For more information about block-level data sharing, see the DBRC information in *IMS Version 9: Administration Guide: System* and the data sharing information in *IMS Version 9: Installation Volume 1: Installation Verification*.

To have multiple instances of an application program process partitions in parallel, restrict the database PCB of each instance to the partitions by specifying in a DFSHALDB DD statement the partition name and either the label name of the database PCB or the *n*th position of the database PCB.

You might also need to make one or more of the following modifications:

- Split the application program input to feed multiple instances of the application program.
- Consolidate the output of multiple instances of the application program.
- Modify the application program to respond correctly to the unavailability of the partitions it cannot access.

For more information about the DFSHALDB DD statement, see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

Managing I/O Errors

When a database I/O error occurs, IMS copies the buffer contents of the error block/control interval (CI) to a virtual buffer. A subsequent DL/I request causes the error block/CI to be read back into the buffer pool. The write error information and buffers are maintained across restarts, deferring recovery to a convenient time. I/O error retry is automatically performed at database close time. If the retry is successful, the error condition no longer exists and recovery is not needed.

When a database I/O error occurs in a sysplex environment, the local system maintains the buffer and informs all members of the data-sharing group with registered interest in the database that the CI is unavailable. Subsequent DL/I requests for that CI receive a failure return code as long as the I/O error persists.

Although you do not have to register your databases with DBRC for error handling to work, registration is required for HALDBs and highly recommended for all other full-function databases.

If an error occurs on a database registered with DBRC and the system stops, the database could be damaged if the system is restarted and a /DBR command is not issued prior to accessing the database. The restart causes the error buffers to be restored as they were when the system stopped. If the same block had been updated during the batch run, the batch update would be overlaid.

Chapter 7. Choosing Fast Path Database Types

This chapter describes the characteristics and basic functions of Fast Path databases to help you decide what type of database to use. Fast Path databases include data entry databases (DEDBs) and main storage databases (MSDBs). DEDBs provide efficient storage for and access to large volumes of data. DEDBs also provide a high level of availability to that data. MSDBs store and provide access to an installation's most frequently used data.

Both DEDBs and MSDBs use the direct method of storing data. With the direct method, the hierarchic sequence of segments is maintained by putting direct-address pointers in each segment's prefix.

Each IMS environment supports Fast Path databases as follows:

- DB/DC supports both DEDBs and MSDBs.
- DBCTL supports DEDBs, but does not support MSDBs.
- DCCTL does not support DEDBs or MSDBs.

For a summary of the different characteristics of all IMS database types, including Fast Path databases, see Table 7 on page 61.

In this Chapter:

- "Data Entry Databases"
- "Main Storage Databases (MSDBs)" on page 144
- "Fast Path Virtual Storage Option" on page 151
- "Fast Path Synchronization Points" on page 165
- "Managing I/O Errors and Long Wait Times" on page 166
- "Registering Fast Path Databases in DBRC" on page 167

Data Entry Databases

Data entry databases (DEDBs) provide efficient storage for and access to large volumes of data. DEDBs also provide a high level of availability of that data.

Several characteristics of DEDBs also make DEDBs useful when you must gather detailed and summary information. These characteristics include:

- Area format
- Area data set replication
- Record deactivation
- Non-recovery option

A DEDB is a hierarchical database that contains up to 127 segment types: a root segment, an optional sequential dependent segment, and 0 to 126 direct dependent segments. If an optional sequential dependent segment is defined, you can define no more than 125 direct dependent segments. A DEDB structure can have as many as 15 hierarchical levels. Instances of sequential dependent segments for an area are stored in chronological order, regardless of the root on which they are dependent. Direct dependent segments are stored hierarchically, which allows for rapid retrieval.

Recommendation: Because ETO terminals cannot access terminal-related MSDBs, you should develop any new Fast Path databases as DEDBs instead of as MSDBs. You should also consider converting any of your existing non-terminal-related MSDBs with non-terminal-related keys to VSO DEDBs. You can use the MSDB-to-DEDB Conversion utility to do so.

Related Reading: For more information about the MSDB-to-DEDB Conversion utility (DBFUCDB0), see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

DEDB Functions

DEDBs and MSDBs have many similar functions, including:

- Virtual storage
- The field (FLD) call
- Fixed length segments
- MSDB or DEDB commit view

In addition, DEDBs have the following functions and support:

- Full DBRC support
- Block-level sharing of areas available to
 - DBCTL
 - LU 6.2 applications
 - DB/DC applications
- RSR tracking
- HSSP support
- DEDB utilities
- Online database maintenance
- A full hierarchical model, including support of INSERT and DELETE calls
- A randomizer search technique

DEDB Areas

A DEDB can be organized into one or more data sets called areas. Areas increase the efficiency, capacity, and flexibility of DEDBs. This topic discusses DEDB areas and how to work with them.

Areas and the DEDB Format

The physical format of DEDBs makes the data they contain more readily available. In a hierarchical IMS database that does not use areas, the logical data structure is spread across the entire database. If multiple data sets are used, the data structure is broken up on a segment basis. A DEDB can use multiple data sets, called areas, with each area containing the entire data structure (see Figure 70 on page 140). Each area in a DEDB is a VSAM data set. A DEDB record (a root and its dependent segments) does not span areas. A DEDB can be divided into as many as 2048 such areas. This organization is transparent to the application program.

The maximum size of a DEDB area is 4 GB. The maximum number of areas per database is 2048, thus the maximum size of a DEDB database is 8 796 093 020 160 bytes (8 TB).

The randomizing module is used to determine which records are placed in each area. Because of the area concept, larger databases can exceed the limitation of 2^{32}

bytes for a single VSAM data set. Each area can have its own space management parameters. You can choose these parameters according to the message volume, which can vary from area to area. DEDB areas can be allocated on different volume types.

Initialization, reorganization, and recovery of DEDBs are done on an area basis. Resource allocation is done at the control interval (CI) level. Multiple programs, optionally together with one online utility, can access an area concurrently within a database, as long as they are using different CIs. CI sizes can be 512 bytes, 1 K, 2 K, 4 K, and up to 28 K in 4K increments. The media manager and Integrated Catalog Facility catalog of Data Facility Storage Management Subsystem (DFSMS) are required.

Opening and Preopening DEDB Areas

By default, IMS does not open a DEDB area until an eligible application accesses the area. Although this prevents unneeded areas from being opened at startup, it burdens the first application that accesses a DEDB area with some additional processing overhead. Multiple calls to multiple areas immediately following a startup process can increase this burden significantly.

You can limit the overhead of opening areas by preopening your DEDB areas. You can also distribute this overhead between the startup process and online operation by preopening only those areas that applications use the most and by leaving all other areas closed until an application first accesses them.

You specify the preopen status of an area using the PREOPEN and NOPREO parameters of the DBRC INIT.DBDS command or CHANGE.DBDS command.

By default IMS preopens all DEDB areas that have been assigned preopen status during the startup process; however, preopening a large number of DEDB areas during the startup process can delay data processing. To avoid this delay, you can have IMS preopen DEDB areas after the startup process and asynchronously to the execution of your application programs. In this case, if IMS has not preopened a DEDB area when an application program attempts to access the area, IMS opens the DEDB area at that time. You can specify this behavior by using the FPOPN= keyword in the IMS and DBC startup procedures. Specifically, FPOPN=P causes IMS to preopen DEDB areas after startup and asynchronous to application program execution.

The FPOPN= keyword determines how IMS reopens DEDB areas for both normal restarts (/NRE) and emergency restarts (/ERE).

Related Reading:

- For more information about the FPOPN= keyword and the IMS and DBC procedures, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- For more information about DBRC and DBRC commands, see the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

Reopening DEDB Areas During an Emergency Restart: You can specify how IMS reopens DEDB areas during an emergency restart by using the FPOPN= keyword in the IMS procedure or DBC procedure. The following list describes how the FPOPN= keyword affects the reopening of DEDB areas during an emergency restart:

FPOPEN=N

During the startup process, IMS opens only those areas that have preopen status. This is the default.

FPOPEN=P

After the startup process completes and asynchronous to the resumption of application processing, IMS opens only those areas that have preopen status.

FPOPEN=R

After the startup process completes and asynchronous to the resumption of application processing, IMS opens only those areas that were open prior to the abnormal termination. All DEDB areas that were closed at the time of the abnormal termination, including DEDB areas with a preopen status, will remain closed when you restart IMS.

FPOPEN=D

Suppresses the preopen process. DEDB areas that have a preopen status are not preopened and remain closed until they are first accessed by an application program or until they are manually opened with a /START AREA command.

FPOPEN=D overrides, but does not change, the preopen status of DEDB areas as set by the PREOPEN parameter of the DBRC commands INIT.DBDS and CHANGE.DBDS.

Related Reading: For more information about the FPOPEN= keyword and the IMS and DBC startup procedures, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

Stopping and Starting DEDBs and DEDB Areas

You can prevent access to a DEDB by stopping it with the /STOP DATABASE command. You can also prevent access to a single DEDB area by stopping it with the /STOP AREA command. These commands do not affect application programs currently scheduled against the DEDB, but prevent IMS from scheduling any new application programs that need access to the stopped database or area.

You can resume access to a stopped DEDB by starting it with the /START DATABASE command. You can also resume access to a stopped area by starting it with the /START AREA command. The /START AREA command does not open areas unless you have specified them as PREOPEN areas.

Restarting and Reopening Areas After an IRLM Failure

The internal resource lock manager (IRLM) ensures the integrity of databases in a data sharing environment. To avoid compromising the integrity of the data in DEDB areas when an IRLM fails, all DEDB areas under the control of the failed IRLM are stopped. After you correct the failure and reconnect IRLM to the IMS system, you must restart and reopen the DEDB areas that the IRLM controls.

You can specify how IMS restarts and reopens DEDB areas after the IRLM reconnects, by using the FPRLM= keyword in the IMS and DBC procedures. The following list describes how the FPRLM= keyword affects the reopening of DEDB areas after an IRLM failure has been corrected:

FPRLM=N

All DEDB areas remain stopped and unopened until you issue a /START DATABASE or /START AREA command. This is the default.

FPRLM=S

After IRLM reconnects, IMS restarts, but does not reopen, all areas that were

open at the time of the IRLM failure. IMS restarts the DEDB areas asynchronously to the resumption of application processing.

FPRLM=R

After IRLM reconnects, IMS restores all DEDB areas to their state at the time of the IRLM failure, restarting and reopening DEDB areas regardless of whether the DEDB areas have preopen status. IMS restores the DEDB areas asynchronously to the resumption of application processing.

FPRLM=A

After IRLM reconnects, IMS restarts and reopens all DEDB areas that were open at the time of the IRLM failure and all DEDB areas that have a preopen status, even if they were closed at the time of the IRLM failure. IMS restores the DEDB areas asynchronously to the resumption of application processing.

Related Reading:

- For more information about the FPRLM= keyword and the IMS and DBC procedures, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- For more information about IRLM, see:
 - *IMS Version 9: Operations Guide*
 - *IMS Version 9: Administration Guide: System*

Read and Write Errors in DEDB Areas

This topic describes how IMS handles read and write errors that occur in DEDB areas.

Read Error: When a read error is detected in an area, the application program receives an AO status code. An Error Queue Element (EQE) is created, but not written to the second CI nor sent to the sharing system in a data sharing environment. Application programs can continue to access that area; they are prevented only from accessing the CI in error. After read errors on four different CIs, the area data set (ADS) is stopped. The read errors must be consecutive; that is, if there is an intervening write error, the read EQE count is cleared. This read error processing only applies to a multiple area data set (MADS) environment.

Write Error: When a write error is detected in an area, an EQE is created and application programs are allowed access to the area until the EQE count reaches 11. Even though part of a database might not be available (one or more areas are stopped), the database is still logically available and transactions using that database are still scheduled. If multiple data sets make up the area, chances are that one copy of the data will always be available.

If your DEDB is nonrecoverable, write errors are handled differently, compared to recoverable DEDBs. When there is a write error in an area, an EQE is created. When there are 10 EQEs for an area, DBRC marks it "Recovery Needed" and IMS stops the area. If the area is shared, then all IMS systems in the sharing group are notified and they also stop the area. When a DEDB is marked "Recovery Needed", you must restore it, such as from an image copy. Incorporate this recovery procedure into your operational procedures.

When a write error occurs to a DEDB using MADS, an EQE is created for the ADS that had the write error. In this environment, when the maximum of 10 EQEs is reached, the ADS is stopped.

When a write error to a recoverable DEDB area using a single ADS occurs, IMS invokes the I/O toleration (IOT) processing. IMS allocates a virtual buffer in ECSA and copies the control interval in error from the Fast Path common buffer to the virtual buffer. IMS records the creation of the virtual buffer with an X'26' log record. If the database is registered with DBRC, an Extended Error Queue Element (EEQE) is created and registered in DBRC. The EEQE identifies the control interval in error. In a data sharing environment using IRLM, all sharing partners are notified of the creation of the EEQE.

The data that is tolerated is available to the IMS system that created the EEQE. The sharing partner will get an 'AO' status when it requests that CI because the data is not available. When a request is made for a control interval that is tolerated, the data is copied from the virtual buffer to a common buffer. When an update is performed on the data, it is copied back to the virtual buffer. A standard X'5950' log record is generated for the update.

Every write error is represented by an EEQE on an area basis. The EEQEs are maintained by DBRC and logged to the IMS log as X'26' log records. There is no logical limit to the number of EEQEs that can exist for an area. There is a physical storage limitation in DBRC and ECSA for the number of EEQEs that can be maintained. This limit is installation dependent. To make sure that we do not over extend DBRC or ECSA usage, a limited number of EEQEs are allowed for a DEDB. The limit is 100. After 100 EEQEs are created for an area, the area is stopped.

During system checkpoint, /ST0, and /VUN commands, IMS attempts to write back the CIs in error. If the write is successful, the EEQE is removed. If the write is unsuccessful, the EEQE remains.

Record Deactivation

If an error occurs while an application program is updating a DEDB, it is not necessary to stop the database or even the area. IMS continues to allow application programs to access that area. It only prevents them from accessing the control interval in error by creating an EQE for the error CI. If there are multiple copies of the area, chances are that one copy of the data will always be available. It is unlikely that the same control interval will be in error in all copies of the area. IMS automatically makes an area data set unavailable when a count of 11 errors has been reached for that data set.

Record deactivation minimizes the effect of database failure and errors to the data in these ways:

- If multiple copies of an area data set are used, and an error occurs while an application program is trying to update that area, the error does not need to be corrected immediately. Other application programs can continue to access the data in that area through other available copies of that area.
- If a copy of an area has a number of I/O errors, you can create a new copy from existing copies of the area using the DEDB Area Data Set Create utility. The copy with the errors can then be destroyed.

Non-Recovery Option

By specifying a VSO or non-VSO DEDB as nonrecoverable, you can improve online performance and reduce database change logging of your DEDBs. IMS does not log any changes from a nonrecoverable DEDB, nor does it keep any updates in the DBRC RECON data set. All areas are nonrecoverable in a nonrecoverable DEDB.

SDEPs are not supported for nonrecoverable DEDBs. After IMS calls DBRC to authorize the areas, IMS checks for SDEPs. If IMS finds SDEPs, IMS calls DBRC to

unauthorize them and IMS stops them. You must remove the SDEP segment type from the DEDB design before IMS will authorize the DEDB.

Unlike full-function nonrecoverable databases, which support backout, nonrecoverable DEDBs are truly nonrecoverable and cannot REDO during restart or XRF takeover. IMS writes a single log record, X'5951', once for every area at each sync point to indicate that nonrecoverable suppression has taken place. The X'5951' log and DMAC flags determine the integrity of an area during an emergency restart or XRF takeover. If there are errors found in a nonrecoverable DEDB during an XRF takeover or an emergency restart, message DFS3711W is issued and the DEDB is not stopped.

Related Reading: For information on how IMS handles nonrecoverable DEDB write errors, which can happen during restart or XRF takeover, see "Write Error" on page 129.

Nonrecoverable DEDBs must register with DBRC. To define a DEDB as nonrecoverable, use the command `INIT.DB DBD() TYPEFP NONRECOV`. The default is `RECOVABL` for recoverable DEDB.

Before changing the recoverability of a DEDB, issue a `/STOP DB`, `/STO AREA`, or `/DBR DB` command. To change a recoverable DEDB to a nonrecoverable DEDB, use the DBRC command `CHANGE.DB DBD() NONRECOV`. To change nonrecoverable DEDB to a recoverable DEDB, use the command `CHANGE.DB DBD() RECOVABL`.

To restore a nonrecoverable DEDB, use the `GENJCL.RECOV RESTORE` command. The recovery utility restores the database to the last image copy taken. If the DEDB had been changed from a recoverable DEDB to a nonrecoverable DEDB, the recovery utility will apply any updates from the logs up to the point when the change was made (if no image copy was made after the change to nonrecoverable).

Area Data Set Replication

A data set can be copied, or replicated, up to seven times, increasing the availability of the data to application programs. The DEDB Area Data Set Create utility (DBFUMRI0) produces one or more copies of a data set representing the area without stopping the area. All copies of an area data set must have identical CI sizes and spaces but can reside on different devices. The utility uses all the current copies to complete its new data set, proceeding to another copy if it detects an I/O error for a particular record. In this way, a clean copy is constructed from the aggregate of the available data. Current updates to the new data set take effect immediately.

The Create utility can create its new copy on a different device, as specified in its job control language (JCL). If your installation was migrating data to other storage devices, then this process could be carried out while the online system was still executing, and the data would remain current.

To ensure all copies of a DEDB remain identical, IMS updates all copies when a change is made to only one copy.

If an ADS fails open during normal open processing of a DEDB with multiple data sets (MADS), none of the copies of the ADS can be allocated, and the area is stopped. However, when open failure occurs during emergency restart, only the failed ADS is unallocated and stopped. The other copies of the ADS remain available for use.

DEDBs and Data Sharing

You can specify different levels of data sharing for DEDBs. The specifications you make for a DEDB apply to all of the areas the DEDB contains.

If you specify that a DEDB does not allow data sharing, only one IMS system can access a DEDB area at a time; however, other IMS systems can still access the other areas the DEDB contains.

If you specify that a DEDB allows data sharing, multiple IMS systems can access the same DEDB area at the same time. Sharing a single DEDB area is equivalent to block-level sharing of full-function databases.

You can specify the level of data sharing that a DEDB allows by using the SHARELVL parameter in the DBRC commands INIT.DB and CHANGE.DB. If any IMS has already authorized the database, changing the SHARELVL does not modify the database record. The SHARELVL parameter applies to all areas in a DEDB.

You can share DEDB areas directly from DASD or from a coupling facility structure using the Virtual Storage Option (VSO).

Related Reading:

- For general information on VSO, including its benefits and use, see “Fast Path Virtual Storage Option” on page 151.
- For specific information on sharing VSO DEDB areas, see “Sharing of VSO DEDB Areas” on page 154.
- For more information on the SHARELVL parameter, see the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.
- For general information on data sharing, see *IMS Version 9: Administration Guide: System*.

Fixed- and Variable-Length Segments in DEDBs

DEDBs support fixed-length segments. Thus you can define fixed-length or variable-length segments for your DEDBs. This support allows you to use MSDB applications for your DEDBs.

To define fixed-length segments, specify a single value for the BYTES= parameter during DBDGEN in the SEGM macro. To define variable-length segments, specify two values for the BYTES= parameter during DBDGEN in the SEGM macro.

Application programs for fixed-length-segment DEDBs, like MSDBs, do not see the length (LL) field at the beginning of each segment. Application programs for variable-length-segment DEDBs do see the length (LL) field at the beginning of each segment, and must use it to process the segment properly.

Fixed-length-segment application programs using REPL and ISRT calls can omit the length (LL) field.

Examples of Defining Segments

Figure 63 on page 133 and Figure 64 on page 133 show examples of how to use the BYTES= parameter to define variable-length or fixed-length segments.


```

ROOTSEG  SEGM  NAME=ROOTSEG1,          C
          PARENT=0,                     C
          BYTES=(390,20)

```

Figure 63. Defining a Variable-Length Segment

```

ROOTSEG  SEGM  NAME=ROOTSEG1,          C
          PARENT=0,                     C
          BYTES=(320)

```

Figure 64. Defining a Fixed-Length Segment

Parts of a DEDB Area

A DEDB area consists of three parts:

- Root addressable part
- Independent overflow part
- Sequential dependent part

Figure 65 on page 134 shows these parts of a DEDB area. Each part is described in detail in the following topics:

- “Root Addressable Part” on page 135
- “Independent Overflow Part” on page 135
- “Sequential Dependent Part” on page 135
- “CI and Segment Formats” on page 135

Data Entry Databases

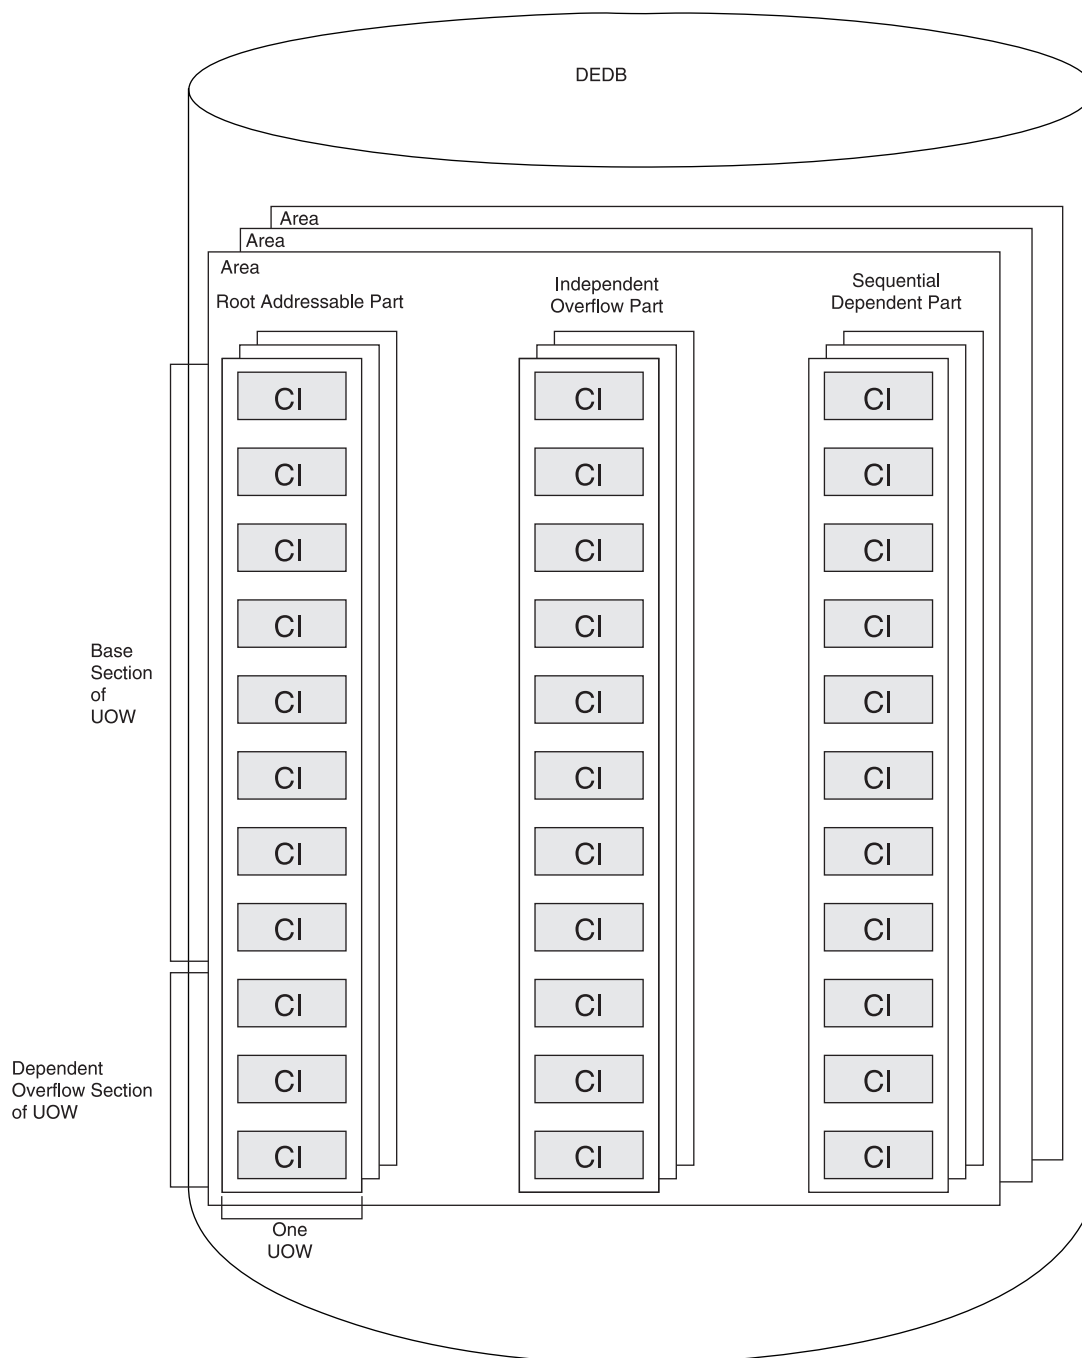


Figure 65. Parts of a DEDB Area in Storage

When a DEDB data set is initialized by the DEDB initialization utility (DBFUMIN0), additional CIs are created for internal use, so the DEDB area will actually contain more CIs than are shown in Figure 65. These extra CIs are referred to as the Reorganization UOW and were used for the DEDB Direct Reorganization utility (DBFUMDR0), which went out service with IMS Version 5 and was replaced by the High-Speed DEDB Direct Reorganization utility (DBFUHDR0). Although IMS does not use the extra CIs, DBFUMIN0 creates them for compatibility purposes.

Root Addressable Part

The root addressable part is divided into units-of-work (UOW), which are the basic elements of space allocation. A UOW consists of a user-specified number of CIs located physically contiguous.

Each UOW in the root addressable part is further divided into a base section and an overflow section. The base section contains CIs of a UOW that are addressed by the randomizing module, whereas the overflow section of the UOW is used as a logical extension of a CI within that UOW.

Root and direct dependent segments are stored in the base section. Both can be stored in the overflow section if the base section is full.

Independent Overflow Part

The independent overflow part contains empty CIs that can be used by any UOW in the area. When a UOW gets a CI from the independent overflow part, the CI can be used only by that UOW. A CI in the independent overflow part can be considered an extension of the overflow section in the root addressable part as soon as it is allocated to a UOW. The independent overflow CI remains allocated to a specific UOW unless, after a reorganization, it is no longer required, at which time it is freed.

Sequential Dependent Part

The sequential dependent part holds sequential dependent segments from roots in all UOWs in the area. Sequential dependent segments are stored in chronological order without regard to the root or UOW that contains the root. When the sequential dependent part is full, it is reused from the beginning. However, before the sequential dependent part can be reused, you must use the Delete utility DBFUMDLO to delete a contiguous portion, or all the sequential dependent segments in that part.

CI and Segment Formats

This topic contains diagnosis, modification, or tuning information.

The following four diagrams—Figure 66, Figure 67 on page 136, Figure 68 on page 137, and Figure 69 on page 137—show the following formats:

- CI format
- Root segment format
- Sequential dependent segment format
- Direct dependent segment format

The tables that follow each figure—Table 10 on page 136, Table 11 on page 136, Table 12 on page 137, and Table 13 on page 137, respectively—describe the sections of the CI and segments in the order that the sections appear in the graphic.




Figure 66. CI Format

Table 10. CI Format

CI Section	Number of Bytes	Explanation
FSE AP	2 bytes	Offset to the first free space element. These 2 bytes are unused if the CI is in the sequential dependent part.
CI TYP	2 bytes	Describes the use of this CI and the meaning of the next 4 bytes.
RAP	4 bytes	Root anchor point if this CI belongs to the base section of the root addressable area. All root segments randomizing to this CI are chained off this RAP in ascending key sequence. Only one RAP exists per CI. Attention: In the dependent and independent overflow parts, these 4 bytes are used by Fast Path control information. No RAP exists in sequential dependent CIs.
CUSN	2 bytes	CI Update Sequence Number (CUSN). A sequence number maintained in each CI. It is increased with each update of the particular CI during the synchronization process.
RBA	4 bytes	Relative byte address of this CI.
RDF	3 bytes	Record definition field (contains VSAM control information).
CIDF	4 bytes	CI definition field (contains VSAM control information).

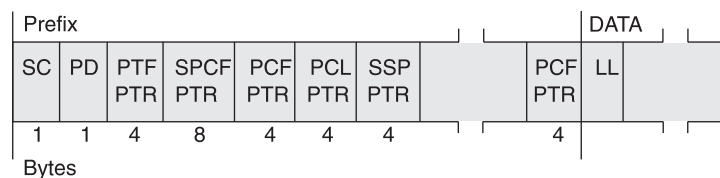


Figure 67. Root Segment Format (with Sequential and Direct Dependent Segments with Subset Pointers)

Table 11. Root Segment Format

Segment Section	Number of Bytes	Explanation
SC	1 byte	Segment code.
PD	1 byte	Prefix descriptor.
PTF	4 bytes	Physical twin forward pointer. Contains the RBA of the next root in key sequence.
SPCF	8 bytes	Sequential physical child first pointer. Contains the cycle count and RBA of the last inserted sequential dependent under this root. This pointer will not exist if the sequential dependent segment is not defined.
PCF	4 bytes	Physical child first pointer. PCF points to the first occurrence of a direct dependent segment type. There can be up to 126 PCF pointers or 125 PCF pointers if there is a sequential dependent segment. PCF pointers will not exist if direct dependent segments are not defined.
PCL	4 bytes	Physical child last pointer. PCL is an optional pointer that points to the last physical child of a segment type. This pointer will not exist if direct dependent segments are not defined.
SSP	4 bytes	Subset pointer. For each child type of the parent, up to eight optional subset pointers can exist.

Table 11. Root Segment Format (continued)

Segment Section	Number of Bytes	Explanation
LL	2 bytes	Variable length of this segment.

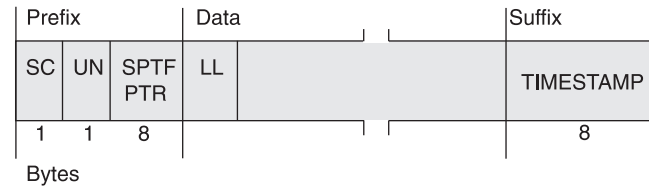


Figure 68. Sequential Dependent Segment Format

Table 12. Sequential Dependent Segment Format

Segment Section	Number of Bytes	Explanation
SC	1 byte	Segment code.
UN	1 byte	Prefix descriptor.
SPTF	8 bytes	Sequential physical twin forward pointer. Contains the cycle count and the RBA of the immediately preceding sequential dependent segment under the same root.
LL	2 bytes	Variable length of this segment.

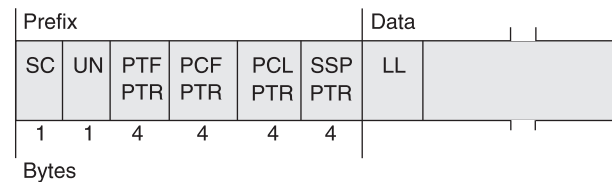


Figure 69. Direct Dependent Segment Format

Table 13. Direct Dependent Segment Format

Segment Section	Number of Bytes	Explanation
SC	1 byte	Segment code.
UN	1 byte	Unused.
PTF	4 bytes	Physical twin forward pointer. Contains the RBA of the next occurrence of this direct dependent segment type.
PCF	4 bytes	Physical child first pointer. PCF points to the first occurrence of a direct dependent segment type. In a direct dependent segment there can be up to 125 PCF pointers or 124 PCF pointers if there is a sequential dependent segment. PCF pointers will not exist if direct dependent segments are not defined.
PCL	4 bytes	Physical child last pointer. PCL is an optional pointer that points to the last physical child of a segment type. This pointer will not exist if direct dependent segments are not defined.
SSP	4 bytes	Subset pointer. For each child type of the parent, up to eight optional subset pointers can exist.

Table 13. Direct Dependent Segment Format (continued)

Segment Section	Number of Bytes	Explanation
LL	2 bytes	Variable length of this segment.

Root Segment Storage

DEDB root segments are stored as prescribed by the randomizing routine, and are chained in ascending key sequence from each anchor point.

Related Reading: For information on the system-supplied or user-supplied randomizing module for DEDBs, see *IMS Version 9: Customization Guide*.

Each CI in the base section of a UOW in an area has a single anchor point. Sequential processing using GN calls processes the roots in the following order:

1. Ascending area number
2. Ascending UOW
3. Ascending key in each anchor point chain

Each root segment contains, in ascending key sequence, a PTF pointer containing the RBA of the next root.

Direct Dependent Segment Storage

The DEDB maintains processing efficiency while supporting a hierarchic physical structure with direct dependent segment types. A maximum of 127 segment types are supported (up to 126 direct dependent segment types, or 125 if a sequential dependent segment is present).

Direct dependent (DDEP) segment types can be efficiently retrieved hierarchically, and the user has complete online processing control over the segments. Supported processing options are insert, get, delete, and replace. With the replace function, users can alter the length of the segment. DEDB space management logic attempts to store an inserted direct dependent in the same CI that contains its root segment. If insufficient space is available in that CI, the root addressable overflow and then the independent overflow portion of the area are searched.

DDEP segments can be defined with or without a unique sequence field, and are stored in ascending key sequence.

Physical chaining of direct dependent segments consists of a physical child first (PCF) pointer in the parent for each defined dependent segment type and a physical twin forward (PTF) pointer in each dependent segment.

DEDBs allow a PCL pointer to be used. This pointer makes it possible to access the last physical child of a segment type directly from the physical parent. The INSERT rule LAST avoids the need to follow a potentially long physical child pointer chain.

Subset pointers are a means of dividing a chain of segment occurrences under the same parent into two or more groups, of subsets. You can define as many as eight subset pointers for any segment type, dividing the chain into as many as nine subsets. Each subset pointer points to the start of a new subset.

Related Reading: For more information on defining and using subset pointers, see *IMS Version 9: Application Programming: Database Manager*.

Sequential Dependent Segment Storage

DEDB sequential dependent (SDEP) segments are stored in the sequential dependent part of an area in the order of entry. SDEP segments chained from different roots in an area are intermixed in the sequential part of an area without regard to which roots are their parents. SDEP segments are specifically designed for fast insert capability. However, online retrieval is not as efficient because increased input operations can result.

If all SDEP dependents were chained from a single root segment, processing with Get Next in Parent calls would result in a backward sequential order. (Some applications are able to use this method.) Normally, SDEP segments are retrieved sequentially only by using the DEDB Sequential Dependent Scan utility (DBFUMSC0), described in *IMS Version 9: Utilities Reference: Database and Transaction Manager*. SDEP segments are then processed by offline jobs.

SDEP segments are used for data collection, journaling, and auditing applications.

Enqueue Level of Segment CIs

Allocation of CIs involves three different enqueue levels.

- A NO ENQ level, which is typical of any SDEP CI. SDEP segments can never be updated; therefore they can be accessed and shared by all regions at the same time.
- A SHARED level, which means that the CI can be shared between non-update transactions. A CI at the SHARED level delays requests from any update transactions.
- An EXCLUSIVE level, which prevents contenders from acquiring the same resource.

The level of enqueue at which ROOT and SDEP segment CIs are originally acquired depends on the intent of the transaction. If the intent is update, all acquired CIs (with the exception of SDEP CIs) are held at the EXCLUSIVE level. If the intent is not update, they're held at the SHARED level. Of course, there is the potential for deadlock.

The level of enqueue, just described, is reexamined each time the buffer stealing facility is invoked. The buffer stealing facility examines each buffer (and CI) that is already allocated and updates its level of enqueue.

All other enqueued CIs are released and therefore can be allocated by other regions.

Related Reading: For more information about the buffer stealing facility, see "Fast Path Buffer Allocation Algorithm" on page 300.

Figure 70 on page 140 shows an example of DEDB structure.

Data Entry Databases

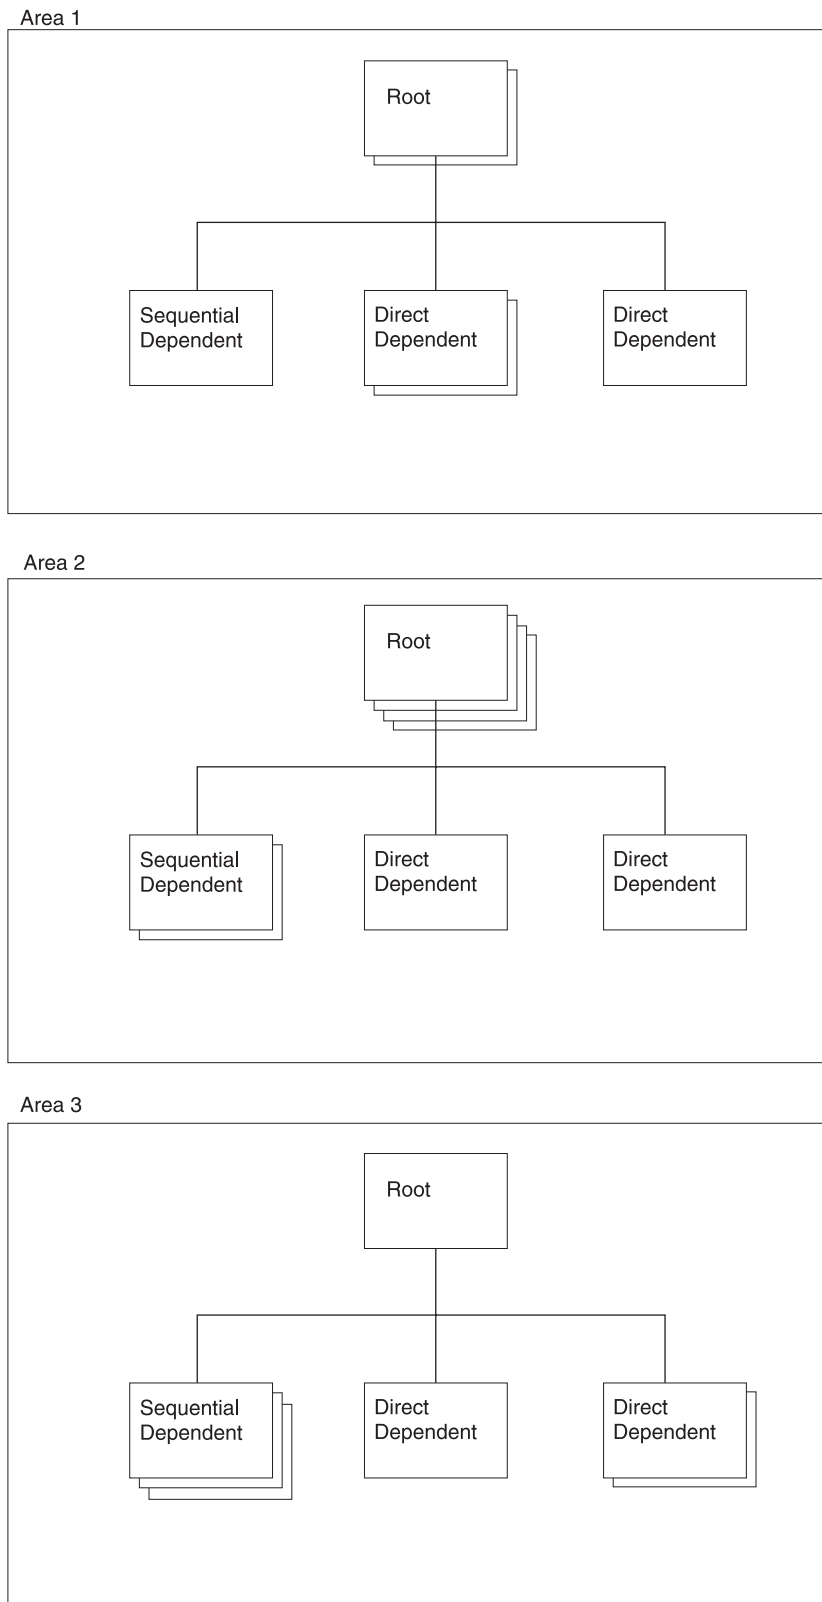


Figure 70. DEDB Structure Example

DEDB Space Search Algorithm

This topic contains diagnosis, modification, or tuning information.

The general rule for inserting a segment into a DEDB is the same as it is for an HD database. The rule is to store the segment (root and direct dependents) into the most desirable block.

For root segments, the most desirable block is the RAP CI. For direct dependents, the most desirable block is the root CI. When space for storing either roots or direct dependents is not available in the most desirable block, the DEDB insert algorithm (described next) searches for additional space. Space to store a segment could exist:

- In the dependent overflow
- In an independent overflow CI currently owned by this UOW

Additional independent overflow CIs would be allocated if required.

This algorithm attempts to store the data in the minimum amount of CIs rather than scatter database record segments across a greater number of RAP and overflow CIs. The trade-off is improved performance for future database record access versus optimum space utilization.

DEDB Insert Algorithm

This topic contains diagnosis, modification or tuning information.

The DEDB insert algorithm searches for additional space when space is not available in the most desirable block. For root segments, if the RAP CI does not have sufficient space to hold the entire record, it contains the root and as many direct dependents as possible. Base CIs that are not randomizer targets go unused. The algorithm next searches for space in the first dependent overflow CI for this UOW. From the header of the first dependent overflow CI, a determination is made whether space exists in that CI.

Related Reading: For information on DEDB CI format and allocation, see *IMS Version 9: Diagnosis Guide and Reference*.

If the CI pointed to by the current overflow pointer does not have enough space, the next dependent overflow CI (if one exists) is searched for space. The current overflow pointer is updated to point to this dependent overflow CI. If no more dependent overflow CIs are available, then the algorithm searches for space in the independent overflow part.

When an independent overflow CI has been selected for storing data, it can be considered a logical extension of the overflow part for the UOW that requested it.

Figure 71 on page 142 shows how a UOW is extended into independent overflow. This UOW, defined as 10 CIs, includes 8 Base CIs and 2 dependent overflow CIs. Additional space is needed to store the database records that randomize to this UOW. Two independent overflow CIs have been acquired, extending the size of this UOW to 12 CIs. The first dependent overflow CI has a pointer to the second independent overflow CI indicating that CI is the next place to look for space.

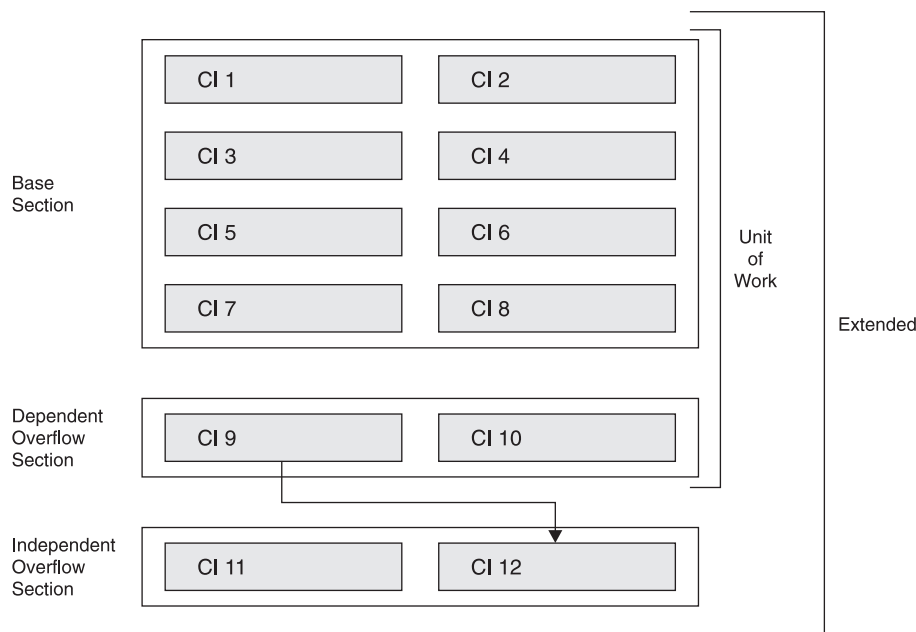


Figure 71. Extending a UOW to Use Independent Overflow

DEDB Free Space Algorithm

This topic contains diagnosis, modification, or tuning information.

The DEDB free space algorithm is used to free dependent overflow and independent overflow CIs. When a dependent overflow CI becomes entirely empty, it becomes the CI pointed to by the current overflow pointer in the first dependent overflow CI, indicating that this is the first overflow CI to use for overflow space if the most desirable block is full. An independent overflow CI is owned by the UOW to which it was allocated until every segment stored in it has been removed. When the last segment in an independent overflow CI is deleted, the empty CI is made available for reuse. When the last segment in a dependent overflow CI is deleted, it can be reused as described at the beginning of this topic.

A dependent overflow or an independent overflow CI can be freed in two ways:

- Reorganization
- Segment deletion

Reorganization

During online reorganization, the segments within a UOW are read in GN order and written to the reorganization utility private buffer set. This process inserts segments into the reorganization utility private buffer set, eliminating embedded free space. If all the segments do not fit into the reorganization utility private buffer set (RAP CI plus dependent overflow CIs), then new independent overflow CIs are allocated as needed. When the data in the reorganization utility private buffer set is copied back to the correct location, then the following events occur:

- The newly acquired independent overflow CIs are retained.
- The old segments are deleted.
- Previously allocated independent overflow CIs are freed.

Segment Deletion

A segment is deleted either by an application DLET call or because a segment is REPLaced with a different length. Segment REPLace can cause a segment to move. Full Function handles segment length increases differently from DEDBs. In Full Function, an increased segment length that does not fit into the available free space is split, and the data is inserted away from the prefix. For DEDBs, if the replaced segment is changed, it is first deleted and then reinserted. The insertion process follows the normal space allocation rules.

The REPL call can cause a dependent overflow or an independent overflow CI to be freed if the last segment is deleted from the CI.

Managing Unusable Space with IMS Tools

Space in a DEDB should be closely monitored to avoid out-of-space conditions for an area. Products such as the IMS High Performance (HP) Pointer Checker, which includes the Hierarchical Database (HD) Tuning Aid and Space Monitor tools, can identify the different percentages of free space in the RAP, dependent overflow, and independent overflow CIs. If a large amount of space exists in the RAP CIs or dependent overflow CIs, and independent overflow has a high use percentage, a reorganization can allow the data to be stored in the root addressable part, freeing up independent overflow CIs for use by other UOWs. The IMS HP Pointer Checker and the tools it includes can help you determine if the data distribution is reasonable.

For more information on tuning DEDBs, see “Tuning Fast Path Systems” on page 430.

DL/I Calls against a DEDB

This topic contains diagnosis, modification, or tuning information.

DEDB processing uses the same call interface as DL/I processing. Therefore, any DL/I call or calling sequence executed against a DEDB has the same logical result as if executed against an HDAM or PHDAM database.

The SSA rules for DEDBs have the following restrictions:

- You cannot use the Q command code with DEDBs.
- IMS ignores command codes used with sequential dependent segments.
- If you use the D command code in a call to a DEDB, the P processing option need not be specified in the PCB for the program. The P processing option has a different meaning for DEDBs than for DL/I databases.

Related Reading: For more information on how DEDBs are processed, see *IMS Version 9: Application Programming: Database Manager*.

Mixed Mode Processing

IMS application programs can run as message processing programs (MPPs), batch message processing programs (BMPs), and Fast Path programs (IFPs). IFPs can access full function databases. Similarly, MPPs and BMPs can access DEDBs and MSDBs.

Because of differences in sync point processing, there are differences in the way database updates are committed. IFPs that request full function resources, or MPPs

(or BMPs) that request DEDB (or MSDB) resources operate in “mixed mode”. The performance and resource use implications are discussed in “Fast Path Synchronization Points” on page 165.

Main Storage Databases (MSDBs)

The MSDB structure consists of fixed-length root segments only, although the root segment length can vary between MSDBs. The maximum length of any segment is 32000 bytes with a maximum key length of 240 bytes. Additional prefix data extends the maximum total record size to 32258 bytes.

The following options are *not* available for MSDBs:

- Multiple data set groups
- Logical relationships
- Secondary indexing
- Variable-length segments
- Field-level sensitivity

The MSDB family of databases consists of four types:

- Terminal-related *fixed* database
- Terminal-related *dynamic* database
- Non-terminal-related database *with* terminal keys
- Non-terminal-related database *without* terminal keys

Recommendation: ETO terminals cannot access terminal-related MSDBs. IBM recommends that any new Fast Path database that you develop be DEDBs instead of MSDBs. Also, you should consider converting any of your existing non-terminal-related MSDBs with non-terminal-related-keys to VSO DEDBs. You can use the MSDB-to-DEDB Conversion utility.

An MSDB is defined in the DBD in the same way as any other IMS database, by coding ACCESS=MSDB in the DBD statement. The REL keyword in the DATASET statement selects one of the four MSDB types.

Both dynamic and fixed terminal-related MSDBs have the following characteristics:

- The record can be updated only through processing of messages issued from the LTERM that owns the record. However, the record can be read using messages from any LTERM.
- The name of the LTERM that owns a segment is the key of the segment. An LTERM cannot own more than one segment in any one MSDB.
- The key does not reside in the stored segment.
- Each segment in a fixed terminal-related MSDB is assigned to and owned by a different LTERM.

Non-terminal-related MSDBs have the following characteristics:

- No ownership of segments exists.
- No insert or delete calls are allowed.
- The key of segments can be an LTERM name or a field in the segment. As with a terminal-related MSDB, if the key is an LTERM name, it does not reside in the segment. If the key is not an LTERM name, it resides in the sequence field of the

segment. If the key resides in the segment, the segments must be loaded in key sequence because, when a qualified SSA is issued on the key field, a binary search is initiated.

When to Use an MSDB

MSDBs store and provide access to an installation's most frequently used data. The data in an MSDB is stored in segments, and each segment available to one or all terminals.

MSDBs provide a high degree of parallelism and are suitable for applications in the banking industry (such as general ledger). To provide fast access and allow frequent update to this data, MSDBs reside in virtual storage during execution.

One use for a terminal-related fixed MSDB is in an application in which each segment contains data associated with a logical terminal. In this type of application, the application program can read the data (possibly for general reporting purposes) but cannot update it.

Non-terminal-related MSDBs (without terminal-related keys) are typically used in applications in which a large number of people need to update data at a high transaction rate. An example of this is a real-time inventory control application, in which reduction of inventory is noted from many cash registers.

MSDBs Storage

The MSDB Maintenance utility (DBFDBMA0) creates the MSDBINIT sequential data set in physical ascending sequence (see Figure 73 on page 146). During a cold start, or by operator request during a normal warm start, the sequential data set MSDBINIT is read and the MSDBs are created in virtual storage (see Figure 72).

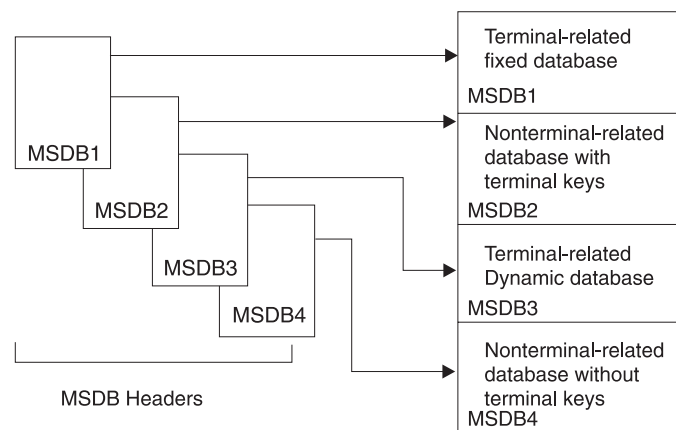


Figure 72. MSDB Pointers

During a warm start, the control program uses the current checkpoint data set for initialization. The MSDB Maintenance utility can also modify the contents of an old MSDBINIT data set. For warm start, the master terminal operator can request use of the IMS.MSDBINIT, rather than a checkpoint data set.

Diagnosis, Modification or Tuning Information

Figure 73 shows the MSDBINIT record format. Table 14 on page 146 explains the

Main Storage Databases (MSDBs)

record parts.

	LL	00	DBDname	Count	Type	KL	KEY	MSDB Segment
Bytes	2	2	8	4	1	1	Varies	Varies(MAX 32,000)

Figure 73. MSDBINIT Record Format

Table 14. MSDBINIT Record Format

Record Part	Bytes	Explanation
LL	2	Record length (32,258 maximum)
X'00'	2	Always hexadecimal zeros
DBDname	8	DBD name
Count	4	Segment count
Type	1	MSDB type: <ul style="list-style-type: none">• X'11' non-related• X'31' non-related with terminal keys• X'33' fixed related• X'37' dynamic related
KL	1	Key length (240 maximum)
Key	varies	Key or terminal name
MSDB segment	varies	MSDB segment (32,000 maximum)
_____ End of Diagnosis, Modification or Tuning Information _____		

MSDB Record Storage

This topic contains diagnosis, modification, or tuning information.

MSDB records contain no pointers except the forward chain pointer (FCP) connecting free segment records in the terminal-related dynamic database.

Figure 74 on page 147 shows a high-level view of how MSDBs are arranged in priority sequence.

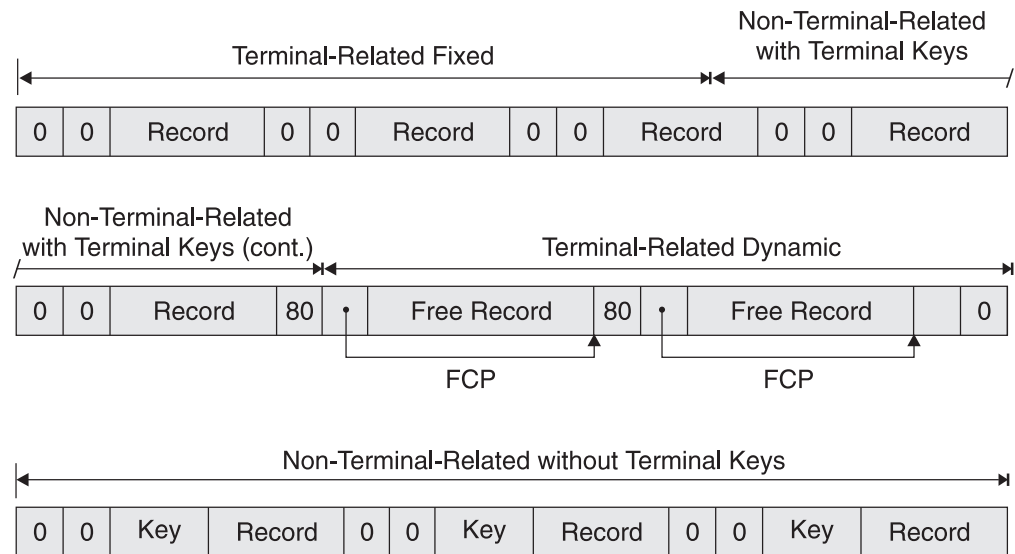


Figure 74. Sequence of the Four MSDB Organizations

Saving MSDBs for Restart

At system checkpoint, a copy of all MSDBs is written alternately to one of the MSDB checkpoint data sets—MSDBCP1 or MSDBCP2. During restart, the MSDBs are reloaded from the most recent copy on MSDBCP1 or MSDBCP2. During an emergency restart, the log is used to update the MSDB. During a normal restart, the operator can reload from MSDBINIT using the MSDBLOAD parameter on the restart command.

On a cold start (including /ERE CHKPT 0), MSDBs are loaded from the MSDBINIT data set.

DL/I Calls against an MSDB

All DL/I database calls, except those that specify “within parent”, are valid with MSDBs. Because an MSDB is a root-only database, a “within parent” call is meaningless. Additionally, the DL/I call, FLD, exists that is applicable to all MSDBs. The FLD call allows an application program to check and modify a single field in an MSDB segment.

Rules for Using an SSA

MSDB processing imposes the following restrictions on the use of an SSA (segment search argument):

- No Boolean operator
- No command code

Even with the preceding restrictions, the result of a call to the database with no SSA, an unqualified SSA, or a qualified SSA remains the same as a call to the full-function database. For example, a retrieval call without an SSA returns the first record of the MSDB or the full-function database, depending on the environment in which you are working. The following list shows the type of compare or search technique used for a qualified SSA.

Type of Compare

Main Storage Databases (MSDBs)

- Sequence field: logical
- Non-sequence arithmetic field: arithmetic
- Non-sequence non-arithmetic: logical

Type of Search

- Sequence field: binary if operator is = or >=, otherwise sequential
- Non-sequence arithmetic field: sequential
- Non-sequence non-arithmetic: sequential

Insertion and Deletion of Segments

The terminal-related dynamic database accepts ISRT and DLET calls, and the other MSDB databases do not. Actual physical insertion and deletion of segments do not occur in the dynamic database. Rather, a segment is assigned to an LTERM from a pool of free segments by an ISRT call. The DLET call releases the segment back to the free segment pool.

Figure 75 on page 149 shows a layout of the four MSDBs and the control blocks and tables necessary to access them. The Extended Communications Node Table (ECNT) is located by a pointer from the Extended System Contents Directory (ESCD), which in turn is located by a pointer from the System Contents Directory (SCD). The ESCD contains first and last header pointers to the MSDB header queue. Each of the MSDB headers contains a pointer to the start of its respective database area.

Combination of Binary and Direct Access Methods

A combination access technique works against the MSDB on a DL/I call. The access technique combines a binary search and the direct access method. A binary search of the ECNT table attempts to match the table LTERM names to the LTERM name of the requesting terminal. When a match occurs, the application program accesses the segment of the desired database using a direct pointer in the ECNT table. Access to the non-terminal-related database segments without terminal keys is accomplished by a binary search technique only, without using the ECNT.

Figure 75 on page 149 shows the ECNT and MSDB storage layout.

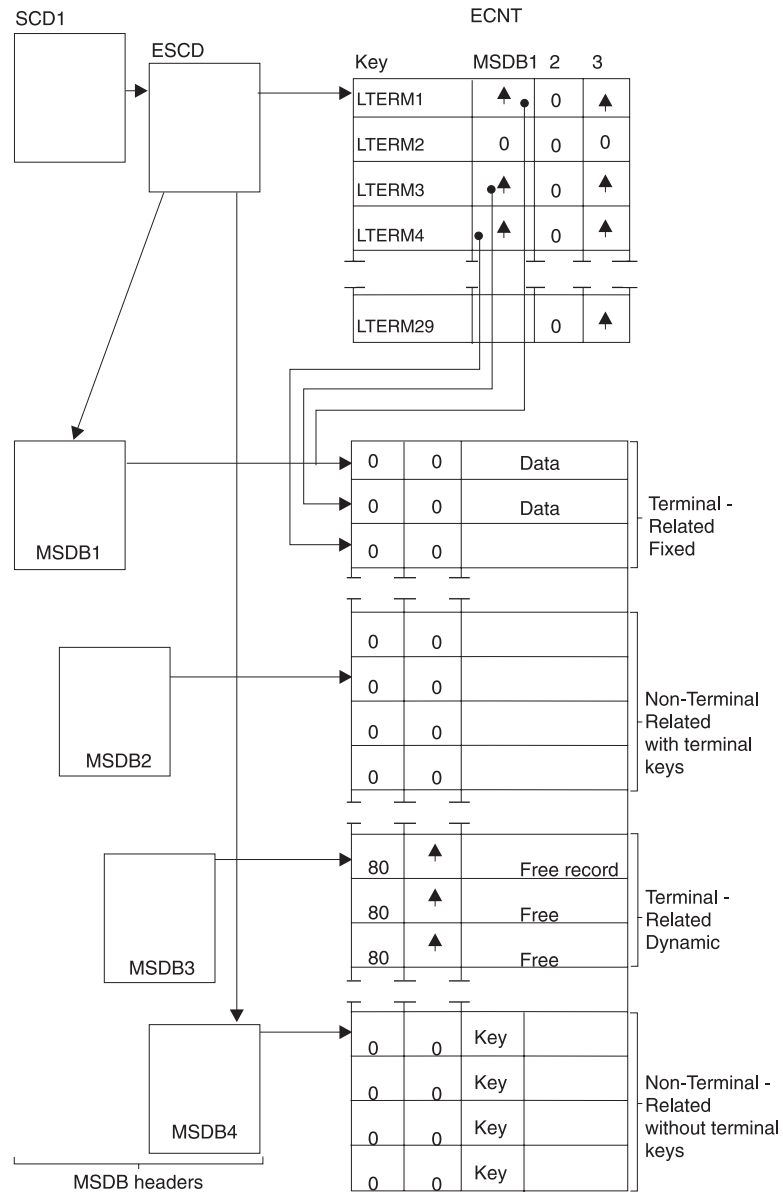


Figure 75. ECNT and MSDB Storage Layout

Position in an MSDB

Issuing a DL/I call causes a position pointer to fix on the current segment. The meaning of “next segment” depends on the key of the MSDB. The current segment in a non-terminal-related database without LTERM keys is the physical segment against which a call was issued. The next segment is the following physically adjacent segment after the current segment. The other three databases, using LTERM names as keys, have a current pointer fixed on a position in the ECNT table. Each entry in the table represents one LTERM name and segment pointers to every MSDB with which LTERM works. A zero entry indicates no association between an LTERM and an MSDB segment. If nonzero, the next segment is the next entry in the table. The zero entries are skipped until a nonzero entry is found.

The Field Call

The DL/I FLD call is available to MSDBs and DEDB. It allows for the operation on a field, rather than on an entire segment. Additionally, it allows conditional operation on a field.

Modification is done with the CHANGE form of the FLD call. The value of a field can be tested with the VERIFY form of the FLD call. These forms of the call allow an application program to test a field value before applying the change. If a VERIFY fails, all CHANGE requests in the same FLD call are denied. This call is described in *IMS Version 9: Application Programming: Database Manager*.

Call Sequence Results

The same call sequence against MSDBs and other IMS databases might bring different results. For parallel access to MSDB data, updates to MSDB records take place during sync point processing. Changes are not reflected in those records until the sync point is completed. For example, the sequence of calls GHU (Get-Hold-Unique), REPL (Replace), and GU (Get-Unique) for the same database record results in the same information in the I/O area for the GU call as that returned for the GHU.

The postponement of an updated database record to the point of commitment is also true of FLD/CHANGE calls, and affects FLD/VERIFY calls. You should watch for multiple FLD/VERIFY and FLD/CHANGE calls on the same field of the same segment. Such sequences can decrease performance because reprocessing results.

For terminal-related dynamic MSDBs, the following examples of call sequences do *not* have the same results as with other IMS databases or DEDBs:

- A GHU following an ISRT receives a 'segment not found' status code.
- An ISRT after a DLET receives a 'segment already exists' status code.
- No more than one ISRT or DLET is allowed for each MSDB in processing a transaction.

The preceding differences become more critical when transactions update or refer to both full function DL/I and MSDB data. Updates to full function DL/I databases and DEDBs are immediately available while MSDB changes are not. For example, if you issue a GHU and a REPL for a segment in an MSDB, then you issue another get call for the same segment in the same commit interval, the segment IMS returns to you is the “old” value, not the updated one.

If processing is not single mode, this difference can increase. In the case of multiple mode processing, the sync point processing is not invoked for every transaction. Your solution might be to ask for single mode processing when MSDB data is to be updated.

Another consideration for MSDB processing is that terminal-related MSDB segments can be updated only by transactions originating from the owners of the segment, the LTERMs. Programs that are non-transaction-driven BMPs can only update MSDBs that are declared as non-terminal-related.

Fast Path Virtual Storage Option

The Fast Path Virtual Storage Option (VSO) allows you to map data into virtual storage or a coupling facility structure. You can map one or more DEDB areas into virtual storage or a coupling facility structure by defining the DEDB areas as VSO areas.

For high-end performance applications with DEDBs, defining your DEDB areas as VSO allows you to realize the following performance improvements:

- Reduced read I/O

After an IMS and VSAM control interval (CI) has been brought into virtual storage, all subsequent I/O read requests read the data from virtual storage rather than from DASD.

- Decreased locking contention

For VSO DEDBs, locks are released after both of the following:

- Logging is complete for the second phase of an application synchronization (commit) point
- The data has been moved into virtual storage

For non-VSO DEDBs, locks are held at the VSAM CI-level and are released only after the updated data has been written to DASD.

- Fewer writes to the area data set

Updated data buffers are not immediately written to DASD; instead they are kept in the data space and written to DASD at system checkpoint or when a threshold is reached.

In all other respects, VSO DEDBs are the same as non-VSO DEDBs. Therefore, VSO DEDB areas are available for IMS DBCTL and LU 6.2 applications, as well as other IMS DB or IMS TM applications. Use the DBRC commands `INIT.DBDS` and `CHANGE.DBDS` to define VSO DEDB areas.

The virtual storage for VSO DEDB areas is housed differently depending on the share level assigned to the area. VSO DEDB areas with share levels of 0 and 1 are loaded into a z/OS data space. VSO DEDB areas with share levels of 2 and 3 are loaded into a coupling facility cache structure.

Coupling facility cache structures are defined by the system administrator and can accommodate either a single DEDB area or multiple DEDB areas. Cache structures that support multiple DEDB areas are called *multi-area structures*. For more information on multi-area structures, see *IMS Version 9: Administration Guide: System*.

Recommendation: Terminal-related MSDBs and non-terminal-related MSDBs with terminal-related keys are *not supported* in IMS Version 5 and later releases. Non-terminal-related MSDBs without terminal-related keys are still supported. Therefore, you should consider converting all your existing MSDBs to VSO DEDBs or non-VSO DEDBs.

Restrictions Using VSO DEDB Areas

VSO DEDB areas have the following restrictions in their use:

- VSO DEDB areas *must* be registered with DBRC.

Fast Path Virtual Storage Option

- For local VSO DEDB areas, z/OS data spaces impose a 2 GB (2 147 483 648 bytes) maximum size limit, even though the maximum size of a single or multiple area data set on DASD is 4 GB. If the local VSO DEDB area is more than 2 GB, the area fails to open.

When Local VSO DEDB areas are opened for preloading, IMS checks to make sure that the area can fit into the structure. If the area cannot fit, the open fails.

The actual size available in a z/OS data space for a local VSO DEDB area is the maximum size (2 GB) minus amounts used by z/OS (from 0 to 4 KB) and IMS Fast Path (approximately 100 KB).

To see the size, usage, and other statistics for a VSO DEDB area, enter the /DISPLAY FPVIRTUAL command.

- For shared VSO DEDB areas, z/OS coupling facility cache structures do not place a limit on the maximum size of single or multiple area data sets, even though the maximum size of a coupling facility cache structure is 2 GB. If a shared VSO DEDB area is larger than 2 GB, IMS loads a maximum of 2 GB of CIs into the coupling facility cache structure.

IMS does not check to see if a shared VSO DEDB area can fit into a coupling facility cache structure, regardless of whether the shared VSO DEDB area is preloaded or loaded only when requested.

The actual size available for a shared VSO DEDB area in a coupling facility cache structure is the maximum size (2 GB) minus amounts used by z/OS (from 0 to 4 KB) and IMS Fast Path (approximately 100 KB).

- The DEDB Area Data Set Compare utility (DBFUMMH0) does not support VSO DEDB areas.

Related Reading:

- See “Accessing a Data Space” on page 160 for more information on data spaces.

Defining a VSO DEDB Area

All of the Virtual Storage Option (VSO) information for a DEDB is recorded in the RECON data set. Use the following parameters of the DBRC INIT.DBDS and CHANGE.DBDS commands to define your VSO DEDB Areas:

VSO Defines the area as a VSO area.

When a CI is read for the first time, it will be copied into a z/OS data space or a coupling facility structure. Data is read into a common buffer and is then copied into the data space or structure. Subsequent access to the data retrieves it from the data space or structure rather than from DASD.

CIs that are not read are not copied into the data space or structure.

All updates to the data are copied back to the data space or structure and any locks held are released. Updated CIs are periodically written back to DASD.

NOVSO

Defines the area as a non-VSO area. This is the default.

You can use NOVSO to define a DEDB as non-VSO or to turn off the VSO option for a given area. If the area is in virtual storage when it is redefined as NOVSO, the area must be stopped (/STOP AREA or /DBR AREA) or removed from virtual storage (/VUNLOAD) for the change to take effect.

PRELOAD

For VSO areas, this preloads the area into the data space or coupling

facility structure when the VSO area is opened. This keyword implies the PREOPEN keyword, thus if PRELOAD is specified, then PREOPEN does not have to be specified.

The root addressable portion and the independent overflow portion of an area are loaded into the data space or coupling facility structure at control region initialization or during /START AREA processing. Data is then read from the data space or coupling facility structure to a common buffer. Updates are copied back to the data space or coupling facility structure and any locks are released. Updated CIs are periodically written back to DASD.

NOPREL

Defines the area as load-on-demand. For VSO DEDBs areas, as CIs are read from the data set, they are copied to the data space or coupling facility structure. This is the default.

To define an area with NOPREL gives you the ability to deactivate the preload processing. The area is not preloaded into the data space or coupling facility structure the next time that it is opened.

If you specify NOPREL, and you want the area to be preopened, you must separately specify PREOPEN for the area.

CFSTR1

Defines the name of the cache structure in the primary coupling facility. Cache structure names must follow z/OS coupling facility naming conventions. CFSTR1 uses the name of the DEDB area as its default. This parameter is valid only for VSO DEDB areas that are defined with SHARELVL(2|3).

Related Reading: For detailed information on coupling facility naming, see “Coupling Facility Structure Naming Convention” on page 156.

CFSTR2

Defines the secondary coupling facility cache structure name when you use IMS-managed duplexing of structures. The cache structure name must follow z/OS coupling facility naming conventions. CFSTR2 does not provide a default name. This parameter is valid only for VSO areas of DEDBs that are defined with SHARELVL(2|3) and that are single-area structures. This parameter cannot be used with multi-area structures, which use system-managed duplexing.

Related Reading:

- For detailed information on coupling facility naming, see “Coupling Facility Structure Naming Convention” on page 156.
- For more information on multi-area structures, see *IMS Version 9: Administration Guide: System*.

MAS Defines a VSO DEDB area as using a multi-area structure as opposed to a single-area structure.

Related Reading: For more information on multi-area structures, see *IMS Version 9: Administration Guide: System*.

NOMAS

Defines a VSO DEDB area as using a single-area cache structure as opposed to a multi-area structure. NOMAS is the default.

LKASID

Indicates that buffer lookaside is to be performed on read requests for this

area. For VSO DEDB areas that use a multi-area structure, lookaside can also be specified using the DFSVSMxx PROCLIB member. If there is a discrepancy between the specifications in DBRC and those in DFSVSMxx, the specifications in DFSVSMxx are used.

Related Reading: For additional information on defining private buffer pools, see “Defining a Private Buffer Pool Using the DFSVSMxx IMS.PROCLIB Member” on page 158.

NOLKASID

Indicates that buffer lookaside is not to be performed on read requests for this area.

Related Reading: For additional information on defining private buffer pools, see “Defining a Private Buffer Pool Using the DFSVSMxx IMS.PROCLIB Member” on page 158.

VSO DEDB Areas and the PREOPEN and NOPREO Keywords

The PREOPEN and NOPREO keywords of DBRC’s INIT.DBDS and CHANGE.DBDS commands apply to both VSO DEDB areas and non-VSO DEDB areas.

When a NOPREO area is also defined as shared VSO with a share level of 2 or 3, you can open the area with the /START AREA command. This connects the area to the VSO structures.

You can use the DBRC commands to define your VSO DEDB areas at any time; it is not necessary that IMS be active. The keywords specified on these DBRC commands go into effect at two different points in Fast Path processing:

- Control region startup
After the initial checkpoint following control region initialization, DBRC provides a list of areas with any of the VSO options (VSO, NOVSO, PRELOAD, and NOPREL) or either of the PREOPEN or NOPREO options. The options are then maintained by IMS Fast Path.
- Command processing
When you use a /START AREA command, DBRC provides the VSO options or PREOPEN|NOPREO options for the area. If the area needs to be preopened or preloaded, it is done at this time.
When you use a /STOP AREA command, any necessary VSO processing is performed.

Related Reading: See *IMS Version 9: Command Reference* for details on start and stop processing.

Sharing of VSO DEDB Areas

Sharing of VSO DEDB areas allows multiple IMS systems to concurrently read and update the same VSO DEDB area. The three main participants are the coupling facility hardware, the coupling facility policy software, and the XES and z/OS services.

The coupling facility hardware provides high-performance, random-access shared storage in which IMS systems can share data in a sysplex environment. The shared storage area in the coupling facility is divided into sections, called *structures*. For VSO DEDB data, the structure type used is called a *cache structure*, as opposed to a list structure or a lock structure. The cache structure is designed for high-performance read reference reuse and deferred write of modified data. The coupling facility and structures are defined in a common z/OS data set, the *couple data set* (COUPLExx).

The coupling facility policy software and its cache structure services provide interfaces and services to z/OS that allow sharing of VSO DEDB data in shared storage. Shared storage controls VSO DEDB reads and writes:

- A read of a VSO CI brings the CI into the coupling facility from DASD.
- A write of an updated VSO CI copies the CI to the coupling facility from main storage, and marks it as changed.
- Changed CI data is periodically written back to DASD.

The XES and z/OS services provide a way of manipulating the data within the cache structures. They provide high performance, data integrity, and data consistency for multiple IMS systems sharing data.

The Coupling Facility and Shared Storage

In the coupling facility shared storage, a cache structure can represent one or multiple VSO DEDB areas; however, any given VSO DEDB area can be represented by only one cache structure. Cache structures are not persistent. That is, they are deleted after the last IMS system disconnects from the coupling facility.

Duplexing Structures

Duplexed structures are duplicate structures for the same area. Duplexing allows you to have dual structure support for your VSO DEDB areas, which helps to ensure the availability and recoverability of your data.

Structure duplexing can be either IMS-managed or system-managed. With IMS-managed duplexing, you must define both the primary and the secondary structures in DBRC and in the z/OS coupling facility resource management (CFRM) policy. When you use system-managed duplexing, you have to define only the primary structure. The duplexing operation is transparent to you, except that you need to request duplex mode in your CFRM policy and allocate additional resources for a secondary structure instance.

VSO multi-area structures require the use of system-managed duplexing.

Related Reading: For information about enabling and initiating system-managed duplexing, see the chapter on data sharing in *IMS Version 9: Administration Guide: System*.

Automatic Altering of Structure Size

z/OS can automatically expand or contract the size of a VSO structure in the coupling facility if it needs storage space. Enabling this function for preloaded VSO DEDBs can prevent wasted space; however, you must be careful with this function when VSO DEDBs are loaded on demand.

If you have dual structures, IMS systems below Version 8 cannot connect to structures with different sizes.

Recommendation: If you preload your shared VSO DEDB areas, do not use the automatic alter function. The automatic alter function might reclaim any unchanged data in the cache structure.

To ensure correct sizing and that the automatic alter function is disabled for your preloaded shared VSO DEDB areas, specify the following parameters in the area's CFRM policy:

Fast Path Virtual Storage Option

INITSIZE(x)

Specifies the initial amount of space to be allocated for the structure in the coupling facility. You can estimate this size using the CFSIZER tool available online.

SIZE(y)

Specifies the maximum amount of space to be allocated for the structure in the coupling facility.

ALLOWAUTOALT(NO)

Specifies whether to allow system-initiated alters (automatic alter) for this structure. For preloaded shared VSO DEDB areas, you should specify ALLOWAUTOALT(NO).

If the size specified by INITSIZE is too small, IMS will alter the size of the structure to the needed value as calculated by IXLCSP, up to the size specified in the SIZE parameter.

Related Reading: For information on the CFRM parameters that enable automatic altering of structures, see:

- The chapter on data sharing in *IMS Version 9: Administration Guide: System*
- *z/OS V1R4: MVS Setting Up a Sysplex*

System-Managed Rebuild

You can reconfigure a coupling facility while keeping all VSO structures online by copying the structures to another coupling facility. There is no change to the VSO definition.

Related Reading: For information on enabling and allocating a system-managed rebuild, allocating and populating a new structure, and managing the coupling facility, see the chapter on data sharing in *IMS Version 9: Administration Guide: System*.

Private Buffer Pools

IMS provides special private buffer pools for Shared VSO areas. Each pool can be associated with an area, a DBD, or a specific group of areas. These private buffer pools are only used for Shared VSO data. Using these private buffer pools, the customer can request buffer lookaside for the data. The keywords LKASID or NOLKASID, when specified on the DBRC commands INIT.DBDS or CHANGE.DBDS, indicate whether to use this lookaside capability or not.

Defining a VSO Cache Structure Name

The system programmer defines all coupling facility structures, including VSO cache structures, in the CFRM policy definition. In this policy definition, VSO structures are defined as cache structures, as opposed to list structures (used by shared queues) or lock structures (used by IRLM).

Coupling Facility Structure Naming Convention

The structure name is 16 characters long, padded on the right with blanks if necessary. It can contain any of the following, but must begin with an uppercase, alphabetic character:

- Uppercase alphabetic characters
- Numeric characters
- Special characters (\$, @, and #)
- Underscore (_)

IBM names begin with:

'SYS'

Letters 'A' through 'T' (uppercase)

An IBM component prefix

Examples of Defining Coupling Facility Structures

Figure 76 shows how to define two structures in separate coupling facilities.

```
//UPDATE EXEC PGM=IXCL2FDA
//SYSPRINT DD SYSOUT=A
//*
/* THE FOLLOWING SYSIN WILL UPDATE THE POLICY DATA IN THE COUPLE
/* DATASET FOR CFRM (COUPLING FACILITY RESOURCE MANAGEMENT)
/*
//SYSIN DD *
UPDATE DSN(IMS.DSHR.PRIME.FUNC) VOLSER(DSHR03)

DEFINE POLICY(POLICY1)

    DEFINE CF(FACIL01)
        ND(123456)
        SIDE(0)
        ID(01)
        DUMPSPACE(2000)

    DEFINE CF(FACIL02)
        ND(123456)
        SIDE(1)
        ID(02)
        DUMPSPACE(2000)

    DEFINE STR(LIST01)
        SIZE(1000)
        PREFLIST(FACIL01,FACIL02)
        EXCLLIST(CACHE01)

    DEFINE STR(CACHE01)
        SIZE(1000)
        PREFLIST(FACIL02,FACIL01)
        EXCLLIST(LIST01)
/*
```

Figure 76. Example of Updating a Policy with New Structures

In the example, the programmer defined one list structure (LIST01) and one cache structure (CACHE01).

Attention: When defining a cache structure to DBRC, ensure that the name is identical to the name used in the CFRM policy (see “Registering a Cache Structure Name with DBRC”).

Registering a Cache Structure Name with DBRC

When you define DEDB areas to DBRC, use the same structure names defined in the CFRM policy to specify the structures that each DEDB area will use. The DEDB area definitions and the corresponding structure names are then stored in the RECON data set. The structure names are entered in either the CFSTR1 or CFSTR2 parameter of the INIT.DBDS or CHANGE.DBDS command. For more information on defining DEDB areas, see “Defining a VSO DEDB Area” on page 152.

Restriction: The CFSTR2 parameter is not supported by multi-area structures. If you specify both CFSTR2 and MAS in INIT.DBDS, or use CHANGE.DBDS to apply CFSTR2 to DEDB area already defined by MAS, IMS will reject the DBRC command with either a DSP0141I or DSP0144I error message.

Figure 77 registers structure name TSTDEDBAR1.

```
INIT.DBDS DBD(DEDBFR01) AREA(DEDBAR1) VSO PRELOAD CFSTR1(TSTDEDBAR1)
```

Figure 77. Defining a VSO Area Coupling Facility Structure Name in DBRC

Defining a Private Buffer Pool Using the DFSVSMxx IMS.PROCLIB Member

Define a private buffer pool using the following format:

```
DEDB=(poolname,size,pbuf,sbuf,maxbuf,LKASID|NOLKASID,dbname)
```

where:

poolname	8 character name of the pool. Used in displays and reports.
size	The buffer size of the pool. All the standard DEDB-supported buffer sizes are supported.
pbuf	The primary buffer allocation. The first allocation receives this number of buffers. Maximum value is 99999.
sbuf	The secondary buffer allocation. If the primary allocation starts to run low, another allocation of buffers is made. This amount indicates the secondary allocation amount. Maximum value is 99999.
maxbuf	The maximum number of buffers allowed for this pool. It is a combination of PBUF plus some iteration of SBUF. Maximum value is 99999.
LKASID NOLKASID	Indicates whether this pool is to be used as a local cache with buffer lookaside capability. This value is cross-checked with the DBRC specification of LKASID to determine which pool the area will use. If there is an inconsistency between the DEDB statement and DBRC, the DBRC value takes precedence.
dbname	Association of the pool to a specific area or DBD. If the dbname is an area name, then the pool is used only by that area. If the dbname specifies a DBD name, the pool is used by all areas in that DBD. The dbname is first checked for an area name then for a DBD name.

Figure 78 shows examples of how to define a private buffer pool.

```
DEDB=(POOL1,512,400,50,800,LKASID)
DEDB=(POOL2,8196,100,20,400,NOLKASID)
```

Figure 78. Examples of Defining Private Buffer Pools

In this example, 2 private buffer pools are defined:

1. The first pool has a buffer size of 512, with an initial allocation of 400 buffers, increasing by 50, as needed, to a maximum of 800. This pool will be used as a local cache, and buffer lookaside will be performed for areas that share this pool.

2. The second pool has a buffer size of 8K, with an initial allocation of 100 buffers, increasing by 20, as needed, to a maximum of 400. This pool will be used in the same fashion as the common buffer pool. There will be no lookaside performed.

If the customer does not define a private buffer pool, the default parameter values are calculated as follows:

DEDB=(poolname,XXX,64,16,512)

where:

- XXX is the CI size of the area to be opened.
- The initial buffer allocation is 64.
- The secondary allocation is 16.
- The maximum number of buffers for the pool is 512.
- The LKASID option is specified if it is specified in DBRC for the area.

Defining a Private Buffer Pool for a Multi-Area Structure

You can define private buffer pools for multi-area structure using the DEDBMAS= keyword in the DFSVSMxx PROCLIB member. The format is as follows:

DEDBMAS=(poolname,csize,pbuf,sbuf,maxbuf,LKASID|NOLKASID,strname)

Except for the following parameters, the parameters for DEDBMAS are the same as those in the DFSVSMxx DEDB= keyword:

csize	The control interval size of the area. All areas that share a multi-area structure must have the same control interval size. If there is a discrepancy between the control interval size of the area used in creating the structure and the control interval size of the area attempting to share the structure, the open process for the area attempting to share the structure fails.
strname	The required 1- to 16-character name of the primary coupling facility structure. The installation must have defined the structure in the CFRM administrative policy. The structure name must follow the naming conventions of the CFRM. If the name has fewer than 16 characters, the system pads the name with blanks. The valid characters are A–Z, 0–9, and the characters \$, &, #, and _. Names must be uppercase and start with alphabetic character.
	Restriction: Do not begin structure names with the letters A-I, or the character string SYS. IBM reserves these characters for its structures.

Acquiring and Accessing Data Spaces for VSO DEDB Areas

IMS allocates data spaces to accommodate VSO DEDB areas. When a VSO DEDB area CI is preloaded or read for the first time, it is copied into a data space (or a coupling facility structure). Subsequent access to the data retrieves it from the data space rather than from DASD.

Acquiring a Data Space

IMS acquires data spaces for VSO areas when the VSO areas first open, but not before. The maximum size of any VSO area data space is two gigabytes. Data spaces for preloaded VSO areas use the z/OS DREF (disabled reference) option. Data spaces for non-preloaded VSO areas do not use the DREF option.

Fast Path Virtual Storage Option

DREF data spaces use a combination of central storage and expanded storage, but no auxiliary storage. Data spaces without the DREF option use central storage, expanded storage, and auxiliary storage, if auxiliary storage is available.

IMS acquires additional data spaces for VSO areas, both with DREF and without, as needed.

Accessing a Data Space

During IMS control region initialization, IMS calls DBRC to request a list of all the areas that are defined as VSO. This list includes the PREOPEN or PRELOAD status of each VSO area. If VSO areas exist, IMS acquires the appropriate data spaces. Then IMS opens all areas defined with PREOPEN and opens and loads areas defined with PRELOAD. During a normal or emergency restart, the opening and loading of areas might occur after control region initialization, if you have changed the specifications of the FPOPN parameter in the IMS procedure.

IMS assigns areas to data spaces using a “first fit” algorithm. The entire root addressable portion of an area (including independent overflow) resides in the data space. The sequential dependent portion does not reside in the data space.

The amount of space needed for an area in a data space is $(CI\ size) \times (number\ of\ CIs\ per\ UOW) \times ((number\ of\ UOWs\ in\ root\ addressable\ portion) + (number\ of\ UOWs\ in\ independent\ overflow\ portion))$ rounded to the next 4 KB.

Expressed in terms of the parameters of the DBDGEN AREA statement, this formula is $(SIZE\ parameter\ value) \times (UOW\ parameter\ value) \times (ROOT\ parameter\ value)$ rounded to the next 4 KB.

The actual amount of space in a data space available for an area (or areas) is two gigabytes (524,288 blocks, 4 KB each) minus an amount reserved by z/OS (from 0 to 4 KB) minus an amount used by IMS Fast Path (approximately 100 KB). You can use the /DISPLAY FPVIRTUAL command to determine the actual storage usage of a particular area.

Related Reading: For sample output from this command, see *IMS Version 9: Command Reference*.

Resource Control and Locking

Using VSO can reduce the number and duration of DEDB resource locking contentions by managing DEDB resource requests on a segment level and holding locks only until updated segments are returned to the data space. Segment-level resource control and locking applies only to Get and Replace calls.

Without VSO, the VSAM CI (physical block) is the smallest available resource for DEDB resource request management and locking. If there is an update to any part of the CI, the lock is held until the whole CI is rewritten to DASD. No other requester is allowed access to any part of the CI until the first requester's lock is released.

With VSO, the database segment is the smallest available resource for DEDB resource request management and locking. Segment-level locking is available only for the root segment of a DEDB with a root-only structure, and when that root segment is a fixed-length segment. If processing options R or G are specified in the calling PCB, IMS can manage and control DEDB resource requests and serialize change at the segment level; for other processing options, IMS maintains VSAM CI

locks. Segment locks are held only until the segment updates are applied to the CI in the data space. Other requesters for different segments in the same CI are allowed concurrent access.

A VSO DEDB resource request for a segment causes the entire CI to be copied into a common buffer. VSO manages the segment request at a level of control consistent with the request and its access intent. VSO also manages access to the CI that contains the segment but at the share level in all cases. A different user's subsequent request for a segment in the same CI accesses the image of the CI already in the buffer.

Updates to the data are applied directly to the CI in the buffer at the time of the update. Segment-level resource control and serialization provide integrity among multiple requesters. After an updated segment is committed and applied to the copy of the CI in the data space, other requesters are allowed access to the updated segment from the copy of the CI in the buffer.

If after a segment change the requester's updates are not committed for any reason, VSO copies the unchanged image of the segment from the data space to the CI in the buffer. VSO does not allow other requesters to access the segment until VSO completes the process of removing the uncommitted and canceled updates. Locking at the segment level is not supported for shared VSO areas. Only CI locking is supported.

When a compression routine is defined on the root segment of a DEDB with a root-only structure, and when that root segment is a fixed-length segment, its length becomes variable after being compressed. Replacing a compressed segment then requires a delete and an insert. In this case, segment level control and locking is not available.

Preopen Areas and VSO Areas in a Data Sharing Environment

A VSO can be registered with any of the following share levels:

SHARELVL(0)

Exclusive access: in a data sharing environment, any SHARELVL(0) area with the PREOPEN option (including VSO PREOPEN and VSO PRELOAD) is opened by the first IMS system to complete its control region initialization. IMS will not attempt to preopen the area for any other IMS.

SHARELVL(1)

One updater, many readers: in a data sharing environment, a SHARELVL(1) area with the PREOPEN option is preopened by all sharing IMS systems. The first IMS system to complete its control region initialization has update authorization; all others have read authorization.

If the SHARELVL(1) area is a VSO area, it is allocated to a data space by any IMS that opens the area. If the area is defined as VSO PREOPEN or VSO PRELOAD, it is allocated to a data space by all sharing IMS systems.

If the area is defined as VSO NOPREO NOPREL, it is allocated to a data space by all IMS systems, as each opens the area. The first IMS to access the area has update authorization; all others have read authorization.

SHARELVL(2)

Block-level sharing: a SHARELVL(2) area with at least one coupling facility structure name (CFSTR1) defined is shared at the block or control interval

Fast Path Virtual Storage Option

(CI) level within the scope of a single IRLM. Multiple IMS systems can be authorized for update or read processing if they are using the same IRLM.

SHARELVL(3)

Block-level sharing: a SHARELVL(3) area with at least one coupling facility structure name (CFSTR1) defined is shared at the block or control interval (CI) level within the scope of multiple IRLMs. Multiple IMS systems can be authorized for nonexclusive access.

Attention: Be careful when registering a VSO area as SHARELVL(1). Those systems that receive read-only authorization never see the updates made by the read/write system because all reads come from the data space (not from DASD, where updates are eventually written).

Input/Output Processing With VSO

This topic describes how IMS uses buffers, data spaces, and DASD in response to read and update requests.

Input Processing

When an application program issues a read request to a VSO area, IMS checks to see if the data is in the data space. If the data is in the data space, it is copied from the data space into a common buffer and passed back to the application. If the data is not in the data space, IMS reads the CI from the area data set on DASD into a common buffer, copies the data into the data space, and passes the data back to the application.

For SHARELVL(2|3) VSO areas, Fast Path uses private buffer pools. Buffer lookaside is an option for these buffer pools. When a read request is issued against a SHARELVL(2|3) VSO area using a lookaside pool, a check is made to see if the requested data is in the pool. If the data is in the pool, a validity check to XES is made. If the data is valid, it is passed back to the application from the local buffer. If the data is not found in the local buffer pool or XES indicates that the data in the pool is not valid, the data is read from the coupling facility structure and passed to the application. When the buffer pool specifies the no-lookaside option, every request for data goes to the coupling facility.

For those areas that are defined as load-on-demand (using the VSO and NOPREL options), the first access to the CI is from DASD. The data is copied to the data space and then subsequent reads for this CI retrieve the data from the data space rather than from DASD. For those areas that are defined using the VSO and PRELOAD options, all access to CIs comes from the data space.

Whether the data comes from DASD or from the data space is transparent to the processing done by application programs.

Output Processing

During phase 1 of synchronization point processing VSO data is treated the same as non-VSO data. The use of VSO is transparent to logging.

During phase 2 of the synchronization point processing VSO and non-VSO data are treated differently. For VSO data, the updated data is copied to the data space, the lock is released and the buffer is returned to the available queue. The relative byte address (RBA) of the updated CI is maintained in a bitmap. If the RBA is already in the bitmap from a previous update, only one copy of the RBA is kept. At interval timer, the updated CIs are written to DASD. This batching of updates reduces the amount of output processing for CIs that are frequently updated.

While the updates are being written to DASD, they are still available for application programs to read or update because copies of the data are made within the data space just before it is written.

For SHARELVL(2|3) VSO areas, the output thread process is used to write updated CIs to the coupling facility structures. When the write is complete, the lock is released. XES maintains the updated status of the data in the directory entry for the CI.

The PRELOAD Option

The loading of one area takes place asynchronously with the loading of any others. The loading of an area is (or can be) concurrent with an application program's accesses to that area. If the CI requested by the application program has been loaded into the data space, it is retrieved from the data space. If the requested CI has not yet been loaded into the data space, it is obtained from DASD and UOW locking is used to maintain data integrity.

The preload process for SHARELVL(2|3) VSO areas is similar to that of SHARELVL(0|1). Multiple preloads can be run concurrently, and also concurrent with application processing. The locking, however, is different. SHARELVL(2|3) Areas that are loaded into coupling facility structures use CI locking instead of UOW locking. The load process into the coupling facility is done one CI at a time.

If a read error occurs during preloading, an error message flags the error, but the preload process continues. If a subsequent application program call accesses a CI that was not loaded into the data space due to a read error, the CI request goes out to DASD. If the read error occurs again, the application program receives an "A0" status code, just as with non-VSO applications. If instead the access to DASD is successful this time, the CI is loaded into the data space.

I/O Error Processing

Using VSO increases the availability of data when write errors occur. When a CI for a VSO area has been put into a data space, the CI is available from that data space as long as IMS is active, even if a write error occurs when an update to the CI is being written to DASD.

Write Errors: When a write error occurs, IMS create an error queue element (EQE) for the CI in error. For VSO areas, all read requests are satisfied by reading the data from the data space. Therefore, as long as the area continues to reside in the data space, the CI that had the write error continues to be available. When the area is removed from the data space, the CI is no longer available and any request for the CI receives an "AO" status code.

Read Errors: For VSO areas, the first access to a CI causes it to be read from DASD and copied into the data space. From then on, all read requests are satisfied from the data space. If there is a read error from the data space, z/OS abends.

For VSO areas that have been defined with the PRELOAD option, the data is preloaded into the data space; therefore, all read requests are satisfied from the data space.

Related Reading: See "The PRELOAD Option" for a discussion of read error handling during the preload process.

To provide for additional availability, SHARELVL(2|3) VSO areas support multiple structures per area. If a read error occurs from one of the structures, the read is

Fast Path Virtual Storage Option

attempted from the second structure. If there is only one structure defined and a read error occurs, an AO status code is returned to the application.

There is a maximum of three read errors allowed from a structure. When the maximum is reached and there is only one structure defined, the area is stopped and the structure is disconnected.

When the maximum is reached and there are two structures defined, the structure in error is disconnected. The one remaining structure is used. If a write error to a structure occurs, the CI in error is deleted from the structure and written to DASD. The delete of the CI is done from the sharing partners. If none of the sharers can delete the CI from the structure, an EQE is generated and the CI is deactivated. A maximum of three write errors are allowed to a structure. If there are two structures defined and one of them reaches the maximum allowed, it is disconnected.

Checkpoint Processing

During a system checkpoint, all of the VSO area updates that are in the data space are written to DASD. All of the updated CIs in the CF structures are also written to DASD. Only CIs that have been updated are written. Also, all updates that are in progress are allowed to complete before checkpoint processing continues.

VSO Options Across IMS Restart

For all types of IMS restart except XRF takeover (cold start, warm start, emergency restart, COLDBASE, COLDCOMM and COLDSYS emergency restart), the VSO options in effect after restart are those defined to DBRC. In the case of the XRF takeover, the VSO options in effect after the takeover are the same as those in effect for the active IMS prior to the failure that caused the XRF takeover.

Emergency Restart Processing

Recovery of VSO areas across IMS or z/OS failures is similar to recovery of existing non-VSO areas. IMS examines the log records, from a previous system checkpoint to the end of the log, to determine if there are any committed updates that were not written to DASD before the failure. If any such committed updates are found, IMS will REDO them (apply the update to the CI and write the updated CI to DASD). Because VSO updates are batched together during normal processing, VSO areas are likely to require more REDO processing than non-VSO areas.

During emergency restart log processing, IMS tracks VSO area updates differently depending on the share level of the VSO area. For share levels 0 and 1, IMS uses data spaces to track VSO area updates. For share levels 2 and 3, IMS uses a buffer in memory to track VSO area updates.

IMS also obtains a single non-DREF data space which it releases at the end of restart. If restart log processing is unable to get the data space or main storage resources it needs to perform VSO REDO processing, the area is stopped and marked as "recovery needed".

By default, at the end of emergency restart, IMS opens areas defined with the PREOPEN or PRELOAD options. IMS then loads areas with the PRELOAD option into a data space or coupling facility structure. You can alter this behavior by using the FPOPN keyword of the IMS procedure to have IMS restore all VSO DEDB areas to their open or closed state at the time of the failure.

Related Reading: For more information on specifying how IMS reopens DEDB areas during an emergency restart, see “Reopening DEDB Areas During an Emergency Restart” on page 127.

VSO areas without the PREOPEN or PRELOAD options are assigned to a data space during the first access following emergency restart.

After an emergency restart, the VSO options and PREOPEN|NOPREO options in effect for an area are those that are defined to DBRC, which may not match those in effect at the time of the failure. For example, a non-shared VSO area removed from virtual storage by the /VUNLOAD command before the failure, is restored to the data space after the emergency restart. For shared VSO areas, the area remains unloaded until the next /STA AREA command is issued for it.

VSO Options with XRF

During the tracking and takeover phases on the alternate IMS, log records are processed in the same manner as during active IMS emergency restart (from a previous active system checkpoint to the end of the log). The alternate IMS uses the log records to determine which areas have committed updates that were not written to DASD before the failure of the active IMS. If any such committed updates are found, the alternate will REDO them, following the same process as for active IMS emergency restart.

Related Reading: See “Emergency Restart Processing” on page 164 for information on restart and REDO.

During tracking, the alternate uses data spaces to track VSO area updates: in addition to the data space resources used for VSO areas, the alternate obtains a single non-DREF data space which it releases at the end of takeover. If XRF tracking or takeover is unable to get the data space or main storage resources it needs to perform VSO REDO processing, the area is stopped and marked “recovery needed”.

Following an XRF takeover, areas that were open or in the data space remain open or in the data space. The VSO options and PREOPEN|NOPREO options that were in effect for the active IMS before the takeover remain in effect on the alternate (the new active) after the takeover. Note that these options may not match those defined to DBRC. For example, a VSO area removed from virtual storage by the /VUNLOAD command before the takeover is *not* restored to the data space after the takeover.

VSO areas defined with the preload option are preloaded at the end of the XRF takeover. In most cases, dependent regions can access the area before preloading begins, but until preloading completes, some area read requests may have to be retrieved from DASD.

Fast Path Synchronization Points

MSDBs and DEDBs are not updated during application program processing, but the updates are kept in buffers until a sync point. Output messages are not sent until the message response is logged. The Fast Path sync point is defined as the next GU call for a message-driven program, or a SYNC or CHKP call for a BMP using Fast Path facilities. Sync point processing occurs in two phases.

Phase 1 - Build Log Record

DEDB updates and verified MSDB records are written in system log records. All DEDB updates for the current sync point are chained together as a series of log records. Resource contentions, deadlocks, out-of-space conditions, and MSDB verify failures are discovered here.

Phase 2 - Write Record to System Log

Database and message records are written to the IMS system log. After logging, MSDB records are updated, the DEDB updates begin, and messages are sent to the terminals. DEDB updates are applied with a type of asynchronous processing called an output thread. Until the DEDB changes are made, any program that tries to access unwritten segments is put in a wait state.

If, during application processing, a Fast Path program issues a call to a database other than MSDB or DEDB, or to an alternate PCB, the processing is serialized with full function events. This can affect the performance of the Fast Path program. In the case of a BMP or MPP making a call to a Fast Path database, the Fast Path resources are held, and the throughput for Fast Path programs needing these resources can be affected.

Managing I/O Errors and Long Wait Times

When a database write I/O error occurs in single area data sets (ADS), IMS copies the buffer contents of the error control interval (CI) to a virtual buffer. A subsequent DL/I request causes the error CI to be read back into the buffer pool. The write error information and buffers are maintained across restarts, allowing recovery to be deferred to a convenient time. I/O error retry is automatically performed at database close time and at system checkpoint. If the retry is successful, the error condition no longer exists and recovery is not needed.

When a database read I/O error occurs, IMS creates a non-permanent EQE associated with the area data set (ADS) recording the RBA of the error. If there are other ADSs available, IMS retries the read using a different ADS. If there is only a single ADS, or if the read fails on all ADSs, the application program receives an 'AO' status code. The presence of the EQE prevents subsequent access to the same CI in this ADS. Any attempt to access the CI receives an immediate I/O error indication.

For MADS, the I/O is attempted against a different ADS. Up to three distinct I/O errors can be recorded per ADS. On the fourth error, IMS internally stops the ADS. If this is the only ADS for the area, the area is stopped.

EQEs are temporary and do not persist across IMS restarts or the opening and closing of an area. EQEs are not recorded in DBRC or in the DMAC on DASD. A write error eliminates the read EQEs and resets the counter.

The process to create the read EQE also reads the DMAC (second CI) from DASD. If the DMAC read fails, which it might if the failure is device level, IMS internally stops the ADS. ADS stop processing involves a physical close of the area, which involves a DMAC (second CI) write. If this process fails, and the ADS being closed is the only ADS for the area, the area is stopped and flagged in DBRC as 'recovery needed'.

Multiple Area Data Sets I/O Timing (MADSIOT) helps you avoid the excessively long wait times (also known as a *long busy*) that can occur while a RAMAC disk array performs internal recovery processing.

Restriction: MADSIOT applies only to multiple area data sets (MADS). For single area data sets (ADS), IMS treats the long busy condition as a permanent I/O error handled by the Fast Path I/O toleration function. The MADSIOT function works only on a system that supports the long busy state.

To invoke MADSIOT, you must define the MADSIOT keyword on the DFSVSMxx PROCLIB member. The /STA MADSIOT and /DIS AREA MADSIOT commands serve to start and monitor the MADSIOT function.

Additionally, MADSIOT requires the use of a Coupling Facility (CFLEVEL=1 or later) list structure in a sysplex environment. MADSIOT uses this Coupling Facility to store information required for DB recovery. You must use the CFRM policy to define the list structure name, size, attributes, and location.

Table 15 shows the required CFRM list structure storage sizes when CFLEVEL=12 and the number of changed CIs is 1 000, 5 000, 20 000, and 30 000. The storage sizes differ at different CFLEVELs.

Table 15. Required CFRM List Structure Storage Sizes for CFLEVEL=12

Altered number of CIs (entrynum)	Required Storage Size (listheadernum=50)
1 000	1 792 KB
5 000	3 584 KB
20 000	11 008 KB
30 000	15 616 KB

You can estimate CFRM list structure storage sizes tailored to your installation using an online tool: the IBM S/390® Coupling Facility Structure Sizer Tool (CFSizer). CFSizer is available for you to use at the following web site:

www.ibm.com/servers/eserver/zseries/cfsizer/, or search for “CFSizer” at the IBM web site, www.ibm.com.

Related Reading:

- For additional information on the MADSIOT keyword, see the topic on the DFSVSMxx PROCLIB member in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- For an example of defining CFRM policies, see the *IMS Version 9: Common Queue Server Guide and Reference*.
- For information on the /STA MADSIOT and /DIS AREA MADSIOT commands, see the *IMS Version 9: Command Reference*.

Registering Fast Path Databases in DBRC

Although databases need not be registered in DBRC in order for the error handling to work, registration is highly recommended. If an error occurs on a database not registered and the system stops, the database could be damaged if the system is restarted and a /DBR command is not issued prior to accessing the database. The

DBRC Registration

restart causes the error buffers to be restored as they were when the system stopped. If the same block had been updated during the batch run, the batch update would be overlaid.

Chapter 8. Choosing Optional Database Functions

After you have determined the type of database that best suits your application's processing requirements, you are ready to determine which additional IMS functions you need to use.

This chapter explains the following functions and describes when and how to use them:

- "Logical Relationships" on page 204
- "Secondary Indexes" on page 204
- "Choosing Secondary Indexes Versus Logical Relationships" on page 226
- "Variable-Length Segments" on page 227
- "Segment Edit/Compression Exit Routine" on page 230
- "Data Capture Exit Routines" on page 233
- "Field-Level Sensitivity" on page 238
- "Multiple Data Set Groups" on page 248
- "VSAM KSDS CI Reclaim For Full-Function Databases" on page 254
- "Integrated HALDB Online Reorganization Function" on page 255
- "Storing XML Data in IMS Databases" on page 255

Notes:

1. These functions do not apply to GSAM, MSDB, HSAM, and SHSAM databases.
2. Only the variable-length segment function, the Segment Edit/Compression exit routine, and the Data Capture exit routine apply to DEDBs.

Logical Relationships

The following database types support logical relationships:

- HISAM
- HDAM
- PHDAM
- HIDAM
- PHIDAM

Logical relationships resolve conflicts in the way application programs need to view segments in the database. With logical relationships, application programs can access:

- Segment types in an order other than the one defined by the hierarchy
- A data structure that contains segments from more than one physical database.

An alternative to using logical relationships to resolve the different needs of applications is to create separate databases or carry duplicate data in a single database. However, in both cases this creates duplicate data. Avoid duplicate data because:

- Extra maintenance is required when duplicate data exists because both sets of data must be kept up to date. In addition, updates must be done simultaneously to maintain data consistency.
- Extra space is required on DASD to hold duplicate data.

Logical Relationships

By establishing a path between two segment types, logical relationships eliminate the need to store duplicate data. To establish a logical relationship, three segment types are always defined:

- A physical parent
- A logical parent
- A logical child

Example: Two databases, one for orders that a customer has placed and one for items that can be ordered, are called ORDER and ITEM. The ORDER database contains information about customers, orders, and delivery. The ITEM database contains information about inventory.

If an application program needs data from both databases, this can be done by defining a logical relationship between the two databases. As shown in Figure 79, a path can be established between the ORDER and ITEM databases using a segment type, called a logical child segment, that points into the ITEM database. Figure 79 is a simple implementation of a logical relationship. In this case, ORDER is the physical parent of ORDITEM. ORDITEM is the physical child of ORDER and the logical child of ITEM.

In a logical relationship, there is a logical parent segment type and it is the segment type pointed to by the logical child. In this example, ITEM is the logical parent of ORDITEM. ORDITEM establishes the path or connection between the two segment types. If an application program now enters the ORDER database, it can access data in the ITEM database by following the pointer in the logical child segment from the ORDER to the ITEM database.

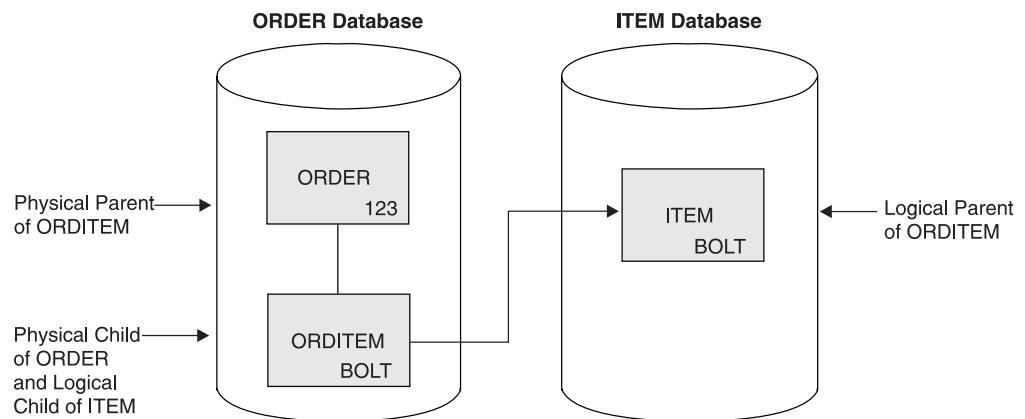


Figure 79. A Simple Logical Relationship

The physical parent and logical parent are the two segment types between which the path is established. The logical child is the segment type that establishes the path. The path established by the logical child is created using pointers.

Logical Relationship Types

Three types of logical relationships are discussed in this topic:

- Unidirectional logical relationships
- Bidirectional physically paired logical relationships
- Bidirectional virtually paired logical relationships

Unidirectional Logical Relationships

A unidirectional relationship links two segment types, a logical child and its logical parent, in one direction. A one-way path is established using a pointer in the logical child. Figure 80 shows a unidirectional relationship that has been established between the ORDER and ITEM databases. A unidirectional relationship can be established between two segment types in the same or different databases. Typically, however, a unidirectional relationship is created between two segment types in different databases. In the figure, the logical relationship can be used to cross from the ORDER to the ITEM database. It cannot be used to cross from the ITEM to the ORDER database, because the ITEM segment does not point to the ORDER database.

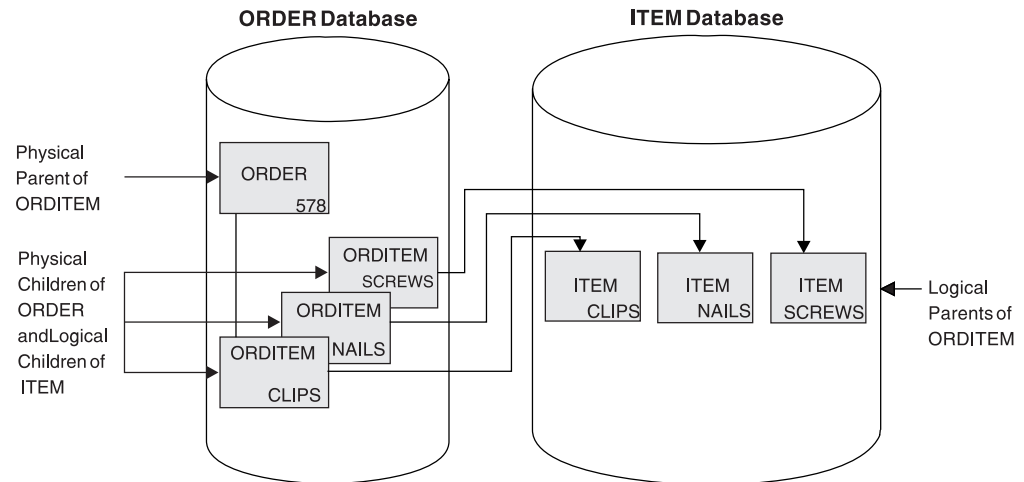


Figure 80. Unidirectional Logical Relationship

It is possible to establish two unidirectional relationships, as shown in Figure 81 on page 172. Then either physical database can be entered and the logical child in either can be used to cross to the other physical database. However, IMS treats each unidirectional relationship as a one-way path. It does not maintain data on both paths. If data in one database is inserted, deleted, or replaced, the corresponding data in the other database is not updated. If, for example, DL/I replaces ORDITEM-SCREWS under ORDER-578, ITEMORD-578 under ITEM-SCREWS is not replaced. This maintenance problem does not exist in both bidirectional physically paired-logical and bidirectional virtually paired-logical relationships. Both relationship types are discussed next. IMS allows either physical database to be entered and updated and automatically updates the corresponding data in the other database.

Logical Relationships

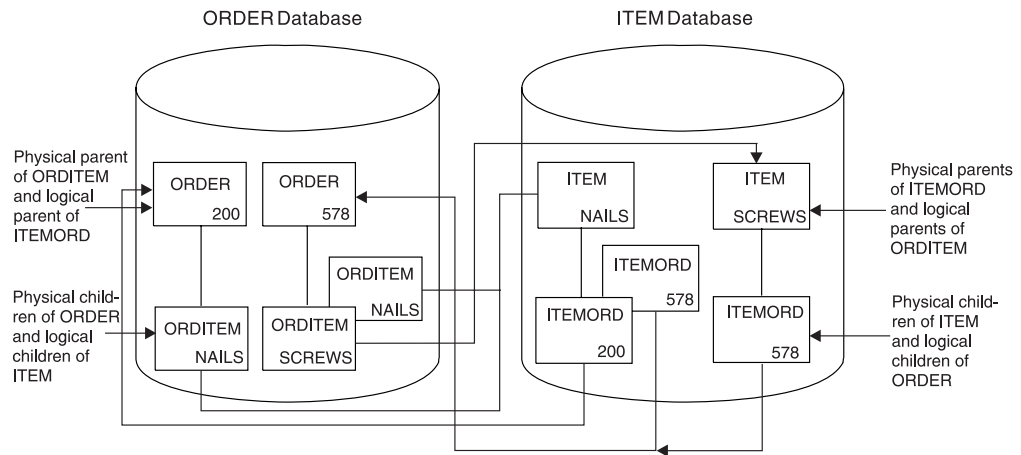


Figure 81. Two Unidirectional Logical Relationships

Bidirectional Physically Paired Logical Relationship

A bidirectional physically paired relationship links two segment types, a logical child and its logical parent, in two directions. A two-way path is established using pointers in the logical child segments. Figure 82 shows a bidirectional physically paired logical relationship that has been established between the ORDER and ITEM databases.

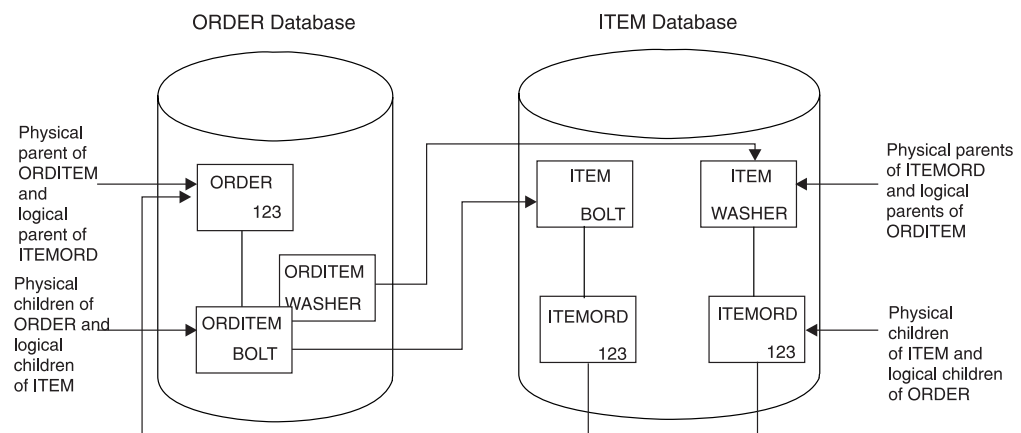


Figure 82. Bidirectional Physically Paired Logical Relationship

Like the other types of logical relationships, a physically paired relationship can be established between two segment types in the same or different databases. The relationship shown in Figure 82 allows either the ORDER or the ITEM database to be entered. When either database is entered, a path exists using the logical child to cross from one database to the other.

In a physically paired relationship, a logical child is stored in both databases. However, if the logical child has dependents, they are only stored in one database. For example, IMS maintains data in both paths in physically paired relationships. In Figure 82 if ORDER 123 is deleted from the ORDER database, IMS deletes from the ITEM database all ITEMORD segments that point to the ORDER 123 segment. If data is changed in a logical child segment, IMS changes the data in its paired

logical child segment. Or if a logical child segment is inserted into one database, IMS inserts a paired logical child segment into the other database.

With physical pairing, the logical child is duplicate data, so there is some increase in storage requirements. In addition, there is some extra maintenance required because IMS maintains data on two paths. In the next type of logical relationship examined, this extra space and maintenance do not exist; however, IMS still allows you to enter either database. IMS also performs the maintenance for you.

Bidirectional Virtually Paired Logical Relationship

A bidirectional virtually paired relationship is like a bidirectional physically paired relationship in that:

- It links two segment types, a logical child and its logical parent, in two directions, establishing a two-way path.
- It can be established between two segment types in the same or different databases.

Figure 83 shows a bidirectional virtually paired relationship between the ORDER and ITEM databases. Note that although there is a two-way path, a logical child segment exists only in the ORDER database. Going from the ORDER to the ITEM database, IMS uses the pointer in the logical child segment. Going from the ITEM to the ORDER database, IMS uses the pointer in the logical parent, as well as the pointer in the logical child segment.

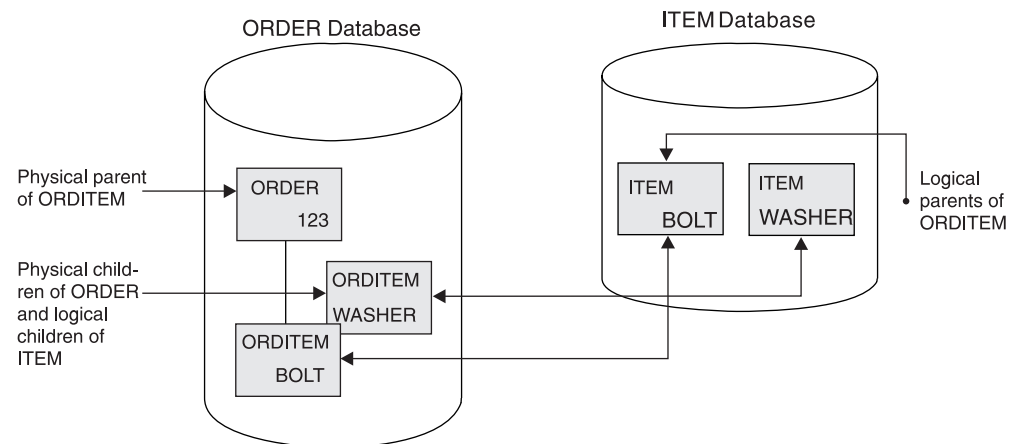


Figure 83. Bidirectionally Virtually Paired Logical Relationship

To define a virtually paired relationship, two logical child segment types are defined in the physical databases involved in the logical relationship. Only one logical child is actually placed in storage. The logical child defined and put in storage is called the *real logical child*. The logical child defined but not put in storage is called the *virtual logical child*.

IMS maintains data in both paths in a virtually paired relationship. However, because there is only one logical child segment, maintenance is simpler than it is in a physically paired relationship. When, for instance, a new ORDER segment is inserted, only one logical child segment has to be inserted. For a replace, the data only has to be changed in one segment. For a delete, the logical child segment is deleted from both paths.

Note the trade-off between physical and virtual pairing. With virtual pairing, there is no duplicate logical child and maintenance of paired logical children. However, virtual pairing requires the use and maintenance of additional pointers, called logical twin pointers.

Logical Relationship Pointer Types

In all logical relationships the logical child establishes a path between two segment types. The path is established by use of pointers. The following topics look at pointing in logical relationships and the four types of pointers that you can specify for logical relationships:

- “Logical Parent Pointer”
- “Logical Child Pointer” on page 176
- “Physical Parent Pointer” on page 177
- “Logical Twin Pointer” on page 178
- “Indirect Pointers” on page 179

For HALDBs, consider the following:

- Logical relationships are not allowed between HALDBs and non-HALDBs.
- Direct pointers and indirect pointers are used. See “Indirect Pointers” on page 179.
- Unidirectional relationships and bidirectional, physically paired relationships are supported for HALDBs.
- Physical parent pointers are always present in PHDAM and PHIDAM segments.

Logical Parent Pointer

The pointer from the logical child to its logical parent is called a logical parent (LP) pointer. This pointer must be a symbolic pointer when it is pointing into a HISAM database. It can be either a *direct* or a *symbolic* pointer when it is pointing into an HDAM or a HIDAM database. PHDAM or PHIDAM databases require direct pointers.

A direct pointer consists of the direct address of the segment being pointed to, and it can only be used to point into a database where a segment, once stored, is not moved. This means the logical parent segment must be in an HD (HDAM, PHDAM, HIDAM, or PHIDAM) database, since the logical child points to the logical parent segment. The logical child segment, which contains the pointer, can be in a HISAM or an HD database except in the case of HALDB. In the HALDB case, the logical child segment must be in an HD (PHDAM or PHIDAM) database. A direct LP pointer is stored in the logical child's prefix, along with any other pointers, and is four bytes long. Figure 84 on page 175 shows the use of a direct LP pointer. In a HISAM database, pointers are not required between segments because they are stored physically adjacent to each other in hierarchic sequence. Therefore, the only time direct pointers will exist in a HISAM database is when there is a logical relationship using direct pointers pointing into an HD database.

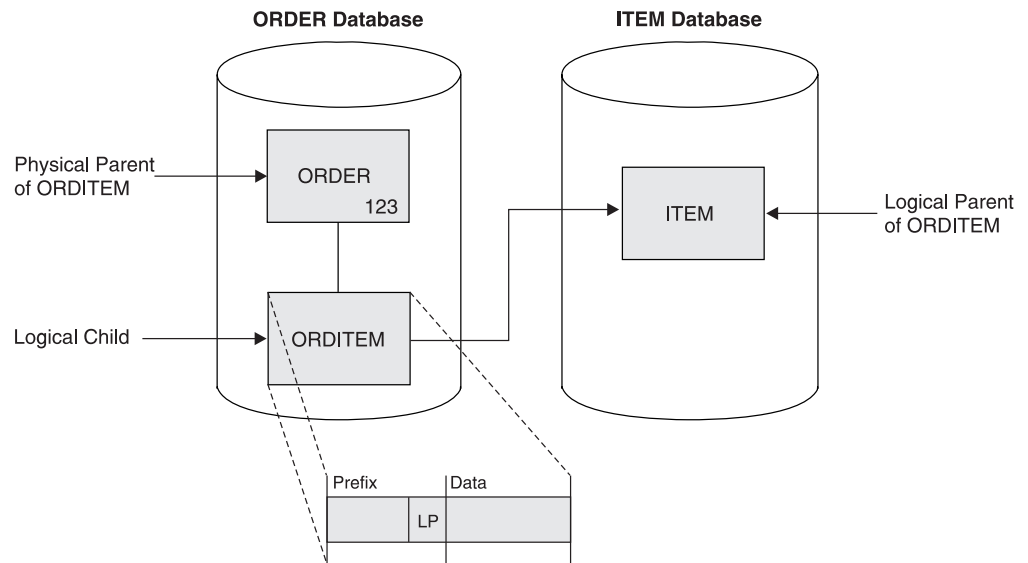


Figure 84. Direct Logical Parent (LP) Pointer

In Figure 84, the direct LP pointer points from the logical child ORDITEM to the logical parent ITEM. Because it is direct, the LP pointer can only point to an HD database. However, the LP pointer can “exist” in a HISAM or an HD database. The LP pointer is in the prefix of the logical child and consists of the 4-byte direct address of the logical parent.

A symbolic LP pointer, which consists of the logical parent's concatenated key (LPCK), can be used to point into a HISAM or HD database. Figure 85 on page 176 illustrates how to use a symbolic LP pointer. The logical child ORDITEM points to the ITEM segment for BOLT. BOLT is therefore stored in ORDITEM in the LPCK. A symbolic LP pointer is stored in the first part of the data portion in the logical child segment.

Note: The LPCK part of the logical child segment is considered non-replaceable and is not checked to see whether the I/O area is changed. When the LPCK is virtual, checking for a change in the I/O area causes a performance problem. Changing the LPCK in the I/O area does not cause the REPL call to fail. However, the LPCK is not changed in the logical child segment.

With symbolic pointers, if the database the logical parent is in is HISAM or HIDAM, IMS uses the symbolic pointer to access the index to find the correct logical parent segment. If the database containing the logical parent is HDAM, the symbolic pointer must be changed by the randomizing module into a block and RAP address to find the logical parent segment. IMS accesses a logical parent faster when direct pointing is used.

Although the figures show the LP pointer in a unidirectional relationship, it works exactly the same way in all three types of logical relationships.

Figure 85 on page 176 shows an example of a symbolic logical parent pointer.

Logical Relationships

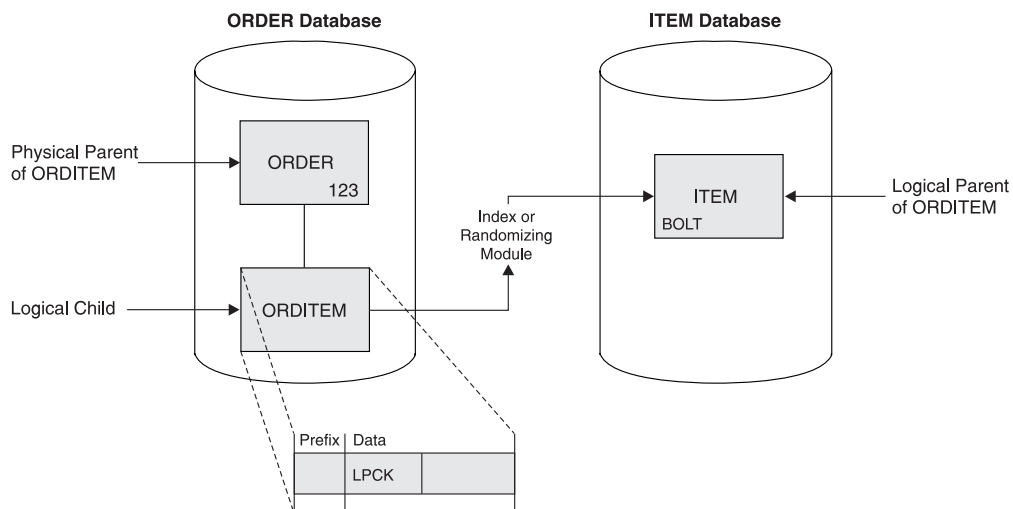


Figure 85. Symbolic Logical Parent (LP) Pointer

In Figure 85, the *symbolic* LP pointer points from the logical child ORDITEM to the logical parent ITEM. With symbolic pointing, the ORDER and ITEM databases can be either HISAM or HD. The LPCK, which is in the first part of the data portion of the logical child, functions as a pointer from the logical child to the logical parent, and is the pointer used in the logical child.

Logical Child Pointer

Logical child pointers are only used in logical relationships with virtual pairing. When virtual pairing is used, there is only one logical child on DASD, called the real logical child. This logical child has an LP pointer. The LP pointer can be symbolic or direct. In the ORDER and ITEM databases you have seen, the LP pointer allows you to go from the database containing the logical child to the database containing the logical parent. To enter either database and cross to the other with virtual pairing, you use a logical child pointer in the logical parent. Two types of logical child pointers can be used:

- Logical child first (LCF) pointers, or
- The *combination* of logical child first (LCF) and logical child last (LCL) pointers

The LCF pointer points from a logical parent to the first occurrence of each of its logical child types. The LCL pointer points to the last occurrence of the logical child segment type for which it is specified. A LCL pointer can only be specified in conjunction with a LCF pointer. Figure 86 on page 177 shows the use of the LCF pointer. These pointers allow you to cross from the ITEM database to the logical child ORDITEM in the ORDER database. However, although you are able to cross databases using the logical child pointer, you have only gone from ITEM to the logical child ORDITEM. To go to the ORDER segment, use the physical parent pointer explained in “Physical Parent Pointer” on page 177.

LCF and LCL pointers are direct pointers. They contain the 4-byte direct address of the segment to which they point. This means the logical child segment, the segment being pointed to, must be in an HD database. The logical parent can be in a HISAM or HD database. If the logical parent is in a HISAM database, the logical child segment must point to it using a symbolic pointer. LCF and LCL pointers are stored in the logical parent's prefix, along with any other pointers. Figure 86 shows a LCF pointer.

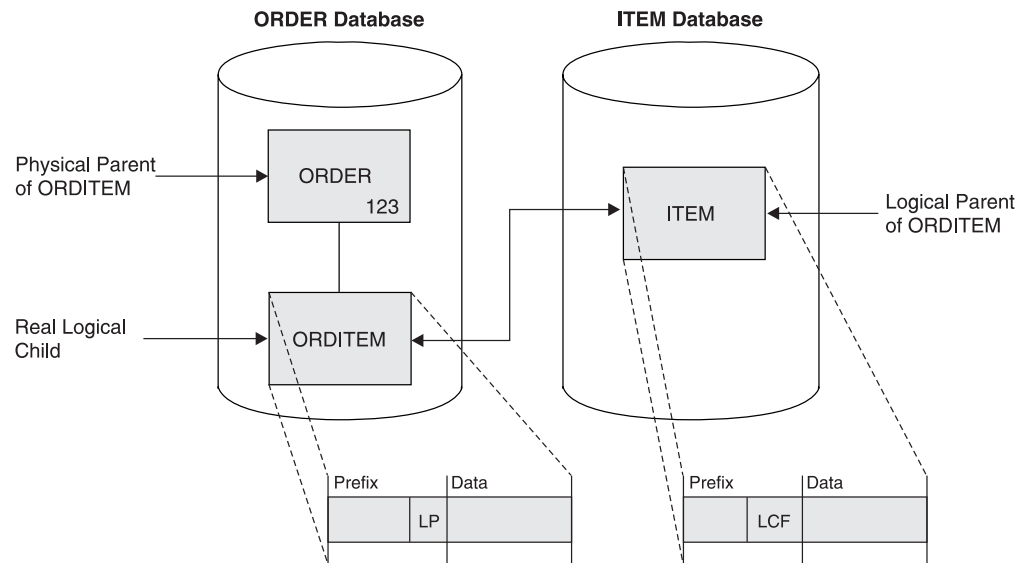


Figure 86. Logical Child First (LCF) Pointer (Used in Virtual Pairing Only)

In Figure 86, the LCF pointer points from the logical parent ITEM to the logical child ORDITEM. Because it is a direct pointer, it can only point to an HD database, although, it can exist in a HISAM or an HD database. The LCF pointer is in the prefix of the logical parent and consists of the 4-byte RBA of the logical child.

Physical Parent Pointer

Physical parent (PP) pointers point from a segment to its physical parent. They are generated automatically by IMS for all HD databases involved in logical relationships. PP pointers are put in the prefix of all logical child and logical parent segments. They are also put in the prefix of all segments on which a logical child or logical parent segment is dependent in its physical database. This creates a path from a logical child or its logical parent back up to the root segment on which it is dependent. Because all segments on which a logical child or logical parent is dependent are chained together with PP pointers to a root, access to these segments is possible in reverse of the usual order.

In Figure 86, you saw that you could cross from the ITEM to the ORDER database when virtual pairing was used, and this was done using logical child pointers. However, the logical child pointer only got you from ITEM to the logical child ORDITEM. Figure 87 on page 178 shows how to get to ORDER. The PP pointer in ORDITEM points to its physical parent ORDER. If ORDER and ITEM are in an HD database but are not root segments, they (and all other segments in the path of the root) would also contain PP pointers to their physical parents.

PP pointers are direct pointers. They contain the 4-byte direct address of the segment to which they point. PP pointers are stored in a logical child or logical parent's prefix, along with any other pointers.

Logical Relationships

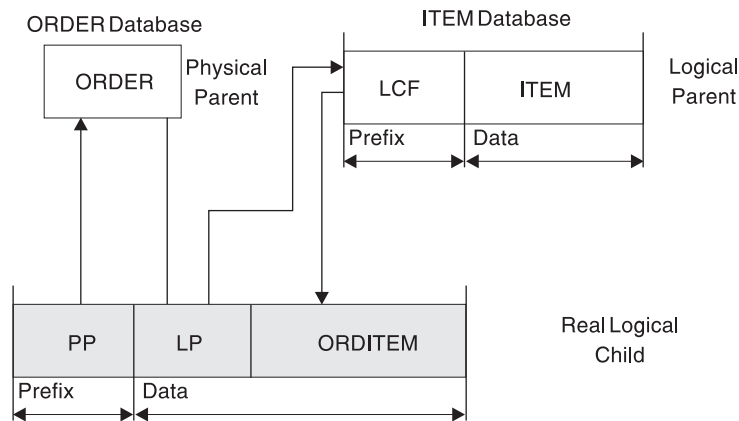


Figure 87. Physical Parent (PP) Pointer

In Figure 87, the PP pointer points from the logical child ORDITEM to its physical parent ORDER. It is generated automatically by IMS for all logical child and logical parent segments in HD databases. In addition, it is in the prefix of the segment that contains it and consists of the 4-byte direct address of its physical parent. PP pointers are generated in all segments from the logical child or logical parent back up to the root.

Logical Twin Pointer

Logical twin pointers are used only in logical relationships with virtual pairing. Logical twins are multiple logical child segments that point to the same occurrence of a logical parent. Two types of logical twin pointers can be used:

- Logical twin forward (LTF) pointers, or
- The combination of logical twin forward (LTF) and logical twin backward (LTB) pointers

An LTF pointer points from a specific logical twin to the logical twin stored after it. An LTB pointer can only be specified in conjunction with an LTF pointer. When specified, an LTB points from a given logical twin to the logical twin stored before it. Logical twin pointers work in a similar way to the physical twin pointers used in HD databases. As with physical twin backward pointers, LTB pointers improve performance on delete operations. They do this when the delete that causes DASD space release is a delete from the physical access path. Similarly, PTB pointers improve performance when the delete that causes DASD space release is a delete from the logical access path.

Figure 88 on page 179 shows use of the LTF pointer. In this example, ORDER 123 has two items: bolt and washer. The ITEMORD segments beneath the two ITEM segments use LTF pointers. If the ORDER database is entered, it can be crossed to the ITEMORD segment for bolts in the ITEM database. Then, to retrieve all items for ORDER 123, the LTF pointers in the ITEMORD segment can be followed. In Figure 88 only one other ITEMORD segment exists, and it is for washers. The LTF pointer in this segment, because it is the last twin in the chain, contains zeros.

LTB pointers on dependent segments improve performance when deleting a real logical child in a virtually paired logical relationship. This improvement occurs when the delete is along the physical path.

LTF and LTB pointers are direct pointers. They contain the 4-byte direct address of the segment to which they point. This means LTF and LTB pointers can only exist

in HD databases. Figure 88 shows a LTF pointer.

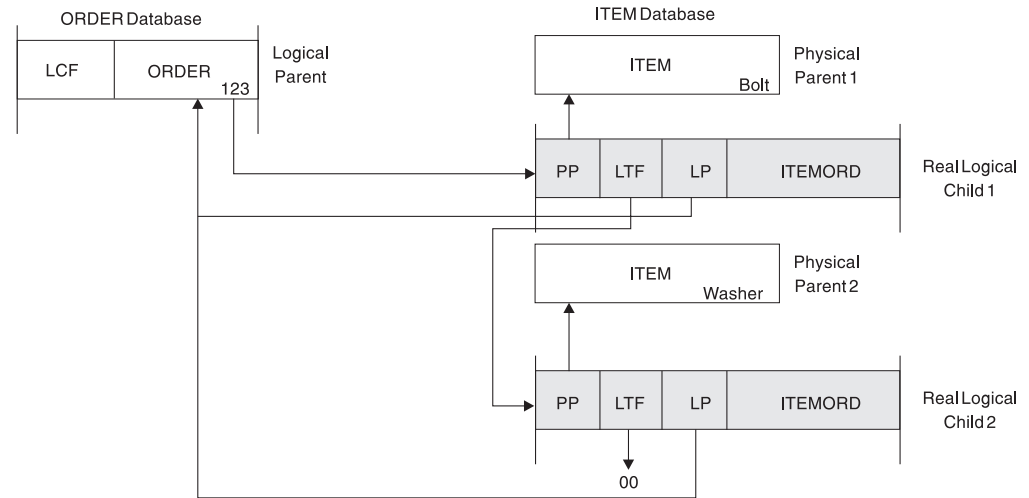


Figure 88. Logical Twin Forward (LTF) Pointer (Used in Virtual Pairing Only)

In Figure 88, the LTF pointer points from a specific logical twin to the logical twin stored after it. In this example, it points from the ITEMORD segment for bolts to the ITEMORD segment for washers. Because it is a direct pointer, the LTF pointer can only point to an HD database. The LTF pointer is in the prefix of a logical child segment and consists of the 4-byte RBA of the logical twin stored after it.

Indirect Pointers

HALDBs (PHDAM, PHIDAM, and PSINDEX databases) use direct and indirect pointers for pointing from one database record to another database record. Figure 89 shows how indirect pointers are used.

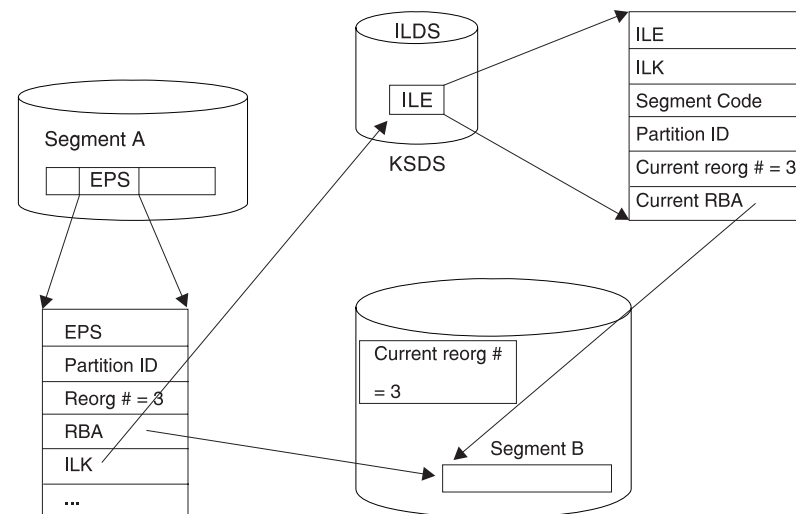


Figure 89. Self-healing Pointers

The use of indirect pointers prevents the problem of misdirected pointers that would otherwise occur when a database is reorganized.

The repository for the indirect pointers is the indirect list data set. The misdirected pointers after reorganization are self-healing using indirect pointers.

Related Reading: For a complete discussion of the self-healing pointer process, see “The HALDB Self-Healing Pointer Process” on page 401.

Paths in Logical Relationships

The relationship between physical parent and logical child in a physical database and the LP pointer in each logical child creates a physical parent to logical parent path. To define use of the path, the logical child and logical parent are defined as a concatenated segment type that is a physical child of the physical parent, as shown in Figure 90. Definition of the path and the concatenated segment type is done in what is called a logical database. The logical database is examined in “Specifying Logical Relationships in the Logical DBD” on page 194 and elsewhere in this chapter.

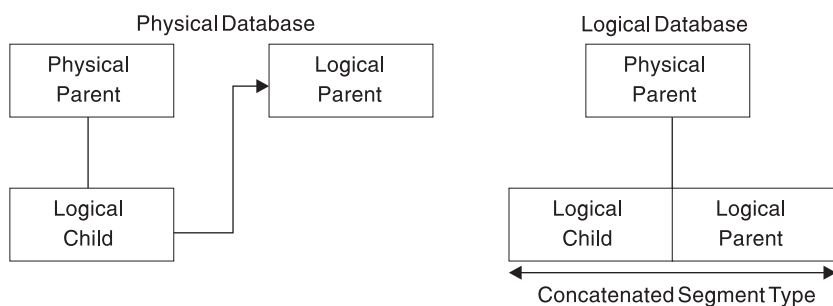


Figure 90. Defining a Physical Parent to Logical Parent Path in a Logical Database

In addition, when LC pointers are used in the logical parent and logical twin and PP pointers are used in the logical child, a logical parent to physical parent path is created. To define use of the path, the logical child and physical parent are defined as one concatenated segment type that is a physical child of the logical parent, as shown in Figure 91. Again, definition of the path is done in a logical database.

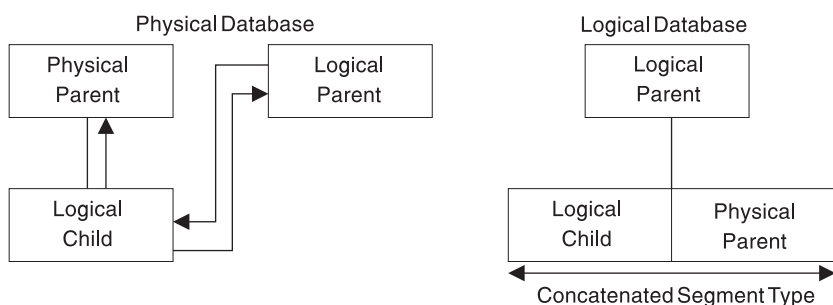


Figure 91. Defining a Logical Parent to Physical Parent Path in a Logical Database

When use of a physical parent to logical parent path is defined, the physical parent is the parent of the concatenated segment type. When an application program retrieves an occurrence of the concatenated segment type from a physical parent, the logical child and its logical parent are concatenated and presented to the application program as one segment. When use of a logical parent to physical parent path is defined, the logical parent is the parent of the concatenated segment type. When an application program retrieves an occurrence of the concatenated segment type from a logical parent, an occurrence of the logical child and its physical parent are concatenated and presented to the application program as one segment.

In both cases, the physical parent or logical parent segment included in the concatenated segment is called the *destination parent*. For a physical parent to logical parent path, the logical parent is the destination parent in the concatenated segment. For a logical parent to physical parent path, the physical parent is the destination parent in the concatenated segment.

The Logical Child Segment

When defining a logical child in its physical database, the length specified for it must be large enough to contain the concatenated key of the logical parent. Any length greater than that can be used for intersection data.

Related Reading For information about intersection data, see “Intersection Data” on page 182.

To identify which logical parent is pointed to by a logical child, the concatenated key of the logical parent must be present. Each logical child segment must be present in the application program's I/O area when the logical child is initially presented for loading into the database. However, if the logical parent is in an HD database, its concatenated key might not be written to storage when the logical child is loaded. If the logical parent is in a HISAM database, a logical child in storage must contain the concatenated key of its logical parent.

For logical child segments, you can define a special operand on the PARENT= parameter of the SEGM statement. This operand determines whether a symbolic pointer to the logical parent is stored as part of the logical child segment on the storage device. If PHYSICAL is specified, the concatenated key of the logical parent is stored with each logical child segment. If VIRTUAL is specified, only the intersection data portion of each logical child segment is stored.

When a concatenated segment is retrieved through a logical database, it contains the logical child segment, which consists of the concatenated key of the destination parent, followed by any intersection data. In turn, this is followed by data in the destination parent. Figure 92 shows the format of a retrieved concatenated segment in the I/O area. The concatenated key of the destination parent is returned with each concatenated segment to identify which destination parent was retrieved. IMS gets the concatenated key from the logical child in the concatenated segment or by constructing the concatenated key. If the destination parent is the logical parent and its concatenated key has not been stored with the logical child, IMS constructs the concatenated key and presents it to the application program. If the destination parent is the physical parent, IMS must always construct its concatenated key.

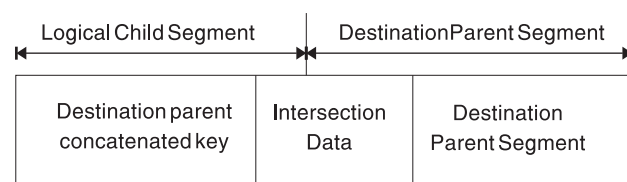


Figure 92. Format of a Concatenated Segment Returned to User I/O Area

Segment Prefix Information for Logical Relationships

There are two things that you should be aware of regarding the prefix of a segment involved in a logical relationship. First, IMS places pointers in the prefix

Logical Relationships

in a specific sequence and, second, IMS places a counter in the prefix for logical parents that do not have logical child pointers.

Sequence of Pointers in a Segment's Prefix

When a segment contains more than one type of pointer and is involved in a logical relationship, pointers are put in the segment's prefix in the following sequence:

1. HF
2. HB
3. PP
4. LTF
5. LTB
6. LP

Or:

1. TF
2. TB
3. PP
4. LTF
5. LTB
6. LP
7. PCF
8. PCL

Or:

1. TF
2. TB
3. PP
4. PCF
5. PCL
6. EPS

Multiple PCF and PCL pointers can exist in a segment type; however, more than one of the other types of pointers can not.

Counter Used in Logical Relationships

IMS puts a 4-byte counter in all logical parents that do not have logical child pointers. The counter is stored in the logical parent's prefix and contains a count of the number of logical children pointing to this logical parent. The counter is maintained by IMS and is used to handle delete operations properly. If the count is greater than zero, the logical parent cannot be deleted from the database because there are still logical children pointing to it.

Intersection Data

When two segments are logically related, data can exist that is unique to only that relationship. In Figure 93 on page 183, for example, one of the items ordered in ORDER 123 is 5000 bolts. The quantity 5000 is specific to this order (ORDER 123) and this item (bolts). It does not belong to either the order or item on its own. Similarly, in ORDER 123, 6000 washers are ordered. Again, this data is concerned only with that particular order and item combination.

This type of data is called intersection data, since it has meaning only for the specific logical relationship. The quantity of an item could not be stored in the ORDER 123 segment, because different quantities are ordered for each item in ORDER 123. Nor could it be stored in the ITEM segment, because for each item there can be several orders, each requesting a different quantity. Because the logical child segment links the ORDER and ITEM segments together, data that is unique to the relationship between the two segments can be stored in the logical child.

The two types of intersection data are: fixed intersection data (FID) and variable intersection data (VID).

Fixed Intersection Data

Data stored in the logical child is called fixed intersection data (FID). When symbolic pointing is used, it is stored in the data part of the logical child after the LPCK. When direct pointing is used, it is the only data in the logical child segment. Because symbolic pointing is used in Figure 93, BOLT and WASHER are the LPCK, and the 5000 and 6000 are the FID. The FID can consist of several fields, all of them residing in the logical child segment.

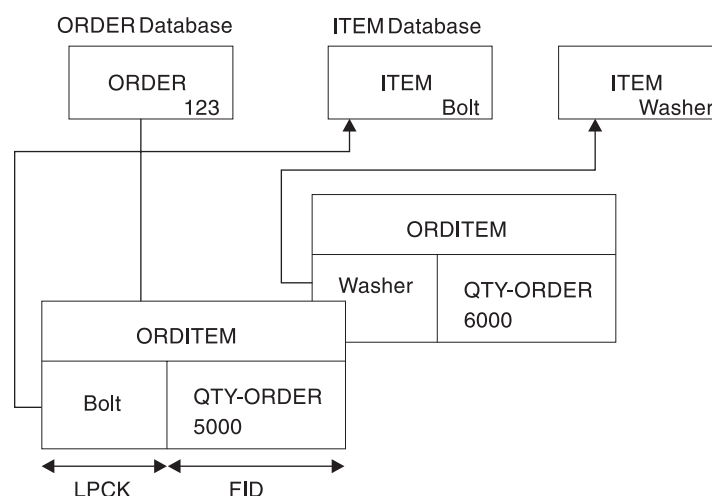


Figure 93. Fixed Intersection Data

Variable Intersection Data

VID is used when you have data that is unique to a relationship, but several occurrences of it exist. For example, suppose you cannot supply in one shipment the total quantity of an item required for an order. You need to store delivery data showing the quantity delivered on a specified date. The delivery date is not dependent on either the order or item alone. It is dependent on a specific order-item combination. Therefore, it is stored as a dependent of the logical child segment. The data in this dependent of the logical child is called variable intersection data. For each logical child occurrence, there can be as many occurrences of dependent segments containing intersection data as you need.

Figure 94 on page 184 shows variable intersection data. In the ORDER 123 segment for the item BOLT, 3000 were delivered on March 2 and 1000 were delivered on April 2. Because of this, two occurrences of the DELIVERY segment exist. Multiple segment types can contain intersection data for a single logical child segment. In addition to the DELIVERY segment shown in the figure, note the SCHEDULE segment type. This segment type shows the planned shipping date and the number

Logical Relationships

of items to be shipped. Segment types containing VID can all exist at the same level in the hierarchy as shown in the figure, or they can be dependents of each other.

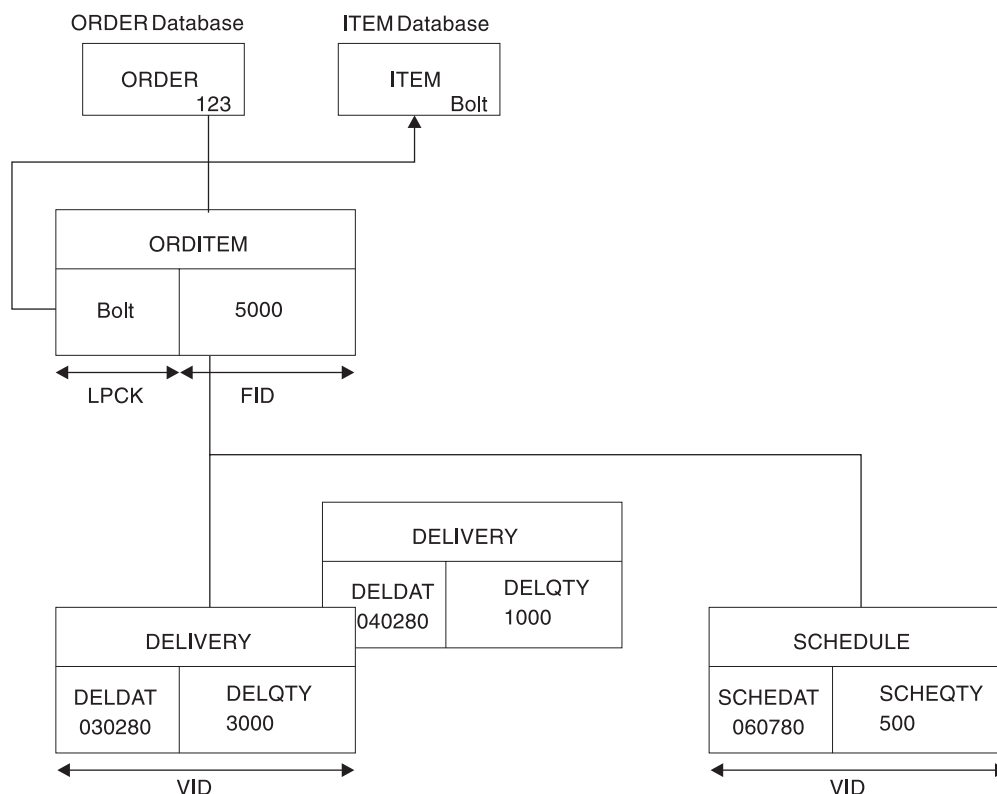


Figure 94. Variable Intersection Data

FID, VID, and Physical Pairing

In the previous figures, intersection data has been stored in a unidirectional logical relationship. It works exactly the same way in the two bidirectional logical relationships. However, when physical pairing is used, VID can only be stored on one side of the relationship. It does not matter on which side it is stored. An application program can access it using either the ORDER or ITEM database. FID, on the other hand, must be stored on both sides of the relationship when physical pairing is used. IMS automatically maintains the FID on both sides of the relationship when it is changed on one side. However, extra time is required for maintenance, and extra space is required on DASD for FID in a physically paired relationship.

Recursive Structures: Same Database Logical Relationships

Logical relationships can be established between segments in two or more physical databases. Logical relationships can also be established between segments in the same database. The logical data structure that results is called a *recursive structure*.

Most often, recursive structures are defined in manufacturing for bill-of-materials type applications. Suppose, for example, a company manufactures bicycles. The first model the manufacturer makes is Model 1, which is a boy's bicycle. Table 16 on page 185 lists the parts needed to manufacture this bicycle and the number of each part needed to manufacture one Model 1 bicycle.

Table 16. Parts List for the Model 1 Bicycle Example

Part	Number Needed
21-inch boy's frame	1
Handlebar	1
Seat	1
Chain	1
Front fender	1
Rear fender	1
Pedal	2
Crank	1
Front sprocket	1
26-inch tube and tire	2
26-inch rim	2
26-inch spoke	72
Front hub	1
Housing	1
Brake	1
Rear sprocket	1

In manufacturing, it is necessary to know the steps that must be executed to manufacture the end product. For each step, the parts needed must be available and any subassemblies used in a step must have been assembled in previous steps. Figure 95 on page 186 shows the steps required to manufacture the Model 1 bicycle. A housing, brake, and rear sprocket are needed to make the rear hub assembly in step 2. Only then can the part of step 3 that involves building the rear wheel assembly be executed. This part of step 3 also requires availability of a 26-inch tire, a rim, and 36 spokes.

The same company manufactures a Model 2 bicycle, which is for girls. The parts and assembly steps for this bicycle are exactly the same, except that the bicycle frame is a girl's frame.

If the manufacturer stored all parts and subassemblies for both models as separate segments in the database, a great deal of duplicate data would exist. Figure 95 on page 186 shows the segments that must be stored just for the Model 1 bicycle. A similar set of segments must be stored for the Model 2 bicycle, except that it has a girl's bicycle frame. As you can see, this leads to duplicate data and the associated maintenance problems. The solution to this problem is to create a recursive structure. Figure 96 on page 187 shows how this is done using the data for the Model 1 bicycle.

Logical Relationships

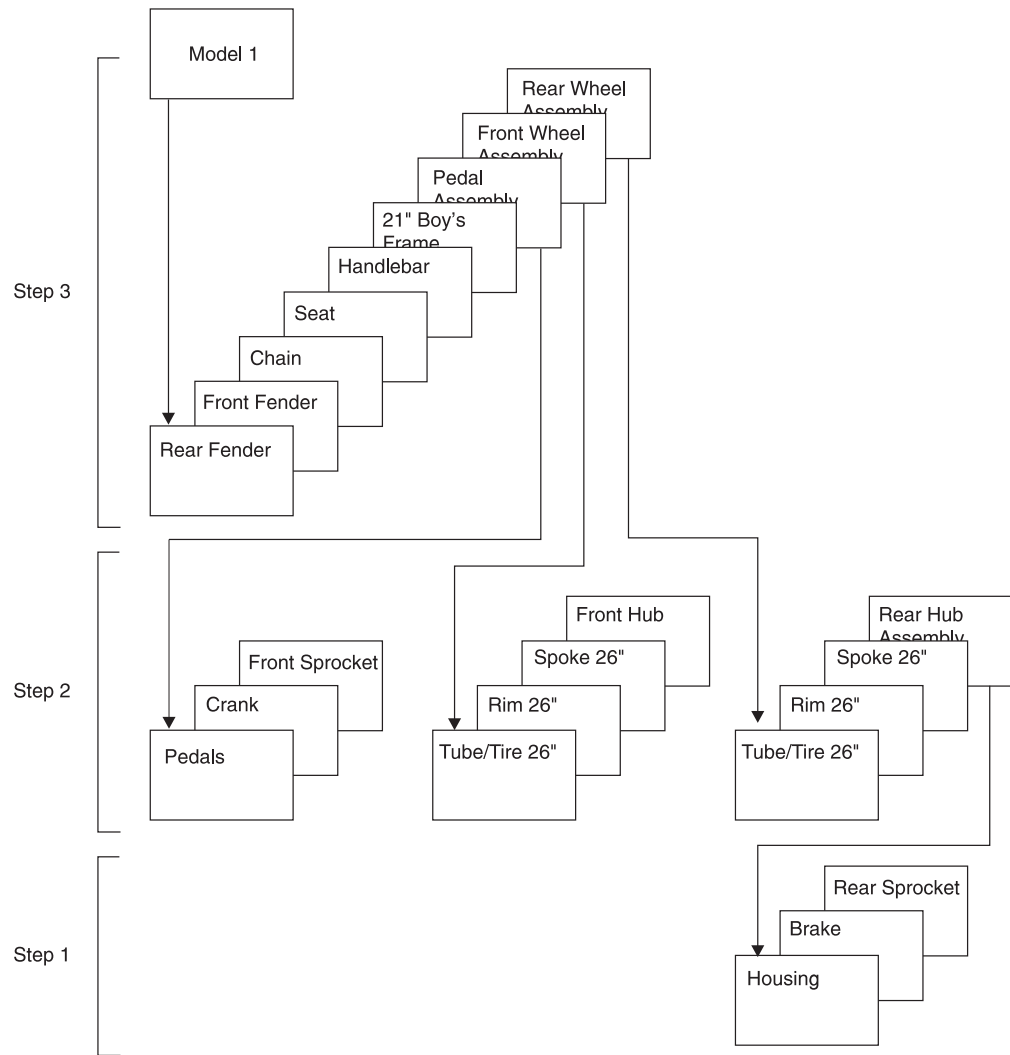


Figure 95. Model 1 Components and Subassemblies

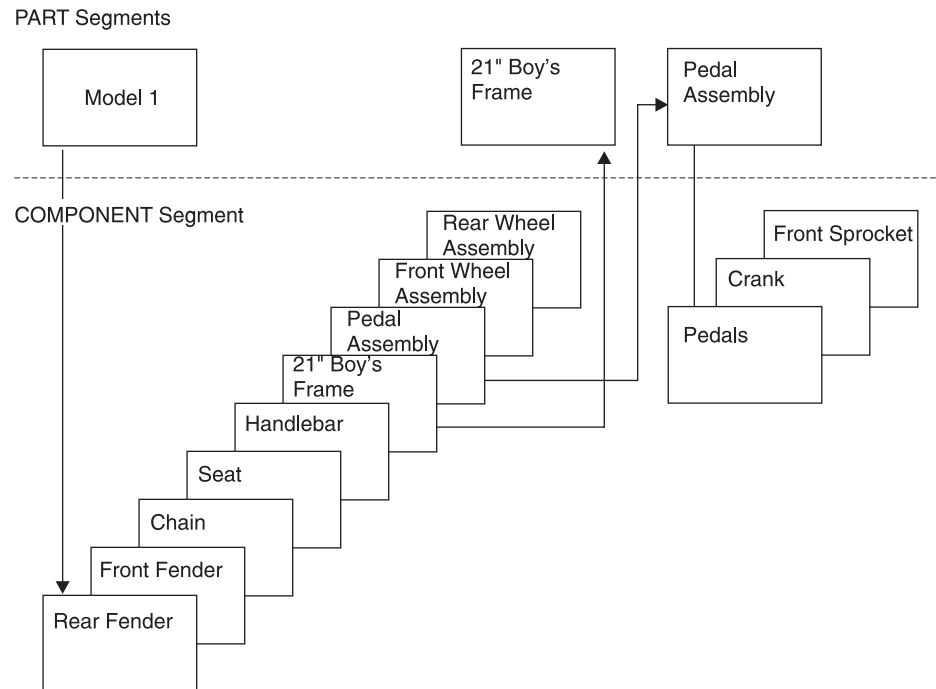


Figure 96. Database Records for the Model 1 Bicycle

In Figure 96, two types of segments exist: PART and COMPONENT segments. A unidirectional logical relationship has been established between them. The PART segment for Model 1 is a root segment. Beneath it are nine occurrences of COMPONENT segments. Each of these is a logical child that points to another PART root segment. (Only two of the pointers are actually shown to keep the figure simple.) However, the other PART root segments show the parts required to build the component.

For example, the pedal assembly component points to the PART root segment for assembling the pedal. Stored beneath this segment are the following parts that must be assembled: one front sprocket, one crank, and two pedals. With this structure, much of the duplicate data otherwise stored for the Model 2 bicycle can be eliminated.

Figure 97 on page 188 shows the segments, in addition to those in Figure 96, that must be stored in the database record for the Model 2 bicycle. The logical children in the figure, except the one for the unique component, a 21" girl's frame, can point to the same PART segments as are shown in Figure 96. A separate PART segment for the pedal assembly, for example, need not exist. The database record for both Model 1 and 2 have the same pedal assembly, and by using the logical child, it can point to the same PART segment for the pedal assembly.

Logical Relationships

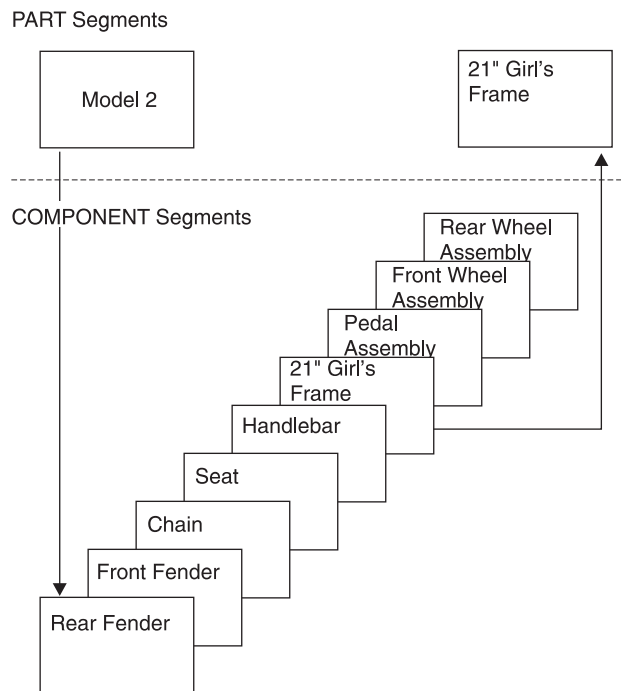


Figure 97. Extra Database Records Required for the Model 2 Bicycle

One thing to note about recursive structures is that the physical parent and the logical parent of the logical child are the same segment type. For example, in Figure 96 on page 187, the PART segment for *Model 1* is the physical parent of the COMPONENT segment for pedal assembly. The PART segment for pedal assembly is the logical parent of the COMPONENT segment for pedal assembly.

Defining Sequence Fields for Logical Relationships

This topic discusses defining the following types of sequence fields:

- “Logical Parent Sequence Fields”
- “Real Logical Children Sequence Fields” on page 189
- “Virtual Logical Children Sequence Fields” on page 189

Logical Parent Sequence Fields

To avoid potential problems in processing databases using logical relationships, unique sequence fields should be defined in all logical parent segments and in all segments a logical parent is dependent on in its physical database. When unique sequence fields are not defined in all segments on the path to and including a logical parent, multiple logical parents in a database can have the same concatenated key. When this happens, problems can arise during and after initial database load when symbolic logical parent pointers in logical child segments are used to establish position on a logical parent segment.

At initial database load time, if logical parents with non-unique concatenated keys exist in a database, the resolution utilities (described in Chapter 15, “Tuning Databases,” on page 359) attach all logical children with the same concatenated key to the first logical parent in the database with that concatenated key.

When inserting or deleting a concatenated segment and position for the logical parent, part of the concatenated segment is determined by the logical parent's concatenated key. Positioning for the logical parent starts at the root and stops on

the first segment at each level of the logical parent's database that satisfies the key equal condition for that level. If a segment is missing on the path to the logical parent being inserted, a GE status code is returned to the application program when using this method to establish position in the logical parent's database.

Real Logical Children Sequence Fields

If the sequence field of a real logical child consists of any part of the logical parent's concatenated key, PHYSICAL must be specified on the PARENT= parameter in the SEGM statement for the logical child. This will cause the concatenated key of the logical parent to be stored with the logical child segment.

Virtual Logical Children Sequence Fields

As a general rule, a segment can have only one sequence field. However, in the case of virtual pairing, multiple FIELD statements can be used to define a logical sequence field for the virtual logical child.

A sequence field must be specified for a virtual logical child if, when accessing it from its logical parent, you need real logical child segments retrieved in an order determined by data in a field of the virtual logical child as it could be seen in the application program I/O area. This sequence field can include any part of the segment as it appears when viewed from the logical parent (that is, the concatenated key of the real logical child's physical parent followed by any intersection data). Because it can be necessary to describe the sequence field of a logical child as accessed from its logical parent in non-contiguous pieces, multiple FIELD statements with the SEQ parameter present are permitted. Each statement must contain a unique fldname1 parameter.

Control Blocks for Logical Relationships

When a logical relationship is used, you must define the physical databases involved in the relationship to IMS. This is done using a *physical* DBD. In addition, many times you must define the logical structure to IMS because this is the structure that the application program perceives. This is done using a *logical* DBD. A logical DBD is needed because the application program's PCB references a DBD, and the physical DBD does not reflect the logical data structure the application program needs to access. Finally, the application program needs a PSB, consisting of one or more PCBs. The PCB that is used when processing with a logical relationship points to the logical DBD when one has been defined. This PCB indicates which segments in the logical database the application program can process. It also indicates what type of processing the application program can perform on each segment.

Figure 98 on page 190 shows the relationship between these three control blocks. It assumes that the logical relationship is established between two physical databases. The following topics explain how the physical and logical DBD are coded when a logical relationship is defined:

- "Specifying Logical Relationships in the Physical DBD" on page 190
- "Specifying Logical Relationships in the Logical DBD" on page 194

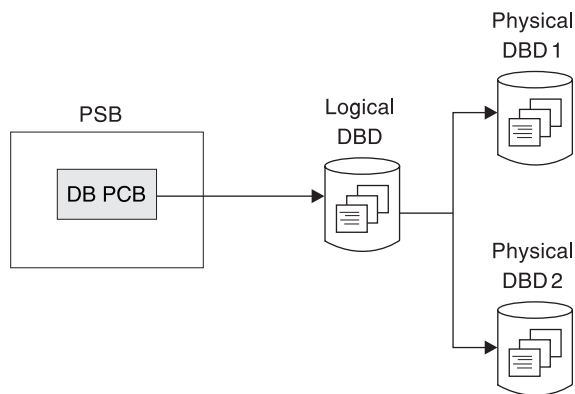


Figure 98. Relationship of Control Blocks When a Logical Relationship Is Used

Specifying Logical Relationships in the Physical DBD

For each of the databases involved in a logical relationship, you must code a physical DBD. All statements in the physical DBD are coded with the same format used when a logical relationship is not defined, except for the SEGM and LCHILD statements. The SEGM statement, which describes a segment and its length and position in the database hierarchy, is expanded to include the new types of pointers. The LCHILD statement is added to define the logical relationship between the two segment types. Figure 100 on page 191 shows an example of how the physical DBD is coded.

In the SEGM statements of the examples associated with Figure 99 on page 191 and Figure 100 on page 191, only the pointers required with logical relationships are shown. No pointers required for use with HD databases are shown. When actually coding a DBD, you must ask for these pointers in the PTR= parameter. Otherwise, IMS will not generate them once another type of pointer is specified.

Figure 99 shows the layout of segments. Figure 100 on page 191 shows physical DBDs for unidirectional relationships.

ORDER				
ORDKEY	DESCRIPTION OF LOCATION		ORDATE	*
Bytes 1	11	41	47	50

ORDITEM	
ITEMNO	ORDITQTY
Bytes 1	17

DELIVERY				
DELDAT	QUANTITY	DESCRIPTION	*	
Bytes 1	7	15	45	50

SCHEDULE				
SCHEDAT	QUANTITY	PLANNED SHIPPING DATE	INVENTORY PLACE	DESCRIPTION
Bytes 1	7	15	21	25
				50

ITEM				
ITEMKEY	DESCRIPTION		DATE OF CREATION	*
Bytes 1	9	49	55	60

Figure 99. Layouts of Segments Used in the Examples

This is the hierarchic structure of the two databases involved in the logical relationship. In this example, we are defining a unidirectional relationship using symbolic pointing. ORDITEM has an LPCK and FID, and DELIVERY and SCHEDULE are VID.

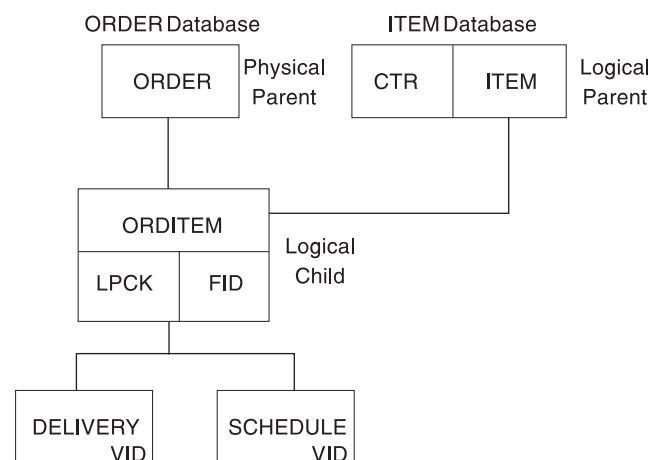


Figure 100. Physical DBDs for Unidirectional Relationship Using Symbolic Pointing

Logical Relationships

The following DBD is for the ORDER database:

```
DBD    NAME=ORDDB
SEGM   NAME=ORDER,BYTES=50,FREQ=28000,PARENT=0
FIELD  NAME=(ORDKEY,SEQ),BYTES=10,START=1,TYPE=C
FIELD  NAME=ORDATE,BYTES=6,START=41,TYPE=C
SEGM   NAME=ORDITEM,BYTES=17,PARENT=((ORDER),(ITEM,P,ITEMDB))
FIELD  NAME=(ITEMNO,SEQ),BYTES=8,START=1,TYPE=C
FIELD  NAME=ORDITQTY,BYTES=9,START=9,TYPE=C
SEGM   NAME=DELIVERY,BYTES=50,PARENT=ORDITEM
FIELD  NAME=(DELDAT,SEQ),BYTES=6,START=1,TYPE=C
SEGM   NAME=SCHEDULE,BYTES=50,PARENT=ORDITEM
FIELD  NAME=(SCHEDAT,SEQ),BYTES=6,START=1,TYPE=C
DBDGEN
FINISH
END
```

The following DBD is for the ITEM database:

```
DBD    NAME=ITEMDB
SEGM   NAME=ITEM,BYTES=60,FREQ=50000,PARENT=0
FIELD  NAME=(ITEMKEY,SEQ),BYTES=8,START=1,TYPE=C
LCHILD NAME=(ORDITEM,ORDDB)
DBDGEN
FINISH
END
```

Notes to Figure 100:

In the ORDER database, the DBD coding that differs from normal DBD coding is that for the logical child ORDITEM.

In the SEGM statement for ORDITEM:

1. The BYTES= parameter is 17. The length specified is the length of the LPCK, plus the length of the FID. The LPCK is the key of the ITEM segment, which is 8 bytes long. The length of the FID is 9 bytes.
2. The PARENT= parameter has two parents specified. Two parents are specified because ORDITEM is a logical child and therefore has both a physical and logical parent. The physical parent is ORDER. The logical parent is ITEM, specified after ORDER. Because ITEM exists in a different physical database from ORDITEM, the name of its physical database, ITEMDB, must be specified. Between the segment name ITEM and the database name ITEMDB is the letter P. The letter P stands for physical. The letter P specifies that the LPCK is to be stored on DASD as part of the logical child segment.

In the FIELD statements for ORDITEM:

1. ITEMNO is the sequence field of the ORDITEM segment and is 8 bytes long. ITEMNO is the LPCK. The logical parent is ITEM, and if you look at the FIELD statement for ITEM in the ITEM database, you will see ITEM's sequence field is ITEMKEY, which is 8 bytes long. Because ITEM is a root segment, the LPCK is 8 bytes long.
2. ORDITQTY is the FID and is coded normally.

In the ITEM database, the DBD coding that differs from normal DBD coding is that an LCHILD statement has been added. This statement names the logical child ORDITEM. Because the ORDITEM segment exists in a different physical database from ITEM, the name of its physical database, ORDDDB, must be specified.

Specifying Bidirectional Logical Relationships

Figure 100 on page 191 shows the coding for a unidirectional relationship. When defining a bidirectional relationship with physical pairing, you need to include an LCHILD statement under both logical parents. In addition to other pointers, you need to include the PAIRED operand on the POINTER= parameter of the SEGM statements for both logical children.

When defining a bidirectional relationship with virtual pairing, you need to code an LCHILD statement only for the real logical child. On the LCHILD statement, you code POINTER=SNGL or DBLE to get logical child pointers. You code the PAIR= operand to indicate the virtual logical child that is paired with the real logical child. When you define the SEGM statement for the real logical child, the PARENT= parameter identifies both the physical and logical parents. You should specify logical twin pointers (in addition to any other pointers) on the POINTER= parameter. Also, you should define a SEGM statement for the virtual logical child even though it does not exist. On this SEGM statement, you specify PAIRED on the POINTER= parameter. In addition, you specify a SOURCE= parameter. On the SOURCE= parameter, you specify the SEGM name and DBD name of the real logical child. DATA must always be specified when defining SOURCE= on a virtual logical child SEGM statement.

Related Reading: For more information on coding logical relationships, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Checklist of Rules for Defining Logical Relationships in Physical Databases

This topic provides the list of rules that must be followed when defining logical relationships in physical databases. In all cases, references are to segment types, *not* occurrences.

Logical Child Rules:

- A logical child must have a physical and a logical parent.
- A logical child can have only one physical and one logical parent.
- A logical child is defined as a physical child in the physical database of its physical parent.
- A logical child is always a dependent segment in a physical database, and can, therefore, be defined at any level except the first level of a database.
- A logical child in its physical database cannot have a physical child defined at the next lower level in the database that is also a logical child.
- A logical child can have a physical child. However, if a logical child is physically paired with another logical child, only one of the paired segments can have physical children.

Logical Parent Rules:

- A logical parent can be defined at any level in a physical database, including the root level.
- A logical parent can have one or more logical children. Each logical child related to the same logical parent defines a logical relationship.
- A segment in a physical database cannot be defined as both a logical parent and a logical child.
- A logical parent can be defined in the same physical database as its logical child, or in a different physical database.

Rules for Defining Logical Relationships

Physical Parent Rules: A physical parent of a logical child cannot also be a logical child.

Specifying Logical Relationships in the Logical DBD

To identify which segment types are used in a logical data structure, you must code a logical DBD. Figure 101 shows an example of how the logical DBD is coded. The example is a logical DBD for the same physical databases defined in “Specifying Logical Relationships in the Physical DBD” on page 190.

When defining a segment in a logical database, you can specify whether the segment is returned to the program's I/O area by using the KEY or DATA operand on the SOURCE= parameter of the SEGM statement. DATA returns both the key and data portions of the segment to the I/O area. KEY returns only the key portion, and not the data portion of the segment to the I/O area.

When the SOURCE= parameter is used on the SEGM statement of a concatenated segment, the KEY and DATA parameters control which of the two segments, or both, is put in the I/O area on retrieval calls. In other words, you define the SOURCE= parameter twice for a concatenated segment type, once for the logical child portion and once for the destination parent portion.

Figure 101 illustrates the logical data structure you need to create in the application program. It is implemented with a unidirectional logical relationship using symbolic pointing. The root segment is ORDER from the ORDER database. Dependent on ORDER is ORDIT, the logical child, concatenated with its logical parent ITEM. The application program receives both segments in its I/O area when a single call is issued for ORDIT. DELIVERY and SCHEDULE are VID.

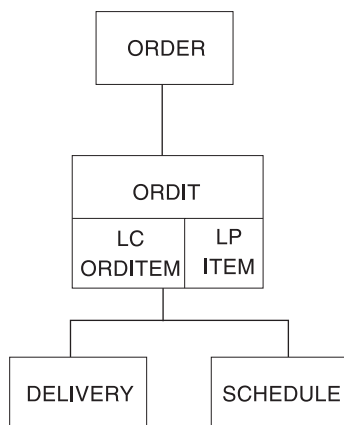


Figure 101. Logical Data Structure for a Unidirectional Relationship Using Symbolic Pointing

The following logical DBD is for the logical data structure shown in Figure 101:

```
DBD NAME=ORDLOG,ACCESS=LOGICAL
DATASET LOGICAL
SEGM NAME=ORDER,SOURCE=((ORDER,DATA,ORDDB))
SEGM NAME=ORDIT,PARENT=ORDER,
      SOURCE=((ORDITEM,DATA,ORDDB),(ITEM,DATA,ITEMDB)) X
SEGM NAME=DELIVERY,PARENT=ORDIT,SOURCE=((DELIVERY,DATA,ORDDB))
SEGM NAME=SCHEDULE,PARENT=ORDIT,SOURCE=((SCHEDULE,DATA,ORDDB))
DBDGEN
FINISH
END
```

Notes to Figure 101:

1. The DBD statement has the name of the logical DBD, in this example ORDLOG. As with physical DBDs, this name must be unique and must be the same name as specified in the MBR operand of the DBDGEN procedure. ACCESS=LOGICAL simply says this is a logical DBD.
2. The DATASET statement always says LOGICAL, meaning a logical DBD. No other parameters can be specified on this statement; however, DDNAMEs for data sets are all specified in the DATASET statements in the physical DBDs.
3. The SEGM statements show which segments are to be included in the logical database. The only operands allowed on the SEGM statements for a logical DBD are NAME=, PARENT=, and SOURCE=. All other information about the segment is defined in the physical DBD.
 - The first SEGM statement defines the root segment ORDER.
 The NAME= operand specifies the name used in the PCB to refer to this segment. This name is used by application programmers when coding SSAs. In this example, the segment name is the same as the name used in the physical DBD - ORDER. However, the segment could have a different name from that specified in its physical DBD.
 The SOURCE= operand tells IMS where the data for this segment is to come from. First the name of the segment type appears in its physical database, which is ORDER. DATA says that the data in this segment needs to be put in the application program's I/O area. ORDDDB is the name of the physical database in which the ORDER segment exists.
 No FIELD statements are coded in the logical DBD. IMS picks the statements up from the physical DBD, so when accessing the ORDER segment in this logical data structure, the application program could have SSAs referring to ORDKEY or ORDATE. These fields were defined for the ORDER segments in its physical DBD, as shown in Figure 100 on page 191.
 - The second SEGM statement is for the ORDIT segment. The ORDIT segment is made up of the logical child ORDITEM, concatenated with its logical parent ITEM. As you can see, the SOURCE= operand identifies both the ORDITEM and ITEM segments in their different physical databases.
 - The third and fourth SEGM statements are for the VID DELIVERY and SCHEDULE. These SEGM statements must be placed in the logical DBD in the same relative order they appear in the physical DBD. In the physical DBD, DELIVERY is to the left of SCHEDULE.

Checklist of Rules for Defining Logical Databases

Before the rules for defining logical databases can be described, you need to know the following definitions:

- Crossing a logical relationship
- The first and additional logical relationships crossed

Also, a logical DBD is needed only when an application program needs access to a concatenated segment or needs to cross a logical relationship.

Definition of Crossing a Logical Relationship: A logical relationship is considered crossed when it is used in a logical database to access a segment that is:

- A physical parent of a destination parent in the destination parent's database
- A physical dependent of a destination parent in the destination parent's physical database

Rules for Defining Logical Relationships

If a logical relationship is used in a logical database to access a destination parent only, the logical relationship is not considered crossed.

In Figure 102, DBD1 and DBD2 are two physical databases with a logical relationship defined between them. DBD3 through DBD6 are four logical databases that can be defined from the logical relationship between DBD1 and DBD2. With DBD3, no logical relationship is crossed, because no physical parent or physical dependent of a destination parent is included in DBD3. With DBD4 through DBD6, a logical relationship is crossed in each case, because each contains a physical parent or physical dependent of the destination parent.

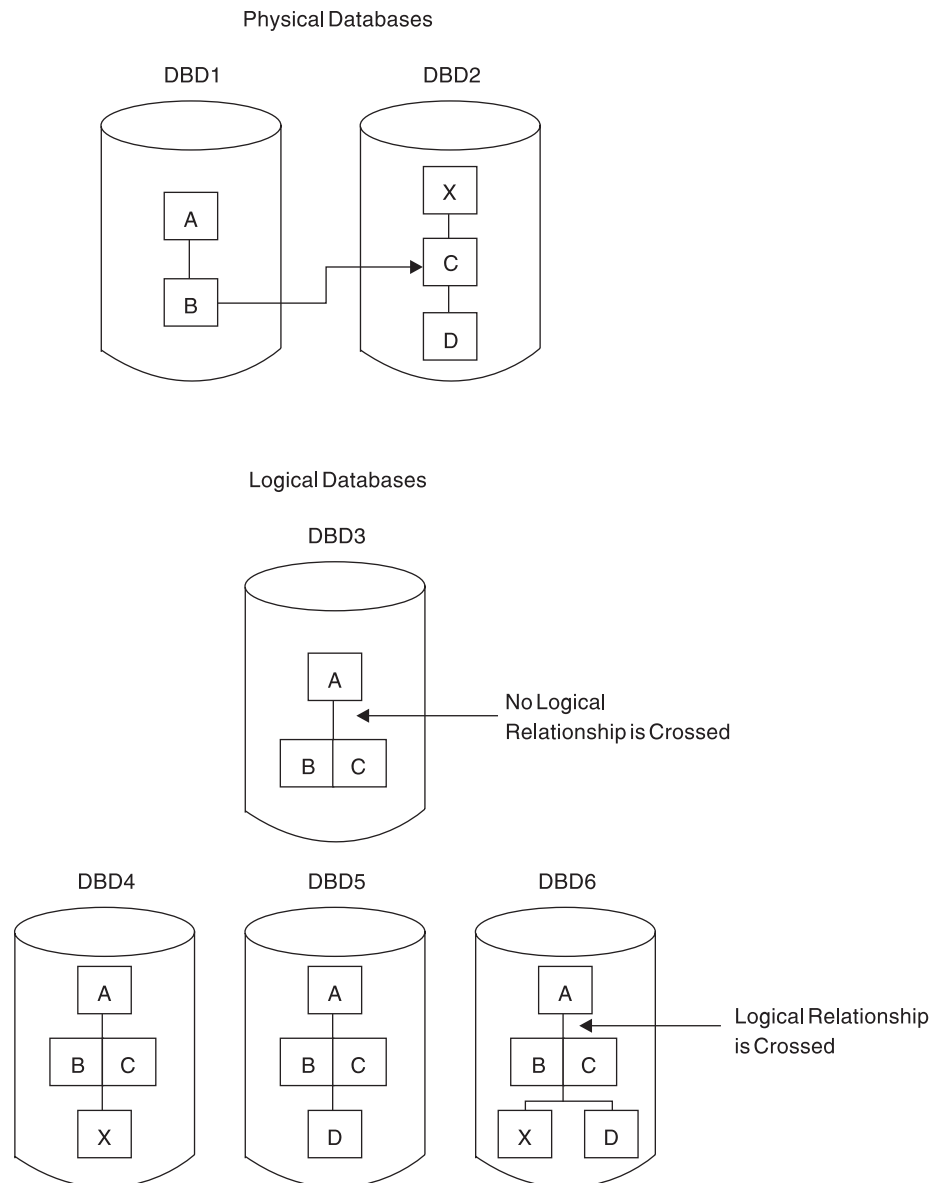


Figure 102. Definition of Crossing a Logical Relationship

Definition of First and Additional Logical Relationships Crossed: More than one logical relationship can be crossed in a hierarchic path in a logical database. Figure 103 on page 197 shows three physical databases (DBD1, DBD2 and DBD3) in which logical relationships have been defined. Also in the figure are two (of many) logical databases (DBD4 and DBD5) that can be defined from the logical

relationships in the physical databases. In DBD4, the two concatenated segments BF and DI allow access to all segments in the hierarchic paths of their destination parents. If either logical relationship or both is crossed, each is considered the first logical relationship crossed. This is because each concatenated segment type is reached by following the physical hierarchy of segment types in DBD1.

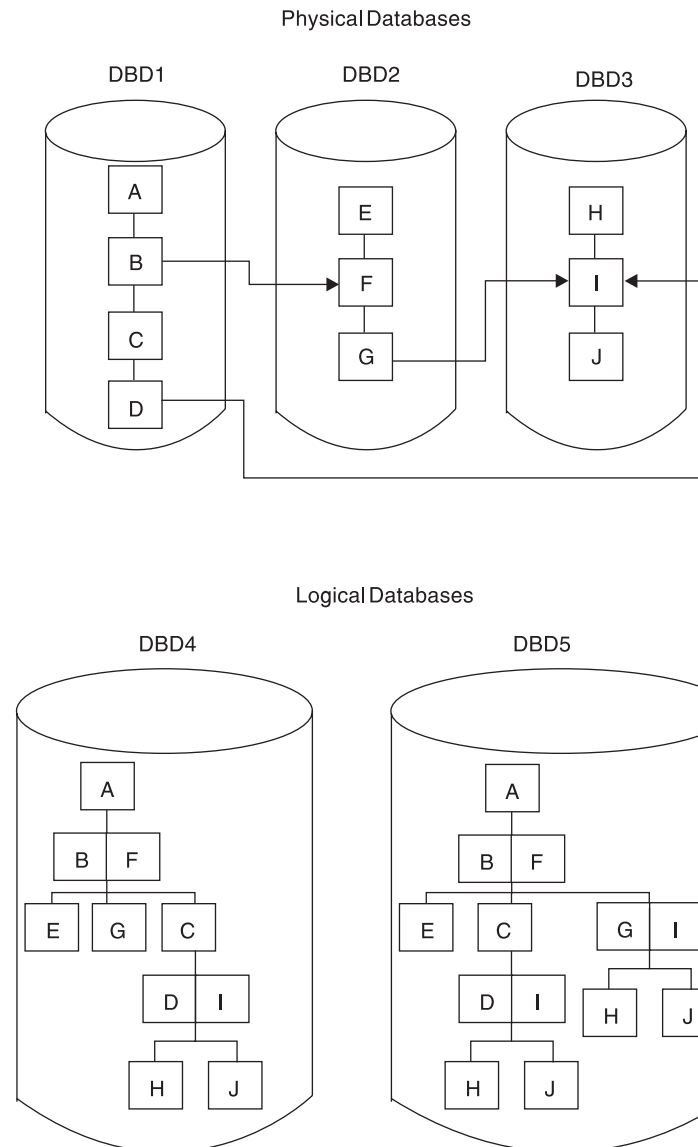


Figure 103. The First Logical Relationship Crossed in a Hierarchic Path of a Logical Database

In DBD5 in Figure 103, an additional concatenated segment type GI, is defined that was not included in DBD4. GI allows access to segments in the hierarchic path of the destination parent if crossed. When the logical relationship made possible by concatenated segment GI is crossed, this is an additional logical relationship crossed. This is because, from the root of the logical database, the logical relationship made possible by concatenated segment type BF must be crossed to allow access to concatenated segment GI.

Rules for Defining Logical Relationships

When the first logical relationship is crossed in a hierarchic path of a logical database, access to all segments in the hierarchic path of the destination parent is made possible as follows:

- Parent segments of the destination parent are included in the logical database as dependents of the destination parent in reverse order, as shown in Figure 104.
- Dependent segments of the destination parent are included in the logical database as dependents of the destination parent without their order changed, as shown in Figure 104.

When an additional logical relationship is crossed in a logical database, access to all segments in the hierarchic path of the destination parent is made possible, just as in the first crossing.

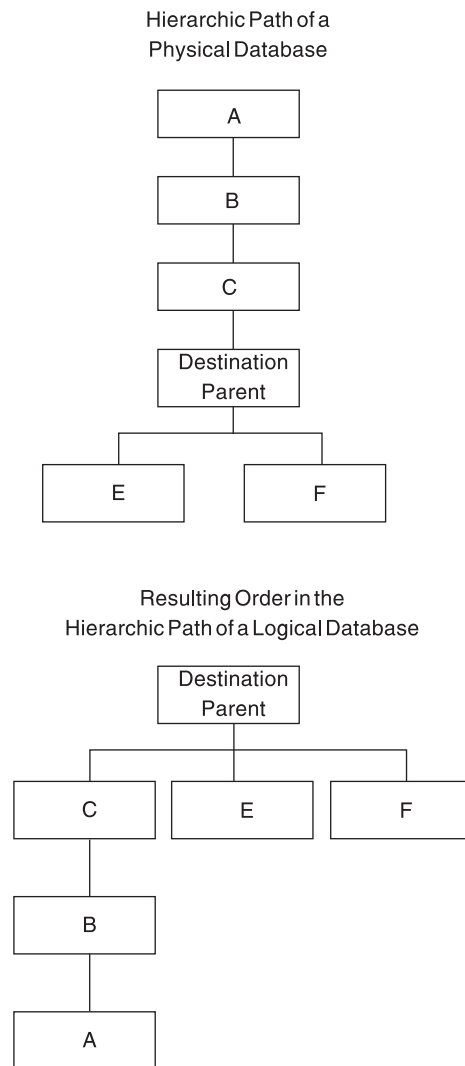


Figure 104. Logical Database Hierarchy Enabled by Crossing the First Logical Relationship

Rules for Defining Logical Databases:

- The root segment in a logical database must be the root segment in a physical database.
- A logical database must use only those segments and physical and logical relationship paths defined in the physical DBD referenced by the logical DBD.

- The path used to connect a parent and child in a logical database must be defined as a physical relationship path or a logical relationship path in the physical DBD referenced by the logical DBD.
- Physical and logical relationship paths can be mixed in a hierarchic segment path in a logical database.
- Additional physical relationship paths, logical relationship paths, or both paths can be included after a logical relationship is crossed in a hierarchic path in a logical database. These paths are included by going in upward directions, downward directions, or both directions, from the destination parent. When proceeding downward along a physical relationship path from the destination parent, direction cannot be changed except by crossing a logical relationship. When proceeding upward along a physical relationship path from the destination parent, direction can be changed.
- Dependents in a logical database must be in the same relative order as they are under their parent in the physical database. If a segment in a logical database is a concatenated segment, the physical children of the logical child and children of the destination parent can be in any order. The relative order of the children or the logical child and the relative order of the children of the destination parent must remain unchanged.
- The same concatenated segment type can be defined multiple times with different combinations of key and data sensitivity. Each must have a distinct name for that view of the concatenated segment. Only one of the views can have dependent segments. Figure 105 shows the four views of the same concatenated segment that can be defined in a logical database. A PCB for the logical database can be sensitive to only one of the views of the concatenated segment type.

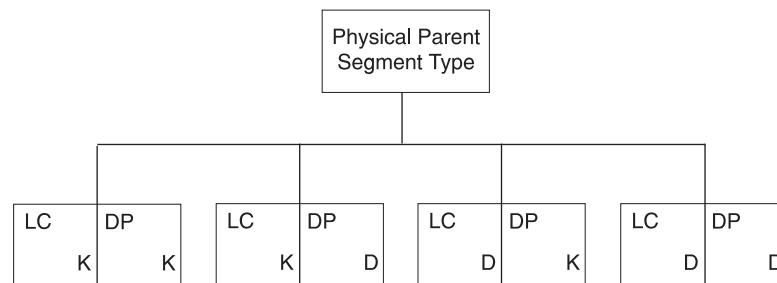


Figure 105. Single Concatenated Segment Type Defined Multiple Times with Different Combinations of Key and Data Sensitivity

- LC Logical child segment type
- DP Destination parent segment type
- K KEY sensitivity specified for the segment type
- D DATA sensitivity specified for the segment type

Choosing Replace, Insert, and Delete Rules for Logical Relationships

You must establish insert, delete, and replace rules when a segment is involved in a logical relationship, because such segments can be updated from two paths: a physical path and a logical path.

Rules for Defining Logical Relationships

Figure 106 and Figure 107 show example insert, delete, and replace rules. Consider the following questions:

1. Should the CUSTOMER segment in Figure 106 be able to be inserted by both its physical and logical paths?
2. Should the BORROW segment be replaceable using only the physical path, or using both the physical and logical paths?
3. If the LOANS segment is deleted using its physical path, should it be erased from the database? Or should it be marked as physically deleted but remain accessible using its logical path?
4. If the logical child segment BORROW or the concatenated segment BORROW/LOANS is deleted from the physical path, should the logical path CUST/CUSTOMER also be automatically deleted? Or should the logical path remain?

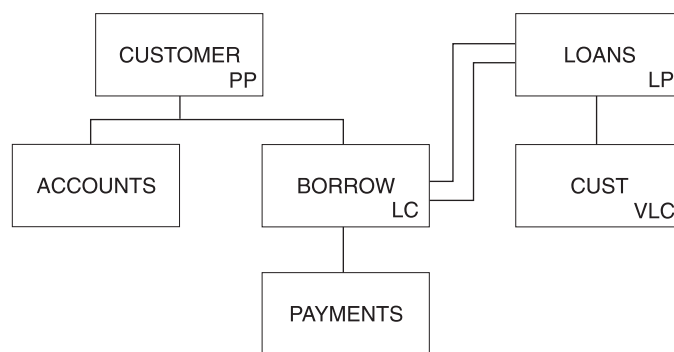


Figure 106. Example of the Replace, Insert, and Delete Rules

Abbreviation	Explanation
PP	Physical parent segment type
LC	Logical child segment type
LP	Logical parent segment type
VLC	Virtual logical child segment type

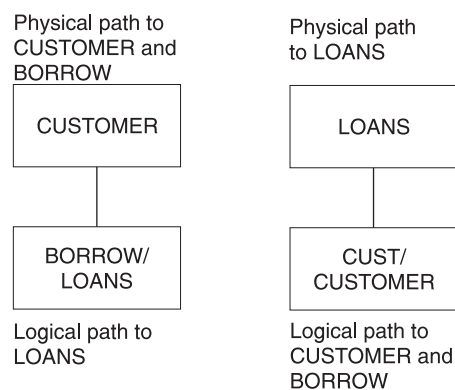


Figure 107. Example of the Replace, Insert, and Delete Rules: Before and After

The answer to these questions depends on the application. The enforcement of the answer depends on your choosing the correct insert, delete, and replace rules for

the logical child, logical parent, and physical parent segments. You must first determine your application processing requirements and then the rules that support those requirements.

For example, the answer to question 1 depends on whether the application requires that a CUSTOMER segment be inserted into the database before accepting the loan. An insert rule of physical (P) on the CUSTOMER segment prohibits insertion of the CUSTOMER segment except by the physical path. An insert rule of virtual (V) allows insertion of the CUSTOMER segment by either the physical or logical path. It probably makes sense for a customer to be checked (past credit, time on current job, and so on.) and the CUSTOMER segment inserted before approving the loan and inserting the BORROW segment. Thus, the insert rule for the CUSTOMER segment should be P to prevent the segment from being inserted logically. (Using the insert rule in this example provides better control of the application.)

Or consider question 3. If it is possible for this loan institution to cancel a type of loan (cancel 10% car loans, for instance, and create 12% car loans) before everyone with a 10% loan has fully paid it, then it is possible for the LOANS segment to be physically deleted and still be accessible from the logical path. This can be done by specifying the delete rule for LOANS as either logical (L) or V, but not as P.

The P delete rule prohibits physically deleting a logical parent segment before all its logical children have been physically deleted. This means the logical path to the logical parent is deleted first.

You need to examine all your application requirements and decide who can insert, delete, and replace segments involved in logical relationships and how those updates should be made (physical path only, or physical and logical path). The insert, delete, and replace rules in the physical DBD and the PROCOPT= parameter in the PCB are the means of control.

Related Reading: These rules are explained in detail in Appendix B, “Insert, Delete, and Replace Rules for Logical Relationships,” on page 507.

Logical Relationships and HALDB Databases

HALDB databases support logical relationships in the same manner that non-HALDB DL/I databases do, with a single exception: bidirectional logical relationships in a HALDB database must be implemented with physical pairing. When you load a new partitioned database that contains logical relationships, the logical child segments cannot be loaded as part of the load step. IMS adds the logical children by normal update processing after the database has been loaded.

HALDBs use an indirect list data set (ILDS) to maintain logical relationship pointers when logically related databases are reorganized. For more information about how the ILDS heals pointers after a database reorganization, see “The HALDB Self-Healing Pointer Process” on page 401.

Performance Considerations for Logical Relationships

If you are implementing a logical relationship, you make several choices that affect the resources needed to process logically related segments. This topic explains these choices.

Logical Parent Pointers

The logical child segment on DASD has a pointer to its logical parent. You choose how this pointer is physically stored on external storage. Your choices are:

- Direct pointing (specified by coding `POINTER=LPARNT` in the `SEGM` statement for the logical child)
- Symbolic pointing (specified by coding the `PHYSICAL` operand for the `PARENT=` keyword in the `SEGM` statement for the logical child)
- Both direct and symbolic pointing

The advantages of direct pointers are:

- Because direct pointers are only 4 bytes long, they are usually shorter than symbolic pointers. Therefore, less DASD space is generally required to store direct pointers.
- Direct pointers usually give faster access to logical parent segments, except possibly HDAM or PHDAM logical parent segments, which are roots. Symbolic pointers require extra resources to search an index for a HIDAM database. Also, with symbolic pointers, DL/I has to navigate from the root to the logical parent if the logical parent is not a root segment.

The advantages of symbolic pointers are:

- Symbolic pointers are stored as part of the logical child segment on DASD. Having the symbolic key stored on DASD can save the resources required to format a logical child segment in the user's I/O area. Remember, the symbolic key always appears in the I/O area as part of the logical child. When retrieving a logical child, IMS has to construct the symbolic key if it is not stored on DASD.
- Logical parent databases can be reorganized without the logical child database having to be reorganized. This applies to unidirectional and bidirectional physically paired relationships (when symbolic pointing is used).

Symbolic pointing must be used:

- When pointing to a HISAM logical parent database
- If you need to sequence logical child segments (except virtual logical children) on any part of the symbolic key

KEY/DATA Considerations

When you include a concatenated segment as part of a logical DBD, you control how the concatenated segment appears in the user's I/O area. You do this by specifying either `KEY` or `DATA` on the `SOURCE=` keyword of the `SEGM` statement for the concatenated segment. A concatenated segment consists of a logical child followed by a logical (or destination) parent. You specify `KEY` or `DATA` for both parts. For example, you can access a concatenated segment and ask to see the following segment parts in the I/O area:

- The logical child part only
- The logical (or destination) parent part only
- Both parts

By carefully choosing `KEY` or `DATA`, you can retrieve a concatenated segment with fewer processing and I/O resources. For example:

- Assume you have the unidirectional logical relationship shown in Figure 108 on page 203.

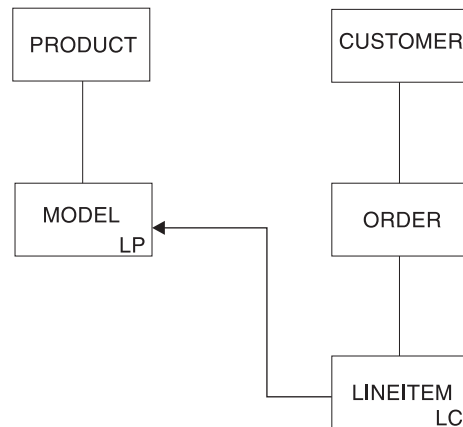


Figure 108. Example of a Unidirectional Logical Relationship

- Assume you have the logical structure shown in Figure 109.

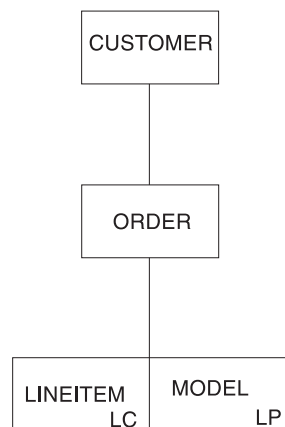


Figure 109. Example of a Logical Structure

- Finally, assume you only need to see the data for the LINEITEM part of the concatenated segment.

You can avoid the extra processing and I/O required to access the MODEL part of the concatenated segment if you:

- Code the SOURCE keyword of the concatenated segment's SEGM statement as:
`SOURCE=(lcsegname,DATA,lcdbname),(lpsegname,KEY,lpdbname)`
- Store a symbolic logical parent pointer in LINEITEM. If you do not store the symbolic pointer, DL/I must access MODEL and PRODUCT to construct it.

To summarize, do not automatically choose DATA sensitivity for both the logical child and logical parent parts of a concatenated segment. If you do not need to see the logical parent part, code KEY sensitivity for the logical parent and store the symbolic logical parent pointer on DASD.

Sequencing Logical Twin Chains

With virtual pairing, it is possible to sequence the real logical child on physical twin chains and the virtual logical child on logical twin chains. If possible, avoid operations requiring that you sequence logical twins. When a logical twin chain is followed, DL/I usually has to access multiple database records. Accessing multiple database records increases the resources required to process the call.

Performance Considerations for Logical Relationships

This problem of increased resource requirements to process calls is especially severe when you sequence the logical twin chain on all or part of the symbolic logical parent pointer. Because a virtual logical child is not stored, it is necessary to construct the symbolic logical parent pointer to determine if a virtual logical child satisfies the sequencing operation. DL/I must follow physical parent pointers to construct the symbolic pointers. This process takes place for each virtual logical child in the logical twin chain until the correct position is found for the sequencing operation.

Placement of the Real Logical Child in a Virtually Paired Relationship

In placing the real logical child in a virtually paired relationship, here are some considerations:

- If you need the logical child sequenced in only one of the logically related databases, put the real logical child in that database.
- If you must sequence the logical child in both logically related databases, put the real logical child in the database from which it is most often retrieved.
- Try to place the real logical child so logical twin chains are as short as possible. This placement decreases the number of database records that must be examined to follow a logical twin chain.

Note: You cannot store a real logical child in a HISAM database, because you cannot have logical child pointers (which are direct pointers) in a HISAM database.

Secondary Indexes

The following database types support secondary indexes:

- HISAM
- HDAM
- PHDAM
- HIDAM
- PHIDAM

Secondary indexes are indexes that allow you to process a segment type in a sequence other than the one defined by the segment's key. A secondary index can also be used to process a segment type based on a qualification in a dependent segment.

Why Secondary Indexes?

When you design your database records, you design them to meet the processing requirements of many applications. You decide what segments will be in a database record and what fields will be in a segment. You decide the order of segments in a database record and fields within a segment. You also decide which field in the root segment will be the key field, and whether the key field will be unique. All these decisions are based on what works best for all your application's processing requirements. However, the choices you make might suit the processing requirements of some applications better than others.

Example: A database record in an educational database is shown in Figure 110 on page 205.

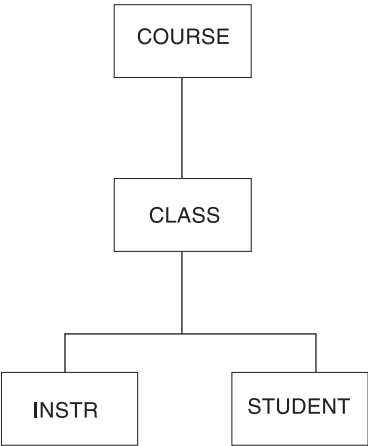


Figure 110. Database Record in Educational Database

|
|
|

Figure 111, shows the root segment, COURSE, and the fields it contains. The course number field is a unique key field.

Class Date	Course Number	Course Name	Class Room Number	Room Size	Total Attended
	Key Field				

Figure 111. Example of a Database Record Unique Key Field

You chose COURSE as the root and course number as a unique key field partly because most applications requested information based on course numbers. For these applications, access to the information needed from the database record is fast. For a few of your applications, however, the organization of the database record does not provide such fast access. One application, for example, would be to access the database by student name and then get a list of courses a student is taking. Given the order in which the database record is now organized, access to the courses a student is taking requires a sequential scan of the entire database. Each database record has to be checked for an occurrence of the STUDENT segment. When a database record for the specific student is found, then the COURSE segment has to be referenced to get the name of the course the student is taking. This type of access is relatively slow. In this situation, you can use a secondary index that has a set of pointer segments for each student to all COURSE segments for that student.

Another application would be to access COURSE segments by course name. In this situation, you can use a secondary index that allows access to the database in course name sequence (rather than by course number, which is the key field).

Secondary indexing is a solution to the different processing requirements of various applications. It allows you to have an index based on any field in the database, and not just the key field in the root segment.

Characteristics of Secondary Indexes

Secondary indexes can be used with HISAM, HDAM, PHDAM, HIDAM, and PHIDAM databases. A secondary index is in its own separate database and must

Secondary Indexes

use VSAM as its access method. Because a secondary index is in its own database, it can be processed as a separate database.

Secondary indexes are invisible to the application program. When an application program needs to do processing using the secondary index, this fact is communicated to IMS by coding the PROCSEQ= parameter in the PCB. If an application program needs to do processing using the regular processing sequence, PROCSEQ= is simply not coded. If the application program needs to do processing using both the regular processing sequence and the secondary index, the application program's PSB must contain two PCBs, one with PROCSEQ= coded and one without.

When two PCBs are used, it enables an application program to use two paths into the database and two sequence fields. One path and sequence field is provided by the regular processing sequence, and one is provided by the secondary index. The secondary index gives an application program both an alternative way to enter the database and an alternative way to sequentially process database records.

A final characteristic of secondary indexes is that there can be 32 secondary indexes for a segment type and a total of 1000 secondary indexes for a single database.

Segments Used for Secondary Indexes

As shown in Figure 112, to set up a secondary index, three types of segments must be defined to IMS. The three types of segments are pointer, target, and source segments.

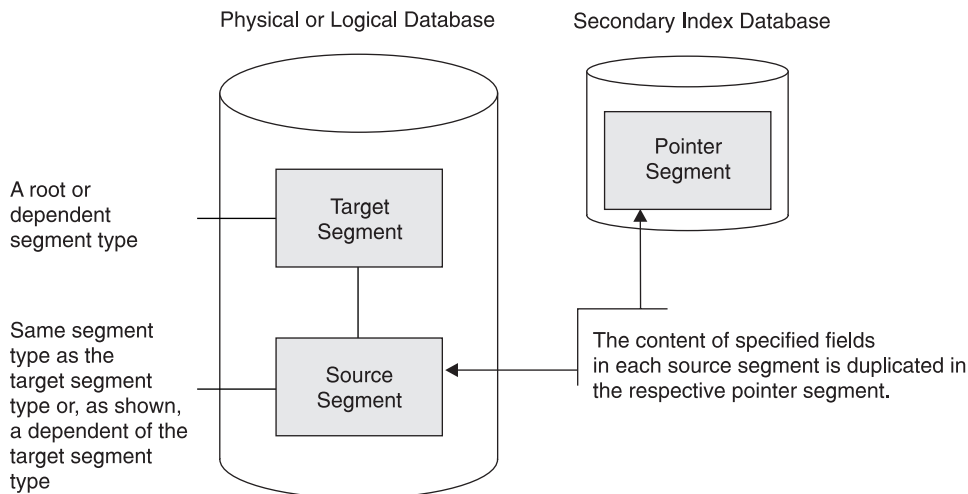


Figure 112. Segments Used for Secondary Indexes

- **Pointer Segment.** The pointer segment is contained in the secondary index database and is the *only* type of segment in the secondary index database. Its format is shown in Figure 113 on page 207.

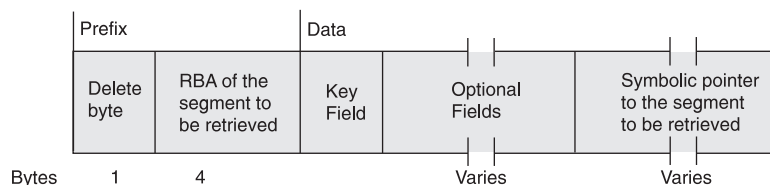


Figure 113. Format of Pointer Segments Contained in the Secondary Index Database

The first field in the prefix is the delete byte. The second field is the address of the segment the application program retrieves from the regular database. This field is not present if the secondary index uses symbolic pointing. Symbolic pointing is pointing to a segment using its concatenated key. HIDAM and HDAM can use symbolic pointing; however, HISAM must use symbolic pointing. Symbolic pointing is not supported for PHDAM and PHIDAM databases.

For a HALDB PSINDEX database, the segment prefix of pointer segments is slightly different. The “RBA of the segment to be retrieved field” is part of an Extended Pointer Set (EPS), which is longer than 4 bytes. Within the prefix the EPS is followed by the key of the target's root.

- **Target Segment.** The target segment is in the regular database, and it is the segment the application program needs to retrieve. A target segment is the segment to which the pointer segment points. The target segment can be at any one of the 15 levels in the database, and it is accessed directly using the RBA or symbolic pointer stored in the pointer segment. Physical parents of the target segment are not examined to retrieve the target segment (except in one special case discussed in “Concatenated Key Field” on page 213).
- **Source Segment.** The source segment is also in the regular database. The source segment contains the field (or fields) that the pointer segment has as its key field. Data is copied from the source segment and put in the pointer segment's key field. The source and the target segment can be the same segment, or the source segment can be a dependent of the target segment. The optional fields are also copied from the source segment with one exception, which is discussed later in this topic.

Using the education database in Figure 114 on page 208, you can see how three segments work together. In this example, the education database is a HIDAM database that uses RBAs rather than symbolic pointers. Suppose an application program needs to access the education database by student name and then list all courses the student is taking:

- The segment the application is trying to retrieve is the COURSE segment, because the segment contains the names of courses (COURSENM field). Therefore, COURSE is the target segment, and needs retrieval.
- In this example, the application program is going to use the student's name in its DL/I call to retrieve the COURSE segment. The DL/I call is qualified using student name as its qualifier. The source segment contains the fields used to sequence the pointer segments in the secondary index. In this example, the pointer segments must be sequenced by student name. The STUDENT segment becomes the source segment. It is the fields in this segment that are copied into the data portion of the pointer segment as the key field.
- The call from the application program invokes a search for a pointer segment with a key field that matches the student name. Once the correct pointer segment in the index is found, it contains the address of the COURSE segment the application program is trying to retrieve.

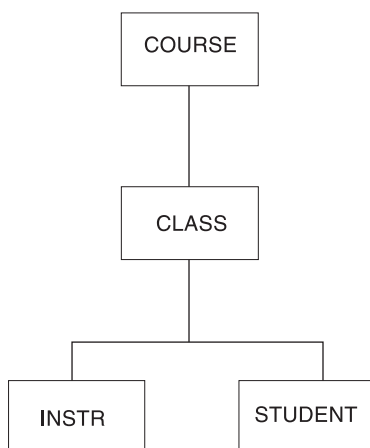


Figure 114. Education Database Record

Figure 115 shows how the pointer, target, and source segments work together. Figure 116 is the call the application program issues. XNAME is the from the NAME parameter in the XFLD statement.

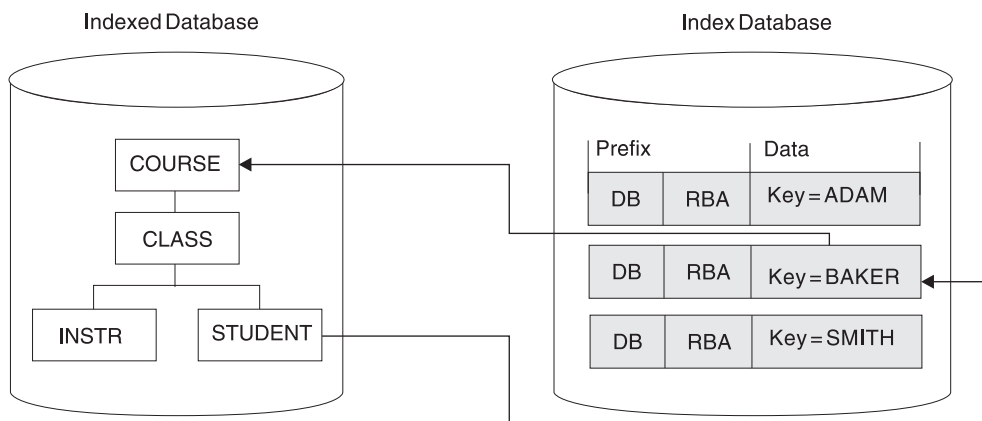


Figure 115. How a Segment Is Accessed Using a Secondary Index

```
GU COURSE (XNAME = BAKER ... )
```

Figure 116. Call an Application Issues When a Secondary Index Is Used

COURSE is the target segment that the application program is trying to retrieve.

STUDENT is the source segment containing the one or more fields that the application program uses as a qualifier in its call and that the data portion of a pointer segment contains as a key.

The BAKER segment in the secondary index is the pointer segment, whose prefix contains the address of the segment to be retrieved and whose data fields contain the key the application program uses as a qualifier in its call.

How the Hierarchy Is Restructured

When the PROCSEQ= parameter in the PCB is coded (specifying that the application program needs to do processing using the secondary index), the way in which the application program perceives the database record changes.

If the target segment is the root segment in the database record, the structure the application program perceives does not differ from the one it can access using the regular processing sequence. However, if the target segment is not the root segment, the hierarchy in the database record is conceptually restructured. Figure 117 and Figure 118 on page 210 illustrate this concept.

The target segment (as shown in the figure) is segment G. Target segment G becomes the root segment in the restructured hierarchy. All dependents of the target segment (segments H, J, and I) remain dependents of the target segment. However, all segments on which the target is dependent (segments D and A) and their subordinates become dependents of the target and are put in the left most positions of the restructured hierarchy. Their position in the restructured hierarchy is the order of immediate dependency. D becomes an immediate dependent of G, and A becomes an immediate dependent of D.

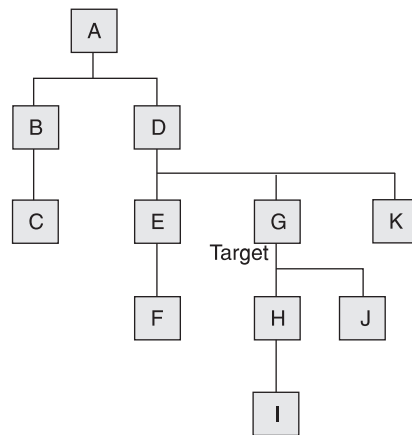


Figure 117. Physical Database Structure with Target Segment G

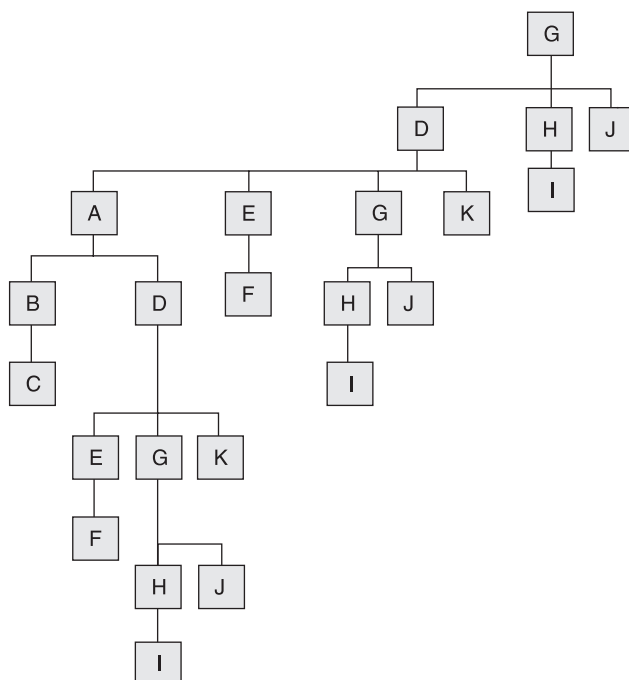


Figure 118. Secondary Index Structure Indexed in Secondary Index on Segment G

Secondary Data Structure

This new structure is called a *secondary data structure*. A processing restriction exists when using a secondary data structure, and the target segment and the segments on which it was dependent (its physical parents, segments D and A) cannot be inserted or deleted.

Secondary Processing Sequence

The restructuring of the hierarchy in the database record changes the way in which the application program accesses segments. The new sequence in which segments are accessed is called the *secondary processing sequence*. Figure 118 shows how the application program perceives the database record.

If the same segment is referenced more than once (as shown in Figure 118), you must use the DBDGEN utility to generate a logical DBD that assigns alternate names to the additional segment references. If you do not generate the logical DBD, the PSBGEN utility will issue the message "SEG150" for the duplicate SENSEG names.

How a Secondary Index Is Stored

Secondary index databases contain root segments only. They are stored in a single VSAM KSDS if the key in the pointer segment is unique. If keys are not unique, an additional data set must be used (an ESDS) to store segments containing duplicate keys. (KSDS data sets do not allow duplicate keys.) Duplicate keys exist when, for example, a secondary index is used to retrieve courses based on student name. As shown in Figure 119 on page 211, several source segments could exist for each student.

Prefix		Data	
DB	RBA	MATH	ADAMS
DB	RBA	FRENCH	ADAMS
DB	RBA	HIST	ADAMS

Figure 119. Examples of Source Segments for Each Student

Each pointer segment in a secondary index is stored in one logical record. A logical record containing a pointer segment is shown in Figure 120.




Figure 120. Example of a Logical Record Containing a Pointer Segment

A HALDB secondary index entry is shown in Figure 121.

Delete Byte	EPS-Extended pointer set	Key for the root of the target	Data
← 1 →	← 28 →	← 1 to 255 →	← Variable length →

Figure 121. Secondary Index Entry for HALDB

The format of the logical record is the same in both a KSDS and ESDS data set. The pointer field at the beginning of the logical record exists only when the key in the data portion of the segment is not unique. If keys are not unique, some pointer segments will contain duplicate keys. These pointer segments must be chained together, and this is done using the pointer field at the beginning of the logical record.

Pointer segments containing duplicate keys are stored in the ESDS in LIFO (last in, first out) sequence. When the first duplicate key segment is inserted, it is written to the ESDS, and the KSDS logical record containing the segment it is a duplicate of points to it. When the second duplicate is inserted, it is inserted into the ESDS in the next available location. The KSDS logical record is updated to point to the second duplicate. The effect of inserting duplicate pointer segments into the ESDS in LIFO sequence is that the original pointer segment (the one in the KSDS) is retrieved last. This retrieval sequence should not be a problem, because duplicates, by definition, have no special sequence.

Format and Use of Fields in a Pointer Segment

This topic contains diagnosis, modification, or tuning information.

Figure 122 on page 212 shows the fields in a pointer segment. Like all segments, the pointer segment has a prefix and data portion. The prefix portion has a delete byte, and when direct rather than symbolic pointing is used, it has the address of the target segment (4 bytes). The data portion has a series of fields, and some of them are optional. All fields in the data portion of a pointer segment contain data

Secondary Indexes

taken from the source segment (with the exception of user data). These fields are the constant field (optional), the search field, the subsequence field (optional), the duplicate data field (optional), the concatenated key field (optional except for HISAM), and then the data (optional).

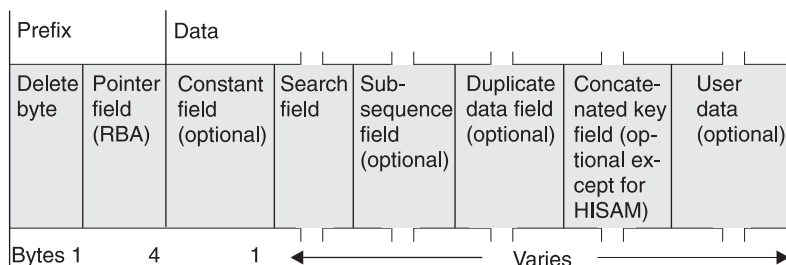


Figure 122. Examples of Several Source Segments for Each Student

Delete Byte

The delete byte is used by IMS to determine whether a segment has been deleted from the database.

Pointer Field

This field, when present, contains the RBA of the target segment. The pointer field exists when direct pointing is specified for an index pointing to an HD database. Direct pointing is simply pointing to a segment using its actual address. The other type of pointing that can be specified is symbolic pointing. Symbolic pointing, which is explained under “Concatenated Key Field,” can be used to point to HD databases and must be used to point to HISAM databases. If symbolic pointing is used, this field does not exist.

Constant Field

This field, when present, contains a 1-byte constant. The constant is used when more than one index is put in an index database (This topic is discussed under “Sharing Secondary Index Databases” on page 219). The constant identifies all pointer segments for a specific index in the shared index database. The value in the constant field becomes part of the key.

Search Field

The data in the search field is the key of the pointer segment. All data in the search field comes from data in the source segment. As many as five fields from the source segment can be put in the search field. These fields do not need to be contiguous fields in the source segment. When the fields are stored in the pointer segment, they can be stored in any order. When stored, the fields are concatenated. The data in the search field (the key) can be unique or non-unique.

IMS automatically maintains the search field in the pointer segment whenever a source segment is modified.

Subsequence Field

The subsequence field, like the search field, contains from one to five fields of data from the source segment. Subsequence fields are optional, and can be used if you have non-unique keys. The subsequence field can make non-unique keys unique. Making non-unique keys unique is desirable because of the many disadvantages of non-unique keys. For example, non-unique keys require you to use an additional data set, an ESDS, to store all index segments with duplicate keys. An ESDS requires additional space. More important, the search for specific occurrences of duplicates requires additional I/O operations that can decrease performance.

When a subsequence field is used, the subsequence data is concatenated with the data in the search field. These concatenated fields become the key of the pointer segment. If properly chosen, the concatenated fields form a unique key. (It is not always possible to form a unique key using source data in the subsequence field. Therefore, you can use system related fields, explained later in the chapter, to form unique keys.)

One important thing to note about using subsequence fields is that if you use them, the way in which an SSA is coded does not need to change. The SSA can still specify what is in the search field, but it cannot specify what is in the search plus the subsequence field. Subsequence fields are not seen by the application program unless it is processing the secondary index as a separate database.

Up to five fields from the source segment can be put in the subsequence field. These fields do not need to be contiguous fields in the source segment. When the fields are stored in the pointer segment, they can be stored in any order. When stored, they are concatenated.

IMS automatically maintains the subsequence field in the pointer segment whenever a source segment is modified.

Duplicate Data Field

The duplicate data field, like the search field, contains from one to five fields of data from the source segment. Duplicate data fields are optional. Use duplicate data fields when you have applications that process the secondary index as a separate database (This topic is discussed under “Processing a Secondary Index as a Separate Database” on page 218). Like the subsequence field, the duplicate data field is not seen by an application program unless it is processing the secondary index as a separate database.

As many as five fields from the source segment can be put in the duplicate data field. These fields do not need to be contiguous fields in the source segment. When the fields are stored in the pointer segment, they can be stored in any order. When stored, they are concatenated.

IMS automatically maintains the duplicate data field in the pointer segment whenever a source segment is modified.

Concatenated Key Field

This field, when present, contains the concatenated key of the target segment. This field exists when the pointer segment points to the target segment symbolically, rather than directly. Direct pointing is simply pointing to a segment using its actual address. Symbolic pointing is pointing to a segment by a means other than its actual address. In a secondary index, the concatenated key of the target segment is used as a symbolic pointer.

Segments in an HDAM or a HIDAM database being accessed using a secondary index can be accessed using a symbolic pointer. Segments in a HISAM database must be accessed using a symbolic pointer because segments in a HISAM database can “move around,” and the maintenance of direct-address pointers could be a large task. One of the implications of using symbolic pointers is that the physical parents of the target segment must be accessed to get to the target segment. Because of this extra access, retrieval of target segments using symbolic pointing is not as fast as retrieval using direct pointing. Also, symbolic pointers generally require more space in the pointer segment. When symbolic pointers are used, the

pointer field (4 bytes long) in the prefix is not present, but the fully concatenated key of the target segment is generally more than 4 bytes long.

IMS automatically generates the concatenated key field when symbolic pointing is specified.

One situation exists in which symbolic pointing is specified and IMS does not automatically generate the concatenated key field. This situation is caused by specifying the system-related field /CK as a subsequence or duplicate data field in such a way that the concatenated key is fully contained. In this situation, the symbolic pointer portion of either the subsequence field or the duplicate data field is used.

User Data in Pointer Segments

You can include any user data in the data portion of a pointer segment by specifying a segment length long enough to hold it. You need user data when applications process the secondary index as a separate database (This topic is discussed under “Processing a Secondary Index as a Separate Database” on page 218). Like data in the subsequence and duplicate data fields, user data is never seen by an application program unless it is processing the secondary index as a separate database.

You must initially load user data. You must also maintain it. During reorganization of a database that uses secondary indexes, the secondary index database is rebuilt by IMS. During this process, all user data in the pointer segment is lost.

Making Keys Unique Using System Related Fields

You have already seen why it is desirable to have unique keys in the secondary index. You have also seen one way to force unique keys using the subsequence field in the pointer segment. If use of the subsequence field to contain additional information from the source segment does not work for you, there are two other ways to force unique keys. Both are done using an operand in the FIELD statement of the source segment in the DBD. The FIELD statement defines fields within a segment type.

Using the /SX Operand

For HD databases, you can code a FIELD statement with a NAME field that starts with /SX. The /SX can be followed by any additional characters (up to five) that you need. When you use this operand, the system generates (during segment insertion) the RBA, or an 8-byte ILK for PHDAM or PHIDAM, of the source segment. The system also puts the RBA or ILK in the subsequent field in the pointer segment, thus ensuring that the key is unique. The FIELD statement in which /SX is coded is the FIELD statement defining fields in the source segment. The /SX value is not, however, put in the source segment. It is put in the pointer segment.

When you use the /SX operand, the XDFLD statement in the DBD must also specify /SX (plus any of the additional characters added to the /SX operand). The XDFLD statement, among other things, identifies fields from the source segment that are to be put in the pointer segment. The /SX operand is specified in the SUBSEQ= operand in the XDFLD statement.

Using the /CK Operand

The other way to force unique keys is to code a FIELD statement with a NAME parameter that starts with /CK. When used as a subsequence field, /CK ensures unique keys for pointer segments. You can use this operand for HISAM, HDAM,

PHDAM, HIDAM, or PHIDAM databases. The /CK can be followed by up to five additional characters. The /CK operand works like the /SX operand except that the concatenated key, rather than the RBA, of the source segment is used. Another difference is that the concatenated key is put in the subsequence or duplicate data field in the pointer segment. Where the concatenated key is put depends on where you specify the /CK.

When using /CK, you can use a portion of the concatenated key of the source segment (if some portion will make the key unique) or all of the concatenated key. You use the BYTES= and START= operands in the FIELD statement to specify what you need.

For example, suppose you are using the database record shown in Figure 123.

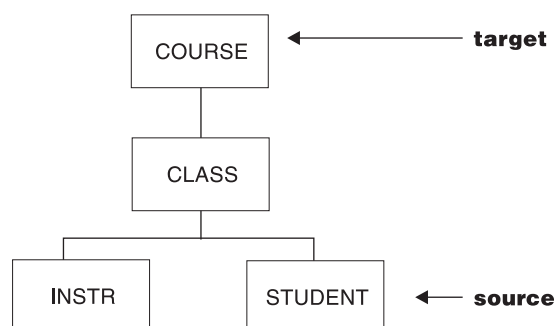


Figure 123. Database Record Showing the Source and Target for Secondary Indexes

The concatenated key of the STUDENT segment is shown in Figure 124.

COURSECD	CLASSNO	SEQ
Bytes 15	3	3

Figure 124. Concatenated Key of the STUDENT Segment

If you specify on the FIELD statement whose name begins with /CK BYTES=21, START=1, the entire concatenated key of the source segment will be put in the pointer segment. If you specify BYTES=6, START=16, only the last six bytes of the concatenated key (CLASSNO and SEQ) will be put in the pointer segment. The BYTES= operand tells the system how many bytes are to be taken from the concatenated key of the source segment in the PCB key feedback area. The START= operand tells the system the beginning position (relative to the beginning of the concatenated key) of the information that needs to be taken. As with the /SX operand, the XDFLD statement in the DBD must also specify /CK.

To summarize: /SX and /CK fields can be included on the SUBSEQ= parameter of the XDFLD statement to make key fields unique. Making key fields unique avoids the overhead of using an ESDS to hold duplicate keys. The /CK field can also be specified on the DDATA= parameter of the XDFLD statement but the field will not become part of the key field.

When making keys unique, unique sequence fields must be defined in the target segment type, if symbolic pointing is used. Also, unique sequence fields must be

defined in all segment types on which the target segment type is dependent (in the physical rather than restructured hierarchy in the database).

Suppressing Index Entries: Sparse Indexing

When a source segment is loaded, inserted, or replaced in the database, DL/I automatically creates or maintains the pointer segment in the index. This happens automatically unless you have specified that you do not need certain pointer segments built.

For example: suppose you have a secondary index for the education database at which you have been previously looking. STUDENT is the source segment, and COURSE is the target segment. You might need to create pointer segments for students only if they are associated with a certain customer number. This could be done using sparse indexing, a performance enhancement of secondary indexing.

Advantages of Sparse Indexing

Sparse indexing allows you to specify the conditions under which a pointer segment is suppressed, not generated, and put in the index database. Sparse indexing has two advantages. The primary one is that it reduces the size of the index, saving space and decreasing maintenance of the index. By decreasing the size of the index, performance is improved. The second advantage is that you do not need to generate unnecessary index entries.

How to Specify a Sparse Index

Sparse indexing can be specified in two ways:

- You can code a value in the NULLVAL= operand on the XDFLD statement in the DBD that equals the condition under which you do not need a pointer segment put in the index. You can put BLANK, ZERO, or any 1-byte value (for example, X'10', C'Z', 5, or B'00101101') in the NULLVAL= operand.
 - BLANK is the same as C ' ' or X'40'
 - ZERO is the same as X'00' but *not* C'0'

When using the NULLVAL= operand, a pointer segment is suppressed if every byte of the source field has the value you used in the operand.

- If the values you are allowed to code in the NULLVAL= operand do not work for you, you can create an index maintenance exit routine that determines the condition under which you do not need a pointer segment put in the index. If you create your own index maintenance exit routine, you code its name in the EXTRTN= operand on the XDFLD statement in the DBD. You can only have one index maintenance exit routine for each secondary index. This exit routine, however, can be a general purpose one that is used by more than one secondary index.

The exit routine must be consistent in determining whether a particular pointer segment needs to be put in the index. The exit routine cannot examine the same pointer segment at two different times but only mark it for suppression once. Also, user data cannot be used by your exit routine to determine whether a pointer segment is to be put in the index. When a pointer segment needs to be inserted into the index, your exit routine only sees the actual pointer segment just before insertion. When a pointer segment is being replaced or deleted, only a prototype of the pointer segment is seen by your exit routine. The prototype contains the contents of the constant, search, subsequence, and duplicate data fields, plus the symbolic pointer if there is one.

The information needed to code a secondary index maintenance exit routine is in *IMS Version 9: Customization Guide*.

How the Secondary Index Is Maintained

When a source segment is inserted, deleted, or replaced in the database, IMS keeps the index current regardless whether the application program performing the update uses the secondary index.

The way in which IMS maintains the index depends on the operation being performed. Regardless of the operation, IMS always begins index maintenance by building a pointer segment from information in the source segment that is being inserted, deleted, or replaced. (This pointer segment is built but not yet put in the secondary index database.)

Inserting a Source Segment

When a source segment is inserted, DL/I determines whether the pointer segment needs to be suppressed. If the pointer segment needs to be suppressed, it is not put in the secondary index. If the pointer segment does not need to be suppressed, it is put in the secondary index.

Deleting a Source Segment

When a source segment is deleted, IMS determines whether the pointer segment is one that was suppressed. If so, IMS does not do any index maintenance. If the segment is one that was suppressed, there should not be a corresponding pointer segment in the index to delete. If the pointer segment is not one that was suppressed, IMS finds the matching pointer segment in the index and deletes it. Unless the segment contains a pointer to the ESDS data set, which can occur with a non-unique secondary index, the logical record containing the deleted pointer segment in a KSDS data set is erased.

Replacing a Source Segment

When a source segment is replaced, the pointer segment in the index might or might not be affected. The pointer segment in the index might need to be replaced, or it might need to be deleted. After replacement or deletion, a new pointer segment is inserted. On the other hand, the pointer segment might need no changes. IMS determines what needs to be done by comparing the pointer segment it built (the new one) with the matching pointer segment in the secondary index (the old one).

- If both the new and the old pointer segments need to be suppressed, IMS does not do anything (no pointer segment exists in the index).
- If the new pointer segment needs to be suppressed but the old one does not, then the old pointer segment is deleted from the index.
- If the new pointer segment does not need to be suppressed but the old pointer segment is suppressed, then the new pointer segment is inserted into the secondary index.
- If neither the new or the old segment needs to be suppressed and:
 - If there is no change to the old pointer segment, IMS does not do anything.
 - If the non-key data portion in the new pointer segment is different from the old one, the old pointer segment is replaced. User data in the index pointer segment is preserved when the pointer segment is replaced.
 - If the key portion in the new pointer segment is different from the old one, the old pointer segment is deleted and the new pointer segment is inserted. User data is *not* preserved when the index pointer segment is deleted and a new one inserted.

If you reorganize your secondary index and it contains non-unique keys, the resulting pointer segment order can be unpredictable.

Processing a Secondary Index as a Separate Database

Because they are actual databases, secondary indexes can be processed independently. A number of reasons exist why an application program might process a secondary index as an independent database. For example, an application program can use the secondary index to retrieve a small piece of data from the database. If you put this piece of data in the pointer segment, the application program can retrieve it without an I/O operation to the regular database. You could put the piece of data in the duplicate data field in the pointer segment if the data was in the source segment. Otherwise, you must carry the data as user data in the pointer segment. (If you carry the data as user data, it is lost when the primary database is reorganized and the secondary index is recreated.)

Another reason for processing a secondary index as a separate database is to maintain it. You could, for example, scan the subsequence or duplicate data fields to do logical comparisons or data reduction between two or more indexes. Or you can add to or change the user data portion of the pointer segment. The only way an application program can see user data or the contents of the duplicate data field is by processing the secondary index as a separate database.

In processing a secondary index as a separate database, several processing restrictions designed primarily to protect the secondary index database exist. The restrictions are as follows:

- Segments cannot be inserted.
- Segments can be deleted. Note, however, that deleted segments can make your secondary index invalid for use as an index.
- The key field in the pointer segment (which consists of the search field, and if they exist, the constant and subsequence fields) cannot be replaced.

In addition to the restrictions imposed by the system to protect the secondary index database, you can further protect it using the PROT operand in the DBD statement. When PROT is specified, an application program can only replace user data in a pointer segment. However, pointer segments can still be deleted when PROT is specified. When a pointer segment is deleted, the source segment that caused the pointer segment to be created is not deleted. Note the implication of this: IMS might try to do maintenance on a pointer segment that has been deleted. When it finds no pointer segment for an existing source segment, it will return an NE status code. When NOPROT is specified, an application program can replace all fields in a pointer segment except the constant, search, and subsequence fields. PROT is the default for this parameter.

For an application program to process a secondary index as a separate database, you merely code a PCB for the application program. This PCB must reference the DBD for the secondary index. When an application program uses qualified SSAs to process a secondary index database, the SSAs must use the complete key of the pointer segment as the qualifier. The complete key consists of the search field and the subsequence and constant fields (if these last two fields exist). The PCB key feedback area in the application program will contain the entire key field.

If you are using a shared secondary index, calls issued by an application program (for example, a series of GN calls) will not violate the boundaries of the secondary index they are against. Each secondary index in a shared database has a unique DBD name and root segment name.

Sharing Secondary Index Databases

As many as 16 secondary indexes can be put in a single index database. When more than one secondary index is in the same database, the database is called a shared index database.

HALDB does not support shared secondary indexes.

Although using a shared index database can save some main storage, the disadvantages of using a shared index database generally outweigh the small amount of space that is saved by its use. For example, performance can decrease when more than one application program simultaneously uses the shared index database. (Search time is increased because the arm must move back and forth between more than one secondary index.) In addition, maintenance, recovery, and reorganization of the shared index database can decrease performance because all secondary indexes are, to some extent, affected if one is. For example, when a database that is accessed using a secondary index is reorganized, IMS automatically builds a new secondary index. This means all other indexes in the shared database must be copied to the new shared index.

If you are using a shared index database, you need to know the following information:

- A shared index database is created, accessed, and maintained just like an index database with a single secondary index.
- The various secondary indexes in the shared index database do not need to index the same database.
- One shared index database could contain all secondary indexes for your installation (if the number of secondary indexes does not exceed 16).

In a shared index database:

- All index segments must be the same length.
- All keys must be the same length.
- The offset from the beginning of all segments to the search field must be the same. This means all keys must be either unique or non-unique. With non-unique keys, a pointer field exists in the target segment. With unique keys, it does not. So the offset to the key field, if unique and non-unique keys were mixed, would differ by 4 bytes.

If the search fields in your secondary indexes are not the same length, you might be able to force key fields of equal length by using the subsequence field. You can put the number of bytes you need to make each key field an equal length in the subsequence field.

- Each shared secondary index requires a constant specified for it, a constant that uniquely identifies it from other indexes in the secondary index database. IMS puts this identifier in the constant field of each pointer segment in the secondary index database. For shared indexes, the key is the constant, search, and (if used) the subsequence field.

Using the INDICES= Parameter

In the PCB on a SENSEG statement, you can specify an INDICES= parameter. This parameter is used to specify a secondary index that contains search fields used to qualify SSAs for an indexed segment type. Figure 125, Figure 126 on page 220, and Figure 127 on page 220 illustrate the use of the INDICES=parameter.

Secondary Indexes

The use of the `INDICES=` parameter does not alter the processing sequence selected for the PCB by the presence or absence of the `PROCSEQ=` parameter.

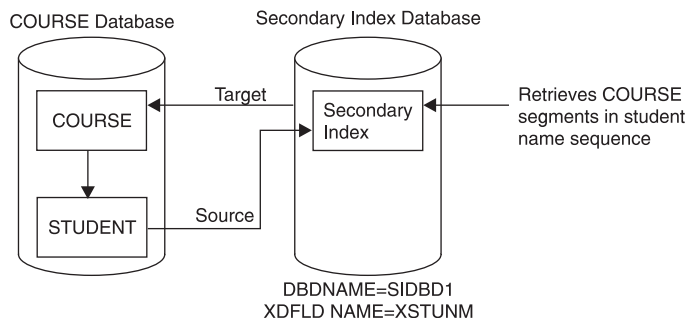


Figure 125. Databases for First Example of the `INDICES=` Parameter

```
PCB
SENSEG NAME=COURSE, INDICES=SIDBD1
SENSEG NAME=STUDENT
```

Figure 126. PCB for the First Example of the `INDICES=` Parameter

```
GU COURSE COURSENM=12345&.XSTUNM=JONES
```

Figure 127. Application Program Call Issued for the First Example of the `INDICES=` Parameter

When the call shown in Figure 127 is used, IMS gets the `COURSE` segment with a number 12345. Then IMS gets a secondary index entry, one in which `XSTUNM` is equal to `JONES`. IMS checks to see if the pointer in the secondary index points to the `COURSE` segment with course number 12345. If it does, IMS returns the `COURSE` segment to the application program's I/O area. If the secondary index pointer does not point to the `COURSE` segment with course number equal to 12345, IMS checks for other secondary index entries with `XSTUNM` equal to `JONES` and repeats the compare.

If all secondary index entries with `XSTUNM` equal to `JONES` result in invalid compares, no segment is returned to the application program. By doing this, IMS need not search the `STUDENT` segments for a student with `NAME` equal to `JONES`. This technique involving use of the `INDICES=` parameter is useful when source and target segments are different.

Compare Process and Performance

Excluding `COURSENM=12345` (in Figure 127) from a `GU` call, impacts performance. IMS retrieves the first `COURSE` segment in the `COURSE` database, and then a secondary index entry in which `XSTUNM` is equal to `JONES`. IMS checks to see if the pointer in the secondary index points to the `COURSE` segment just retrieved. If it does, IMS returns the `COURSE` segment to the application program's I/O area. If the secondary index pointer does not point to this `COURSE` segment, IMS checks for other secondary index entries with `XSTUNM` equal to `JONES` and repeats the compare. If all secondary index entries with `XSTUNM` equal to `JONES` result in invalid compares, IMS retrieves the next `COURSE` segment and the secondary index entries as before, then repeats the compare. If all the `COURSE` segments result in invalid compares, no segment is returned to the application program.

The `INDICES=` parameter can also be used to reference more than one secondary index in the source call. Figure 130 on page 221 shows the use of `INDICES=parameter`.

In the Figure 128, IMS uses the SIDBD2 secondary index to get the COURSE segment for MATH. IMS then gets a COURSE segment using the SIDBD1. IMS can then compare to see if the two course segments are the same. If they are, IMS returns the COURSE segment to the application program's I/O area. If the compare is not equal, IMS looks for other SIDBD1 pointers to COURSE segments and repeats the compare operations. If there are still no equal compares, IMS checks for other SIDBD2 pointers to COURSE segments and looks for equal compares to SIDBD1 pointers. If all possible compares result in unequal compares, no segment is returned to the application program.

Note: This compare process can severely degrade performance.

Using Secondary Indexes with Logical Relationships

When creating or using a secondary index for a database that has logical relationships, the following restrictions exist:

- A logical child segment or a dependent of a logical child cannot be a target segment.
- A logical child cannot be used as a source segment; however, a dependent of a logical child can.
- A concatenated segment or a dependent of a concatenated segment in a logical database cannot be a target segment.
- When using logical relationships, no qualification on indexed fields is allowed in the SSA for a concatenated segment. However, an SSA for any dependent of a concatenated segment can be qualified on an indexed field.

Figure 128 shows the databases for the second example of the INDICES parameter. Following the databases is the example PCB in Figure 129 and the application programming call in Figure 130.

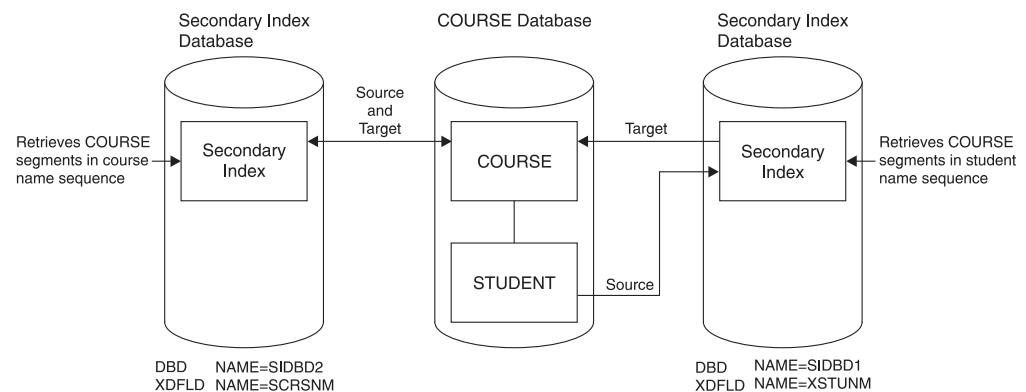


Figure 128. Databases for Second Example of the INDICES= Parameter

```
PCB      PROCSEQ=SIDBD2
SENSEG NAME=COURSE, INDICES=SIDBD1
SENSEG NAME=STUDENT
```

Figure 129. PCB for the Second Example of the INDICES= Parameter

```
GU COURSE SCRSNM=MATH&XTUNNM=JONES
```

Figure 130. Application Program Call Issued for the Second Example of the INDICES= Parameter

Using Secondary Indexes with Variable-Length Segments

If a variable-length segment is a source segment, when an occurrence of it is inserted that does not have fields specified for use in the search, subsequence, or duplicate data fields of the pointer segment, the following occurs:

- If the missing source segment data is used in the search field of the pointer segment, no pointer segment is put in the index.
- If the missing source segment data is used in the subsequence or duplicate data fields of the pointer segment, the pointer segment is put in the index. However, the subsequence or duplicate data field will contain one of the three following representations of zero:

P = X'0F'

X = X'00'

C = C'0'

Which of these is used is determined by what is specified on the FIELD statements in the DBD that defined the source segment field.

Considerations When Using Secondary Indexing

- When a source segment is inserted into or deleted from a database, an index pointer segment is inserted into or deleted from the secondary index. This maintenance always occurs regardless of whether the application program doing the updating is using the secondary index.
- When an index pointer segment is deleted by a REPL or DLET call, position is lost for all calls within the database record for which a PCB position was established using the deleted index pointer segment.
- When replacing data in a source segment, if the data is used in the search, subsequence, or duplicate data fields of a secondary index, the index is updated to reflect the change as follows:
 - If data used in the duplicate data field of the pointer segment is replaced in the source segment, the pointer segment is updated with the new data.
 - If data used in the search or subsequence fields of the pointer segment is replaced in the source segment, the pointer segment is updated with the new data. In addition, the position of the pointer segment in the index is changed, because a change to the search or subsequence field of a pointer segment changes the key of the pointer segment. The index is updated by deleting the pointer segment from the position that was determined by the old key. The pointer segment is then inserted in the position determined by the new key.
- The use of secondary indexes increases storage requirements for all calls made within a specific PCB when the processing option allows the source segment to be updated. Additional storage requirements for each secondary index database range from 6K to 10K bytes. Part of this additional storage is fixed in real storage by VSAM.
- You should always compare the use of secondary indexing with other ways of achieving the same result. For example, to produce a report from an HDAM or PHDAM database in root key sequence, you can use a secondary index. However, in many cases, access to each root sequentially is a random operation. It would be very time-consuming to fully scan a large database when access to each root is random. It might be more efficient to scan the database in physical sequence (using GN calls and no secondary index) and then sort the results by root key to produce a final report in root key sequence.
- When calls for a target segment are qualified on the search field of a secondary index, and the indexed database is not being processed using the secondary index, additional I/O operations are required. Additional I/O operations are

required because the index must be accessed each time an occurrence of the target segment is inspected. Because the data in the search field of a secondary index is a duplication of data in a source segment, you should decide whether an inspection of source segments might yield the same result faster.

- When using a secondary data structure, the target segment and the segments on which it was dependent (its physical parents) cannot be inserted or deleted.

How to Specify Use of Secondary Indexing in the DBD

Figure 131 on page 224 shows the EDUC database and its secondary index. Figure 132 on page 225 and Figure 133 on page 225 show the two DBDs required for the databases. The secondary index in this example is used to retrieve COURSE segments based on student names. The example uses direct, rather than symbolic, pointers. The pointer segment in the secondary index contains a student name in the search field and a system related field in the subsequence field. Both of these fields are defined in the STUDENT segment. The STUDENT segment is the source segment. The COURSE segment is the target segment.

The DBDs in Figure 132 on page 225 and Figure 133 on page 225 highlight the statements and parameters coded when a secondary index is used. (Wherever statements or parameters are omitted the parameter in the DBD is coded the same regardless of whether secondary indexing is used.) “DBD for the EDUC Database” and “DBD for the SINDX Database” on page 225 provide a summary of how the statements and parameters in the DBDs in Figure 132 on page 225 and Figure 133 on page 225 are used.

DBD for the EDUC Database

An LCHILD and XDFLD statement are used to define the secondary index. These statements are coded after the SEGM statement for the target segment.

- LCHILD statement. The LCHILD statement specifies the name of the secondary index SEGM statement and the name of the secondary index database in the NAME= parameter. The PTR= parameter is always PTR=INDX when a secondary index is used.
- XDFLD statement. The XDFLD statement defines the contents of the pointer segment and the options used in the secondary index. It must appear in the DBD input deck after the LCHILD statement that references the pointer segment. The meaning of the parameters in the XDFLD statement are as follows:

NAME=

This parameter specifies the name that can be used in the SSA to qualify a DL/I call on the secondary processing sequence.

SEGMENT=

This parameter identifies the source segment, which in this example is STUDENT. If this operand is omitted, the target segment is assumed to be the same segment as the source segment. The remaining parameters in the XDFLD statement describe information related to the source segment.

CONSTANT=

This parameter (not used in the example) specifies the unique constant required when a secondary index is part of a shared database.

SRCH=

This parameter specifies the one to five fields from the source segment that are to be copied into the pointer segment's search field. In this case, only one field is being copied, the STUDNM field, which contains student names.

SUBSEQ=

This parameter specifies the one to five fields from the source segment that

Secondary Indexes

are to be copied into the pointer segment's subsequence field. These extra fields can be used to make the key in the index unique. In this case, one field is being copied, the /SX1 field, which contains a system-related field. This parameter is optional.

DDATA=

This parameter (not used in the example) specifies the one to five fields from the source segment that are to be copied into the pointer segment's duplicate data field. These fields can only be accessed when the secondary index is processed as a separate database. This parameter is optional.

NULLVAL=

This parameter (not used in the example) contains a 1-byte value used to suppress entries in the secondary index database. This parameter is optional.

EXTRTN=

This parameter (not used in the example) specifies a user-exit routine. The user routine gets control after a source segment is built. The routine is used to suppress entries in the secondary index database when you cannot use the values that can be specified in the NULLVAL= parameter. This parameter is optional.

In the example, shown in Figure 131, a system-related field (/SX1) is used on the SUBSEQ parameter. System-related fields must also be coded on FIELD statements after the SEGM for the source segment. For more details, see “Making Keys Unique Using System Related Fields” on page 214.

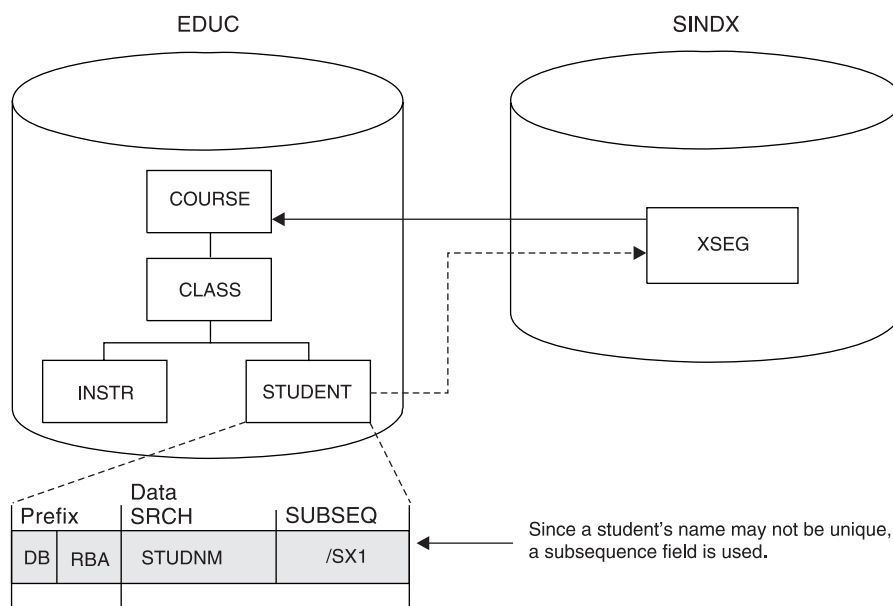


Figure 131. Databases for Secondary Indexing Example

Figure 132 on page 225 shows the EDUC DBD for the example in Figure 131.

```

DBD      NAME=EDUC,ACCESS=HDAM,...
SEGM     NAME=COURSE,...
FIELD    NAME=(COURSECD,...
LCHILD   NAME=(XSEG,SINDX),PTR=INDX
XDFLD    NAME=XSTUDENT,SEGMENT=STUDENT,SRCH=STUDNM,SUBSEQ=/SX1
SEGM     NAME=CLASS,...
FIELD    NAME=(EDCTR,...
SEGM     NAME=INSTR,...
FIELD    NAME=(INSTNO,...
SEGM     NAME=STUDENT,...
FIELD    NAME=SEQ,...
FIELD    NAME=STUDNM,BYTES=20,START=1
FIELD    NAME=/SX1

DBDGEN
FINISH
END

```

Figure 132. EDUC DBD for Secondary Indexing

Figure 133 shows the SINDX DBD for the example in Figure 131 on page 224.

```

DBD      NAME=SINDX,ACCESS=INDEX
SEGM     NAME=XSEG,...
FIELD    NAME=(XSEG,SEQ,U),BYTES=24,START=1
LCHILD   NAME=(COURSE,EDUC),INDEX=XSTUDENT,PTR=SNGL

DBDGEN
FINISH
END

```

Figure 133. SINDX DBD for Secondary Indexing

DBD for the SINDX Database

- DBD statement. The DBD statement specifies the name of the secondary index database in the NAME= parameter. The ACCESS= parameter is always ACCESS=INDEX for the secondary index DBD.
- SEGM statement. You choose what is used in the NAME= parameter. This value is used when processing the secondary index as a separate database.
- FIELD statement. The NAME= parameter specifies the sequence field of the secondary index. In this case, the sequence field is composed of both the search and subsequence field data, the student name, and the system-related field /SX1. You specify what is chosen by NAME=parameter.
- LCHILD statement. The LCHILD statement specifies the name of the target, SEGM, and the name of the target database in the NAME= parameter. The INDEX= parameter has the name on the XDFLD statement in the target database. If the pointer segment contains a direct-address pointer to the target segment, the PTR= parameter is PTR=SNGL. The PTR= parameter is PTR=SYMB if the pointer segment contains a symbolic pointer to the target segment.

HALDB Partitioned Secondary Indexes

A secondary index of a HALDB database must be a HALDB partitioned secondary index (PSINDEX). A PSINDEX can have one or more partitions. The key ranges for the partitions of a secondary index are not likely to match the key ranges of its target database. Partition selection for the secondary index is based on its key. Partition selection for the target database is based on its key. Usually, these keys are unrelated. In some cases, you can use a partition selection exit routine to partition the secondary index along the same boundaries of the main database. An

Secondary Indexes

appropriate key is required, because the selection of a partition always depends on the root key. The partition selection exit routine uses the parts of the root key that you specify to select the correct partition.

To initialize partitions in a PSINDEX, use the HALDB Partition Data Set Initialization utility (DFSUPNT0). DFSUPNT0 automatically generates recovery points for the PSINDEX. Recovery points are not created if you delete and redefine your PSINDEX partitions and then turn off their PINIT flags.

Additionally, there are other requirements and considerations for HALDB partitioned secondary indexes:

- Symbolic pointing is not supported.
- Shared secondary indexes are not supported.
- Secondary indexes must have unique keys.
- /SX and /CK fields can be used to provide uniqueness.
- The reorganization of a target database does not require the rebuilding of its secondary indexes. HALDBs use an indirect list data set (ILDS) to maintain pointers between the PSINDEX and the target segments. For more information about how the ILDS heals PSINDEX pointers after a reorganization of a HALDB database, see “The HALDB Self-Healing Pointer Process” on page 401.

Choosing Secondary Indexes Versus Logical Relationships

While learning about secondary indexes and logical relationships, you might have noted that both options give you logical data structures. A logical data structure is a hierarchic data structure different from the data structure represented by the physical DBD. How, then, do you decide when to use a logical relationship and when to use a secondary index? This decision is based primarily on how your applications need to process the data.

When to Use a Secondary Index

In analyzing application requirements, if more than one candidate exists for the sequence field of a segment, use a secondary index. Choose one sequence field to be defined in the physical DBD. Then set up a secondary index to allow processing of the same segment in another sequence. For the example shown in Figure 134, access the customer segment that follows in both customer number (CUSTNO) and customer name (CUSTNAME) sequence. To do this, define CUSTNO as the sequence field in the physical DBD and then define a secondary index that processes CUSTOMER segments in CUSTNAME sequence.

CUSTOMER

CUSTNO	CUSTNAME	
--------	----------	--

Figure 134. Fields in the CUSTOMER Segment

When to Use a Logical Relationship

If you have applications such as a bill-of-materials using a recursive structure, use a logical relationship. A recursive structure exists when there is a many-to-many association between two segments in the same physical hierarchy. For example, in the segments shown in Figure 135 on page 227, the assembly “car” is composed of many parts, one of which is an engine. However, the engine is itself an assembly composed of many parts.




Figure 135. Assembly and Parts as Examples to Demonstrate Segments Logical Relationship

Related Reading: Recursive structure are explained in “Recursive Structures: Same Database Logical Relationships” on page 184.

Finally, you can have application requirements that result in a segment that appears to have two parents. In the example shown in Figure 136, the customer database keeps track of orders (CUSTORDN). Each order can have one or more line items (ORDLINE), with each line item specifying one product (PROD) and model (MODEL). In the product database, many outstanding line item requests can exist for a given model. This type of relationship is called a many-to-many relationship and is handled in IMS through a logical relationship.

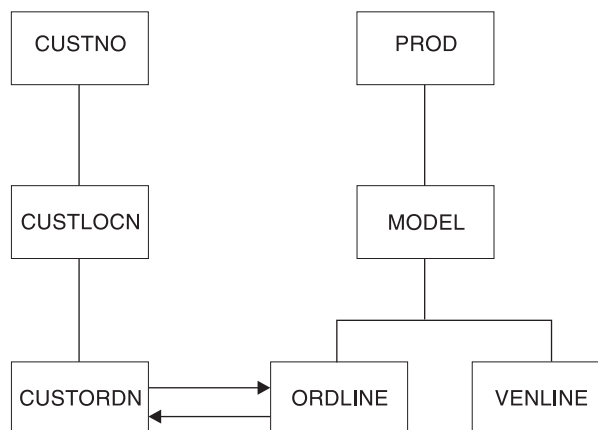


Figure 136. Example of a Segment That Appears to Have Two Parents

Variable-Length Segments

Database types that support variable-length segments:

- HISAM
- HDAM
- PHIDAM
- HIDAM
- PHDAM
- DEDB

Variable-length segments are simply segments whose length can vary in occurrence of some segment types. A database can contain both variable-length segment and fixed-length segment types. Variable-length segments can be used for HISAM, HDAM, PHDAM, HIDAM, and PHIDAM databases.

How to Specify Variable-Length Segments

It is the data portion of a variable-length segment whose length varies. The data portion varies between a minimum and a maximum number of bytes. As shown in Figure 137, you specify minimum and maximum size in the BYTES= keyword in the SEGM statement in the DBD. Because IMS needs to know the length of the data portion of a variable-length segment, you include a 2-byte size field in each segment when loading it. The size field is in the data portion of the segment. The length of the data portion you specify must include the two bytes used for the size field. If the segment type has a sequence field, the minimum length specified in the size field must equal at least the size field and all data to the end of the sequence field.

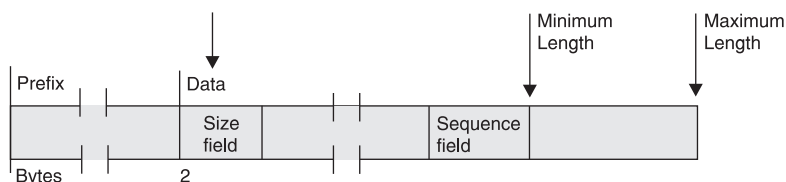


Figure 137. How Variable-Length Segments Are Specified

How Variable-Length Segments Are Stored and Processed

When a variable-length segment is initially loaded, the space used to store its data portion is the length specified in the MINBYTES operand or the length specified in the size field, whichever is larger. If the space in the MINBYTES operand is larger, more space is allocated for the segment than is required. The additional space can be used when existing data in the segment is replaced with data that is longer.

The prefix and data portion of HDAM, PHDAM, HIDAM, and PHIDAM variable-length segments can be separated in storage when updates occur. When this happens, the first four bytes following the prefix point to the separated data portion of the segment.

Figure 138 shows the format of a HISAM variable-length segment. It is also the format of an HDAM, PHDAM, HIDAM, or PHIDAM variable-length segment when the prefix and data portion of the segment have not been separated in storage.




Figure 138. Format of HISAM Variable-Length Segments

Figure 139 on page 229 shows the format of an HDAM, PHDAM, HIDAM, or PHIDAM variable-length segment when the prefix and data portion of the segment have been separated in storage.

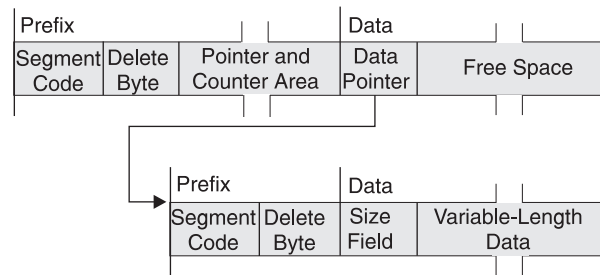


Figure 139. Format of HDAM, PHDAM, HIDAM or PHIDAM Variable-Length Segments

After a variable-length segment is loaded, replace operations can cause the size of data in it to be either increased or decreased. When the length of data in an existing HISAM segment is increased, the logical record containing the segment is rewritten to acquire the additional space. Any segments displaced by the rewrite are put in overflow storage. Displacement of segments to overflow storage can affect performance. When the length of data in an existing HISAM segment is decreased, the logical record is rewritten so all segments in it are physically adjacent.

When a replace operation causes the length of data in an existing HDAM, PHDAM, HIDAM, or PHIDAM segment to be increased, one of two things can happen:

- If the space allocated for the existing segment is long enough for the new data, the new data is simply placed in the segment. This is true regardless of whether the prefix and data portions of the segment were previously separated in the data set.
- If the space allocated for the existing segment is not long enough for the new data, the prefix and data portions of the segment are separated in storage. IMS puts the data portion of the segment as close to the prefix as possible. Once the segment is separated, a pointer is placed in the first four bytes following the prefix to point to the data portion of the segment. This separation increases the amount of space needed for the segment, because, in addition to the pointer kept with the prefix, a 1-byte segment code and 1-byte delete code are added to the data portion of the segment (see Figure 138 on page 228). In addition, if separation of the segment causes its two parts to be stored in different blocks, two read operations will be required to access the segment.

When a replace operation causes the length of data in an existing HDAM, PHDAM, HIDAM, or PHIDAM segment to be decreased, one of three things can happen:

- If prefix and data are not separated, the data in the existing segment is replaced with the new, shorter data followed by free space.
- If prefix and data are separated but sufficient space is not available immediately following the original prefix to recombine the segment, the data in the separated data portion of the segment is replaced with the new, shorter data followed by free space.
- If prefix and data are separated and sufficient space is available immediately following the original prefix to recombine the segment, the new data is placed in the original space, overlaying the data pointer. The old separated data portion of the segment is then available as free space in HD databases.

When to Use Variable-Length Segments

Use variable-length segments when the length of data in your segment varies, for example, with descriptive data. By using variable-length segments, you do not need to make the data portion of your segment type as long as the longest piece of descriptive data you have. This saves storage space. Note, however, that if you are using HDAM, PHDAM, HIDAM, or PHIDAM databases and your segment data characteristically grows in size over time, segments will split. If a segment split causes the two parts of a segment to be put in different blocks, two read operations will be required to access the segment until the database is reorganized. So variable-length segments work well if segment size varies but is stable (as in an address segment). Variable-length segments might not work well if segment size typically grows (as in a segment type containing a cumulative list of sales commissions).

What Application Programmers Need to Know about Variable-Length Segments

If you are using variable-length segments in your database, you need to let application programmers who will be using the database know this. They need to know which of the segment types they have access to are variable in length and the maximum size of each of these variable-length segment types. In calculating the size of their I/O area, application programmers must use the maximum size of a variable-length segment. In addition, they need to know that the first two bytes of the data portion of a variable-length segment contain the length of the data portion including the size field.

Working with the application programmer, you should devise a scheme for accessing data in variable-length segments. You should devise a scheme because if variable-length fields and fixed-length fields in a segment are mixed, the application program has no way of knowing where specific fields begin. One way to solve this problem is to put the size of a variable-length field at the beginning of the variable-length field. If a segment has only one variable-length field, it can be made the last field in the segment. If it is at all possible, the simplest scheme is to have only one field in a variable-length segment.

Adding or Converting to Variable-Length Segments

Information on how to add variable-length segments to an existing database and convert an entire database to variable-length segments is in Chapter 16, "Modifying Databases," on page 437.

Segment Edit/Compression Exit Routine

The following database types support the Segment Edit/Compression exit routine:

- HISAM
- HDAM
- PHDAM
- HIDAM
- PHIDAM
- DEDB

Detailed information on how the Segment Edit/Compression exit routine works and how you use it is in *IMS Version 9: Customization Guide*. This topic introduces you to the facility.

The Segment Edit/Compression exit routine allows you to encode, edit, or compress the data portion of a segment. You can use this facility on segment data in full function databases and Fast Path DEDBs. You write the routine (your edit routine) that actually manipulates the data in the segment. The IMS code gives your edit routine information about the segment's location and assists in moving the segment back and forth between the buffer pool and the application program's I/O area.

The Segment Edit/Compression exit routine lets you:

- **Encode data for security purposes.** Encoding data consists of “scrambling” segment data when it is on the device so only programs with access to the edit routine can see it in decoded form.
- **Edit data.** Editing data allows application programs to receive data in a format other than the one in which it is stored. For example, an application program might receive segment fields in an order other than the one in which they are stored; an application program might require all blank space be removed from descriptive data.
- **Compress data.** This allows better use of DASD storage because segments can be compressed when written to the device and then expanded when passed back to the application program. Segment data might be compressed, for example, by removing all blanks and zeros.
- **Expand Data.** The DEDB Sequential Dependent Scan utility invokes the Segment Edit/Compression exit routine (DFSCMPX0) to expand compressed SDEP segments when you specify both SDEP segment compression in the DBD and the DEDB Scan utility keyword, EXPANDSEG.

Related Reading: EXPANDSEG and the DEDB Scan utility are described in *IMS Version 9: Utilities Reference: Database and Transaction Manager*. The segment compression exit is described in *IMS Version 9: Customization Guide*.

Two types of segment manipulation are possible using the Segment Edit/Compression exit routine:

- **Data compression**— movement or compression of data within a segment in a manner that does not alter the content or position of the key field. Typically, this involves compression of data from the end of the key field to the end of the segment. When a fixed-length segment is compressed, a 2-byte field must be added to the beginning of the data portion of the segment by the user data compression routine. This field is used by IMS to determine secondary storage requirements and is the only time that the location of the key field can be altered. The segment size field of a variable-length segment cannot be compressed but must be updated to reflect the length of the compressed segment.
- **Key compression**— movement or compression of any data within a segment in a manner that can change the relative position, value, or length of the key field and any other fields except the size field. The segment size field of a variable-length segment must be updated by the compression routine to reflect the length of the compressed segment.

You specify the use of the segment edit/compression exit routine when you define a segment type. Any segment type can be edited or compressed (using either data or key compression) as long as the segment is:

- Not a logical child
- Not in an HSAM, SHISAM, or index database

Segment Edit/Compression Exit Routine

The use of the segment edit/compression exit routine is defined in physical database DBDs. This exit routine's use cannot be defined in a logical database DBD.

Data compression is allowed but key compression is not allowed when the segment is:

- A root segment in a HISAM database
- A segment in a DEDB database

Things to Consider Before Using the Segment Edit/Compression Exit Routine

Before using a Segment Edit/Compression routine you should be aware of the following points:

- Because your edit routine is executed as part of a DL/I call, if it abnormally terminates so does the entire IMS region.
- Your routine cannot use the operating system macros LOAD, GETMAIN, SPIE or STAE.

Related Reading: For alternatives to these macros, see *IMS Version 9: Customization Guide*.

- The name of the Segment Edit/Compression exit routine must not be the same as the DBDNAME.
- Editing and compressing of each segment on its way to or from an application program requires additional processor time.

Depending on the options you select, search time to locate a specific segment can increase. If you are fully compressing the segment using key compression, every segment type that is a candidate to satisfy either a fully qualified key or data field request must be expanded or divided. IMS then examines the appropriate field. For key field qualification, only those fields from the start of the segment through the sequence field are expanded during the search. For data field qualification, the total segment is expanded. In the case of data compression and a key field request, little more processing is required to locate the segment than that of non-compressed segments. Only the segment sequence field is used to determine if this segment occurrence satisfies the qualification.

Other considerations can affect total system performance, especially in an online environment. For example, being able to load an algorithm table into storage gives the compression routine a large amount of flexibility. However, this can place the entire IMS control region into a wait state until the requested member is present in storage. It is suggested that all alternatives be explored to lessen the impact of situations such as this.

Preventing Split Segments from Impacting Performance

When segments in a full-function database grow larger than the size of their current location, replace calls can split the segments. When segments are split, their prefixes remain in their existing location, but their data parts are stored in a new location, possibly in another block or CI. Split segments can negatively affect performance by requiring additional reads to retrieve both parts of the segments.

To prevent IMS from splitting compressed segments, you can specify a minimum size for the segments that includes extra padded space. This gives the compressed segment room to grow and decreases the chance that IMS will split the segment.

You specify the minimum size for fixed-length full-function segments differently than you do for variable-length full-function segments:

- For fixed-length segments, specify the minimum size using both the fourth and fifth subparameters on the COMPRTN= parameter of the SEGM statement. The fourth subparameter, *size*, only defines the minimum size if you also specify the fifth subparameter, PAD.
- For variable-length segments, specify the minimum size using the second subparameter, *min_bytes*, of the BYTES= parameter of the SEGM statement.

Related Reading: For a complete description of the COMPRTN= and BYTES= parameters of SEGM statements for full-function databases, see *IMS Version 9: Utilities Reference: System*.

DEDB segments are never split by replace calls. If a DEDB segment grows beyond the size of its current location, the entire segment, including its prefix, is moved to a new location. For this reason, it is not necessary to pad compressed DEDB segments.

How to Specify the Segment Edit/Compression Exit Routine

To specify the use of the segment edit/compression exit routine for a segment, use the COMPRTN= keyword of the SEGM statement in the DBD.

Related Reading: For more information on using the COMPRTN= keyword to specify the use of the segment edit/compression exit routine, see *IMS Version 9: Utilities Reference: System*.

Converting to the Segment Edit/Compression Exit Routine

Information on how to convert an existing database so it can use a Segment Edit/Compression exit routine is discussed in Chapter 16, “Modifying Databases,” on page 437.

Data Capture Exit Routines

The following database types support data capture exit routines:

- HISAM
- SHISAM
- HDAM
- PHDAM
- HIDAM
- PHIDAM
- DEDB

The Data Capture exit routine is an installation-written exit routine. Data Capture exit routines promote and enhance database coexistence. Data Capture exit routines capture segment-level data from a DL/I database for propagation to DB2 UDB for z/OS databases. Installations running IMS and DB2 UDB for z/OS databases can use Data Capture exit routines to exchange data across the two database types.

Data Capture exit routines can be written in assembler language, C, VS COBOL II, or PL/I. *IMS Version 9: Customization Guide* describes Data Capture exit routines in detail.

Data Capture Exit Routines

Data Capture exit routines are supported by IMS Transaction Manager and Database Manager. DBCTL support is for BMPs only.

Data Capture exit routines are compatible with the following physical database structures:

- HDAM
- PHDAM
- HIDAM
- PHIDAM
- HISAM
- SHISAM
- DEDB

Data Capture exit routines do not support segments in secondary indexes.

A Data Capture exit routine is called based on segment-level specifications in the DBD. When a Data Capture exit routine is specified on a database segment, it is invoked by all application program activity on that segment, regardless of which PSB is active. Therefore, Data Capture exit routines are global. Using a Data Capture exit routine can have a performance impact across the entire database system.

DBD Parameters for Data Capture Exit Routines

This topic contains programming interface information.

Using Data Capture exit routines requires specification of one or two DBD parameters and subsequent DBDGEN. The EXIT= parameter identifies which Data Capture exit routines will run against segments in a database. The VERSION= parameter records important information about the DBD for use by Data Capture exit routines.

The EXIT= Parameter

To use the Data Capture exit routine, you must use the optional EXIT= parameter. You specify EXIT= on either the DBD or SEGM statements of physical database definitions.

Specifying EXIT= on the DBD statement applies a Data Capture exit routine to all segments within a database structure. Specifying EXIT= on the SEGM statement applies a Data Capture exit routine to only that segment type.

You can override Data Capture exit routines specified on the DBD statement by specifying EXIT= on a SEGM statement. EXIT=NONE on a SEGM statement cancels all Data Capture exit routines specified on the DBD statement for that segment type. A physical child does not inherit an EXIT= parameter specified on the SEGM statement of its physical parent.

You can specify multiple Data Capture exit routines on a single DBD or SEGM statement. For example, you might code a DBD statement as:

```
DBD  EXIT=((EXIT1A),(EXIT1B))
```

The name of the Data Capture exit routine that you intend to use is the only required operand for the EXIT= parameter. Exit names can have a maximum of

eight alphanumeric characters. For example, if you specify a Data Capture exit routine with the name EXITA on a SEGM statement in a database, the EXIT= parameter is coded as follows:

```
SEGM  EXIT=(EXITA,KEY,DATA,NOPATH,(CASCADE,KEY,DATA,NOPATH))
```

KEY, NOPATH, DATA, CASCADE, KEY, DATA, and NOPATH are default operands. These defaults define what data is captured by the exit routine when a segment is updated by an application program.

Related Reading:

- For more information about the Data Capture exit routine, see *IMS Version 9: Customization Guide*.
- For a full description of the EXIT= parameter on both the DBD and SEGM statements, see *IMS Version 9: Utilities Reference: System*.

The VERSION= Parameter

VERSION= is an optional parameter that supports Data Capture exit routines. VERSION= is specified on the DBD statement as:

```
VERSION='character string'
```

The maximum length of the character string is 255 bytes. You can use VERSION= to create a naming convention that denotes the database characteristics that affect the proper functioning of Data Capture exit routines. You might use VERSION= to flag DBDs containing logical relationships, or to indicate which data capture exit routines are defined on the DBD or SEGM statements. VERSION= might be coded as:

```
DBD  VERSION='DAL-&SYSDATE-&SYSTIME'
```

DAL, in this statement, tells you that Data Capture exit routine A is specified on the DBD statement (D), and that the database contains logical relationships (L). &SYSDATE and &SYSTIME tell you the date and time the DBD was generated.

If you do not specify a VERSION= parameter, DBDGEN generates a default 13-character date-time stamp. The default consists of an 8-byte date stamp and a 5-byte time stamp with the following format:

```
MM/DD/YYHH.MM
```

The default date-time stamp on VERSION= is identical to the DBDGEN date-time stamp.

VERSION= is passed as a variable length character string with a 2-byte length of the VERSION=, which does not include the length of the LL.

Call Sequence of Data Capture Exit Routines

This topic contains programming interface information.

A Data Capture exit routine is invoked once per segment update for each segment for which the Data Capture exit routine is specified. Data Capture exit routines are invoked multiple times for a single call under certain conditions. These conditions include:

- Path updates.
- Cascade deletes when multiple segment types or multiple segment occurrences are deleted.
- Updates on logical children.

Data Capture Exit Routines

- Updates on logical parents.
- Updates on a single segment when multiple Data Capture exit routines are specified against that segment. Each exit is invoked once, in the order it is listed on the DBD or SEGM statements.

When multiple segments are updated in a single application program call, Data Capture exit routines are invoked in the same order in which IMS physically updates the segments:

1. Path inserts are executed “top-down” in DL/I. Therefore, a Data Capture exit routine for a parent segment is called before a Data Capture exit routine for that parent's dependent.
2. Cascade deletes are executed “bottom-up”. All dependent segments' exits are called before their respective parents' exits on cascade deletes. IMS physically deletes dependent segments on cascade deletes only after it has validated the delete rules by following the hierarchy to the lowest level segment. After delete rules are validated, IMS deletes segments starting with the lowest level segment in a dependent chain and continuing up the chain, deleting the highest level parent segment in the hierarchy last. Data Capture exit routines specified for segments in a cascade delete are called in reverse hierarchical order.
3. Path replaces are performed “top-down” in IMS. In Data Capture exit routines defined against segments in path replaces, parent segments are replaced first. All of their descendents are then replaced in descending hierarchical order.

When an application program does a cascade delete on logically related segments, Data Capture exit routines defined on the logical child are always called before Data Capture exit routines defined on the logical parent. Data Capture exit routines are called even if the logical child is higher in the physical hierarchy, except in recursive structures where the delete results in the deletion of a parent of the deleted segment.

Data Passed To and Captured By the Data Capture Exit Routine

This topic contains programming interface information.

Data is passed to Data Capture exit routines when an application program updates IMS with a DL/I insert, delete, or replace call. Segment data passed to Data Capture exit routines is always physical data. When the update involves logical children, the data passed is physical data and the concatenated key of the logical parent segment. For segments that use the Segment Edit/Compression exit routine (DFSCMPX0), the data passed is expanded data.

When an application replaces a segment, both the existing and the replacement physical data are captured. In general, segment data is captured even if the application call does not change the data. However, for full-function databases, IMS compares the before and after data. If the data has not changed, IMS does not update the database or log the replace data. Because data is not replaced, Data Capture exit routines specified for that segment are not called and the data is not captured.

Data might be captured during replaces even if segment data does not change when:

1. The application inserts a concatenation of a logical child and logical parent, IMS replaces the logical parent, and the parent data does not change.

2. The application issues a replace for a segment in a DEDB database.

In each case, IMS updates the database without comparing the before and after data, and therefore the data is captured even though it does not change.

The entire segment, before and after, is passed to Data Capture exit routines when the application replaces a segment. When the exit routine is interested in only a few fields, it is recommended that the SQL update request not be issued until after the before and after replace data for those fields is compared to see if the fields were changed.

Data Capture Call Functions

This topic contains programming interface information.

Data Capture exit routines are called when segment data is updated by an application program insert, replace, or delete call. Optionally, Data Capture exit routines are called when DL/I deletes a dependent segment because the application program deleted its parent segment, a process known as cascade delete. Data Capture exit routines are passed two functions to identify the following:

1. The action performed by the application program
2. The action performed by IMS

The two functions that are passed to the Data Capture exit routines are:

- Call function. The DL/I call, ISRT, REPL, or DLET, that is issued by the application program for the segment.
- Physical function. The physical action, ISRT, REPL, or DLET, performed by IMS as a result of the call. The physical function is used to determine the type of SQL request to issue when propagating data.

The call and physical functions passed to the exit routine are always the same for replace calls. However, the functions passed might differ for delete or insert calls:

- For delete calls resulting in cascade deletes, the call function passed is CASC (to indicate the cascade delete) and the physical function passed is DLET.
- For insert calls resulting in the insert of a logical child and the replace of a logical parent (because the logical parent already exists), the call function passed is ISRT and the physical function passed is REPL. IMS physically replaces the logical parent with data inserted by the application program even if the parent data does not change. Both call and physical functions are then used, based on the data propagation requirements, to determine the SQL request to issue in the Data Capture exit routine.

Cascade Delete When Crossing Logical Relationships

This topic contains programming interface information.

If the EXIT= options specify NOCASCADE, data is not captured for cascade deletes. However, when a cascade delete crosses a logical relationship into another physical database to delete dependent segments, a Data Capture exit routine needs to be called in order to issue the SQL delete for the parent of the physical structure in DB2 UDB for z/OS. Rather than requiring the EXIT= CASCADE option, IMS always calls the exit routine for a segment when deleting the parent segment in a physical database record with an exit routine defined, regardless of the CASCADE/NOCASCADE option specified on the segment. IMS bypasses the NOCASCADE option only when crossing logical relationships into another

physical database. As with all cascade deletes, the call function passed is CASC and the physical function passed is DLET.

Data Capture Exit Routines and Logically Related Databases

This topic contains programming interface information.

Segment data passed to Data Capture exit routines is always physical data. Consequently, you must place restrictions on delete rules in logically related databases supporting Data Capture exit routines. Table 17 summarizes which delete rules you can and cannot use in logically related databases with Data Capture exit routines specified on their segments.

Table 17. Delete Rule Restrictions for Logically Related Databases Using Data Capture Exit Routines

Segment Type	Virtual Delete Rule	Logical Delete Rule	Physical Delete Rule
Logical Children	Yes	No	No
Logical Parents	No	Yes	Yes

When a logically related database has a delete rule violation on a logical child:

- The logical child cannot have a Data Capture exit routine specified.
- No ancestor of the logical child can have a Data Capture exit routine specified.

When a logically related database has a delete rule violation on a logical parent, the logical parent cannot have a Data Capture exit routine specified. ACBGEN validates logical delete rule restrictions and will not allow a PSB that refers to a database that violates these restrictions to proceed.

Converting to Data Capture Exit Routines

Related Reading:

- For information on how to convert an existing database for Data Capture exit routines, see “Converting Databases for Data Capture Exit Routines and Asynchronous Data Capture” on page 461.
- For detailed information on coding the EXIT= and VERSION= parameters, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Field-Level Sensitivity

The following database types support field-level sensitivity:

- HSAM
- HISAM
- SHISAM
- HDAM
- PHDAM
- HIDAM
- PHIDAM

Field-level sensitivity gives you an increased level of data independence by isolating application programs from:

- Changes in the arrangement of fields within a segment
- Addition or deletion of data within a segment

In addition, field-level sensitivity enhances data security by limiting an application program to a subset of fields within a segment, and controlling replace operations at the field level.

Field-level sensitivity allows you to reformat a segment type. Reformatting a segment type can be done without changing the application program's view of the segment data, provided fields have not been removed or altered in length or data type. Fields can be added to or shifted within a segment in a manner transparent to the application program. Field-level sensitivity gives applications a segment organization that always conforms to what is specified in the SENFLD statements. (SENFLD statements are described in "How to Specify Use of Field-Level Sensitivity in the DBD and PSB," but basically they determine the order of fields in a segment as seen by an application program.)

Using Field-Level Sensitivity as a Mapping Interface

Field-level sensitivity acts as a mapping interface by letting PSBGEN field locations differ from DBDGEN field locations. Mapping is invoked after the segment edit routine on input and before the segment edit routine on output. When creating a sequential data set from database information (or creating database information from a sequential data set), field-level sensitivity can reduce or eliminate the amount of formatting an application program must do.

Using Field-Level Sensitivity with Variable-Length Segments

If field-level sensitivity is used with variable-length segments, you can add new fields to a segment without reorganizing the database. FIELD definitions in a DBDGEN allow you to enlarge segment types without affecting any previous users of the segment. The DBDGEN FIELD statement lets you specify a field that doesn't yet exist in the physical segment but that will be dynamically created when the segment is retrieved.

Field-level sensitivity can help in the transition of an application program from a non-database environment to a database environment. Application programs that formerly accessed z/OS files might be able to receive the same information in the same format if the database was designed with conversion in mind.

Field-level sensitivity is *not* supported for DEDBs and MSDBs.

How to Specify Use of Field-Level Sensitivity in the DBD and PSB

An application program's view of data is defined through the PSBGEN utility using SENFLD statements following the SENSEG statement. In the SENFLD statement, the NAME= parameter identifies a field that has been defined in the segment through the DBDGEN utility.

The START= parameter defines the starting location of the field in the application program's I/O area. In the I/O area, fields do not need to be located in any particular order, nor must they be contiguous. The end of the segment in the I/O area is defined by the end of the right most field. All segments using field-level sensitivity appear fixed in length in the I/O area. The length is determined by the sum of the lengths of fields on SENFLD statements associated with a SENSEG statement.

Figure 140 on page 240 is an example of field-level sensitivity. Following the figure is information about coding field-level sensitivity.

Field-Level Sensitivity

Field-level sensitivity is used below to reposition three fields from a physical segment in the application program's I/O area.

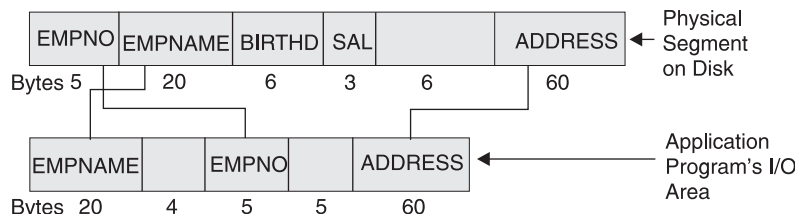


Figure 140. DBD and PSB Coding for Field-Level Sensitivity

Figure 141 shows the DBD for the example shown in Figure 140.

```
SEGM  NAME=EMPREC,BYTES=100
FIELD NAME=(EMPNO,SEQ),BYTES=5,START=1,TYPE=C
FIELD NAME=EMPNAME,BYTES=20,START=6,TYPE=C
FIELD NAME=BIRTHD,BYTES=6,START=26,TYPE=C
FIELD NAME=SAL,BYTES=3,START=32,TYPE=P
FIELD NAME=ADDRESS,BYTES=60,START=41,TYPE=C
```

Figure 141. DBD Example for Field-Level Sensitivity

Figure 142 shows the PSB for the figure shown in Figure 140.

```
SENSEG NAME=EMPREC,PROCOPT=A
SENFLD NAME=EMPNAME,START=1,REPL=N
SENFLD NAME=EMPNO,START=25
SENFLD NAME=ADDRESS,START=35,REPL=Y
```

Figure 142. PSB Example for Field-Level Sensitivity

- A SENFLD statement is coded for each field that can appear in the I/O area. A maximum of 255 SENFLD statements can be coded for each SENSEG statement, with a limit of 10000 SENFLD statements for a single PSB.
- The optional REPL= parameter on the SENFLD statement indicates whether replace operations are allowed on the field. In the figure, replace is not allowed for EMPNAME but is allowed for EMPNO and ADDRESS. If REPL= is not coded on a SENFLD statement, the default is REPL=Y.
- The TYPE= parameter on FIELD statements in the DBD is used to determine fill values on insert operations.

Retrieving Segments Using Field-Level Sensitivity

When you retrieve segments using field-level sensitivity, you should be aware of the following information:

- Gaps between fields in the I/O area are set to blanks on a retrieve call.
- If an application program uses a field in an SSA, that field must be coded on a SENFLD statement. This rule does not apply to sequence fields used in an SSA on retrieve operations.

Figure 143 shows an example of a retrieve call based on the DBD and PSB in Figure 140.

Physical Segment on Disk					
EMPNO 12345	EMPNAME SMITH, JOE	BIRTHD 480207	SAL 999		ADDRESS NEW YORK
1	5 6	25	26 31	32 34	41 100
Bytes					

I/O Area After Get Call					
EMPNAME SMITH, JOE	↔ ↔ ↔	EMPNO 12345	↔ ↔ ↔		ADDRESS NEW YORK
1	20	25	29	35	94
Bytes					

Figure 143. Example of a Retrieve Call

Replacing Segments Using Field-Level Sensitivity

The SENFLD statement must allow replace operations (REPL=Y) if the application program is going to replace data in a segment. In Figure 140 on page 240, the SENFLD statement for EMPNAME specifies REPL=N. A “DA” status code would be returned if the application program tried to replace the EMPNAME field. Figure 144 shows an example of a REPL call based on the DBD and PSB in Figure 140.

Physical Segment on Disk					
EMPNO 12345	EMPNAME SMITH, JOE	BIRTHD 480207	SAL 999		ADDRESS NEW YORK
1	5 6	25	26 31	32 34	41 100
Bytes					

I/O Area					
EMPNAME SMITH, JOE	↔ ↔ ↔	EMPNO 12345	↔ ↔ ↔		ADDRESS NEW YORK
1	20	25	29	35	94
Bytes					

Physical Segment on Disk After Update					
EMPNO 12345	EMPNAME SMITH, JOE	BIRTHD 480207	SAL 999		ADDRESS NEW YORK
1	5 6	25	26 31	32 34	41 100
Bytes					

Figure 144. Example of a REPL Call

Inserting Segments Using Field-Level Sensitivity

The TYPE= parameter on the SEGM statement of the DBD determines the fill value in the physical segment when an application program is not sensitive to a field on insert calls.

TYPE=	Fill Value
X	Binary Zeros
P	Packed Decimal Zero
C	Blanks

Field-Level Sensitivity

The fill value in the physical segment is binary zeros when:

- Space in a segment is not defined by a FIELD macro in the DBD
- A defined DBD field is not referenced on the insert operation

Figure 145 shows an example of an insert operation based on the DBD and PCB in Figure 140 on page 240.

I/O Area					
EMPNAME ADAMS, DICK		EMPNO 23456		ADDRESS VERMONT	
1	20	25	29	35	94
Bytes					

Physical Segment on Disk After Update					
EMPNO 23456	EMPNAME ADAMS, DICK	BIRTHD X←→X	SAL 00+	0←→0	ADDRESS VERMONT
1	5	6	25	26	31
32	34			41	100
Bytes					

Figure 145. Example of an ISRT Call

Blanks are inserted in the BIRTHD field because its FIELD statement in the DBD specifies TYPE=C. Packed decimal zero is inserted in the SAL field because its FIELD statement in the DBD specifies TYPE=P. Binary zeros are inserted in positions 35 to 40 because no FIELD statement was coded for this space in the DBD.

Using Field-Level Sensitivity When Fields Overlap

On the SENFLD statement, you code the starting position of fields as they will appear in the I/O area. If fields overlap in the I/O area, here are the rules you must follow:

- Two different bytes of data cannot be moved to the same position in the I/O area on input.
- The same data can be moved to different positions in the I/O area on retrieve operations.
- Two bytes from different positions in the I/O area cannot be moved to the same DBD field on output.

Using Field-Level Sensitivity When Path Calls Are Issued

If an application program issues path calls while using field level sensitivity, here are the rules you must follow:

- You should not code SENFLD statements so that two fields from different physical segments are in the same segment in the I/O area.
- PROCOPT=P is required on the PCB statement.

Using Field-Level Sensitivity with Logical Relationships

Here are the rules you must follow when using field-level sensitivity with segments involved in a logical relationship:

- Application programs can not be insert sensitive to a logical child.
- The same field can be referenced in more than one SENFLD statement within a SENSEG. If the duplicate field names are part of a concatenated segment and the same field name appears in both parts of the concatenation, the first part

references the logical child. The second and all subsequent parts reference the logical parent. This referencing sequence determines the order in which fields are moved to the I/O area.

- When using field-level sensitivity with a virtual logical child, the field list of the paired segment is searched after the field list of the virtual segment and before the field list of the logical parent.

Using Field-Level Sensitivity with Variable-Length Segments

When field-level sensitivity is used with a variable-length segment, an application program's view of the segment is fixed in length and does not include the 2-byte length field. This topic and its subtopics address special situations when field level sensitivity is used with variable-length segments. First, however, here is some general information about using field-level sensitivity with variable-length segments:

- When inserting a variable-length segment, the length used is the minimum length needed to hold all sensitive fields.
- When replacing a variable-length segment, if the length has to be increased to contain data an application program has modified, the length used is the minimum length needed to hold the modified data.
- An application program cannot be sensitive to overlapping fields in a variable-length segment with get or update sensitivity if the data type of any of those fields is not character.
- Existing programs processing variable-length segments that use the length field to determine the presence or absence of a field might need to be modified if segments are inserted or updated by programs using field-level sensitivity.

When field-level sensitivity is used with variable-length segments, two situations exist that you should know about. The first is when fields are missing. The second is when fields are partially present. This topic examines the following information:

- Retrieving Missing Fields
- Replacing Missing Fields
- Inserting Missing Fields
- Retrieving Partially Present Fields
- Replacing Partially Present Fields

Retrieving Missing Fields

If a field does not exist in the physical variable-length segment at retrieval time, the corresponding field in the application program's I/O area is filled with a value based on the data type specified in the DBD. Figure 146 is an example of a missing field on a retrieve call based on the DBD and PSB in Figure 147 and Figure 148 on page 244.

Field-Level Sensitivity

Physical Segment on Disk					
LL	EMPNO	EMPNAME			
27	12345	SMITH, JOE			
1	2	3	7	8	27
Bytes					

User I/O Area After Get Call					
EMPNAME	↔↔↔↔↔		EMPNO	↔↔↔↔↔	
SMITH, JOE			12345		
1	20		25	29	35
Bytes					

Figure 146. Example of a Missing Field on a Retrieve Call

DBD

```
SEGM  NAME=EMPREC,BYTES=(102,7)
FIELD NAME=(EMPNO,SEQ),BYTES=5,START=3,TYPE=C
FIELD NAME=EMPNAME,BYTES=20,START=8,TYPE=C
FIELD NAME=BIRTHD,BYTES=6,START=28,TYPE=C
FIELD NAME=ADDRESS,BYTES=60,START=43,TYPE=C
```

Figure 147. DBD Example for Field-Level Sensitivity with Variable-Length Segments

PSB

```
SENSEG  NAME=EMPREC,PROCOPT=A
SENFLD  NAME=EMPNAME,START=1,REPL=N
SENFLD  NAME=EMPNO,START=25
SENFLD  NAME=ADDRESS,START=35,REPLY=Y
```

Figure 148. PSB Example for Field-Level Sensitivity with Variable-Length Segments

The length field is not present in the I/O area. Also, the address field is filled with blanks, because TYPE=C is specified on the FIELD statement in the DBD.

Replacing Missing Fields

A missing field that is not replaced does not affect the physical variable-length segment. Figure 149 is an example of a missing field on a replace call based on the DBD and PSB in Figure 147.

Physical Segment on Disk Before Update					
LL	EMPNO	EMPNAME			
27	12345	SMITH, JOE			
1	2	3	7	8	27
Bytes					

User I/O Area					
EMPNAME	↔↔↔↔		EMPNO	↔↔↔↔	
SMITH, JOE			12345		
1	20		25	29	35
Bytes					

Physical Segment on Disk After Update					
LL	EMPNO	EMPNAME			
27	12345	SMITH, JOE			
1	3	3	7	8	27
Bytes					

Figure 149. First Example of a Missing Field on a Replace Call

The length field, maintained by IMS, does not include room for the address field, because the field was missing and not replaced.

On a replace call, if a field returned to the application program with a fill value is changed to a non-fill value, the segment length is increased to the minimum size needed to hold the modified field.

- The 'LL' field is updated to include the full length of the added field and all fields up to the added field.
- The TYPE= parameter in the DBD (see Figure 147 on page 244) determines the fill value for non-sensitive DBD fields up to the added field.
- Binary zero is the fill value for space up to the added field that is not defined by a FIELD statement in the DBD.

Figure 150 is an example of a missing field on a replace call based on the DBD and PSB in Figure 147 on page 244.

Field-Level Sensitivity

Physical Segment on Disk Before Update				
LL	EMPNO		EMPNAME	
27	12345		SMITH, JOE	
1	3	3	7	8 27
Bytes				

User I/O Area						
EMPNAME		⌵↔⌵	EMPNO	⌵↔⌵	ADDRESS	
SMITH, JOE			12345		NEW YORK	
1 20			25 29		35	94
Bytes						

Physical Segment on Disk After Update							
LL	EMPNO		EMPNAME	BIRTHD	0↔0	ADDRESS	
27	12345		SMITH, JOE	⌵↔⌵		NEW YORK	
1	2	3	7	8 27	28 33	34 42	43 102
Bytes							

Figure 150. Second Example of a Missing Field on a Replace Call

The 'LL' field is maintained by IMS to include the full length of the ADDRESS field and all fields up to the ADDRESS field. BIRTHD is filled with blanks, because TYPE=C is specified on the FIELD statement in the DBD. Positions 34 to 42 are set to binary zeros, because the space was not defined by a FIELD statement in the DBD.

Inserting Missing Fields

When a variable-length segment is inserted into the database, the length field is set to the value of the minimum size needed to hold all sensitive fields.

- The 'LL' field is updated to include all sensitive fields.
- The TYPE= parameter on the DBD (see Figure 147 on page 244) determines the fill value for non-sensitive DBD fields.
- Binary zero is the fill value for space not defined by a FIELD statement in the DBD.

Figure 151 is an example of a missing field on an insert call using the DBD and PSB in Figure 147 on page 244.

User I/O Area					
EMPNAME ADAMS, DICK		EMPNO 23456		ADDRESS VERMONT	
1	20	25	29	35	94
Bytes					

Physical Segment on Disk After Insert											
LL 102		EMPNO 23456		EMPNAME ADAMS, DICK		BIRTHD ⌵↔⌵		0↔0		ADDRESS VERMONT	
1	2	3	7	8	27	28	33	34	42	43	102
Bytes											

Figure 151. Example of a Missing Field on an Insert Call

The 'LL' field is maintained by IMS to include the full length of all sensitive fields up to and including the ADDRESS field. BIRTHD is filled with blanks, because

TYPE=C was specified on the FIELD statement in the DBD. Positions 34 to 42 are set to binary zeros, because the space was not defined in a FIELD statement in the DBD.

Retrieving Partially Present Fields

If the last field in the physical variable-length segment at retrieval time is only partially present and if the data type is character (TYPE=C), data is returned to the application program padded with blanks on the right. Otherwise, the field is returned with a fill value based on the data type. Figure 152 is an example of a partially present field on a retrieval call based on the DBD and PSB in Figure 147 on page 244.

Physical Segment on Disk									
LL	EMPNO		EMPNAME				BIRTHD		ADDRESS
27	12345		SMITH, JOE				8<-->8		NEW YORK
1	2	3	7	8	27	28	33		43 102
Bytes									

User I/O Area					
EMPNAME			EMPNO		ADDRESS
SMITH, JOE		8<-->8	12345	8<-->8	NEW YORK8<-->8
1	20		25	29	35 94
Bytes					

Figure 152. Example of a Partially Present Field on a Retrieval Call

The ADDRESS field in the I/O area is padded with blanks to correspond to the length defined on the SEGM statement in the DBD.

Replacing Partially Present Fields

You should know the following information about replacing partially present fields:

- If segment length is increased on a REPL call, the field returned to the application program is written to the database if it has not been changed.
- If the data type of the field is character and the field is changed on a REPL call, the segment length is increased if necessary to include all non-blank characters in the changed data.
- If the data type is not character and the field is changed on a REPL call, the segment length is increased to contain the entire field.

Figure 153 on page 248 is an example of a partially present field on a REPL call based on the DBD and PSB in Figure 147 on page 244.

Field-Level Sensitivity

Physical Segment on Disk Before Update									
LL	EMPNO	EMPNAME	BIRTHD		ADDRESS				
50	12345	SMITH, JOE	480207		NEW YORK				
1	2	3	7	8	27	28	33	43	50
Bytes									

I/O Area									
EMPNAME				EMPNO				ADDRESS	
SMITH, JOE				12345				NEW YORK	
1		20		25	29			35	94
Bytes									

Physical Segment on Disk After Update									
LL	EMPNO	EMPNAME	BIRTHD		ADDRESS				
52	12345	SMITH, JOE	480207		NEW YORK				
1	2	3	7	8	27	28	33	43	52
Bytes									

Figure 153. Example of a Partially Present Field on a REPL Call

The 'LL' field is changed from 50 to 52 by DL/I to accommodate the change in the field length of ADDRESS.

General Considerations for Using Field-Level Sensitivity

- Field-level sensitivity is not supported for GSAM, MSDB, or DEDB databases.
- Fields referenced in PSBGEN with SENFLD statements must be defined in DBDGEN with FIELD statements.
- The same DBD field can be referenced in more than one SENFLD statement.
- When using field-level sensitivity, the application program always sees a fixed length segment for a given PCB, regardless of whether the segment is fixed or variable.
- Application programs must be sensitive to any field referenced in an SSA, except the sequence field.
- Application programs must be sensitive to the sequence field, if present, for insert or load.
- Field-level sensitivity and segment level sensitivity can be mixed in the same PCB.
- Non-referenced, non-defined fields are set to binary zeros as fill characters, when required, during insert or replace operations.
- Using call/trace with the compare option increases the amount of storage required in the PSB work pool.

Multiple Data Set Groups

The following database types support multiple data set groups:

- HDAM
- PHDAM
- HIDAM
- PHIDAM

Although this book has explored storing a database on a single or a single pair of data sets, HD databases can be stored on more than the one or two data sets

required for database storage. You have seen that an HD database is stored on an ESDS, if VSAM is being used, or an OSAM data set, if OSAM is being used.

HD databases can be stored on multiple data sets. When storing a database on multiple data sets, the terms primary and secondary data set group are used to distinguish between the one or more data sets that must be specified for the database (called the primary data set group) and the one or more data sets you are allowed to specify for the database (called secondary data set groups).

In HD databases, a single data set is used for storage rather than a pair of data sets. The primary data set group therefore consists of the ESDS (if VSAM is being used) or OSAM data set (if OSAM is being used) on which you must specify storage for your database. The secondary data set group is an additional ESDS or OSAM data set on which you are allowed to store your database.

As many as ten data set groups can be used in HD databases, that is, one primary data set group and a maximum of nine secondary data set groups.

Why Use Multiple Data Set Groups?

When you design database records, you design them to meet the processing requirements of many applications. You decide what segments will be in a database record and their hierarchic sequence within a database record. These decisions are based on what works best for all of your application program's requirements. However, the way in which you arranged segments in a database record no doubt suits the processing requirements of some applications better than others. For example, look at the two database records shown in Figure 154. Both of them contain the same segments, but the hierarchic sequence of segments is different.

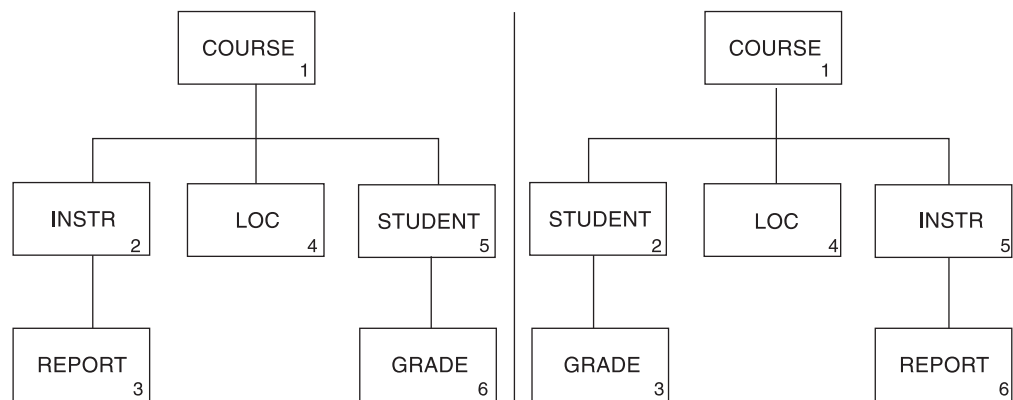


Figure 154. Hierarchy of Applications That Need to Access INSTR and LOC Segments

The hierarchy on the left favors applications that need to access INSTR and LOC segments. The hierarchy on the right favors applications that need to access STUDENT and GRADE segments. (Favor, in this context, means that access to the segments is faster.) If the applications that access the INSTR and LOC segments are more important than the ones that access the STUDENT and GRADE segments, you can use the database record on the left. But if both applications are equally important, you can split the database record into different data set groups. This will give both types of applications good access to the segments each needs.

To split the database record, you would use two data set groups. As shown in Figure 155 on page 250, the first data set group contains the COURSE, INSTR,

Multiple Data Set Groups

REPORT, and LOC segments. The second data set group contains the STUDENT and GRADE segments.

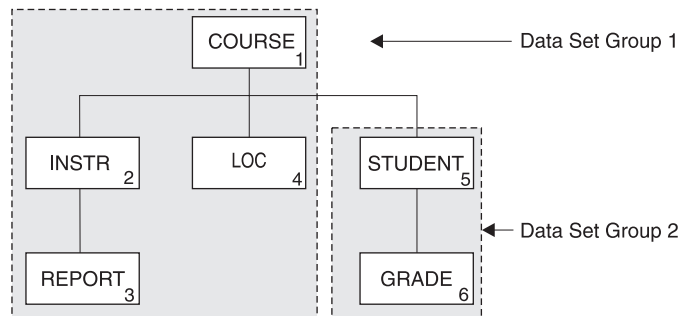


Figure 155. Database Record Split into Two Database Groups

Other uses of multiple data set groups include:

- Separating infrequently used segments from high-use segments.
- Separating segments that frequently have information added to them from those that do not. For the former segments, you might specify additional free space so conditions are optimum for additions.
- Separating segments that are added or deleted frequently from those that are not. This can keep space from being fragmented in the main database.
- Separating segments whose size varies greatly from the average segment size. This can improve use of space in the database. Remember, the bit map in an HD database indicates whether space is available for the *longest* segment type defined in the data set group. It does not keep track of smaller amounts of space. If you have one or more segment types that are large, available space for smaller segments will not be utilized, because the bit map does not track it.

HD Databases Using Multiple Data Set Groups

The following rules must be followed when using a multiple data set group in an HD database:

- As many as ten data set groups can be defined.
- The root segment in a database record must be in the primary data set group.

In the database record shown in Figure 156 on page 251, segments COURSE (1), INSTR (2), LOC (4), and STUDENT (5) could go in one data set group, while segments REPORT (3) and GRADE (6) could go in a second data set group. Examples of how this HD database record could be divided into three groups are in Table 18.

Table 18. Examples of Multiple Data Set Grouping

Data Set Group 1	Data Set Group 2	Data Set Group 3
Segment 1	Segments 2, 5, and 6	Segments 3 and 4
Segments 1, 3, and 6	Segments 2 and 5	Segment 3
Segments 1, 3, and 6	Segments 2 and 5	Segment 4

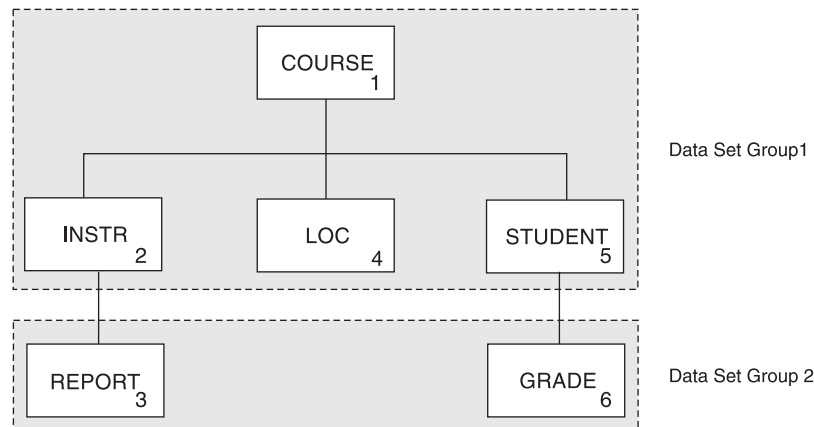


Figure 156. Example of How to Divide an HD Database Record

- Segments separated into different data set groups must be connected by physical child first pointers. For example, in Figure 157 the INSTR segment in the primary data set group must point to the first occurrence of its physical child REPORT in the secondary data set group, and STUDENT must point to GRADE.

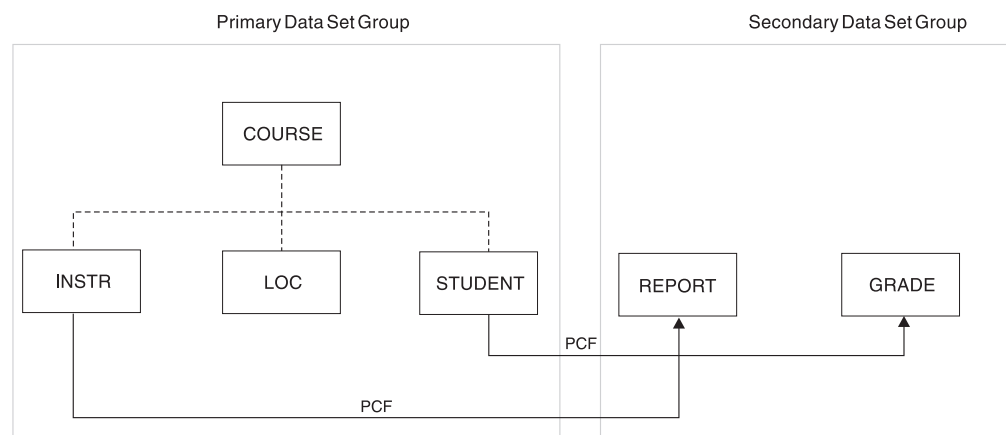


Figure 157. Connecting Segments in Multiple Data Set Groups Using Physical Child First Pointers

How HD Records Are Stored in Multiple Data Set Groups

Now that you have seen what segments can be stored in a single data set group in an HD database, this topic looks at how segments are stored. Figure 158 on page 252 shows one database record:

- Stored in an HDAM or a PHDAM database using two data set groups
- Stored in a HIDAM or a PHIDAM database using two data set groups

Specify in the DBD which segment types need to be put in a data set group. Based on that information, IMS automatically loads segments into the correct data set group. In this example, the user specified that four segment types in the database record were put in the primary data set group (COURSE, INSTR, LOC, STUDENT) and two segment types were put in the secondary data set group (REPORT, GRADE).

Multiple Data Set Groups

In the HDAM or PHDAM database, note that only the primary data set group has a root addressable area. The secondary data set group is additional overflow storage.

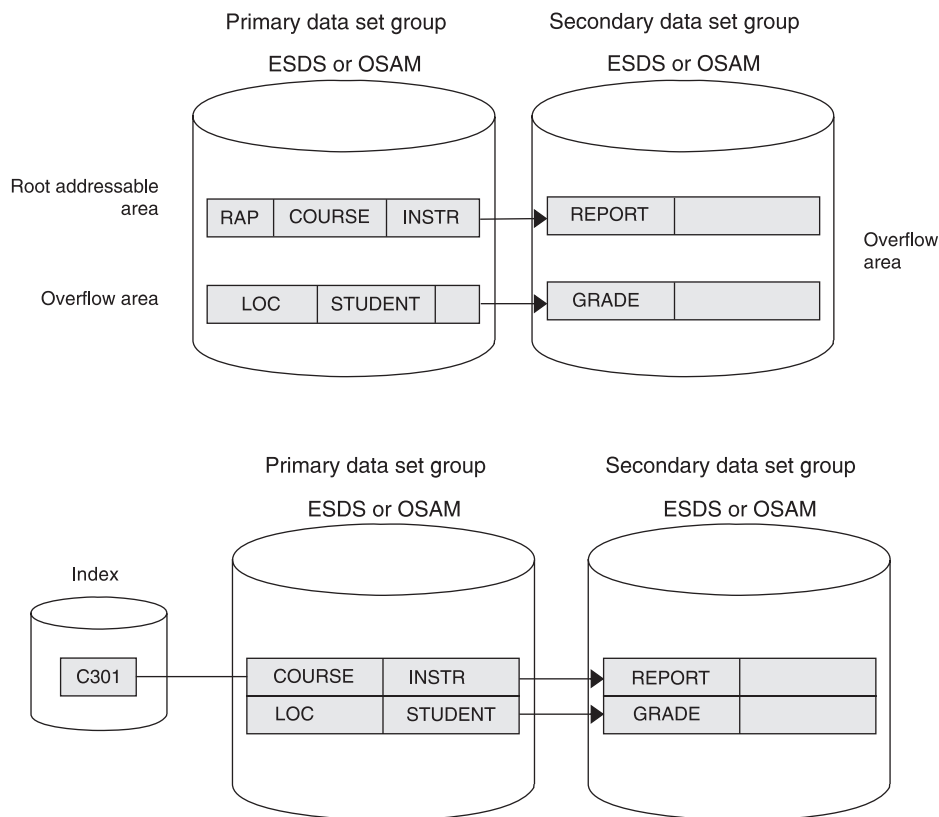


Figure 158. HD Database Record in Storage When Multiple Data Set Groups Are Used

Specifying Use of Multiple Data Set Groups in HD and PHD Databases

You can specify multiple data set groups to IMS in the DBD. For HDAM databases, use the DATASET statement. For PHDAM databases, use the DSGROUP parameter in the SEGM statement. You can group the segments any way, but you still must list the segments in hierarchical sequence in the DBD.

The following examples use the database record used in "Why Use Multiple Data Set Groups?" on page 249 and "HD Databases Using Multiple Data Set Groups" on page 250. The first example, Figure 159, shows two groups: data set group A contains COURSE and INSTR, data set group B contains all of the other segments. The second example shows a different grouping. Note the differences in DBDs when the groups are not in sequential hierarchical order of the segments.

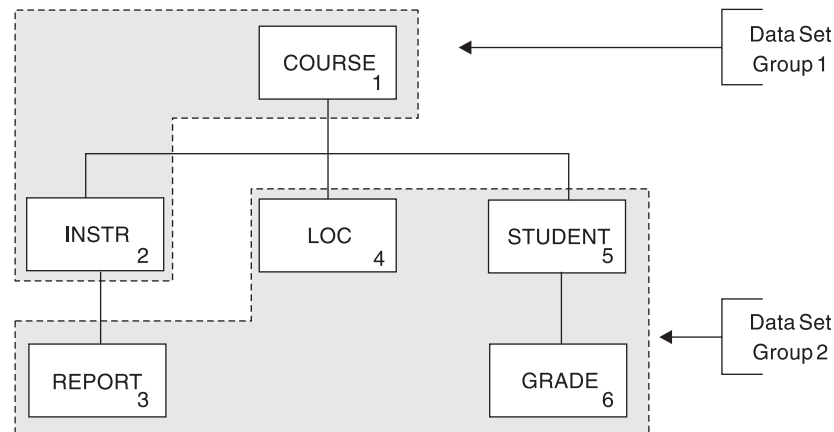


Figure 159. First Example of Data Set Groups

Figure 160 is the HDAM DBD for the first example. Note that the segments are grouped by the DATASET statements preceding the SEGM statements and that the segments are listed in hierarchical order. In each DATASET statement, the DD1= parameter names the VSAM ESDS or OSAM data set that will be used. Also, each data set group can have its own characteristics, such as device type.

```

DBD    NAME=HDMDSG,ACCESS=HDAM,RMNAME=(DFSHDC40,8,500)
DSA    DATASET DD1=DS1DD,
SEGM   NAME=COURSE,BYTES=50,PTR=T
FIELD  NAME=(CODCOURSE,SEQ),BYTES=10,START=1
SEGM   NAME=INSTR,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
DSB    DATASET DD1=DS2DD,DEVICE=2314
SEGM   NAME=REPORT,BYTES=50,PTR=T,PARENT=((INSTR,SNGL))
SEGM   NAME=LOC,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
SEGM   NAME=STUDENT,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
SEGM   NAME=GRADE,BYTES=50,PTR=T,PARENT=((STUDENT,SNGL))
DBDGEN
  
```

Figure 160. HDAM DBD for First Example of Data Set Groups

Figure 161 shows the DBD for a PHDAM database. Instead of using the DATASET statement, use the DSGROUP parameter in the SEGM statement. The first two segments do not have DSGROUP parameters because it is assumed that they are in the first group.

```

DBD    NAME=HDMDSG,ACCESS=PHDAM,RMNAME=(DFSHDC40,8,500)
SEGM   NAME=COURSE,BYTES=50,PTR=T
FIELD  NAME=(CODCOURSE,SEQ),BYTES=10,START=1
SEGM   NAME=INSTR,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
SEGM   NAME=REPORT,BYTES=50,PTR=T,PARENT=((INSTR,SNGL)),DSGROUP=B
SEGM   NAME=LOC,BYTES=50,PTR=T,PARENT=((COURSE,SNGL)),DSGROUP=B
SEGM   NAME=STUDENT,BYTES=50,PTR=T,PARENT=((COURSE,SNGL)),DSGROUP=B
SEGM   NAME=GRADE,BYTES=50,PTR=T,PARENT=((STUDENT,SNGL)),DSGROUP=B
DBDGEN
  
```

Figure 161. PHDAM DBD for First Example of Data Set Groups

The second example, Figure 162 on page 254, differs from the first example in that the groups do not follow the order of the hierarchical sequence. The segments must be listed in the DBD in hierarchical sequence, so additional DATASET statements or DSGROUP parameters are required.

Multiple Data Set Groups

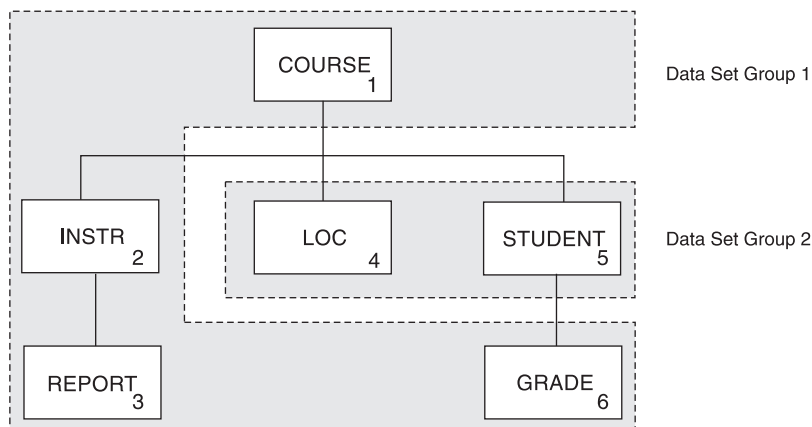


Figure 162. Second Example of Data Set Groups

Figure 163 is the DBD for an HDAM database of the second example. It is similar to the first example, except that because the sixth segment is part of the first group, you need another DATASET statement before it with the DSA label. The additional DATASET label groups the sixth segment with the first three.

```

DBD    NAME=HDMDSG,ACCESS=HDAM,RMNAME=(DFSHDC40,8,500)
DSA    DATASET DD1=DS1DD,
SEGM   NAME=COURSE,BYTES=50,PTR=T
FIELD  NAME=(CODCOURSE,SEQ),BYTES=10,START=1
SEGM   NAME=INSTR,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
SEGM   NAME=REPORT,BYTES=50,PTR=T,PARENT=((INSTR,SNGL))
DSB    DATASET DD1=DS2DD,DEVICE=2314
SEGM   NAME=LOC,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
SEGM   NAME=STUDENT,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
DSA    DATASET DD1=DS1DD
SEGM   NAME=GRADE,BYTES=50,PTR=T,PARENT=((STUDENT,SNGL))
DBDGEN
  
```

Figure 163. HDAM DBD for Second Example of Data Set Groups

Figure 164 is the DBD for a PHDAM database of the second example. It is similar to the first example, except that because the sixth segment is part of the first group, you must explicitly group it with the first two segments by using the DSGROUP parameter.

```

DBD    NAME=HDMDSG,ACCESS=PHDAM,RMNAME=(DFSHDC40,8,500)
SEGM   NAME=COURSE,BYTES=50,PTR=T
FIELD  NAME=(CODCOURSE,SEQ),BYTES=10,START=1
SEGM   NAME=INSTR,BYTES=50,PTR=T,PARENT=((COURSE,SNGL))
SEGM   NAME=REPORT,BYTES=50,PTR=T,PARENT=((INSTR,SNGL)),
SEGM   NAME=LOC,BYTES=50,PTR=T,PARENT=((COURSE,SNGL)),DSGROUP=B
SEGM   NAME=STUDENT,BYTES=50,PTR=T,PARENT=((COURSE,SNGL)),DSGROUP=B
SEGM   NAME=GRADE,BYTES=50,PTR=T,PARENT=((STUDENT,SNGL)),DSGROUP=A
DBDGEN
  
```

Figure 164. PHDAM DBD for Second Example of Data Set Groups

VSAM KSDS CI Reclaim For Full-Function Databases

In data-sharing or XRF environments, IMS can reclaim the storage used for empty VSAM KSDS control intervals (CIs) in full-function databases by using a process called CI reclaim. CI reclaim enhances the performance of database GN, GU, and ISRT calls by reducing the number of empty CIs that VSAM reads on subsequent DL/I calls.

During the deletion of the last record in a CI, IMS flags the CI for reclamation. After the deletion has been committed, IMS reclaims the CI the next time the CI is read for a DL/I call that has update access. On a single DL/I call, IMS reclaims every empty CI flagged for reclamation that it reads until the DL/I call has been satisfied.

CI reclaim is not a replacement for the routine reorganization of KSDS data sets.

CI reclaim works only under the following circumstances:

- You specify ERASE=YES, or accepted it as the default, on the DBD statement of the DFSVSMxx PROCLIB member.
- Your KSDS uses unique keys.
- The application program issuing the GN, GU, or ISRT call has update access to the database. Using a processing option PROCOPT of "I", "R", "D" or "A" guarantees that the dataset is open for update.

Restriction: CI reclaim does not occur for SHISAM databases. When a large number of records in a SHISAM database are deleted, particularly a large number of consecutive records, serious performance degradation can occur. Eliminate empty CIs and resolve the problem by using VSAM REPRO.

Related Reading:

- For information about the data sharing and XRF environments, see *IMS Version 9: Administration Guide: System*.
- For information about the DFSVSMxx PROCLIB member, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- For information about the VSAM REPRO command, see *DFSMS Access Method Services for Catalogs*.

Integrated HALDB Online Reorganization Function

With the integrated HALDB Online Reorganization (OLR) function, you can reorganize HALDB partitions online, improving database performance without disrupting data availability. HALDB OLR can reorganize any number of partitions, singly or in parallel.

Related Reading: For complete information on the online reorganization of HALDBs, see "HALDB Online Reorganization" on page 382.

Storing XML Data in IMS Databases

You can store and retrieve XML documents in IMS databases using Java application programs. When storing and retrieving XML documents, the XML documents must be valid to XML schemas generated by the DLIModel utility. The XML schemas must match the hierarchical structure of the IMS database.

XML documents can be stored in IMS databases using any combination of two storage methods to best fit the structure of the XML document:

Decomposed XML storage

The XML tags are removed from the XML document and only the data is extracted. The extracted data is converted into traditional IMS field types and inserted into the database. Use this approach in the following scenarios:

Storing XML Data in IMS Databases

- XML applications and non-XML applications must access the same database.
- Extensive searching of the database is needed.
- A strict XML schema is available.

Intact XML storage

The XML document is stored, with its XML structure and tags intact, in an IMS database designed exclusively for storing intact XML documents. In this case, only Java application programs can access the data in the database. Because the XML document does not have to be regenerated when the data is retrieved from the database, the retrieval of the XML data is typically faster than when it is stored without its XML tagging. Use this approach in the following scenarios:

- Faster storage and retrieval of XML documents are needed.
- Less searching of the database is required.
- The XML schema requires more flexibility.

Related Reading:

- For more information about the DLIModel utility, see *IMS Version 9: Utilities Reference: System*.
- For more information about storing XML data in IMS databases, see *IMS Version 9: IMS Java Guide and Reference*.

Chapter 9. Designing Full-Function Databases

After you determine the type of database and optional functions that best suit your application's processing requirements, you need to make a series of decisions about database design and use of options. This set of decisions primarily determines how well your database performs and how well it uses available space. This series of decisions is made based on:

- The type of database and optional functions you have already chosen
- The performance requirements of your applications
- How much storage you have available for use online

In this Chapter:

- "Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)"
- "Estimating the Size of the Root Addressable Area (HDAM or PHDAM Only)" on page 258
- "Determining Which Randomizing Module to Use (HDAM and PHDAM Only)" on page 259
- "Choosing HDAM or PHDAM Options" on page 260
- "Choosing a Logical Record Length for a HISAM Database" on page 261
- "Choosing a Logical Record Length for HD Databases" on page 264
- "Determining the Size of CIs and Blocks" on page 264
- "Recommendations for Specifying Sizes for Blocks, CIs, and Records" on page 265
- "Buffering Options" on page 265
- "OSAM Sequential Buffering" on page 270
- "VSAM Options" on page 277
- "OSAM Options" on page 281
- "Dump Option (DUMP Parameter)" on page 281
- "Deciding Which FIELD Statements to Code in the DBD" on page 281
- "Planning for Maintenance" on page 281

Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)

As you have seen, dependent segments inserted after an HD database is loaded are put as close as possible to the segments to which they are related. (When segments are close to the segments that point to them, the I/O time needed to retrieve a dependent segment is shorter. The I/O time is shorter because the seek time and rotational delay time are shorter.) However, as the database grows and available space decreases, dependent segments are increasingly put further from their related segments. When this happens, performance decreases, a problem that can only be eliminated by reorganizing the database.

To minimize the effect of insert operations after the database is loaded, allocate free space in the database when it is initially loaded. Free space allocation in the database will reduce the performance impact caused by insert operations, and therefore, decrease the frequency with which HD databases must be reorganized.

Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)

For OSAM data sets and VSAM ESDS, free space is specified in the FRSPC= keyword of the DATASET statement in the DBD. In the keyword, one or both of the following operands can be specified:

- Free block frequency factor (fbff). The fbff specifies that every nth block or CI in a data set group be left as free space when the database is loaded (where fbff=n). The range of fbff includes all integer values from 0 to 100, except 1. Avoid specifying fbff for HDAM or PHDAM databases. If you specify fbff for HDAM or PHDAM databases and if at load time the randomizing module generates the relative block or CI number of a block or CI marked as free space, the randomizer must store the root segment in another block.

If you specify fbff, every nth block or CI will be considered a second-most desirable block or CI by the HD Space Search Algorithm. This is true unless you specify SEARCHA=1 in the DATASET macro of the DBDGEN utility. By specifying SEARCHA=1, you are telling IMS not to search for space in the second-most desirable block or CI.

Related Reading:

- For details on the HD Space Search Algorithm, see “How the HD Space Search Algorithm Works” on page 107.
- For more information on the SEARCHA keyword, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.
- Free space percentage factor (fspf). The fspf specifies the minimum percentage of each block or CI in a data set group to be left as free space when the database is loaded. The range of fspf is from 0 to 99.

Note: This free space applies to VSAM ESDS and OSAM data sets. It does not apply to HIDAM or PHIDAM index databases or to DEDBs.

For VSAM KSDS, free space is specified in the FREESPACE parameter of the DEFINE CLUSTER command. This VSAM parameter is disregarded for a VSAM ESDS data set used for HIDAM, PHIDAM, HDAM, or PHDAM. This command is explained in detail in *DFSMS Access Method Services for Catalogs*.

Estimating the Size of the Root Addressable Area (HDAM or PHDAM Only)

To estimate the size of the root addressable area, use the following formula:

$$(A \times B) / C = D$$

where:

- A =** the number of bytes of a database record to be stored in the root addressable area
- B =** the expected number of database records
- C =** the number of bytes available for data in each CI or block (CI or block size, minus overhead)
- D =** the size you will need, in blocks or CIs, for the root addressable area.

If you have specified free space for the database, include it in your calculations for determining the size of the root addressable area. Use the following formula to accomplish this step:

$$(D \times E \times G) / F = H$$

where:

- D** = the size you calculated in the first formula (the necessary size of the root addressable area in block or CIs)
- E** = how often you are leaving a block or CI in the database empty for free space (what you specified in the fbff operand in the DBD)
- F** = (E-1) (fbff-1)
- G** = $\frac{100}{100 - \text{fspf}}$ The fspf is the minimum percentage of each block or CI you are leaving as free space (what you specified in the fspf operand in the DBD)
- H** = the total size you will need, in blocks or CIs

Specify the number of blocks or CIs you need in the root addressable area in the RMNAME=rbn keyword in the DBD statement in the DBD.

Determining Which Randomizing Module to Use (HDAM and PHDAM Only)

As you have seen, a randomizing module is required to store and access HDAM or PHDAM database records. This module converts the key of a root segment to a relative block number and RAP number. These numbers are then used to store or access HDAM or PHDAM root segments. An HDAM database or a PHDAM partition uses only one randomizing module, but several databases and partitions can share the same module. Four randomizing modules are supplied with IMS.

Normally, one of the four randomizing modules supplied with the system will work for your database. These modules, and the arithmetic techniques they use, are described in detail in *IMS Version 9: Customization Guide*.

Partition selection is completed prior to invoking the randomizing module on PHDAM databases. The randomizing module selects locations only within a partition.

Write Your Own Randomizing Module

If, given your root key distribution, none of these randomizing modules works well for you, write your own randomizing module. If you write your own randomizing module, one of your goals is to have it distribute root segments so that, when subsequently accessing them, only one read and one seek operation is required. When a root key is given to the randomizing module, if the relative block number the randomizer produces is the block actually containing the root, only one read and seek operation is required (access is fast). The randomizing module you write should allow you to vary the number of blocks and RAPs you specify, so blocks and RAPs can be used for tuning the system. The randomizing module should also distribute roots randomly, not randomize to bit map locations, and keep packing density high. *IMS Version 9: Customization Guide* tells you what the interface to your randomizing module should be.

Assess the Effectiveness of the Randomizing Module

One way to determine the effectiveness of a given randomizing module for your database is to run the IMS High Performance Pointer Checker (HD Tuning Aid). This tool produces a report in the form of a map showing how root segments are stored in the database. It shows you root segment storage based on the number of blocks or CIs you specified for the root addressable area and the number of RAPs you specified for each block or CI. By running the HD Tuning Aid against the

Determining Which Randomizing Module To Use

various randomizing modules, you can see which module gives you the best distribution of root keys in your database. In addition, by changing the number of RAPs and blocks or CIs you specify, you can see (given a specific randomizing module) which combination of RAPs and blocks or CIs produces the best root segment distribution.

Before choosing a randomizing module, read “Adjusting HDAM and PHDAM Options” on page 419, which discusses how you can adjust HDAM or PHDAM options, including the randomizing module, to tune your database after it is running.

Choosing HDAM or PHDAM Options

In an HDAM or a PHDAM database, the options you choose can greatly affect performance. The options discussed here are those you specify in the RMNAME keyword in the DBD statement or when using the HALDB Partition Definition utility. Figure 165 shows the format for specifying the RMNAME parameter. The definition list that follows explains the meaning of *mod*, *anch*, *rbn*, and *bytes*.

RMNAME=(*mod,anch,rbn,bytes*)

Figure 165. Specifying the RMNAME keyword

<i>mod</i>	Name of the randomizing module you have chosen
<i>anch</i>	Number of RAPs in a block or CI
<i>rbn</i>	Number of blocks or CIs in the root addressable area
<i>bytes</i>	Maximum number of bytes of a database record to be put in the root addressable area when segments in the database records are inserted consecutively (without intervening processing operations)

Minimizing I/O Operations

In choosing these HDAM or PHDAM options, your primary goal is to minimize the number of I/O operations it takes to access a database record or segment. The fewer I/O operations, the faster the access time. Performance is best when:

- The number of RAPs in a block or CI is equal to the number of roots in the block or CI (block or CI space is not wasted on unused RAPs).
- Unique block and RAP numbers are generated for most root segments (thereby eliminating long synonym chains).
- Root segments are stored in key sequence.
- All frequently used dependent segments are in the root addressable area (access to the root addressable area is faster than access to the overflow area) and in the same block or CI as the root.

Your choice of a randomizing module (discussed in “Determining Which Randomizing Module to Use (HDAM and PHDAM Only)” on page 259) determines how many addresses are unique for each root and whether roots are stored in key sequence. In general, a randomizing module is considered efficient if roots are distributed evenly in the root addressable area. You can experiment with different randomizing modules. Try various combinations of the *anch*, *rbn*, and *bytes* operands to see what effect they have on distribution of root segments.

Maximizing Packing Density

A secondary goal in choosing HDAM or PHDAM options is to maximize packing density without adversely affecting performance. Packing density is the percentage of space in the root addressable area being used for root segments and the dependent segments associated with them. Packing density is determined as follows:

$$\text{Packing density} = \frac{(\text{Number of roots} \times \text{root bytes})}{(\text{Number of CIs in the root addressable area} \times \text{Usable space in the CI})}$$

root bytes

The average number of bytes in each root in the root addressable area.

Usable space in the CI

The CI or block size minus (as applicable) space for the FSEAP, RAPs, VSAM CIDE, VSAM RDF, and free space.

Packing density should be high, but, as the percentage of packing density increases, the number of dependent segments put into overflow storage can increase. In addition, performance for processing of dependent segments decreases when they are in overflow storage. All of the operands you can specify in the RMNAME= keyword affect packing density. So, to optimize packing density, try different randomizing modules and various combinations of the anch, rbn, and bytes operands.

Choosing a Logical Record Length for a HISAM Database

In a HISAM database, your choice of a logical record length is important because it can affect both the access time and the use of space in the database. The relative importance of each depends on your individual situation. To get the best possible performance and an optimum balance between access time and the use of space, plot several trial logical record lengths and test them before making a final choice.

Logical Record Length Considerations

The following should be considered:

- Only complete segments can be stored in a logical record. Therefore, the space between the last segment that fit in the logical record and the end of the logical record is unused.
- Each database record starts at the beginning of a logical record. The space between the end of the database record and the end of the last logical record containing it is unused. This unused space is relative to the average size of your database records.
- Very short or very long logical records tend to increase wasted space. If logical records are short, the number of areas of unused space increases. If logical records are long, the size of areas of unused space increases. Figure 166 shows why short or long logical records increase wasted space.

Choose a logical record length that minimizes the amount of unused space at the end of logical records.

The database record shown in Figure 166 on page 262 is stored on three short logical records in Figure 167 on page 262 and in two longer logical records in Figure 168 on page 262. Note the three areas of unused space.

Choosing a Logical Record Length for a HISAM Database

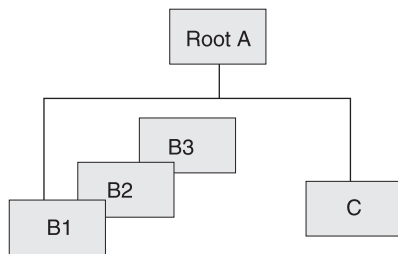


Figure 166. Database Record for Logical Record Examples

In Figure 167, note the three areas of unused space. In Figure 168, there are only two areas of unused space, rather than three, but the total size of the areas is larger.

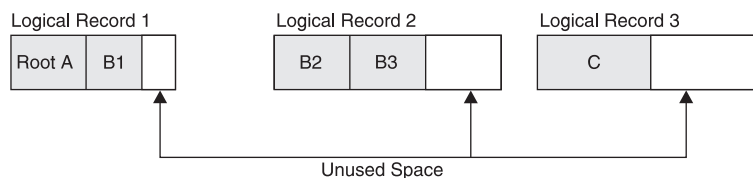


Figure 167. Short Logical Records




Figure 168. Long Logical Records

Segments in a database record that do not fit in the logical record in the primary data set are put in one or more logical records in the overflow data set. More read and seek operations, and therefore longer access time, are required to access logical records in the overflow data set than in the primary data set. This is especially true as the database grows in size and chains of overflow records develop. Therefore, you should try to put the most-used segments in your database record in the primary data set. When choosing a logical record length the primary data set should be as close to average database record length as possible. This results in a minimum of overflow logical records and thereby minimizes performance problems. When you calculate the average record length, beware of unusually long or short records that can skew the results.

A read operation reads one CI into the buffer pool. CIs contain one or more logical records in a database record. Because of this, it takes as many read and seek operations to access an entire database record as it takes CIs to contain it. In Figure 170 on page 263, each CI contains two logical records, and two CIs are required to contain the database record shown in Figure 169 on page 263. Consequently, it takes two read operations to get these four logical records into the buffer.

Choosing a Logical Record Length for a HISAM Database

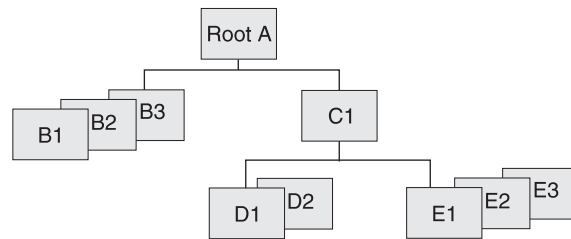


Figure 169. Database Record for Logical Records Example

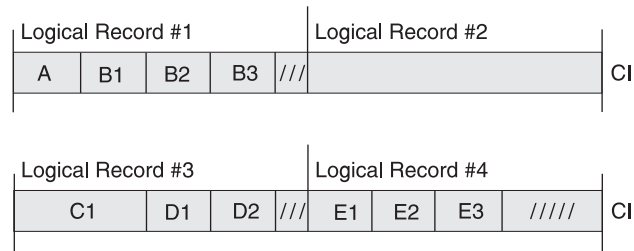


Figure 170. Logical Records Example with Two Read Operations

The number of read and seek operations required to access a database record increases as the size of the logical record decreases. The question to consider is: Do you often need access to the entire database record? If so, you should try to choose a logical record size that will usually contain an entire database record. If, however, you typically access only one or a few segments in a database record, choice of a logical record size large enough to contain the average database record is not as important.

Consider what will happen in the following setup example in which you need to read database records, one after another:

- Your CI or block size is 2048 bytes.
- Your Logical record size is 512 bytes.
- Your Average database record size is 500 bytes.
- The range of your database record sizes is 300 to 700 bytes.

Because your logical and average database record sizes are about equal (512 and 500), approximately one of every two database records will be read into the buffer pool with one read operation. (This assumption is based on the average size of database records.) If, however, your logical record size were 650, you would access most database records with a single read operation. An obvious trade-off exists here, one you must consider in picking a logical record length for HISAM data sets. If your logical record size were 650, much unused space would exist between the end of an average database record and the last logical record containing it.

Rules to Observe

The following rules must be observed when choosing a logical record length for HISAM data sets:

- Logical record size in the primary data set must be at least equal to the size of the root segment, plus its prefix, plus overhead. If variable-length segments are used, logical record size must be at least equal to the size of the longest root segment, plus its prefix, plus overhead. Five bytes of overhead is required for VSAM.

Choosing a Logical Record Length for a HISAM Database

- Logical record size in the overflow data set must be at least equal to the size of the longest segment in the overflow data set, plus its prefix, plus overhead. Five bytes of overhead is required for VSAM.
- Logical record lengths in the overflow data set must be equal to or greater than logical record length in the primary data set.
- The maximum logical record size is 30720 bytes.
- Except for SHISAM databases, logical record lengths must be an even number.

Calculating How Many Logical Records Are Needed to Hold a Database Record

Calculate the average size of a database record before plotting various logical record sizes. By calculating the average size of a database record, given a specific logical record size, you can see how many logical records it takes to hold a database record (of average size).

Related Reading: To determine the average size of your database records, see “Estimating the Minimum Size of the Database” on page 327.

Specifying Logical Record Length

Specify the length of the logical records in the RECORD= operand of the DATASET statement in the DBD.

Choosing a Logical Record Length for HD Databases

In HD databases, the important choice is not logical record length but CI or block size. Logical record length is the same as block size when VSAM is used. Logical record size is equal to CI size, minus 7 bytes of overhead (4 bytes for a CIDE, 3 bytes for an RDF).

Related Reading: See “Determining the Size of CIs and Blocks” for information on determining CI or block size.

As with HISAM databases, specify the length of the logical records in the RECORD= operand of the DATASET statement in the DBD.

Determining the Size of CIs and Blocks

You can specify the DEDB CI resource size for your database. (If you do not specify it, the DBDGEN utility will calculate it for you.) Based on CI size, VSAM determines the size of physical blocks on a DASD track. VSAM always uses the largest possible physical block size, because the largest block size best utilizes space on the track. So your choice of a CI size is an important one. Your goal in picking it is to keep a high percentage of space on the track for your data, rather than for device overhead.

Track sizes vary from one device to another, and many different CI sizes you can specify exist. Because you can specify different CI sizes, the physical block size that VSAM picks varies and is based on device overhead factors. For information about using VSAM data sets, refer to *DFSMS Access Method Services for Catalogs*.

Recommendations for Specifying Sizes for Blocks, CIs, and Records

To ensure that your databases are using appropriate block, CI, and record sizes, consider the recommendations in this section.

The recommendations for block, CI, and record sizes include:

- In general, large CI sizes are good for sequential processing, but not for random processing. For indexes and HISAM databases in which sequential processing is most important, CI sizes of at least 8 K are typically best.
- For INDEX databases, such as secondary indexes and HIDAM primary indexes, do not specify the RECORD parameter on the DATASET statement. IMS calculates the appropriate CI sizes automatically.
- For the KSDS data sets used by PSINDEX, INDEX, PHIDAM, HIDAM, and HISAM databases, to determine the values for the RECORDSIZE parameter in the IDCAMS DEFINE statements, use the output listing from the DBDGEN process.
- For the data component of KSDS data sets, specify a CI size on the IDCAMS DEFINE statement. The CI size for the data component determines the number of logical records stored in the CI. For the index component of KSDS data sets, do not specify a CI size. By default, DFSMS automatically selects the optimum CI size for the index component of KSDS data sets.
- For the CI size of VSAM ESDS and KSDS data sets, specify the value of the SIZE parameter on the DATASET statement by using the value that is specified on the RECORDSIZE parameter of the IDCAMS DEFINE statement. The CI size for VSAM ESDS and KSDS data sets is determined by the IDCAMS RECORDSIZE parameter and not the DBDGEN SIZE parameter. Using the same value for each parameter can help avoid confusion about which value is in effect.
- For HDAM and HIDAM OSAM data sets, specify the SIZE parameter, but not the BLOCK parameter in the DATASET statement.
- For HISAM databases, unless your record sizes vary, specify a value in the RECORD parameter of the DATASET statement large enough to accommodate the largest record size. If your HISAM database record sizes vary, to avoid wasting space, you can specify a RECORD size large enough to hold the majority of database records and specify a record size for the overflow data set that is large enough to hold the largest record size.
- For OSAM block sizes and VSAM ESDS CI sizes, the block and CI sizes should be large enough to hold entire database records. When database record sizes are very large or vary greatly in size, make the block or CI size large enough to hold the most frequently accessed segments in the database records.
- On SEGM statements, do not specify the FREQ parameter.

Buffering Options

Database buffers are defined areas in virtual storage. When an application program processes a segment in the database, the entire block or CI containing the segment is read from the database into a buffer. The application program processes the segment while it is in the buffer. If the processing involves modifying any segments in the buffer, the contents of the buffer must eventually be written back to the database so the database is current.

You need to choose the size and number of buffers that give you the maximum performance benefit. If your database uses OSAM, you might also decide to use OSAM sequential buffering. The subtopics in this topic can help you with these decisions.

Multiple Buffers in Virtual Storage

You can specify both the number of buffers needed in virtual storage and their size. You can specify multiple buffers with different sizes. Because a complete block or CI is read into a buffer, the buffer must be at least as large as the block or CI that is read into it. For best performance, use multiple buffers in virtual storage. To understand why, you need to understand the concept of buffers and how they are used in virtual storage.

When the data an application program needs is already in a buffer, the data can be used immediately. The application program is not forced to wait for the data to be read from the database to the buffer. Because the application program does not wait, performance is better. By having multiple buffers in virtual storage and by making a buffer large enough to contain all the segments of a CI or block, you increase the chance that the data needed by application programs is already in virtual storage. Thus, the reason for having multiple buffers in virtual storage is to eliminate some of an application program's wait time.

In virtual storage, all buffers are put in a buffer pool. Separate buffer pools exist for VSAM and OSAM. A buffer pool is divided into subpools. Each subpool is defined with a subpool definition statement. Each subpool consists of a specified number of buffers of the same size. With OSAM and VSAM you can specify multiple subpools with buffers of the same size.

Subpool Buffer Use Chain

In the subpool, buffers are chained together in the order in which they have been used. This organization is called a “use chain.” The most recently used buffers are at the top of the use chain and the least recently used buffers are at the bottom.

The Buffer Handler

When a buffer is needed, an internal component called the buffer handler selects the buffer at the bottom of the use chain, because buffers that are least recently used are less likely to contain data an application program needs to use again. If a selected buffer contains data an application program has modified, the contents of the buffer are written back to the database before the buffer is used. This causes the application program wait time discussed earlier.

Background Write Option

If you use VSAM, you can reduce or eliminate wait time by using the background write option. This option is discussed under “VSAM Options” on page 277. Otherwise, you control and reduce wait time by carefully choosing of the number and size of buffers.

Shared Resource Pools

You can define multiple VSAM local shared resource pools. Multiple local shared resource pools allow you to specify multiple VSAM subpools of the same size. You create multiple shared resource pools and then place in each one a VSAM subpool that is the same size as other VSAM subpools in other local shared resource pools. You can then assign a specific database data set to a specific subpool by assigning the data set to a shared resource pool. The data set is directed to a specific subpool within the assigned shared resource pool based on the data set's control interval size.

Using Separate Subpools

If you have many VSAM data sets with similar or equal control interval sizes, you might get a performance advantage by replacing a single large subpool with separate subpools of identically sized buffers. Creating separate subpools of the same size for VSAM data sets offers benefits similar to OSAM multiple subpool support.

You can also create separate subpools for VSAM KSDS index and data components within a VSAM local shared resource pool. Creating separate subpools can be advantageous because index and data components do not need to share buffers or compete for buffers in the same subpool.

Hiperspace Buffering

Multiple VSAM local shared resource pools enhance the benefits provided by Hiperspace™ buffering. Hiperspace buffering allows you to extend the buffering of 4K and multiples of 4K buffers to include buffers allocated in expanded storage in addition to the buffers allocated in virtual storage. Using multiple local shared resource pools and Hiperspace buffering allows data sets with certain reference patterns (for example, a primary index data set) to be isolated to a subpool backed by Hiperspace, which reduces the VSAM read I/O activity needed for database processing.

Hiperspace buffering is activated at IMS initialization. In batch systems, you place the necessary control statements in the DFSVSAMP data set. In online systems, you place the control statements in the IMS.PROCLIB data set with the member name DFSVSMnn. Hiperspace buffering is specified for VSAM buffers through one or two optional parameters applied to the VSRBF subpool definition statement.

Related Reading: For a brief explanation of how to specify hiperspace buffering, see “Hiperspace Buffering Parameters” on page 421.

Buffer Size

Pick buffer sizes that are equal to or larger than the size of the CIs and blocks that are read into the buffer. A variety of valid buffer sizes exist. If you pick buffers larger than your CI or block sizes, virtual storage is wasted.

For example, suppose your CI size is 1536 bytes. The smallest valid buffer size that can hold your CI is 2048 bytes. This wastes 512 bytes (2048 - 1536) and is not a good choice of CI and buffer size.

Buffer Numbers

Pick an appropriate number of buffers of each size so buffers are available for use when they are needed, an optimum amount of data is kept in virtual storage during application program processing, and application program wait time is minimized. The trade-off in picking a number of buffers is that each buffer uses up virtual storage.

When you initially choose buffer sizes and the number of buffers, you are making a scientific guess based on what you know about the design of your database and the processing requirements of your applications. After you choose and implement buffer size and numbers, various monitoring tools are available to help you determine how well your scientific guess worked. Monitoring is discussed in Chapter 14, “Monitoring Databases,” on page 353.

Buffering Options

Buffer size and number of buffers are specified when the system is initialized. Both can be changed (tuned) for optimum performance at any time. Tuning is discussed in Chapter 15, "Tuning Databases," on page 359.

VSAM Buffer Sizes

The buffer sizes (in bytes) that you can choose when using VSAM as the access method are:

512
1024
2048
4096
8192
12288
16384
20480
24576
28672
32768

In order not to waste buffer space, choose a buffer size that is the same as a valid CI size. Valid CI sizes for VSAM data clusters are:

- For data components up to 8192 bytes (or 8K bytes), the CI size must be a multiple of 512.
- For data components over 8192 bytes (or 8K bytes), the CI size must be a multiple of 2048 (up to a maximum of 32768 bytes).

Valid CI sizes (in bytes) for VSAM index clusters using VSAM catalogs are:

512
1024
2048
4096

Valid CI sizes for VSAM index clusters using integrated catalog facility catalogs are:

- For index components up to 8192 bytes (or 8K bytes), the CI size must be a multiple of 512.
- For index components over 8192 bytes (or 8K bytes), the CI size must be a multiple of 2048 (up to a maximum of 32768 bytes).

OSAM Buffer Sizes

The buffer sizes (in bytes) that you can choose when using OSAM as the access method are:

512
1024
2048
Any multiple of 2048 up to a maximum of 32768

For OSAM data sets, choose a buffer size that is the same as a valid block size so that buffer space is not wasted. Valid block sizes for OSAM data sets are any size from 18 to 32768 bytes.

Restriction: When using sequential buffering and the coupling facility for OSAM data caching, the OSAM database block size must be defined in multiples of 256 bytes (decimal). Failure to define the block size accordingly can result in ABENDS0DB from the coupling facility. This condition exists even if the IMS system is accessing the database in read-only mode.

Specifying Buffers

Specify the number of buffers and their size when the system is initialized. Your specifications, which are given to the system in the form of control statements, are put in the:

- DFSVSAMP data set in batch, utility.
- IMS.PROCLIB data set with the member name DFSVSMnn in IMS DCCTL and DBCTL environments.

The following example shows the necessary control statements specifications:

- Four 2048-byte buffers for OSAM
 - Four 2048-byte buffers and fifteen 1024-byte buffers for VSAM
- ```
//DFSVSAMP DD *
:
:
: VSRBF=2048,4
: VSRBF=1024,15
: IOBF=(2048,4)
/*
```

Detailed information on how to code these control statements is located in the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

z/OS DFSMS calculates the optimum size for the CIs of the index component of VSAM data sets. If DFSMS determines that the CI size needs to be increased, DFSMS overrides the CI size specified in the IDCAMS DEFINE statement. If DFSMS increases the size of the CI beyond the size specified for the associate buffer pool, the database cannot open and IMS issues message DFS0730I with a determination code of O,DC. In the event that the CI size is increased beyond the buffer pool size, you must increase the buffer pool size to match the CI size.

OSAM buffers can be fixed in storage using the IOBF= parameter. In VSAM, buffers are fixed using the VSAMFIX= parameter in the OPTIONS statement. This parameter is described under “VSAM Options” on page 277. Performance is generally improved if buffers are fixed in storage, then page faults do not occur. A page fault occurs when an instruction needs a page (a specific piece of storage) and the page is not in storage.

With OSAM, you can fix the buffers and their buffer prefixes, or the buffer prefixes and the subpool header, in storage. In addition, you can selectively fix buffer subpools, that is, you can choose to fix some buffer subpools and not others. Buffer subpools are fixed using the IOBF= parameter. The format of this parameter is:

IOBF= (length,number,fix1,fix2,id)

where:

- *length* is the size of buffers in a subpool.



## Buffering Options

- *number* is the number of buffers in a subpool. If three or fewer are specified, IMS gives you three; otherwise, it gives you the number specified. If you do not specify a sufficient number of buffers, your application program calls could waste time waiting for buffer space.
- *fix1* is whether the buffers and buffer prefixes in this subpool need to be fixed and is specified as Y or N (yes or no).
- *fix2* is whether the buffer prefixes in this subpool and the subpool header need to be fixed and is specified as Y or N (yes or no).

The default for the *fix1* parameter is that buffers and their prefixes are not fixed. The default for the *fix2* parameter is that buffer prefixes and the subpool header are not fixed.
- *id* is a parameter that specifies an identifier to be assigned to the subpool. It is used in conjunction with the DBD statement to assign a specific subpool to a given data set. This DBD statement is not the DBD statement used in a DBD generation but one specified during execution, as described in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*. The *id* parameter allows you to have more than one subpool with the same buffer size. You can use it to:
  - Get better distribution of activity among subpools
  - Direct new database applications to “private” subpools
  - Control the contention between a BMP and MPPs for subpools

---

## OSAM Sequential Buffering

Sequential Buffering (SB) is an extension of the normal buffering technique used for OSAM database data sets. When SB is active, multiple consecutive blocks can be read from your database with a single I/O operation. (SB does not enhance OSAM write operations.) This technique can help reduce the elapsed time of many programs and utilities that sequentially process your databases.

### Sequential Buffering Introduction

The normal OSAM buffering method reads only one block with each I/O operation. This method is known as a *random read*. Without SB, IMS must issue a random read each time your program processes a block that is not already in the OSAM buffer pool. For programs that process your databases sequentially, random reads can be time-consuming because the DASD must rotate one revolution or more between each read.

SB reduces the time needed for I/O read operations in three ways:

- By reading 10 consecutive blocks with a single I/O operation. This is called a *sequential read*. Sequential reads reduce the number of I/O operations necessary to sequentially process a database data set.

When a sequential read is issued, the block containing the segment your program requested plus nine adjacent blocks are read from the database into an SB buffer pool in virtual storage. When your program processes segments in any of the other nine blocks, no I/O operations are required because the blocks are already in the SB buffer pool.

**Example:** If your program sequentially processes an OSAM data set containing 100,000 consecutive blocks, 100,000 I/O operations are required using the normal OSAM buffering method. SB can take as few as 10,000 I/O operations to process the same data set.

- By monitoring the database I/O reference pattern and deciding if it is more efficient to satisfy a particular I/O request with a sequential read or a random read. This decision is made for each I/O request processed by SB.



- By overlapping sequential read I/O operations with CPC processing and other I/O operations of the same application. When overlapped sequential reads are used, SB anticipates future requests for blocks and reads those blocks into SB buffers before they are actually needed by your application. (Overlapped I/O is supported only for batch and BMP regions.)

## Benefits of Sequential Buffering

By using SB, any application program or utility that sequentially processes OSAM data sets can run faster. Because many other factors affect the elapsed time of a job, the time savings is difficult to predict. You need to experiment with SB to determine actual time savings.

### Programs That Can Benefit from SB

Some of the programs, utilities, and functions that might benefit from the use of SB are:

- IMS batch programs that sequentially process your databases.
- BMPs that sequentially process your databases.
- Any long-running MPP, Fast Path, and CICS programs that sequentially process your databases.

**Note:** SB is possible but not recommended for short-running MPP, IFP, and CICS programs. SB is not recommended for the short-running programs, because SB has a high initialization overhead each time such online programs are run.

- IMS utilities, including:
  - Online Database Image Copy
  - HD Reorganization Unload
  - Partial Database Reorganization
  - Surveyor
  - Database Scan
  - Database Prefix Update
  - Batch Backout
- HALDB Online Reorganization function

### Typical Productivity Benefits of SB

By using SB for programs and utilities that sequentially process your databases, you might be able to:

- Run existing sequential application programs within decreasing “batch window times.” For example, if the time you set aside to run batch application programs is reduced by one hour, you might still be able to run all the programs you normally run within this reduced time period.
- Run additional sequential application programs within the same time period.
- Run some sequential application programs more often.
- Make online image copies much faster.
- Reduce the time needed to reorganize your databases.

## Flexibility of SB Use

IMS provides several methods for requesting SB. You can request the use of SB for specific programs and utilities during PSBGEN or by using SB control statements. You can also request the use of SB for all or some batch and BMP programs by using an SB Initialization Exit Routine.

IMS also allows a system programmer or master terminal operator (MTO) to override requests for the use of SB by disallowing its use. This is done by issuing an SB MTO command or using an SB Initialization Exit Routine. The use of SB can be disallowed during certain times of the day to avoid virtual or real storage constraint problems.

These methods of controlling the use of SB are discussed in “How to Request the Use of SB” on page 274.

### How SB Buffers Data

This topic describes what happens when you request SB. You will learn what SB buffers, how and when SB is activated, and what happens to the data that SB buffers.

#### What SB Buffers

As discussed in Chapter 8, “Choosing Optional Database Functions,” on page 169, HD databases can consist of multiple data set groups. A database PCB can therefore refer to several data set groups. A database PCB can also refer to several data set groups when the database referenced by the PCB is involved in logical relationships. A particular database, and therefore a particular data set group, can be referenced by multiple database PCBs. A specific data set group referenced by a specific database PCB is referred to in the following discussion as a *DB-PCB/DSG pair*.

When SB is activated, it buffers data from the OSAM data set associated with a specific DB-PCB/DSG pair. SB can be active for several DB-PCB/DSG pairs at the same time, but each pair requires a separate activation.

#### Conditional Activation and Periodical Evaluation of SB

IMS does not immediately activate SB when you request it. Instead, when SB is requested for a program, IMS begins monitoring the I/O reference pattern and activity rate for each DB-PCB/DSG pair used by the program. After awhile, IMS performs the first of a series of *periodical evaluations* of the buffering process. IMS performs these periodic evaluation for each DB-PCB/DSB pair. This periodical evaluation determines if the use of SB would be beneficial for the DB-PCB/DSG pair. If the use of SB would be beneficial, IMS activates SB for the DB-PCB/DSG pair. This activation of SB is known as *conditional activation*.

After SB is activated, IMS continues to periodically evaluate the I/O reference pattern and activity rate. Based on these evaluations, IMS can:

- Temporarily deactivate SB and continue to monitor the I/O reference pattern and activity rate. Temporary deactivation is implemented to unfix and page-release the SB buffers.
- Temporarily deactivate monitoring of the I/O reference pattern and activity rate. This form of temporary deactivation is implemented only if SB has been deactivated and IMS concludes from subsequent evaluations that use of SB would still not be beneficial.

When SB is temporarily deactivated, it can be reactivated later based on the results of subsequent evaluations.

Individual periodical evaluations are performed for each DB-PCB/DSG pair. Therefore, IMS can deactivate SB for one DB-PCB/DSG pair while SB remains active for other DB-PCB/DSG pairs.

## Role of the SB Buffer Handler

When SB is activated for a DB-PCB/DSG pair, a pool of SB buffers is allocated to the pair (SB buffers are also discussed in “Virtual Storage Considerations for SB”). Each SB buffer pool consists of  $n$  buffer sets (the default is four) and each buffer set contains 10 buffers. These buffers are used by an internal component called the SB buffer handler to hold the sets of 10 consecutive blocks read with sequential reads.

While SB is active, all requests for database blocks not found in the OSAM buffer pool are sent to the SB buffer handler. The SB buffer handler responds to these requests in the following way:

- If the requested block is already in an SB buffer, a copy of the block is put into an OSAM buffer.
- If the requested block is not in an SB buffer, the SB buffer handler analyzes a record of previous I/O requests and decides whether to issue a sequential read or a random read. If it decides to issue a random read, the requested block is read directly into an OSAM buffer. If it decides to issue a sequential read, the requested block and nine adjacent blocks are read into an SB buffer set. When the sequential read is complete, a copy of the requested block is put into an OSAM buffer.
- The SB buffer handler also decides when to initiate overlapped sequential reads.

**Note:** When processing a request from an online program, the SB buffer handler only searches the SB buffer pools allocated to that online program.

**Related Reading:** For information on how IMS invalidates SB buffers, see the data-sharing chapter of *IMS Version 9: Administration Guide: System*.

## Virtual Storage Considerations for SB

Each DB-PCB/DSG pair buffered by SB has its own SB buffer pool. By default, each SB buffer pool contains four buffer sets (although IMS lets you change this value). Ten buffers exist in each buffer set. Each buffer is large enough to hold one OSAM data set block.

The total size of each SB buffer pool is:

$$4 * 10 * \text{block size}$$

The SB buffers are page-fixed in storage to eliminate page faults, reduce the path length of I/O operations, and increase performance. SB buffers are page-unfixed and page-released when a periodical evaluation temporarily deactivates SB.

You must ensure that the batch, online or DBCTL region has enough virtual storage to accommodate the SB buffer pools. This storage requirement can be considerable, depending upon the block size and the number of programs using SB.

SB is not recommended in real storage-constrained environments such as batch and DB/TM.

Some systems are storage-constrained only during certain periods of time, such as during online peak times. You can use an SB Initialization Exit Routine to control the use of SB according to specific criteria (the time) of day.

**Related Reading:** For details on the SB Initialization User Exit Routine see *IMS Version 9: Customization Guide*.

### How to Request the Use of SB

IMS provides two methods for specifying which of your programs and databases should use SB.

1. You can explicitly specify which programs and utilities should use SB during PSB generation or by using SB control statements.
2. You can specify that by default all or a subset of your batch and BMP programs and utilities should use SB by coding an SB exit routine or by using a sample SB exit routine provided with IMS.

Determine which method you will use. Using the second method is easier because you do not need to know which BMP and batch programs use sequential processing. However, using SB by default can lead to an uncontrolled increase in real and virtual storage use, which can impact system performance. Generally, if you are running IMS in a storage-constrained z/OS environment, use the first method. If you are running IMS in a non-storage-constrained z/OS environment, use the second method.

### Requesting SB During PSB Generation

To request SB during PSB generation, specify SB=COND in the PCB macro instruction of your application's PSB. (This is not possible for IMS utilities that do not use a PSB during execution.) You code this keyword for each database PCB buffered with SB.

The following diagram shows the syntax of the SB keyword in the PCB statement.



#### COND

Specifies that SB should be conditionally activated for this PCB.

#### NO

Specifies that SB should not be used for this PCB.

If you do not include the SB keyword in your PCB, IMS defaults to NO unless specified otherwise in the SB exit routine.

The SB keyword value can be overridden by SB control statements. This option is discussed in “Requesting SB With SB Control Statements.”

The following example shows a PCB statement coded to request conditional activation of SB:

```
SKILLA PCB TYPE=DB,DBDNAME=SKILLDB,KEYLEN=100,
 PROCOPT=GR,SB=COND
```

Detailed instructions for coding PSB statements are contained in *IMS Version 9: Utilities Reference: System*.

### Requesting SB With SB Control Statements

You can put SBPARM control statements in the optional //DFSCTL file. This file is defined by a //DFSCTL DD statement in the JCL of your batch, dependent, or online region. You can use the SBPARM control statement to:

- Specify which database PCBs (and which data sets referenced by the database PCB) should use SB
- Override the default number of buffer sets

This control statement allows you to override PSB specifications without requiring you to regenerate the PSB.

You can specify keywords that request use of SB for all or specific DBD names, DD names, PSB names, and PCB labels. You can also combine these keywords to further restrict when SB is used.

By using the BUFSETS keyword of the SBPARM control statement, you can change the number of buffer sets allocated to SB buffer pools. For details on the SB buffer pools see “Virtual Storage Considerations for SB” on page 273. The default number of buffer sets is four. Badly organized databases can require six or more buffer sets for efficient sequential processing. Well-organized databases require as few as two buffer sets. An indicator of how well-organized your database is can be found in the optional //DFSSTAT reports.

### **Related Reading:**

- For details on //DFSSTAT reports, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.
- For information on tuning the number of buffer sets, see Chapter 15, “Tuning Databases,” on page 359.

The example below shows the SBPARM control statement necessary to request conditional activation of SB for all DBD names, DD names, PSB names, and PCBs.

```
SBPARM ACTIV=COND
```

The next example shows the parameters necessary to:

- Request conditional activation of SB for all PCBs that were coded with 'DBDNAME=SKILLDB' during PSB generation
- Set the number of buffer sets to 6

```
SBPARM ACTIV=COND,DB=SKILLDB,BUFSETS=6
```

Detailed instructions for coding the SBPARM control statement are contained in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

## **Requesting SB with an SB Initialization Exit Routine**

You can use an SB Initialization Exit Routine to:

- Request conditional activation of SB for all or some batch and BMP programs
- Allow or disallow the use of SB
- Change the default number of buffer sets

You can do this by writing your own SB exit routine or by selecting a sample SB exit routine and copying it under the name DFSSBUX0 into IMS.SDFSRESL. An SB exit routine allows you to dynamically control the use of SB at application scheduling time.

IMS supplies five sample SB exit routines in IMS.SDFSSRC and IMS.SDFSRESL. Three of the sample routines request SB for various subsets of application programs and utilities. One sample routine requests SB during certain times of the day and another routine disallows use of SB. You can use these sample routines as written or modify them to fit your needs.

Detailed instructions for the SB Initialization Exit Routine are in the *IMS Version 9: Customization Guide*.

### SB Options or Parameters Provided by Several Sources

If you provide the same SB option or parameter in more than one place, the following priority list applies (item 1 having the highest priority):

1. SB control statement specifications (the  $n$ th control statement overrides the  $m$ th control statement, where  $n > m$ )
2. PSB specifications
3. Defaults changed by the SB Initialization Exit Routine
4. IMS defaults

### Using SB in an Online System

To allow the use of SB in an online IMS or DBCTL environment, an IMS system programmer must explicitly request that IMS load the SB modules. This is done by putting an SBONLINE control statement in the DFSVSMxx member. By default, IMS does not load SB modules in an online environment. This helps avoid a noticeable increase in virtual storage requirements.

The two forms of the SBONLINE control statement are:

SBONLINE

or

SBONLINE,MAXSB=nnnnn

where *nnnnn* is the maximum storage (in kilobytes) that can be used for SB buffers.

When the MAXSB limit is reached, IMS stops allocating SB buffers to online applications until terminating online programs release SB buffer space. By default, if you do not specify the MAXSB= keyword, the maximum storage for SB buffers is unlimited.

Detailed instructions for coding the SBONLINE control statement are contained in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

### Disallowing the Use of SB

This topic describes how an IMS system programmer or MTO can disallow the use of SB. When the use of SB has been disallowed, a request for conditional activation of SB is ignored.

There are three ways to disallow the use of SB. The following list describes the three methods:

1. An SB Initialization Exit Routine can be written (or a sample exit routine adapted) that can dynamically disallow and allow use of SB. This method can be used if you are using SB in an IMS batch, online, or DBCTL environment.
2. The MTO commands /STOP SB and /START SB can be issued to dynamically disallow and allow use of SB within an IMS online subsystem.

**Related Reading:** For details on the /STOP SB and /START SB commands, see *IMS Version 9: Command Reference*.

3. The SBONLINE control statement can be omitted from the DFSVSMxx member. This will keep IMS from loading the SB modules into the online subsystem. No program in the online subsystem will be able to use SB.



---

## VSAM Options

Several types of options can be chosen for databases using VSAM. Specifying options such as free space for the ESDS data set, logical record size, and CI size are discussed in the preceding topics in this chapter. This topic describes these optional functions:

1. Functions specified in the `OPTIONS` control statement when IMS is initialized.
2. Functions specified in the `POOLID`, `VSRBF`, and `DBD` control statements when IMS is initialized.
3. Functions specified in the Access Method Services `DEFINE CLUSTER` command when a data set is defined.

### Optional Functions Specified in the `OPTIONS` Control Statement

Several options exist that can be chosen during IMS system initialization for databases using VSAM. These options are specified in the `OPTIONS` control statement. In a batch system, the options you specify are put in the data set with the `DDNAME DFSVSAMP`. In an online system, they are put in the `IMS.PROCLIB` data set with the member name `DFSVMnn`. Your choice of VSAM options can affect performance, use of space in the database, and recovery. This topic describes each option and the implications of using it.

The `OPTIONS` statement is described in detail in the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*. The `OPTIONS` statement and all its parameters are optional.

#### Using Background Write (BGWRT Parameter)

When an application program issues a call requiring that data be read from the database, the data is read into a buffer. If the buffer the data is to be read into contains altered data, the altered data must be written back to the database before the buffer can be used. If the data was not written back to the database, the data would be lost (overlaid) when new data was read into the buffer. Then there would be no way to update the database.

For these reasons, when an application program needs data read into a buffer and the buffer contains altered data, the application program waits while the buffer is written to the database. This waiting time decreases performance. The application program is ready to do processing, but the buffer is not available for use. Background write is a function you can choose in the `OPTIONS` statement that reduces the amount of wait time lost for this reason.

To understand how background write works, you need to know something about how buffers are used in a subpool. You specify the number of buffers and their size. All buffers of the same size are in the same subpool. Buffers in a subpool are on a use chain, that is, they are chained together in the order in which they have been most or least recently used. The most recently used buffers are at the top of the use chain; least recently used buffers are at the bottom.

When a buffer is needed, the VSAM buffer manager selects the buffer at the bottom of the use chain. The buffer at the bottom of the use chain is selected, because buffers that have not been used recently are less likely to contain data that will be used again. If the buffer the VSAM buffer handler picks contains altered data, the data is written to the database before the buffer is used. It is during this step that the application program is waiting.

Background write solves the following problem: when the VSAM buffer manager gets a buffer in any subpool, it looks (when background write is used) at the next buffer on the use chain. The next buffer on the use chain will be used next. If the buffer contains altered data, IMS is notified so background write will be invoked. Background write has VSAM write data to the database from some percentage of the buffers at the bottom of the use chain. VSAM does this for *all* subpools. The data that is written to the database still remains in the buffers so the application program can still use any data in the buffers.

Background write is a very useful function when processing is done sequentially, but it is not as important to use in online systems as in batch. This is because, in online environments, IMS automatically writes buffers to the database at sync points.

To use background write, specify BGWRT=YES,n on the OPTIONS statement, where n is the percentage of buffers in each subpool to be written to the database. If you do not code the BGWRT= parameter, the default is BGWRT=YES and the default percentage is 34%. If an application program continually uses buffers but does not reexamine the data in them, you can make n 99%. Then, a buffer will normally be available when it is needed.

CICS does not support this function.

### Choosing an Insert Strategy (INSERT Parameter)

Get free space in a CI in a KSDS is by specifying it in the DEFINE CLUSTER command. (The DEFINE CLUSTER command is explained in “Specifying Free Space for a KSDS (FREESPACE Parameter)” on page 280. Free space for a KSDS cannot be specified using the FRSPC= keyword in the DBD.

To specify free space in the DEFINE CLUSTER command, you must decide:

- Whether free space you have specified is preserved or used when more than one root segment is inserted at the same time into the KSDS.
- Whether to split the CI at the point where the root is inserted, or midway in the CI, when a root that causes a CI split is inserted.

These choices are specified in the INSERT= parameter in the OPTIONS statement. INSERT=SEQ preserves the free space and splits the CI at the point where the root is inserted. INSERT=SKP does not preserve the free space and splits the CI midway in the CI. In most cases, specify INSERT=SEQ so free space will be available in the future when you insert root segments. Your application determines which choice gives the best performance.

If you do not specify the INSERT= parameter, the default is INSERT=SKP.

### Using the IMS Trace Parameters

The IMS trace parameters provide information that has proven valuable in solving problems in the specific area of the trace. All traces share sequencing numbers so that a general picture of the IMS environment can be obtained by looking at all the traces.

IMS DL/I, LOCK and retrieve traces are on by default, except in batch regions, where they are off by default. All other trace types are off by default.

Traces can be turned on at IMS initialization time. They can also be started or stopped by the /TRACE command during IMS execution. Output from long-running traces can be saved on the system log if requested.



**Related Reading:** For more information on the trace parameters, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

### Determining Which Dump Option to Use (DUMP Parameter)

The dump option is a serviceability aid that has no impact on performance. It merely describes the type of abend to take place if an abend occurs in the buffer handler (an internal component). If DUMP=YES is specified, the control region will abend when there is an abend in the buffer handler.

### Deciding Whether to Fix VSAM Database Buffers and IOBs in Storage (VSAMFIX Parameter)

Each VSAM subpool contains buffers and input/output control blocks (IOBs). Performance is generally improved if these buffers and IOBs are fixed in storage. Then, page faults do not occur. A page fault occurs when an instruction references a page (a specific piece of storage) that is not in real storage.

You can specify whether buffers and IOBs are fixed in storage in the VSAMFIX= parameter of the OPTIONS statement. If you have buffers or IOBs fixed, they are fixed in all subpools. If you do not code the VSAMFIX= parameter, the default is that buffers and IOBs are not fixed.

This parameter can be used in a CICS environment if the buffers were specified by IMS.

### Using Local Shared Resources (VSAMPLS Parameter)

Specifying VSAMPLS=LOCL in the OPTIONS statement is for local shared resources (LSR). When you specify VSAMPLS=LOCL, VSAM control blocks and subpools are put in the IMS control region. VSAMPLS=LOCL is the only valid operand and the default.

## Optional Functions Specified in the POOLID, DBD, and VSRBF Control Statements

Options chosen during IMS initialization determine the size and structure of VSAM local shared resource pools. In a batch environment, you specify these options in a data set with the DDNAME DFSVSAMP. In online systems, you specify these options in the IMS.PROCLIB data set with the member name DFSVSMnn.

With these options, you can enhance IMS performance by:

- Defining multiple local shared resource pools
- Dedicating subpools to a specific data set
- Defining separate subpools for index and data components of VSAM data sets

**Related Reading:** Implementing the POOLID, VSRBF, and DBD control statements and their corresponding parameters is described in detail in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

## Optional Functions Specified in the Access Method Services DEFINE CLUSTER Command

There are several optional functions that affect performance that can be chosen when you define your VSAM data sets. These functions are specified in the Access Method Services DEFINE CLUSTER command. HALDBs require that the REUSE parameter be specified on the DEFINE CLUSTER command. IMS Online Recovery Services takes advantage of the REUSE parameter, if it is specified.

**Related Reading:** This command and all its parameters are described in detail in *DFSMS Access Method Services for Catalogs*.

### Specifying that 'Fuzzy' Image Copies Can be Taken with the Database Image Copy 2 utility (DFSUDMT0)

To establish that 'fuzzy' image copies of KSDSs can be taken with the Database Image Copy 2 utility (DFSUDMT0), specify the BWO(TYPEIMS) parameter. For this option to take effect the following conditions must exist:

- The KSDS must be SMS-managed.
- All access to the KSDS, once this option is specified, is done under DFSMS 1.3 or later version (once the KSDS has been opened under DFSMS 1.3, attempts to open it under an earlier version will fail).

### Specifying Free Space for a KSDS (FREESPACE Parameter)

To get free space in a CI in a KSDS, specify it in the FREESPACE parameter in the DEFINE CLUSTER command. Free space for a KSDS can not be specified using the FRSPC= keyword in the DBD.

You specify free space in the FREESPACE parameter as a percentage. The format of the parameter is FREESPACE(x,y) where:

- x is the percentage of space in a CI left free when the database is loaded or when a CI split occurs after initial load
- y is the percentage of space in a control area (CA) left free when the database is loaded or when a CA split occurs after initial load.

Free space is preserved when a CI or CA is split by coding INSERT=SEQ in the OPTIONS control statement. INSERT=SEQ is explained in "Choosing an Insert Strategy (INSERT Parameter)" on page 278.

If you do not specify the FREESPACE parameter, the default is that no free space is reserved in the KSDS data set when the database is loaded.

### Specifying Whether Data Set Space Is Pre-formatted for Initial Load (SPEED | RECOVERY Parameter)

When initially loading a VSAM data set, you can specify whether you need the data set pre-formatted in the SPEED | RECOVERY parameter. When SPEED is specified, it says the data set should *not* be pre-formatted. An advantage of pre-formatting a data set is; if initial load fails, you can recover and continue loading database records after the last correctly-written record. However, IMS does *not* support the RECOVERY option (except by use of the Utility Control Facility). So, although you can specify it, you cannot perform recovery. Because you cannot take advantage of recovery when you specify the RECOVERY parameter, you should specify SPEED to improve performance during initial load.

To be able to recover your data set during load, you should load it under control of the Utility Control Facility. This utility is described in *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

RECOVERY is the default for this parameter.

---

## OSAM Options

Two types of options are available for databases using OSAM:

1. Options specified in the DBD (free space, logical record size, CI size).  
These options are covered in preceding sections in this chapter.
2. Options specified in the OPTIONS control statement when IMS is initialized.  
In a batch system, the options are put in the data set with the DDNAME DFSVSAMP. In an online system, they are put in the IMS.PROCLIB data set with the member name DFSVSMnn. Your choice of OSAM options can affect performance, recovery, and the use of space in the database.  
The OPTIONS statement is described in detail in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*. The statement and all its parameters are optional.

---

## Dump Option (DUMP Parameter)

The dump option is a serviceability aid that has no impact on performance. It merely describes the type of abnormal termination to take place when abnormal termination occurs in the buffer handler (an internal component).

---

## Deciding Which FIELD Statements to Code in the DBD

Chapter 2, “Standards and Procedures,” on page 19 describes the statements that are coded in the DBD. One of those statements is the FIELD statement, which defines a field within a segment type. An important thing to note about the FIELD statement is that it has to be coded for sequence fields and for fields an application program can refer to in the SSA of a call. A FIELD statement also has to be coded if it is referenced by a SENFLD statement in any PSB. Because each FIELD statement takes up storage in the DMB control block, do not generate FIELD statements that are unnecessary.

---

## Planning for Maintenance

In designing your database, remember to plan for maintenance. If your applications require, for instance, that the database be available 16 hours a day, you do not design a database that takes 10 hours to unload and reload. No guideline we can give you for planning for maintenance exists, because all such plans are application dependent. However, remember to plan for it.

A possible solution to the problem just described is to make three separate databases and put them on different volumes. If the separate databases have different key ranges, then application programs could include logic to determine which database to process against. This solution would allow you to reorganize the three databases at separate times, eliminating the need for a single 10-hour reorganization. Another solution to the problem if your database uses HDAM or HIDAM might be to do a partial reorganization using the Partial Database Reorganization utility (described in Chapter 16, “Modifying Databases,” on page 437).

In the online environment, the Image Copy utilities allow you to do some maintenance without taking the database offline. These utilities let you take image copies of databases or partitions while they are allocated to and being used by an online IMS system.

## Planning for Maintenance

HALDB provides greatly improved availability for large databases. By partitioning large databases, you can perform offline maintenance on a single partition, while the remaining partitions remain available.

| You can also reorganize HALDBs online, which improves the performance of your  
| HALDB without disrupting access to its data. If you plan to reorganize your  
| HALDB online, make sure that there is enough DASD space to accommodate the  
| reorganization process.

**Related Reading:** For information on reorganizing HALDBs online, see “HALDB Online Reorganization” on page 382.

---

## Chapter 10. Designing Fast Path Databases

After you determine the type of database and optional functions that best suit your application's processing requirements, you need to make a series of decisions about database design and the use of options. This set of decisions primarily determines how well your database performs and how well it uses available space. These decisions are based on:

- The type of database and optional functions you have already chosen
- The performance requirements of your applications
- How much storage you have available for use online

This chapter examines the following topics:

- “Designing a Data Entry Database (DEDB)”
- “Designing a Main Storage Database (MSDB)” on page 290
- “High-Speed Sequential Processing (HSSP)” on page 296
- “Designing a DEDB or MSDB Buffer Pool” on page 298
- “Designing a DEDB Buffer Pool in the DBCTL Environment” on page 302

---

### Designing a Data Entry Database (DEDB)

This topic describes the choices you need to make in designing a DEDB and proposes guidelines to help you make these choices.

To design a DEDB, you must know the following information:

- How the application fits the limitations imposed by the DEDB itself
- How the application can make optimum use of the area concept of a DEDB
- The size of the CI
- The size of the UOW
- The DEDB randomizing routine
- Record deactivation
- Multiple copies of an area data set
- PCL (physical child last pointer)
- Subset pointers

**Related Reading:** DEDBs can be shared. For information on DEDB data sharing, see *IMS Version 9: Administration Guide: System* and *IMS Version 9: Utilities Reference: System*.

### DEDB Design Guidelines

The following list describes guidelines for designing DEDBs:

- Except for the relationship between a parent and its children, the logical structure (defined by the PCB) does not need to follow the hierarchic order of segment types defined by the DBD.

For example, SENSEG statements for DDEP segments can precede the SENSEG statement for the SDEP segment. This implementation prevents unqualified GN processing from retrieving *all* SDEP segments before accessing the first DDEP segments.

## Designing a Data Entry Database

- Most of the time, SDEP segments are retrieved all at once, using the DEDB Sequential Dependent Scan utility. If you later must relate SDEP segments to their roots, you must plan for root identification as part of the SDEP segment data.
- A journal can be implemented by collecting data across transactions using a DEDB. To minimize contention, you should plan for an area with more than one root segment. For example, a root segment can be dedicated to a transaction/region or to each terminal. To further control resource contention, you should assign different CIs to these root segments, because the CI is the basic unit of DEDB allocation.
- Following is a condition you might be confronted with and a way you might resolve it. Assume that transactions against a DEDB record are recorded in a journal using SDEP segments and that a requirement exists to interrogate the last 20 or so of them.

SDEP segments have a fast insert capability, but on the average, one I/O operation is needed for each retrieved segment. The additional I/O operations could be avoided by inserting the journal data as both a SDEP segment and a DDEP segment and by limiting the twin chain of DDEP segments to 20 occurrences. The replace or insert calls for DDEP segments does not necessarily cause additional I/O, since they can fit in the root CI. The root CI is always accessed even if the only call to the database is an insert of an SDEP segment. The online retrieve requests for the journal items can then be responded to by the DDEP segments instead of the SDEP segments.

- As physical DDEP twin chains build up, I/O activity increases. The SDEP segment type can be of some help if the application allows it.

The design calls for DDEP segments of one type to be batched and inserted as a single segment whenever their number reaches a certain limit. An identifier helps differentiate them from the regular journal segments. This design prevents updates after the data has been converted into SDEP segments.

## DEDB Area Design Guidelines

The following are some reasons why DEDBs are divided into areas and some related design considerations:

- DEDBs should be divided into areas in a way that makes sense for the application programs.

**Example:** A service bureau organization makes a set of applications available to its customers. The design calls for a common database to be used by all users of this set of applications. The area concept fits this design because the randomizing routine and record keys can be set so that data requests are directed to the user's area only. Furthermore, on the operational side, users can be given specific time slots. Their areas are allocated and deallocated dynamically without interrupting other services currently using the same DEDB. National or international companies with business locations spanning multiple time zones might take advantage of the partitioned database concept. Because not all areas must be online all the time, data can be spread across areas by time zone.

Preferential treatment for specific records, such as specific accounts, specific clients, and so on, can be implemented without using a new database, for example, by keeping more sequential dependent segments online for certain records. By putting together those records in one area, you can define a larger sequential dependent segment part and control the retention period accordingly.

- The impact of permanent I/O errors and severe errors can be reduced using a DEDB. DL/I requires that all database data sets, except for HALDBs, be

available all the time. With a DEDB, the data not available is limited only to the area affected by the failure. Because the DEDB utilities run at the level of the area, the recovery of the failing area can be done while the rest of the database is accessible to online processing. The currently allocated log volume must be freed by a /DBR AREA command and used in the recovery operation. Track recovery is also supported. The recovered area can then be dynamically allocated back to the operational environment.

**Related Reading:** Make multiple copies of DEDB area data sets to make data more available to application programs. See “Multiple Copies of an Area Data Set” on page 288.

- Space management parameters can vary from one area to another. This includes: CI size, UOW size, root addressable part, overflow part, and sequential dependent part. Also, the device type can vary from one area to the other.
- It is feasible to define an area on more than one volume and have one volume dedicated to the sequential dependent part. This implementation might save some seek time as sequential dependent segments are continuously added at the end of the sequential dependent part. The savings depends on the current size of the sequential dependent part and the blocking factor used for sequential dependent segments. If an area spans more than one volume, volumes must be of the same type.
- Only the independent overflow part of a DEDB is extendable. Sufficient space should be provided for all parts when DEDBs are designed. To extend the independent overflow part of a DEDB, you must follow the procedures in “Extending DEDB Independent Overflow Online” on page 472.

The /DISPLAY command and the POS call can help monitor the usage of auxiliary space. Unused space in the root addressable and independent overflow parts can be reclaimed through reorganization. It should be noted that, in the overflow area, space is not automatically reused by ISRT calls. To be reused at call time, the space must amount to an entire CI, which is then made available to the ISRT space management algorithm. Local out-of-space conditions can occur, although some available space exists in the database.

- Adding or removing an area from a DEDB requires a DBDGEN and an ACBGEN. Database reload is required if areas are added or deleted in the middle of existing areas. Areas added other than at the end changes the area sequence number assigned to the areas. The subsequent log records written reflect this number, which is then used for recovery purposes. If areas are added between existing areas, prior log records will be invalid. Therefore, an image copy must be made following the unload/reload. Be aware that the sequence of the AREA statements in the DBD determines the sequence of the MRMB entries passed on entry to the randomizing routine. An area does not need to be mounted if the processing does not require it, so a DBDGEN/ACBGEN is not necessary to logically remove an area from processing.
- Careful monitoring of the retention period of each log allows you to make an image copy of one area at a time. Also, because the High-Speed DEDB Direct Reorganization utility logs changes, you do not need to make an image copy following a reorganization.
- The area concept allows randomizing at the area level, instead of randomizing throughout the entire DEDB. This means the key might need to carry some information to direct the randomizing routine to a specific area.

## Determining the Size of the CI

The choice of a CI size depends on the following factors:



## Designing a Data Entry Database

- CI sizes of 512, 1 KB, 2 KB, 4 KB, and up to 28 KB in 4 KB increments are supported.
- Only one RAP exists per CI. The average record length has to be considered. In the base section of the root addressable part, a CI can be shared only by the roots that randomize to its RAP and their DDEP segments.
- Track utilization according to the device type.
- SDEP segment writes. A larger CI requires a fewer number of I/Os to write the same amount of SDEP segments.
- The maximum segment size, which is 28,552 bytes if using a 28 KB CI size.

## Determining the Size of the UOW

The UOW is the unit of space allocation in which you specify the size of the root addressable and independent overflow parts.

Three factors might affect the size of the UOW:

1. The High-Speed DEDB Direct Reorganization utility (DBFUHDR0) runs on a UOW basis. Therefore, while the UOW is being reorganized, none of the CIs and data they contain are available to other processing.  
  
A large UOW can cause resource contention, resulting in increased response time if the utility is run during the online period. A minor side effect of a large UOW is the space reserved on DASD for the "reorganization UOW," which is no longer used, but retained for compatibility purposes.  
  
A UOW that is too small can cause some overhead during reorganization as the utility switches from one UOW to the next with very little useful work each time. However, this might not matter so much if reorganization time is not critical.
2. The use of processing option P, (explained in "Processing Option P (PROCOPT=P)" on page 287). This consideration pertains to sequential processing using BMP regions. If the application program is coded to take advantage of the 'GC' status code, this status code must be returned frequently enough to fit in the planned sync interval.  
  
Assume every root CI needs to be modified and that, for resource control reasons, each sync interval is allowed to process sequentially no more than 20 CIs of data. The size of the UOW should not be set to more than 20 CIs. Otherwise, the expected 'GC' status code would not be returned in time for the application program to trigger a sync point, release the resources, and not lose position in the database.  
  
A UOW that is too small, such as the minimum of two CIs, can cause too many 'unsuccessful database call' conditions each time a UOW is crossed. On a 'GC' status code, no segment is returned and the call must be reissued after an optional SYNC or CHKP call.
3. The dependent overflow (DASD space) usage is more efficient with a large UOW than a small UOW.

See "SDEP CI Preallocation and Reporting" for a discussion of how the size of the UOW affects DEDB design.

## SDEP CI Preallocation and Reporting

Because of data sharing, SDEP CIs cannot be allocated one at a time. Also, each data sharing system requires its own current CI. Therefore, a set of SDEP CIs are



preallocated to each IMS on an allocation call. The number of CIs obtained by an IMS is a function of the system's insert rate. The insert process obtains the current CI, not the area open process.

Because the insert process obtains the current CI, space use and reporting is complex. If a preallocation attempt cannot obtain the number of CIs requested, the ISRT or sync point call receives status FS, even if there is enough space for that particular call. The FS processing marks the area as full, and any subsequent smaller inserts also fail.

When there are few available SDEP CIs in an area, the number that can actually be used for SDEP inserts varies depending on the system's insert rate. Also, the command /DIS AREA calculates the number of SDEP CIs free as those available for preallocation and any unused CIs preallocated to the IMS issuing the command. Area close processing discards CIs preallocated to the IMS, and the unused CIs are lost until the SDEP Delete utility is run. Therefore, the number of unused CIs reported by the /DIS AREA command after area close processing is smaller because the preallocated CIs are no longer available.

### Processing Option P (PROCOPT=P)

The PROCOPT=P option is specified during the PCB generation in the PCB statement or in the SENSEG statement for the root segment.

The option takes effect only if the region type is a BMP. If specified, it offers the following advantage:

Whenever an attempt is made to retrieve or insert a DEDB segment that causes a UOW boundary to be crossed, a 'GC' status code is set in the PCB but no segment is returned or inserted. The only calls for which this takes place are: G(H)U, G(H)N, POS, and ISRT.

Although crossing the UOW boundary has no particular significance for most applications, the 'GC' status code that is returned indicates this could be a convenient time to invoke sync point processing. This is because a UOW boundary is also a CI boundary. As explained for sequential processing, a CI boundary is a convenient place to request a sync point.

The sync point is invoked by either a SYNC or a CHKP call, but this normally causes position on all currently accessed databases to be lost. The application program then has to resume processing by reestablishing position first. This situation is not always easy to solve, particularly for unqualified G(H)N processing.

An additional advantage with this processing option is, if a SYNC or CHKP call is issued after a 'GC' status code, database position is kept. Database position is such that an unqualified G(H)N call issued after a 'GC' status code returns the first root segment of the next UOW. When a 'GC' status code is returned, no data is presented or inserted. Therefore, the application program should, optionally, request a sync point, reissue the database call that caused the 'GC' status code, and proceed. The application program can ignore the 'GC' status code, and the next database call will work as usual.

Database recovery and change accumulation processing must buffer all log records written between sync points. Sync points must be taken at frequent intervals to avoid exhausting available storage. If not, database recovery might not be possible.

### DEDB Randomizing Routine Design

A DEDB randomizing module is required for placing root segments in a DEDB. The randomizing module is also required for retrieving root segments from a DEDB. One or more such modules can be used with an IMS system. Only one randomizing module can be associated with each DEDB.

**Related Reading:** Refer to *IMS Version 9: Customization Guide* for register usage and a sample randomizing program exit (DBFHDC40).

The purpose of the randomizing module is the same as in HDAM processing. A root search argument key field value is supplied by the application program and converted into a relative root anchor point number. Because the entry and exit interfaces are different, DEDB and HDAM randomizing routines are not object code compatible. The main line randomizing logic of HDAM should not need modification if randomizing through the whole DEDB.

Some additional differences between DEDB and HDAM randomizing routines are as follows:

- The ISRT algorithm attempts to put the entire database record close to the root segment (with the exception of SDEP segments). No BYTES parameter exists to limit the size of the record portion to be inserted in the root addressable part.
- With the DEDB, only one RAP can be defined in each root addressable CI.
- CIs that are not randomized to are left empty.

Because of the area concept, some applications might decide to randomize in a particular area rather than through all the DEDB as in HDAM processing. Therefore, the expected output of such a randomizing module is made up of a relative root anchor point number in an area and the address of the control block (DMAC) representing the area selected.

Keys that randomize to the same RAP are chained in ascending key sequence.

DEDB logic runs in parallel, so DEDB randomizing routines must be reentrant. The randomizing routines operate out of the common storage area (CSA). If they use operating system services like LOAD, DELETE, GETMAIN, and FREEMAIN, the routines must abide by the same rules as described in *IMS Version 9: Customization Guide*.

### Multiple Copies of an Area Data Set

The data in an area is in a VSAM data set called the area data set (ADS). Installations can create as many as seven copies (multiple area data sets, MADs) of each ADS, making the data more available to application programs.

Each copy of an ADS contains exactly the same user data. Fast Path maintains data integrity by keeping identical data in the copies during application processing. When an application program updates data in an area, Fast Path updates that data in each copy of the ADS. When an application program reads data from an area, Fast Path retrieves the requested data from any one of the available copies of the ADS. All copies of an ADS must have the same definition but can reside on different devices and on different device types. Using copies of ADS is also helpful in direct access device migration; for example, from a 3380 device to a 3390 device.

To create a copy of an area data set, issue the DBRC command INIT.ADS. In the AREA(name) parameter, specify the same name as the original ADS, as it is recorded

in the RECON data set. Issue the INIT.ADS command for each additional copy. For more information about creating MADS, see the INIT.ADS command in the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

If an ADS fails to open during normal open processing of a DEDB, none of the copies of the ADS can be allocated, and the area is stopped. However, when open failure occurs during emergency restart, only the failed ADS is deallocated and stopped. The other copies of the ADS remain available for use.

### Record Deactivation

If an error occurs while an application program is updating a DEDB, it is not necessary to stop the database or the area. IMS continues to allow application programs to access that area, and it only prevents them from accessing the control interval in error. If multiple copies of the ADS exist, one copy of the data is always available. (It is unlikely that the same control interval is in error in seven copies of the ADS.) IMS automatically deactivates a record when a count of 10 errors is reached.

Record deactivation minimizes the effect of database failures and errors to the data in these ways:

- If multiple copies of an area data set are used, and an error occurs while an application program is trying to update that area, the error does not need immediate correction. Other application programs can continue to access the data in that area through other available copies of that area.
- If a copy of an area has errors, you can create a new copy from existing copies of the ADS using the DEDB Data Set Create utility. The copy with the errors can then be destroyed.

### Physical Child Last Pointers

The PCL pointer makes it possible to access the last physical child of a segment type directly from the physical parent. Using the INSERT rule LAST avoids the need to follow a potentially long physical child pointer chain.

### Subset Pointers

Subset pointers help you avoid unproductive get calls when you need to access the last part of a long segment chain. These pointers divide a chain of segment occurrences under the same parent into two or more groups, or subsets. You can define as many as eight subset pointers for any segment type, dividing the chain into as many as nine subsets. Each subset pointer points to the start of a new subset.

**Related Reading:** For more information on defining and using subset pointers, see the topic about Processing DEDBs with Subset Pointers in *IMS Version 9: Application Programming: Database Manager*.

**Restrictions:** When you unload and reload a DEDB containing subset pointers, IMS does not automatically retain the position of the subset pointers. When unloading the DEDB, you must note the position of the subset pointers, storing the information in a permanent place. (For example, you could append a field to each segment, indicating which subset pointer, if any, points to that segment.) Or, if a segment in a twin chain can be uniquely identified, identify the segment a subset pointer is pointing to and add a temporary indication to the segment for reload. When reloading the DEDB, you must redefine the subset pointers, setting them to the segments to which they were previously set.

### Designing a Main Storage Database (MSDB)

This topic describes the choices you might need to make in designing an MSDB and proposes guidelines to help you make these choices.

Consider the following list of questions when designing an MSDB database:

- How are virtual storage requirements for the database calculated?
- How are virtual storage requirements for the Fast Path buffer pool calculated?
- What are the storage requirements for the I/O area?
- Should FLD calls or other DL/I calls be used for improved MSDB and DEDB performance?
- How can the difference in resource allocation between an MSDB and a DL/I database be a key to good performance?
- What are the requirements in designing for minimum resource contention in a mixed-mode environment?
- How is the number of MSDB segments loaded into virtual storage controlled?
- What are the auxiliary storage requirements for an MSDB?
- How can an MSDB be checkpointed?

### Calculating Virtual Storage Requirements for an MSDB

You can calculate the storage requirements for an MSDB as follows:

$$(L + 4)S + C + 14F + X$$

where:

S = the number of segments in the MSDB as specified by the member DBFMSDBx in the IMS.PROCLIB

L = the segment length as specified in the DBD member

C = 80 for non-related MSDBs without a terminal-related key, *or*  
94 for the other types of MSDB

F = the number of fields defined in the DBD member

X = 2 if C + 14F is not a multiple of 4, OR  
0 if C + 14F is a multiple of 4

MSDBs reside in the z/OS extended common storage area (ECSA).

### Calculating Buffer Requirements

Details about calculating buffer requirements are in “Designing a DEDB or MSDB Buffer Pool” on page 298, along with other Fast Path buffer requirements. The following considerations apply during execution:

- Fast Path buffer requirements vary with the type of call to the MSDB.
- With a GHx/REPL call sequence, an entire segment is kept in the Fast Path buffer until a sync point is reached. If the total size of a series of segments exceeds the NBA (normal buffer allocation), the NBA parameter needs to be adjusted rather than using the OBA (overflow buffer) on a regular basis. You should accommodate the total number of segments used between sync points.
- When using a FLD call, the VERIFY and CHANGE logic reside in the Fast Path buffer.

### Calculating the Storage for an Application I/O Area

A GHx/REPL call requires an I/O area large enough to accommodate the largest segment to be processed. The FLD call requires storage to accommodate the total field search argument (FSA) requirements.

### Understanding Resource Allocation, a Key to Performance

The MSDB resource allocation scheme is different from that of DL/I. Since the MSDB is a key to good performance, it is important to understand it.

1. An MSDB record can be shared (S) by multiple users or be owned exclusively (E) by one user.
2. The same record can have both statuses (shared and exclusive) at the same time.
3. Updates to MSDBs are applied during sync point processing. The resource is always owned in exclusive mode for the duration of sync point processing.

The different enqueue levels of an MSDB record, when a record is enqueued, and the duration are summarized in Table 19.

*Table 19. Levels of Enqueue of an MSDB Record*

| Enqueue Level       | When                                                                     | Duration                                               |
|---------------------|--------------------------------------------------------------------------|--------------------------------------------------------|
| READ                | GH with no update intent                                                 | From call time until sync point (phase 1) <sup>1</sup> |
|                     | VERIFY/get calls                                                         | Call processing                                        |
| HOLD                | GH with update intent                                                    | From call time until sync point (phase 1) <sup>1</sup> |
|                     | At sync point, to reapply VERIFYS                                        | Phase 1 of sync point processing, then released        |
| UPDATE <sup>2</sup> | At sync point, to apply the results of CHANGE, REPL, DLET, or ISRT calls | Sync point processing, then released                   |

#### Notes:

1. If there was no FLD/VERIFY call against this resource or if this resource is not going to be updated, it is released. Otherwise, if only FLD/VERIFY logic has to be reapplied, the MSDB record is enqueued at the HOLD level. If the same record is involved in an update operation, it is enqueued at the UPDATE level as shown in the table above.
2. At DLET/REPL call time, no enqueue activity takes place because it is the prior GH call that set up the enqueue level.

Table 20 shows that the status of an MSDB record depends on the enqueue level of each program involved. Therefore, it is possible for an MSDB record to be enqueued with the shared and exclusive statuses at the same time. For example, such a record can be shared between program A (GH call for update) and program B (GU call), but cannot be shared at the same time with a third program, C, which is entering sync point with update on the record.

*Table 20. Example of MSDB Record Status: Shared (S) or Owned Exclusively (E)*

| Enqueue Level in Program B | Enqueue Level in Program A |      |        |
|----------------------------|----------------------------|------|--------|
|                            | READ                       | HOLD | UPDATE |
| READ                       | S                          | S    | E      |

## Designing a Main Storage Database

Table 20. Example of MSDB Record Status: Shared (S) or Owned Exclusively (E) (continued)

| Enqueue Level in Program B | Enqueue Level in Program A |      |        |
|----------------------------|----------------------------|------|--------|
|                            | READ                       | HOLD | UPDATE |
| HOLD                       | S                          | E    | E      |
| UPDATE                     | E                          | E    | E      |

The FLD/CHANGE call does not participate in any allocation; therefore, FLD/CHANGE calls can be executed even though the same database record is being updated during sync point processing.

If FLD/CHANGE and FLD/VERIFY calls are mixed in the same FLD call, when the first FLD/VERIFY call is encountered, the level of enqueue is set to READ for the remainder of the FLD call.

## Designing to Minimize Resource Contention

One reason to use an MSDB is its fast access to data and high availability for processing. To maintain high availability, you should design to avoid the contention for resources that is likely to happen in a high transaction rate environment.

The following is a list of performance-related considerations. Some of the considerations do not apply exclusively to MSDBs, but they are listed to give a better understanding of the operational environment.

- Access by Fast Path transactions to DL/I databases and use of the alternate PCB should be kept to a minimum. Use of the alternate PCB should be kept to a minimum because FP transactions must contend for resources with IMS transactions (some of which could be long running). Also, common sync point processing is invoked and entirely serialized in the IMS control region.
- To avoid resource contention when sharing MSDBs between Fast Path and DL/I transactions, You should try to make commit processing often and to avoid long-running scans.
- GH for read/update delays any sync point processing that intends to update the same MSDB resource. Therefore, GH logic should be used only when you assume the referenced segments will not be altered until completion of the transaction. If the resource is being updated, release is at the completion of sync point. Otherwise, the release is at entry to sync point.
- The following consideration deals with deadlock prevention. Deadlock can occur if transactions attempt to acquire (GH calls) multiple MSDB resources.

Whenever a request for an MSDB resource exists that is already allocated and the levels involved are HOLD or UPDATE, control is passed to IMS to detect a potential deadlock situation. Increase in path length and response time results. The latter can be significant if a deadlock occurs, thus requiring the pseudo abend of the transaction.

In order to reduce the likelihood of deadlocks caused by resource contention, sync point processing enqueues (UPDATE level) MSDB resources in a defined sequence. This sequence is in ascending order of segment addresses. MSDB segments are acquired in ascending order of keys within ascending order of MSDB names, first the page-fixed ones then the pageable MSDBs.

The application programmer can eliminate potential deadlock situations at call time by also acquiring (GH calls) MSDB resources using the same sequence.



- From the resource allocation scheme discussed earlier, you probably realize that FLD logic should be used whenever possible instead of GH/REPL logic.
  - The FLD/VERIFY call results in an enqueue at the READ level, and if no other levels are involved, then control is not passed to IMS. This occurrence results in a shorter path length.
  - The FLD/CHANGE call, when not issued in connection with VERIFY logic does not result in any enqueue within either Fast Path or IMS.
  - FLD logic has a shorter path length through the Program Request Handler, since only one call to process exists instead of two needed for GH/REPL logic.
  - The FLD/CHANGE call *never* waits for any resource, even if that same resource is being updated in sync point processing.
  - The FLD/VERIFY call waits only for sync point processing during which the same resource is being updated.
  - With FLD logic, the resource is held in exclusive mode only during sync point processing.

In summary, programming with FLD logic can contribute to higher transaction rates and shorter response times.

The following examples, Figure 171 and Figure 172, show how the MSDB record is held in exclusive mode:

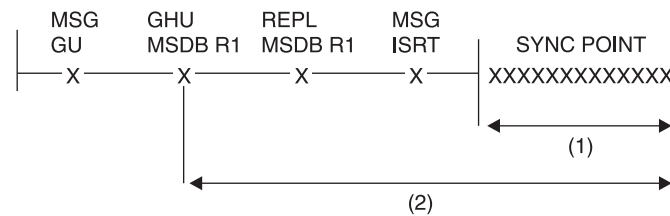


Figure 171. First Example MSDB Record Held in Exclusive Mode

The following notes are for Figure 171:

1. MSDB record R1 is held in exclusive mode against:
  - Any MSDB calls except CHANGE calls
  - Any other sync point processing that intends to update the same record
2. MSDB record R1 is held in exclusive mode against:
  - Any other GH for update
  - Any other sync point processing that intends to update the same record



Figure 172. Second Example MSDB Record Held in Exclusive Mode

The following notes are for Figure 172.

1. MSDB record R1 is held in exclusive mode against:
  - Any MSDB calls except CHANGE calls
  - Any other sync point processing that intends to update the same record

2. MSDB record is held in exclusive mode for the duration of the FLD call against any other sync point processing that intends to update the same resource

## Choosing MSDBs to Load and Page-Fix

Deciding which MSDBs to load and page-fix involves a trade-off between desired application performance and the amount of real storage available. This decision is made with total Fast Path application requirements in mind. IMS system initialization requires additional information before MSDBs can be loaded and page fixed. This information is specified in member DBFMSDBx of IMS.PROCLIB. This member is called by executing the control region startup procedure IMS. The suffix 'x' matches the parameter supplied in the MSDB keyword of the EXEC statement in procedure IMS.

The control information that loads and page fixes MSDBs is in 80-character record format in member DBFMSDBx. Either you supply this information or it can be supplied by the output of the MSDB maintenance utility. When the /NRE command requests MSDBLOAD, the definition of the databases to be loaded is found in the DBFMSDBx procedure.

The definition in DBFMSSDBx can represent a subset of the MSDBs currently on the sequential data set identified by DD statement MSDBINIT. Explicitly state each MSDB that you want IMS to load. If each MSDB is not explicitly stated, IMS abends.

The format for DBFMSDBx is as follows:

►► DBD=*dbd\_name*, —NBSEGS=*nnnnnnnn* .F

**dbd name**

The DBD name as specified during DBDGEN.

nnnnnnnnnn

The number you specify of expected database segments for this MSDB. This number must be equal to or great than the number of MSDB segments loaded during restart.

The NBRSEGS parameter is also used to reserve space for terminal-related dynamic MSDBs for which no data has to be initially loaded.

**F** The optional page-fix indicator for this MSDB.

If the MSDBs are so critical to your Fast Path applications that IMS should not run without them, place a first card image at the beginning of the DBFMSDBx member. For each card image, the characters "MSDABND=n" must be typed without blanks, and all characters must be within columns 1 and 72 of the card image. Four possible card images exist, and each contains one of the following sets of characters:

## MSDBABND=Y

This card image causes the IMS control region to abend if an error occurs while loading the MSDBs during system initialization. Errors include:

- Open failure on the MSDBINIT data set
- Error in the MSDB definition
- I/O error on the MSDBINIT data set



### MSDBABND=C

This card image causes the IMS control region to abend if an error occurs while writing the MSDBs to the MSDBCP1 or MSDBCP2 data set in the initial checkpoint after IMS startup.

### MSDBABND=I

This card image causes the IMS control region to abend if an error occurs during the initial load of the MSDBs from the MSDBINIT data set, making one or more of the MSDBs unusable. These errors include data errors in the MSDBINIT data set, no segments in the MSDBINIT data set for a defined MSDB, and those errors described under "MSDBABND=Y."

### MSDBABND=A

This card image causes the IMS control region to abend if an error occurs during the writing of the MSDBs to the MSDBCPn data set (described in "MSDBABND=C"), or during the initial load of the MSDBs from the MSDBINIT data set (described in "MSDBABND=I").

### MSDBABND=B

This card image causes the IMS control region to abend if an error occurs during the writing of the MSDBs to the MSDBCPn data set (described in "MSDBABND=C"), or during the loading of the MSDBs in system initialization (described in "MSDBABND=Y").

## Auxiliary Storage Requirements for an MSDB

DASD space is needed to keep image copies of MSDBs when they are dumped at system and shutdown checkpoints. The data sets involved are the MSDBCP1 and MSDBCP2 data sets. The same calculations apply to the MSDBDUMP data set, which contains a copy of the MSDBs following a /DBDUMP DATABASE MSDB command.

The data sets just discussed are written in 2K-byte blocks. Because only the first extent is used, the allocation of space must be on cylinder boundaries and be contiguous.

Space allocation is calculated like this:

$SPACE = (2048, (R), , CONTIG, ROUND)$

The calculation of the number of records (R) to be allocated can be derived from the formula:

$$(E + P + 2047) / 2048$$

where:

E = main storage required, in bytes, for the Fast Path extension of the CNTs (ECNTs)

P = main storage required for all MSDBs as defined by the PROCLIB member DBFMSDBx

E is determined by the following formula:

$$E = (20 + 4D)T$$

where:

D = number of MSDBs using logical terminal names as keys

T = total number of logical terminal names defined  
in the system

---

## High-Speed Sequential Processing (HSSP)

High-Speed Sequential Processing (HSSP) is a function of Fast Path that handles sequential processing of DEDBs.

### Why HSSP?

Some reasons you may choose to use it are that, HSSP:

- Generally has a faster response time than regular batch processing.
- Optimizes sequential processing of DEDBs.
- Reduces program execution time.
- Typically produces less output than regular batch processing.
- Reduces DEDB updates and image copy operation times.
- Image copies can assist in database recovery.
- Locks at UOW level to ease “bottle-necking” of cross IRLM communication.
- Uses private buffer pools reducing impact on NBA/OBA buffers.
- Allows for execution in both a mixed mode environment, concurrently with other programs, and in an IRLM-using global sharing environment.
- Optimizes database maintenance by allowing the use of the image-copy option for an updated database.

More detailed information is included in the following topics on HSSP:

- “Limitations and Restrictions When Using HSSP”
- “Using HSSP” on page 297
- “HSSP Processing Option H (PROCOPT=H)” on page 297

### Limitations and Restrictions When Using HSSP

Though HSSP can execute in a mixed-mode environment as well as concurrently with other programs, and in an environment with global sharing using IRLM; a program using HSSP can only execute as a non-message-driven BMP.

Other restrictions and limitations of HSSP include:

- Only one HSSP process can be active on an area at any given time. The /DIS AREA command identifies the IMSID of any HSSP job processing an area.
- HSSP processing and online utilities cannot process on the same area concurrently.
- Non-forward referencing while using HSSP is not allowed.
- Programs using HSSP must properly process the 'GC' status code by following it with a commit process.

Restrictions and limitations involving image copies include:

- The image copy option is available only for HSSP processing.
- HSSP image copying is allowed only if PROCOPT = H.
- The image copy process can only be done if a database is registered with DBRC. In addition, image copy data sets must be initialized in DBRC.

The following restrictions and limitations apply for PROCOPT=H:

- PROCOPT=H is allowed only for DEDBs.
- PROCOPT=H is not allowed on the segment level, only on the PCB level.
- Backward referencing while using HSSP is not allowed. You cannot use an HSSP PCB to refer to a prior UOW in a DEDB.
- Only one PROCOPT=H PCB per database per PSB is allowed.
- A maximum of four PROCOPTs can be specified, including H.
- PROCOPT=H must be used with other Fast Path processing options, such as GH and IH.
- When a GC status code is returned, the program must cause a commit process before any other call can be made to that PCB.
- An ACBGEN must be done to activate the PROCOPT=H.
- H is compatible with all other PROCOPTs except for PROCOPT=O.

### Using HSSP

To use HSSP, you must specify a new PROCOPT option during PSBGEN, option 'H' see "HSSP Processing Option H (PROCOPT=H)." Additionally, you need to make sure that the programs using HSSP properly process the 'GC' status code by following it with a commit process.

HSSP includes the image-copy option and the ability to set area ranges. To use these functions, you need one or more of the following:

- The SETR statement
- The SETO statement
- A DFSCTL data set for the dependent regions
- DBRC
- PROCOPT=H

**Related Reading:** For more information about the SETR and SETO control statements, refer to *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

### HSSP Processing Option H (PROCOPT=H)

PROCOPT=H is a PSBGEN OPTION. It allows you to define whether processing, with respect to a PCB, should be treated as an HSSP process. Its use provides HSSP capability for the application program using this PSB. Following is an example of macros and keywords for a PSBGEN using PROCOPT=H:

```
Label PCB TYPE = DB
 ,DBDNAME = name
 ,PROCOPT = AH
```

Label is an optional parameter of the PCB macro. It can be up to 8 characters long and is identical to the label on the associated SETO or SETR statements. H is compatible with any other Fast Path PROCOPT, except for PROCOPT=O, and PROCOPT=H can be used in one or more PCBs.

**Related Reading:**

- For information on PROCOPT=H rules, see "Limitations and Restrictions When Using HSSP" on page 296.
- For more information on H processing, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

### Image-Copy Option

Selecting the image-copy option with HSSP reduces the total elapsed times of DEDB updates and subsequent image-copy operations.

As database administrator, you decide whether to make an image copy of a database using HSSP. If you specify image copying, HSSP creates an asynchronous copy that is similar to a concurrent image copy.

The image copy process can only be done if a database is registered with DBRC. In addition, image copy data sets must be initialized in DBRC.

HSSP image copies can also be used for database recovery. However, the Database Recovery Utility must know that an HSSP image copy is supplied.

**Related Reading:** For information on DBRC databases and HSSP, and on created image copies, refer to the *IMS Version 9: Operations Guide* and the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

For information about image copies and recovery, refer to the *IMS Version 9: Operations Guide* and the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

### UOW Locking

In a globally shared environment, data is shared not only between IMS subsystems, but also across central processor complexes (CPC). In such an environment, communication between two IRLMs could potentially “bottleneck” and become impeded. To ease this problem, HSSP locks at a UOW level in update mode, reducing the locking overhead. Non-HSSP or DEDB online processing locks at a UOW level in a shared mode. Otherwise, the locking for DEDB online processing is at the CI level. For information on UOW locking, refer to *IMS Version 9: Administration Guide: System*.

### Private Buffer Pools

Private buffer pools for the HSSP area are used for HSSP updates and image copies. HSSP does *not* impact NBA/OBA buffers. HSSP dynamically allocates up to three times the number of CIs per area in one UOW. Each buffer is a CI in size. The private buffer pools are located in ECSA/CSA.

HSSP jobs use a combination of both Private buffer pools and common buffers (NBA/OBA). HSSP dynamically allocates up to three times the number of CIs per area in one UOW, with each buffer being a CI in size. The private buffer pools are located in ECSA/CSA. HSSP uses the private buffers for reading RAP CIs, and common buffers for reading IOVF CIs. An FW status code may be received during the run of an HSSP job when NBA has been exceeded just as in a non-HSSP job.

---

## Designing a DEDB or MSDB Buffer Pool

Buffers needed to fulfill requests resulting from database calls are obtained from a global pool called the Fast Path buffer pool. The characteristics of the pool are defined at IMS definition time and can be overridden at IMS startup time.

Three parameters characterize the Fast Path buffer pool:

#### DBBF

Total number of buffers.

The buffer pool is allocated at IMS startup in the ECSA or, if FPBUFF=LOCAL is specified in DFSFDRxx, in the FDBR private region. During emergency restart processing, the entire buffer pool can be briefly page-fixed. Consider the amount of available real storage when setting the DBBF value. IMS writes the total number of buffers to the X'5937' log.

For more information about page-fixing IMS resources, see *IMS Version 9: Administration Guide: System*.

### DBFX

System buffer allocation.

This is a set of buffers in the Fast Path buffer pool that is page fixed at startup of the first region with access to Fast Path resources.

### BSIZ

Buffer size.

The size must be larger than or equal to the size of the largest CI of any DEDB to be processed. The buffer size can be up to 28 KB.

## Buffer Requirements

Fast Path buffers are used to hold:

- Update information such as:
  - MSDB FLD/VERIFY call logic
  - MSDB FLD/CHANGE call logic
  - MSDB updates (results of REPL, ISRT, and DLET calls)
  - Inserted SDEP segments
- Referenced DEDB CIs from the root addressable part and the sequential dependent part.
- Updated DEDB CIs from the root addressable part.
- SDEP segments that have gone through sync point. The SDEP segments are collected in the current SDEP segment buffer. One such buffer allocated for each area defined with the SDEP segment type exists. This allocation takes place at area open time.

The number of buffers a transaction or a sync interval is allowed to use must be specified for each region if Fast Path resources are likely to be accessed.

## Normal Buffer Allocation (NBA)

Fast Path regions and IMS regions accessing Fast Path resources require that the normal buffer allocation (NBA) be specified in the region startup procedure. Because this allocation of buffers is used first, calculate them to accommodate most of the transaction requirements. At the start of the region, the number of NBA buffers is page fixed in the Fast Path buffer pool.

## Overflow Buffer Allocation (OBA)

The overflow buffer allocation (OBA) is optional and is used for exceptional buffer requirements when the normal buffer allocation (NBA) has been exhausted. Its use is dependent on obtaining a latch that serializes all regions currently in an overflow buffer state. If the latch is not available, the region has to wait until it is available. After the latch has been obtained, the NBA value is increased by the OBA value and normal processing resumes. The overflow buffer latch is released during sync point processing. At any point in time, only the largest OBA request among all the active regions is page fixed in the Fast Path buffer pool.

### Fast Path Buffer Allocation Algorithm

Fast Path buffers are allocated on demand up to a limit specified at the start of the region. Buffers so specified are called NBA to be used by one sync point interval.

Before satisfying any request from the NBA allocation, an attempt is made to reuse any already allocated buffer containing an SDEP CI. This process goes on until the NBA limit is reached. From that point on, a warning in the form of an 'FW' status code returned to Fast Path database calls is sent to BMP regions. MD and MPP regions do not get this warning.

The next request for an additional buffer causes the buffer stealing facility to be invoked and then the algorithm examines each buffer and CI already allocated. As a result, buffers containing CIs being released are sent to a local queue (SDEP buffer chain) to be reused by this sync interval.

If, after invoking the buffer stealing facility, no available buffer is found, a request for the overflow buffer latch is issued. The overflow buffer latch governs the use of an additional buffer allocation called overflow buffer allocation (OBA). This allocation is also specified as a parameter at region start time. From that point on, any time a request cannot be satisfied locally, a buffer is acquired from the OBA allocation until the OBA limit is reached. At that time, MD and BMP regions have their 'FW' status code replaced by an 'FR' status code after an internal ROLB call is performed. In MD and MPP regions, the transaction is abended and stopped.

### System Buffer Allocation (DBFX)

The system buffer allocation (DBFX) is needed, because DEDB writes are deferred until after sync point processing. The result of one transaction or sync interval is written back by one output thread. These output threads run from the control region in SRB mode. Buffers allocated to an output thread are therefore not available to dependent regions until after the CI they contain is written back. If the Fast Path buffer pool is defined exactly as the sum of all NBAs, dependent regions must wait for the buffers to come back to the global pool. Fast Path regions can process the next transaction as soon as the sync point completes. Sync point processing does not wait for the output thread to complete. The DBFX allocation of buffers is page fixed at the start of the first region specifying an NBA request.

### Determining the Fast Path Buffer Pool Size

The number of Fast Path buffers (DBBFs) required is calculated using the following formula:

$$\text{DBBF} \geq A + N + \text{OBA} + \text{DBFX}$$

where:

- DBBF: Fast Path buffer pool size as specified
- A: Number of active areas that have SDEP segments
- NBA: Normal buffer allocation of each active region
- N: Total of all NBAs
- OBA: Largest overflow buffer allocation
- DBFX: System buffer allocation

### Fast Path Buffer Performance Considerations

An incorrect specification of DBBF (too small) can result in the rejection of an area open or a region initialization. The system calculates the size of the buffer pool in



accordance with the formula given in “Determining the Fast Path Buffer Pool Size” on page 300 and rejects the open or initialization if the actual DBBF value is smaller.

A DBFX value that is too small is likely to cause region waits and increase response time.

An NBA value that is too small might cause the region processing to be serialized through the overflow buffer latch and again cause delays.

An NBA value that is too large can increase the probability of contention (and delays) for other transactions. All CIs can be acquired at the exclusive level and be kept at that level until the buffer stealing facility is invoked. This occurrence happens after the NBA limit is reached. Therefore, an NBA that is too large can increase resource contention.

A (NBA + OBA) value that is too small might result in more frequent unsuccessful processing. This means an 'FR' status code condition for BMP regions, or transaction abend for MD and MPP regions.

Inquiry-only programs do not make use of an OBA specification, as buffers already allocated are reused when the NBA limit is reached.

IMS logs information about buffers and their use to the X'5937' log. This information can be helpful in determining how efficiently the Fast Path buffers are being used.

### The NBA Limit and Sync Point

In BMP regions, when the NBA limit is reached, an 'FW' status code is returned. This status code is presented to every subsequent Fast Path database call until the OBA limit condition is reached.

The first occurrence of the 'FW' status code indicates no more NBA buffers exist. This occurrence is a convenient point at which to request a sync point. Fast Path resources (and others) would be released and the next sync point interval would be authorized to use a new set of NBA buffers. The overflow buffer latch serializes all the regions in an overflow buffer state and therefore causes delays in their processing.

If processing is primarily sequential, the sync point should be invoked on a UOW boundary crossing.

**Related Reading:** See “Processing Option P (PROCOPT=P)” on page 287 for details on what happens on a UOW boundary crossing.

### The DBFX Value and the Low Activity Environment

If the IMS or Fast Path activity in the system is relatively low, log buffers are written less often, and therefore output threads are scheduled or dispatched less frequently. This situation is likely to result in many buffers waiting to be written and therefore could cause wait-for-buffer conditions. Wait-for-buffer conditions could be alleviated by specifying a larger DBFX value.

A special case to be considered is the BMP region loading or processing a DEDB and being the only activity in the system. For example, assume an NBA of 20 buffers exists. To avoid a wait-for-buffer condition, the DBFX value must be

## Designing a DEDB or MSDB Buffer Pool

specified as between one or two times the NBA value. This can result in a DBBF specification of three times the NBA number, which gives 60 buffers to the Fast Path buffer pool.

Except for the following case, there is no buffer look-aside capability across transactions or sync intervals (global buffer look-aside).

Assume that a region requests a DEDB CI resource that is currently being written or is owned by another region that ends up being written (output thread processing). Then, this CI and the buffer are passed to the requestor after the write (no read required) completes successfully. Any other regions must read it from disk.

---

## Designing a DEDB Buffer Pool in the DBCTL Environment

Buffers needed to fulfill requests from database calls are obtained from a global pool called the Fast Path buffer pool. The characteristics of the pool are defined at IMS definition time and can be overridden at IMS startup time.

Three parameters characterize the Fast Path buffer pool:

1. DBBF: Total number of buffers.

The buffer pool is allocated at IMS startup in the ECSA or, if FPBUFF=LOCAL is specified in DFSFDRxx, in the FDBR private region. IMS writes the total number of buffers to the X'5937' log.

2. DBFX: System buffer allocation.

This is a set of buffers in the Fast Path buffer pool that is page fixed at startup of the first region with access to Fast Path resources.

3. BSIZ: Buffer size.

The size must be larger than or equal to the size of the largest CI of any DEDB to be processed. The buffer size can be up to 28 KB.

## Buffer Requirements in a DBCTL Environment

Fast Path buffers are used to hold:

- Update information such as inserted SDEP segments.
- Referenced DEDB CIs from the root addressable part and the sequential dependent part.
- Updated DEDB CIs from the root addressable part.
- SDEP segments that have gone through sync point. The segments are collected in the current SDEP segment buffer. One buffer allocated for each area defined with the SDEP segment type exists. This allocation takes place at area open time.

The number of buffers a transaction or a sync interval is allowed to use must be specified for each region if Fast Path resources are likely to be accessed.

## Normal Buffer Allocation for BMPs

BMP regions accessing Fast Path resources require this allocation to be specified in the region startup procedure. The startup parameter is already specified as NBA. This allocation of buffers is used first and should be calculated to accommodate most of the transaction requirements. At the start of the region, the number of NBA buffers is page fixed in the Fast Path buffer pool.



### Normal Buffer Allocation for CCTL Regions and Threads

CCTL (coordinator control) regions, requiring Fast Path resources, need the following parameters specified in the DRA startup table:

- CNBA
- FPB

CNBA is the normal buffer allocation of each active CCTL region. FPB is the normal buffer allocation for CCTL threads.

When the CCTL connects to DBCTL, the number of CNBA buffers is page fixed in the Fast Path buffer pool. However, if CNBA buffers are not available, the connect fails.

Each CCTL thread that requires DEDB buffers is assigned its Fast Path buffers (FPB) out of the total number of CNBA buffers.

For more information about the CCTLNBA parameter, refer to *IMS Version 9: Administration Guide: System*.

### Overflow Buffer Allocation for BMPs

This buffer allocation is optional and is used for exceptional buffer requirements when the NBA has been exhausted. Its use is dependent on obtaining a latch that serializes all BMPs and CCTL threads currently in an overflow buffer state. If the latch is not available, the region has to wait until it is available. After the latch has been obtained, the NBA value is increased by the OBA value and normal processing resumes. The overflow buffer latch is released during sync point processing. At any point in time, only the largest OBA request among all the active BMPs and CCTL threads is page fixed in the Fast Path buffer pool.

### Overflow Buffer Allocation for CCTL Threads

OBA for CCTL threads is similar to that for BMPs. The OBA value used for each thread is set with the FPOB parameter in the startup table. This buffer allocation is optional and is used for exceptional buffer requirements when the FPB has been exhausted. Its use is dependent on obtaining a latch that serializes all BMPs and CCTL threads currently in an overflow buffer state. If the latch is not obtained, the FPB value is increased by the FPOB value, and normal processing resumes. The overflow buffer latch is released during sync point processing. At any point in time, only the largest OBA/FPOB request among all the active BMPs and CCTL threads is page fixed in the Fast Path buffer pool.

### Fast Path Buffer Allocation Algorithm for BMPs

FPBs are allocated on demand up to a limit specified at the start of the region. Buffers specified as NBAs are used by one sync point interval.

Before satisfying any request from the NBA allocation, an attempt is made to reuse any already allocated buffer containing an SDEP CI. This process goes on until the NBA limit is reached. From that point on, a warning in the form of an 'FW' status code returned to Fast Path database calls is sent to BMP regions.

The next request for an additional buffer causes the buffer stealing facility to be invoked and then the algorithm examines each buffer and CI already allocated. As a result, buffers containing CIs being released are sent to a local queue (SDEP buffer chain) to be reused by this sync interval.

## Designing a DEDB Buffer Pool in the DBCTL Environment

If, after invoking the buffer stealing facility, no available buffer is found, a request for the overflow buffer latch is issued. The overflow buffer latch governs the use of an additional buffer allocation, OBA. This allocation is also specified as a parameter at region start time. From that point on, any time a request cannot be satisfied locally, a buffer is acquired from the OBA allocation until the OBA limit is reached. At that time, BMP regions have their 'FW' status code replaced by an 'FR' status code after an internal ROLB call is performed.

### Fast Path Buffer Allocation Algorithm for CCTL Threads

When a CCTL thread issues a schedule request using FPB, buffers are allocated out of the CNBA total. If FPB cannot be satisfied out of CNBA, the schedule request fails.

Before satisfying any request from the FPB allocation, an attempt is made to reuse any already allocated buffer containing an SDEP CI. This process goes on until the FPB limit is reached. From that point on, a warning in the form of an 'FW' status code returned to Fast Path database calls is sent to the CCTL threads.

The next request for an additional buffer causes the buffer stealing facility to be invoked, and then the algorithm examines each buffer and CI already allocated. As a result, buffers containing CIs being released are sent to a local queue (SDEP buffer chain) to be reused by this sync interval.

If, after invoking the buffer stealing facility, no available buffer is found, a request for the overflow buffer latch is issued. The overflow buffer latch governs the use of an additional buffer allocation, OBA (FPOB). From that point on, any time a request cannot be satisfied locally, a buffer is acquired from the FPOB allocation until the FPOB limit is reached. At that time, CCTL threads have their 'FW' status code replaced by an 'FR' status code after an internal ROLB call is performed.

### System Buffer Allocation (SBA)

The system buffer allocation (SBA) is needed because DEDB writes are deferred until after sync point processing. The result of one sync interval is written back by one output thread. These output threads run from the control region in SRB mode. Buffers allocated to an output thread are therefore not available to BMPs and CCTL threads until after the CI they contain is written back. If the Fast Path buffer pool is defined exactly as the sum of all NBAs, BMPs and CCTL threads must wait for the buffers to come back to the global pool. BMPs and CCTL threads can process the next transaction as soon as the sync point completes. Sync point processing does not wait for the output thread to complete. The DBFX allocation of buffers is page fixed at the start of the first region specifying an NBA or FPB request.

### Determining the Size of the Fast Path Buffer Pool for DBCTL

The number of buffers required is calculated using the following formula:

$$DBBF \geq A + N + LO + DBFX + CN$$

Where the values are:

- DBBF: Fast Path buffer pool size as specified
- A: Number of active areas that have SDEP segments
- N: Total of all NBAs
- LO: Largest overflow buffer allocation among active BMPs and CCTL threads
- DBFX: System buffer allocation

- CN: Total of all CNBAs

### Fast Path Buffer Performance Considerations for DBCTL

An incorrect specification of DBBF (too small) can result in the rejection of an area open or a region initialization. The system calculates the size of the buffer pool in accordance with the formula given in “Determining the Size of the Fast Path Buffer Pool for DBCTL” on page 304 and rejects the open or initialization if the actual DBBF value is smaller.

A DBFX value that is too small is likely to cause region waits and increase response time.

An NBA/FPB value that is too small might cause the region processing to be serialized through the overflow buffer latch and again cause delays.

An NBA/FPB value that is too large can increase the probability of contention (and delays) for other BMPs and CCTL threads. All CIs can be acquired at the exclusive level and be kept at that level until the buffer stealing facility is invoked. This happens after the NBA limit is reached. Therefore, an NBA/FPB that is too large can increase resource contention. Also, an FPB value that is too large indicates that fewer CCTL threads can concurrently schedule Fast Path PSBs.

A (NBA + OBA) value that is too small might result in more frequent unsuccessful processing. This means an 'FR' status code condition for BMP regions and CCTL threads.

Inquiry-only BMP or CCTL programs do not make use of the overflow buffer specification logic, as buffers already allocated are reused when the NBA/FPB limit is reached.

IMS logs information about buffers and their use to the X'5937' log. This information can be helpful in determining how efficiently the Fast Path buffers are being used.

### The NBA/FPB Limit and Sync Point in a DBCTL Environment

In BMP regions and CCTL threads, when the NBA/FPB limit is reached, an 'FW' status code is returned. This status code is presented to every subsequent Fast Path database call until the OBA/FPOB limit condition is reached.

The first occurrence of the 'FW' status code indicates no more NBA/FPB buffers exist. This occurrence is a convenient point at which to request a sync point. Fast Path resources (and others) would be released and the next sync point interval would be authorized to use a new set of NBA/FPB buffers. The overflow buffer latch serializes all the regions in an overflow buffer state and therefore causes delays in their processing.

**Related Reading:** See “Processing Option P (PROCOPT=P)” on page 287 for benefits of using PROCOPT=P for BMP regions.

### Low Activity and the DBFX Value in a DBCTL Environment

If the IMS or Fast Path activity in the system is relatively low, log buffers are written less often and therefore output threads are scheduled or dispatched less

## Designing a DEDB Buffer Pool in the DBCTL Environment

frequently. This situation is likely to result in many buffers waiting to be written and therefore could cause wait-for-buffer conditions. This could be alleviated by specifying a larger DBFX value.

Consider the special case: The BMP region loads or processes a DEDB and is the only activity in the system. For example, assume that an NBA of 20 buffers exists. To avoid a wait-for-buffer condition, the DBFX value must be between once or twice the NBA value. This can result in a DBBF specification of three times the NBA number, giving 60 buffers to the Fast Path buffer pool.

Except for the following case, there is no buffer look-aside capability across BMP regions and CCTL threads or sync intervals (global buffer look-aside).

Assume that a region requests a DEDB CI resource that is currently being written or is owned by another region that ends up being written (output thread processing). Then, this CI and the buffer are passed to the requestor after the successful completion of the write (no read required). Any other BMP regions and CCTL threads must read it from disk.

### A Note on Fast Path Buffer Allocation in IMS Regions

IMS regions that access Fast Path resources must have the NBA and OBA parameters specified in their startup procedures.

With MODE=MULT, these allocations must be large enough to accommodate all buffer requirements for transactions processed between sync points.

With MODE=SNGL, transaction classes should be set up so transactions with similar buffer requirements are run in the same region.

---

## Chapter 11. Implementing Database Design

After you have designed your databases and before application programs can use them, you must tell IMS their physical and logical characteristics by coding and generating a DBD (database description) for each database.

Before an application program can use the database, you must tell IMS the application program's characteristics and use of data and terminals. You tell IMS the application program characteristics by coding and generating a PSB (program specification block).

Finally, before an application program can be scheduled for execution, IMS needs the PSB and DBD information for the application program available in a special internal format called an ACB (application control block).

This chapter examines the following areas of implementing your database design:

- “Coding Database Descriptions as Input for the DBDGEN Utility”
- “Implementing HALDB Design” on page 310
- “Coding Program Specification Blocks as Input to the PSBGEN Utility” on page 317
- “Building the Application Control Blocks (ACBGEN)” on page 320
- “Defining Generated Program Specification Blocks for SQL Applications” on page 321

---

### Coding Database Descriptions as Input for the DBDGEN Utility

A DBD is a series of macro instructions that describes such things as a database's organization and access method, the segments and fields in a database record, and the relationships between types of segments. After you have coded the DBD macro instructions, they are used as input to the DBDGEN utility. This utility is a macro assembler that generates a DBD control block and stores it in the IMS.DBDLIB library for subsequent use during database processing.

Figure 173 illustrates the DBD generation process. Figure 174 on page 308 shows the input to the DBDGEN utility. Separate input is required for each database being defined.

## Coding DBDs for DBDGEN Utility

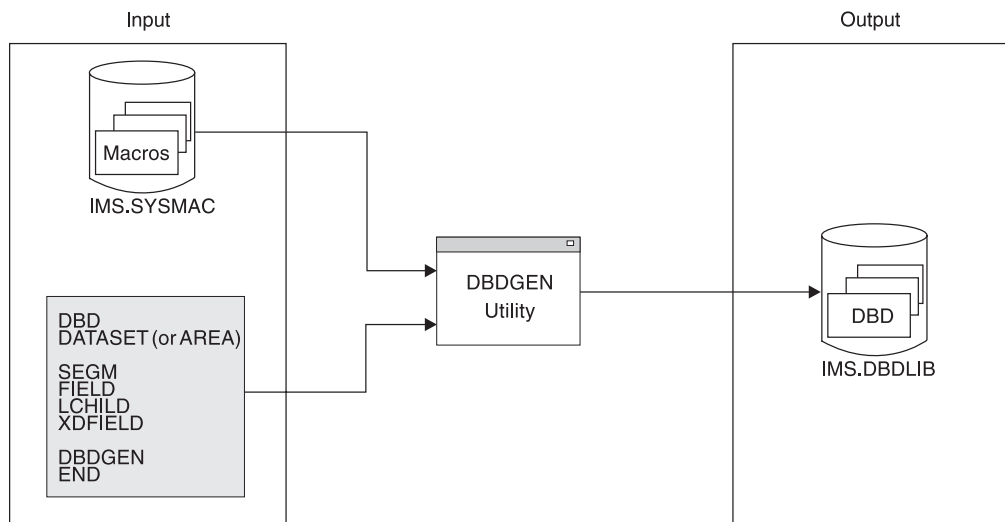


Figure 173. The DBD Generation Process

```
//DBDGEN JOB MSGLEVEL=1
// EXEC DBDGEN,MBR=APPLPGM1
//C.SYSIN DD *
```

|                   |                                                                   |
|-------------------|-------------------------------------------------------------------|
| DBD               | required for each DBD generation                                  |
| data set(or AREA) | required for each data set group<br>(or AREA in a Fast Path DEDB) |
| SEGM              | required for each segment type                                    |
| FIELD             | required for each DBD generation                                  |
| LCHILD            | required for each secondary index or<br>logical relationship      |
| XDFIELD           | required for each secondary index relationship                    |
| .                 |                                                                   |
| .                 |                                                                   |
| DBDGEN            | required for each DBD generation                                  |
| END               | required for each DBD generation                                  |

```
/*
```

Figure 174. Structure of DBD Generation Input

## The DBD Statement

In the input, the DBD statement names the database being described and specifies its organization. Only one DBD statement exists in the input deck.

## The DATASET Statement

This statement defines the physical characteristics of the data sets to be used for the database. At least one DATASET statement is required for each data set group in the database. Depending on the type of database, up to 10 data set groups can be defined. Each DATASET statement is followed by the SEGM statements for all segments to be placed in that data set group.

The DATASET statement is not allowed for HALDBs. Use either the HALDB Partition Definition utility to define HALDB partitions or the DBRC commands INIT.DB and INIT.PART

If the database is a DEDB, the AREA statement is used instead of the DATASET statement. The AREA statement defines an area in the DEDB. Up to 2048 AREA

statements can be used to define multiple areas in the database. All AREA statements must be put between the DBD statement and the first SEGM statement.

## The SEGM Statement

This statement defines a segment type in the database, its position in the hierarchy, its physical characteristics, and its relationship to other segments. SEGM statements are put in the input deck in hierarchic sequence, and a maximum of 15 hierarchic levels can be defined. The number of database statements allowed depends on the type of database. SEGM statements must immediately follow the data set or AREA statements to which they are related.

## The FIELD Statement

This statement defines a field within a segment type. FIELD statements must immediately follow the SEGM statement to which they are related. A FIELD statement is required for all sequence fields in a segment and all fields the application program can refer to in the SSA of a DL/I call. A FIELD statement is also required for any fields referenced by a SENFLD statement in any PSB. To save space, do not generate FIELD statements except in these circumstances. FIELD statements can be put in the input deck in any order except that the sequence field, if one is defined, must always be first. Up to 255 fields can be defined for each segment type, and a maximum of 1000 fields can be defined for each database. The definition of fields within a segment can overlap. For example, a date “field” within a segment can be defined as three 2-byte fields and also as one 6-byte field as shown in Figure 175.

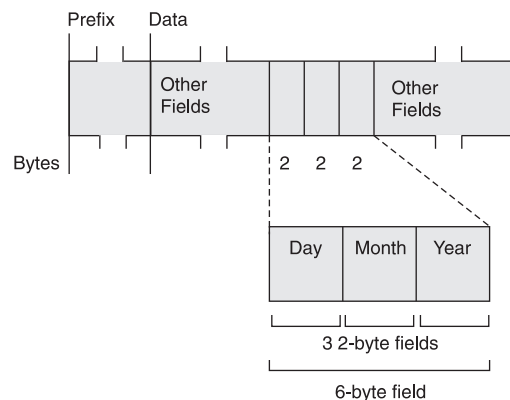


Figure 175. Example of a Date Field within a Segment Defined as Three 2-Byte Fields and One 6-Byte Field

This technique allows application programs to access the same piece of data in a variety of ways. To access the same piece of data in a variety of ways, you code a separate FIELD statement for each field. For the example shown, you would code four FIELD statements, one for the total 6-byte date and three for each 2-byte field in the date.

## The LCHILD Statement

The LCHILD statement defines a secondary index or logical relationship between two segment types, or the relationship between a HIDAM (or PHIDAM) index database and the root segment type in the HIDAM (or PHIDAM) database. LCHILD statements immediately follow the SEGM, FIELD, or XDFLD statement of the segment involved in the relationship. Up to 255 LCHILD statements can be defined for each database.



**Restriction:** The LCHILD statement cannot be specified for the primary index of a PHIDAM database because the primary index is automatically generated.

### The XDFLD Statement

The XDFLD statement is used only when a secondary index exists. It is associated with the target segment and specifies:

- The name of an indexed field
- The name of the source segment
- The field used to create the secondary index from the source segment

Up to 32 XDFLD statements can be defined per segment. However, the number of XDFLD and FIELD statements combined cannot exceed 255 per segment or 1000 per database.

**Restriction:** The CONST parameter is not allowed for a HALDB. Shared secondary indexes are not supported.

### The DBDGEN and END Statements

One DBDGEN statement and one END statement is put at the end of each DBD generation input deck. These specify:

- The end of the statements used to define the DBD (DBDGEN)
- The end of input statements to the assembler (END)

**Related Reading:** Detailed instructions for coding DBD statements and examples of DBDs are contained in *IMS Version 9: Utilities Reference: System*.

---

## Implementing HALDB Design

To define a HALDB, you define it to DBRC. You can do this using either DBRC batch commands or using the Partition Definition utility. This topic discusses defining HALDBs using the Partition Definition utility. This topic also discusses “Allocating an ILDS” on page 316.

**Related Reading:** *The Complete IMS HALDB Guide*, published by IBM Redbooks® for the Version 8 release of IMS, contains a comprehensive discussion of HALDBs.

### Creating HALDB databases with the HALDB Partition Definition Utility

The HALDB Partition Definition utility (%DFSHALDB) is an ISPF application that allows you to manage IMS HALDB partitions.

The HALDB Partition Definition utility is accessed through ISPF panels in a TSO session. You can perform the following tasks on the HALDB master and its partitions:

- Register a new HALDB master database with DBRC.
- Add HALDB partitions to an existing HALDB.
- Find, view, sort, copy, modify, delete, and print HALDB partitions.
- Define and modify data set groups.
- Edit HALDB information.
- Export HALDB definitions.
- Import HALDB definitions.



- View IMS DDNAME concatenations.
- Choose IMS RECON and DBDLIB libraries.
- Delete HALDB information.

### Creating Partitions With the HALDB Partition Definition Utility

To create a HALDB, you first use the Database Description Generation (DBDGEN) utility to create a master database and define it as a HALDB. After you have defined a HALDB master database, use the Partition Definition utility to define the partitions within the HALDB.

**Related Reading:** For information on using the DBDGEN utility to create a HALDB master database, see:

- Figure 161 on page 253 for an example of the DBD for PHDAM
- “Coding Database Descriptions as Input for the DBDGEN Utility” on page 307
- *IMS Version 9: Utilities Reference: System*

When you define the first HALDB partition, you must also register the HALDB master database in the DBRC RECON data set. You can use either the HALDB Partition Definition utility or the DBRC INIT.DB and INIT.PART commands to do this. The HALDB Partition Definition utility does not impact RECON data set contention of online IMS subsystems. The RECON data set is reserved only for the time it takes to process a DBRC request. It is not held for the duration of the utility execution.

**Related Reading:** For additional information on HALDB and the RECON data set, see *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

When defining HALDB partitions using the Partition Definition utility, you must provide information such as the partition name, data set prefix name, and high key value. Whenever possible, the Partition Definition utility provides default values for required fields.

The steps for defining a new HALDB are as follows:

1. Use the DBDGEN process to define a HALDB master database. The HALDB Partition Definition utility does not let you define HALDB partitions until the DBDGEN process is performed.
2. Make the dialog data sets available to the TSO user. You can add the data sets to a LOGON procedure or use TSO commands to allocate them. You can use the TSOLIB command to add data sets to the STEPLIB. Table 21 shows which file names and data sets need to be allocated. Be sure to use your own high level qualifiers.

Table 21. File Names and Data Sets to Allocate

| File Name | Sample Data Set Names | Disposition |
|-----------|-----------------------|-------------|
| STEPLIB   | IVPEXE91.SDFSRESL     | N/A         |
| SYSPROC   | IVPEXE91.SDFSEXEC     | SHR         |
| ISPMLIB   | IVPEXE91.SDFSMLIB     | SHR         |
| ISPPLIB   | IVPEXE91.SDFSPLIB     | SHR         |
| ISPTLIB   | IVPEXE91.SDFSSTLIB    | SHR         |
| IMS       | IVPEXE91.DBDLIB       | SHR         |

If you use a logon procedure, you must log on again and specify logon with the new procedure. If you use allocation commands, they must be issued

outside of ISPF. After you allocate the data sets and restart ISPF, restart the Install/IVP dialog, return to this task description, and continue with the remaining steps.

3. Start the HALDB Partition Definition utility from the ISPF command line by issuing the following command:

```
TSO %DFSHALDB
```

You can use the F2 key to split the screen and view these instructions online while viewing the HALDB partition definition panels at the same time.

4. Specify the name of the database. Fill in the first partition name as shown in Figure 176. Fill in the data set name prefix using the data set name for your data set instead of the high level qualifier shown in Figure 176. You should, however, specify the last qualifier as IVPDB1A to match cluster names previously allocated.

**Recommendation:** When naming your partitions, use a naming sequence that allows you to add new names later without disrupting the sequence. For example, if you name your partitions xxxx010, xxxx020 and xxxx030 and then later split partition xxxx020 because it has grown too large, you can name the new partition xxxx025 without disrupting the order of your naming sequence.

Help

### ----- Partition Default Information

Type the field values. Then press Enter to continue.

Database Name . . . . . IVPDB1

### Processing Options

Automatic Definition . . . .No

Input data set . . . . .

Use defaults for DS groups .No

### Defaults for Partitions

Partition Name . . . . . IVPDB11

Data set name prefix . . . IXUEXEHQ.IVPDB1A

### Free Space

Free block freq. factor . 0

Free space percentage . . 0

### Defaults for data set groups

Block Size . . . . . 8192

### DBRC options

Max. image copies . . . .2

Recovery period . . . . .0

Recovery utility JCL . . RECOVJCL

Default JCL . . . . .

Image Copy JCL . . . . . IJCJCL

Online image copy JCL . . OICJCL

Receive JCL . . . . . RECJVJCL

Reusable? . . . . . No

To exit the application, press F3

Command = = = >

Figure 176. Partition Default Information

5. Define your partitions in the Change Partition panel. Make sure that the name of the partition and the data set name prefix are correct and then define a high key for the partition.

The high key identifies the highest root key of any record that the partition can contain and is represented by a hexadecimal value that you enter directly into the Partition High Key field of the Change Partition panel. Press F5 to accept the hexadecimal value and display its alphanumeric equivalent in the right section of the Partition High Key field.

You can enter the partition high key value using alphanumeric characters by pressing F5 before making any changes in the hexadecimal section of the Partition High Key field. This displays the ISPF editing panel. The alphanumeric input you enter in the editing panel displays in both hexadecimal and alphanumeric formats in the Change Partition Panel when you press F3 to save and exit the ISPF editor.

The last partition you define for a HALDB must have a high key value of X'FF'. This ensures that the keys of all records entered into the HALDB will be lower than the highest high key in the HALDB. The Partition Definition utility fills all remaining bytes in the Partition High Key field with hexadecimal X'FF'.

When you finish defining the partition high key, press enter to create the partition. The Change Partition panel remains active so that you can create additional partitions. To create additional partitions, you must change the partition name and the partition high key.

Figure 177 on page 314. is an example of the Change Partition panel. The Partition High Key field includes sample input.

6. When you finish defining partitions, press the cancel key (F12) to exit the Change Partition panel. A list of partitions defined in the current session displays.

To exit the HALDB Partition Definition utility entirely, press F12 again.

```

Help

 Change Partition
Type the field values. Then press Enter.

Database name.....IVPDB1
Partition name.....IVPDB11
Partition ID.....1
Data set name prefix...IXUEXEHQ.IVPDB1A
Partition Status.....

Partition High Key
+00 57801850 00F7F4F2 40C5A585 99879985 | ...&.742 Evergre |
+10 859540E3 85999981 | en Terra |

Free Space
Free block freq. factor...0
Free space percentage.....0

Attributes for data set group A
Block Size.....8192

DBRC options
Max. image copies.....2
Recovery period.....0
Recovery utility JCL.....
Image copy JCL.....ICJCL
Online image copy JCL....OICJCL
Receive JCL.....RECVJCL
Reusable?.....No

Command = = = >

```

Figure 177. Change Partition Panel

**Automatic and Manual HALDB Partition Definition:** You can choose either automatic or manual partition definition by specifying Yes or No in the Automatic Definition field in the Processing Options section of the Partition Default Information panel.

Entering Yes in the Automatic Definition field specifies that the Partition Definition utility automatically defines your HALDB partitions. You must have previously created a data set and it must contain your HALDB partition selection strings. Specify the name of the data set in the Input data set field.

Entering No in the Automatic Definition field specifies that you define your HALDB partitions manually. “Creating Partitions With the HALDB Partition Definition Utility” on page 311 explains this process. You can still use an input data set when you define HALDB partitions manually.

### Adding HALDB Partitions to an Existing HALDB

**Related Reading:** See Appendix E, “HALDB Partition Definition Utility,” on page 551 for information on using the Partition Definition utility for adding HALDB partitions to an existing HALDB.

### Finding, Viewing, Sorting, Copying, Modifying, Deleting, and Printing HALDB Partitions

**Related Reading:** See Appendix E, “HALDB Partition Definition Utility,” on page 551 for information on the interfaces for finding, viewing, sorting, copying, modifying, deleting, and printing HALDB partitions.

## Defining and Modifying Data Set Groups

**Related Reading:** See Appendix E, “HALDB Partition Definition Utility,” on page 551 for information on the interfaces for defining and modifying HALDB data set groups.

## Number of Data Sets in a HALDB Partition

Table 22 lists the minimum and maximum number of data sets a partition can contain for each type of HALDB.

*Table 22. Minimum and maximum number of data sets for HALDB partitions.*

| HALDB Type | Minimum number of data sets                                                                            | Maximum number of data sets                                                                |
|------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| PHDAM      | Two: an OSAM or VSAM entry-sequenced data set (ESDS), and a key-sequenced data set (KSDS) for the ILDS | Eleven: ten OSAM or VSAM ESDS, and one KSDS for the ILDS                                   |
| PHIDAM     | Three: a OSAM or VSAM ESDS, a KSDS for the ILDS, and a KSDS for the primary index                      | Thirteen: ten OSAM or VSAM ESDS, one KSDS for the ILDS, and one KSDS for the primary index |
| PSINDEX    | One: a KSDS                                                                                            | One: a KSDS                                                                                |

## Exporting Database Definitions

**Related Reading:** See Appendix E, “HALDB Partition Definition Utility,” on page 551 for information on the interfaces for exporting Database definitions.

Use the HALDB Partition Definition utility to export a HALDB definition. The database information is stored in the partitioned data set that you specify as an ISPF table and so must have the attributes of ISPTLIB data sets (record format = fixed block, record length = 80, data set organization = PDS or PDS/E).

## Importing Database Definitions

Only an exported ISPF table can be used for importing database definitions.

The output from the export of a HALDB is a member of a PDS. The information about the HALDB is saved in the form of an ISPF table. The ISPF table becomes input for the import process.

The import can be performed from the HALDB Partition Definition utility or a batch job.

To import a database using a batch job, submit a batch ISPF job similar to the job shown in Figure 342 on page 581. All ISPF DD names are required.

The batch job executes the standard ISPF command, ISPSTART, that sets up the ISPF environment, and then starts the DSPXRUN command. The DSPXRUN command identifies the database, the import file to use, and the processing options.

**Related Reading:** For more information on the DSPXRUN command, see “DSPXRUN Command Syntax” on page 582.

## Viewing IMS DDNAME Concatenation

You can look at the concatenation of data sets that are allocated to the IMS DDNAME. The data set is displayed using the ISRDDN command, which is part of the ISPF product.

## HALDB Partition Utility

When you specify a generic database name and use options 1 through 5 from the DFSHALDB panel, the viewing IMS DDNAME concatenation option only works if you use 4 or fewer DBD data sets. If you specify option 7, the data sets concatenated to the IMS DDNAME always display.

Use the help (F1) information provided by ISRDDN and ISPF to learn more about the ISRDDN utility. When you exit the ISRDDN utility, you return to the HALDB Partition Definition utility panels.

### Choosing IMS RECON and DBDLIB Libraries

The HALDB Partition Definition utility menu contains an option to set IMS configurations. The IMS configuration can consist of a combination of DBDLIB and RECON data sets. You should use the same DBDLIB and RECON data sets that IMS will use to access the database. You can specify one data set for RECON1, RECON2, RECON3, and up to ten DBDLIB data sets for the IMS DDNAME.

You can control the RECON data sets in a configuration. If you have the IMS DDNAME allocated from the logon procedure and the IMS.SDFSRESL libraries allocated to the STEPLIB DDNAME, do not use the configuration option. If you define and select a configuration, those data sets override the allocations from the logon procedure.

The IMS DDNAME includes the data sets that contain the DBDLIB members. The STEPLIB allocation contains the RECON1, RECON2, and RECON3 members that name the actual RECON data sets. The RECON/DBDLIB Configurations option re-allocates the IMS DDNAME and allocates RECON1, RECON2, and RECON3 DDNAMEs to specify the RECON data sets.

If you delete a configuration only, the configuration is deleted from the list, but the data sets that are named in the configuration are not deleted.

### Deleting Database Information

Use the HALDB Partition Definition utility to delete a database. Use the / (slash) character to confirm that you want to delete the database. You may wish to perform an export prior to deleting a database from the RECON data set.

**Attention:** You cannot undo the delete of a HALDB database.

## Allocating an ILDS

Partitioning a database can complicate the use of pointers between database records because after a partition has been reorganized the following pointers may become invalid:

- Pointers from other database records within this partition
- Pointers from other partitions that point to this partition
- Pointers from secondary indexes

The use of indirect pointers eliminates the need to update pointers throughout other database records when a single partition is reorganized. The Indirect List data set (ILDS) acts as a repository for the indirect pointers. There is one ILDS per partition in PHDAM and PHIDAM databases.

The ILDS contains indirect list entries (ILEs). Each ILE in an ILDS has a 9-byte key that is the indirect list key (ILK) of the target segment appended with the segment code of the target segment. The ILK is a unique token that is assigned to segments when the segments are created.

After a reorganization reload or a migration reload of segments involved in inter-record pointing, the ILE is updated to reflect the changes in location of the target segment of the ILE. Segments involved in inter-record pointing can be one of the following types:

- Physically paired logical children
- Logical parents of unidirectional logical children
- Targets of secondary indexes

The sample command in Figure 178 defines an ILDS. Note that the key size is 9 bytes at offset 0 (zero) into the logical record. Also note that the record size is specified as 50 bytes, the current length of an ILE.

```
DEFINE CLUSTER (-
 NAME (FFDBPRT1.XABCD010.L00001) -
 TRK(2,1) -
 VOL(IMSQAV) -
 FREESPACE(80,10) -
 REUSE -
 SHAREOPTIONS(3,3) -
 SPEED) -
DATA (-
 NAME(FFDBPRT1.XABCD010.INDEXD) -
 CISZ(512) -
 KEYS(9,0) -
 RECSZ(50,50)) -
INDEX (-
 NAME(FFDBPRT1.XABCD010.INDEXS) -
 CISZ(2048))
```

Figure 178. Sample Command to Define an ILDS

To compute the size of an ILDS, multiply the size of an ILE by the total number of physically paired logical children, logical parents of unidirectional relationships, and secondary index targets.

#### **Related Reading:**

- For information about the role of ILDS in the HALDB self-healing pointer process, see “The HALDB Self-Healing Pointer Process” on page 401.
- For information about initializing an ILDS, search for “Indirect List Data Set” in *IMS Version 9: Administration Guide: System*.

---

## **Coding Program Specification Blocks as Input to the PSBGEN Utility**

A PSB is a series of macro instructions that describes an application program's characteristics, its use of segments and fields within a database, and its use of logical terminals. A PSB consists of one or more PCBs (program communication blocks). Of the two types of PCBs, one is used for alternate message destinations, the other, for application access and operation definitions.

After you code the PSB macro instructions, they are used as input to the PSBGEN utility. This utility is a macro assembler that generates a PSB control block then stores it in the IMS.PSBLIB library for subsequent use during database processing.

Figure 179 on page 318 shows the PSB generation process.

## Coding PSBs for the PSBGEN Utility

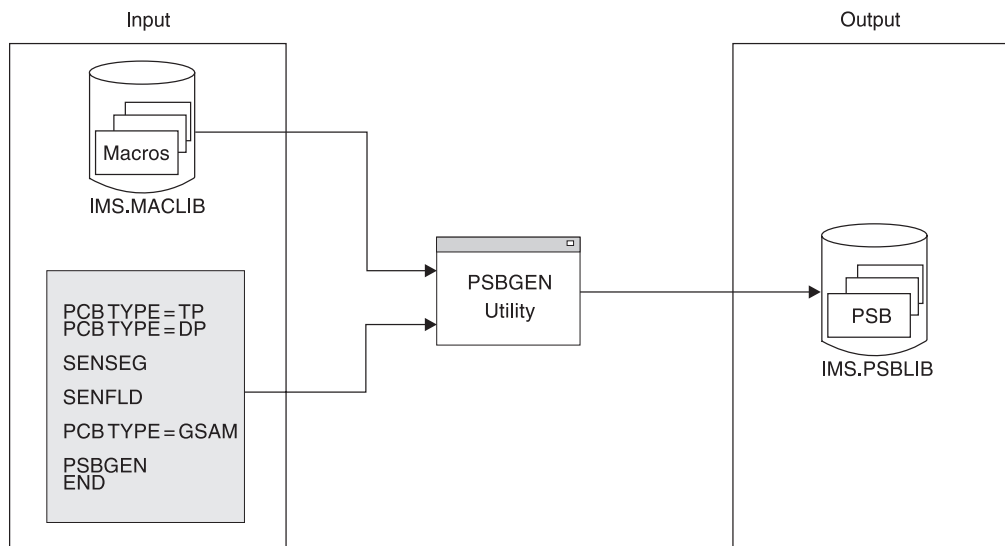


Figure 179. The PSB Generation Process

Figure 180 shows the structure of the deck used as input to the PSBGEN utility.

```
//PSBGEN JOB MSGLEVEL=1
// EXEC PSBGEN,MBR=APPLPGM1
//C.SYSIN DD *
```

|               |                                                                                                                         |
|---------------|-------------------------------------------------------------------------------------------------------------------------|
| PCB TYPE=TP   | required for output message destinations                                                                                |
| PCB TYPE=DB   | required for each database the application program can access                                                           |
| SENSEG        | required for each segment in the database the application program can access                                            |
| SENFLD        | required for each field in a segment that the application program can access, when field-level sensitivity is specified |
| PCB TYPE=GSAM |                                                                                                                         |
| :             |                                                                                                                         |
| PSBGEN        | required for each PSB generation                                                                                        |
| END           | required for each PSB generation                                                                                        |

```
/*
```

Figure 180. Structure of PSB Generation Input

### The Alternate PCB Statement

Two types of PCB statements can be placed in the input deck: the *alternate* PCB statement and the *database* PCB statement. The alternate PCB statement describes where a message can be sent when the message's destination differs from the place where it was entered. Alternate PCB statements must be put at the beginning of the input deck. More information on alternate PCBs is contained in *IMS Version 9: Administration Guide: System*.

### The Database PCB Statement

The database PCB statement defines the DBD of the database that the application program will access. Database PCB statements also define types of operations (such as get, insert, and replace) that the application program can perform on segments in the database. The database can be either physical or logical. A separate database PCB statement is required for each database that the application program accesses.



In each PSB generation, up to 2500 database PCBs can be defined, minus the number of alternate PCBs defined in the input deck. The other forms of statements that apply to PSBs are SENSEG, SENFLD, PSBGEN, and END.

**Attention:** If the PROCOPT values allow a BMP application to insert, replace, or delete segments in databases, ensure that the BMP application does not update a combined total of more than 300 databases and HALDB partitions without committing the changes.

All full-function database types, including logically related databases and secondary indexes, that have uncommitted updates count against the limit of 300. When designing HALDB databases, you should use particular caution because the number of partitions in HALDB databases is the most common reason for approaching the 300 database limit for uncommitted updates.

## The SENSEG Statement

This statement defines a segment type in the database to which the application program is sensitive. A separate SENSEG statement must exist for each segment type. The segments can physically exist in one database or be derived from several physical databases. If an application program is sensitive to a segment beneath the root segment, it must also be sensitive to all segments in the path from the root segment to the sensitive segment. For example, in Figure 181 if D is defined as a sensitive segment for an application program, B and A must also be defined as sensitive segments.

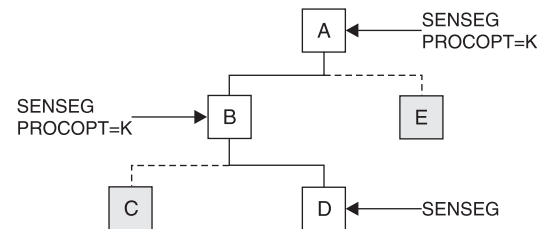


Figure 181. Example of a SENSEG Relationship

An application program must be sensitive to all segments in the path to the segment that you actually want to be sensitive. However, you can make the application program sensitive to only the segment key in these other segments. With this option, the application program does not have any access to the segments other than the keys it needs to get to the sensitive segment. To make an application sensitive to only the segment key of a segment, code PROCOPT=K in the SENSEG statement. The application program will not be able to access any other field in the segment other than the segment key. In the previous example, the application program would be sensitive to the key of segment A and B but not sensitive to A and B's data.

SENSEG statements must immediately follow the PCB statement to which they are related. Up to 30000 SENSEG statements can be defined for each PSB generation.

## The SENFLD Statement

This statement is used only in parallel with field-level sensitivity. It defines the fields in a segment type to which the application program is sensitive. This statement, in conjunction with the SENSEG statement, helps you secure your data. Each SENFLD statement must follow the SENSEG statement to which it is related.

## Coding PSBs for the PSBGEN Utility

Up to 255 sensitive fields can be defined for a given segment type, and a maximum of 10000 can be defined for each PSB generation.

### The PSBGEN Statement

This statement names the PSB and specifies various characteristics of the application program, such as the language it is written in and the size of the largest I/O area it can use. The input deck can contain only one PSBGEN statement.

### The END Statement

One END statement is placed at the end of each PSB generation input deck. The END statement specifies the end of input statements to the assembler.

Detailed instructions for coding PSB statements and examples of PSBs are contained in of *IMS Version 9: Utilities Reference: System*.

---

## Building the Application Control Blocks (ACBGEN)

IMS builds the ACB with the ACBGEN utility by merging information from the PSB and DBD. For execution in a batch environment, IMS can build ACBs either dynamically (PARM=DLI), or it can prebuild them using the ACB Maintenance utility (PARM=DBB). ACBs *must* be prebuilt for use by online application programs. The ACB generation process is shown in Figure 182.

ACBs cannot be prebuilt for GSAM DBDs. However, ACBs can be prebuilt for PSBs that reference GSAM databases.

The ACB Maintenance utility, shown in Figure 182, gets the PSB and DBD information it needs from IMS.PSBLIB and IMS.DBDLIB.

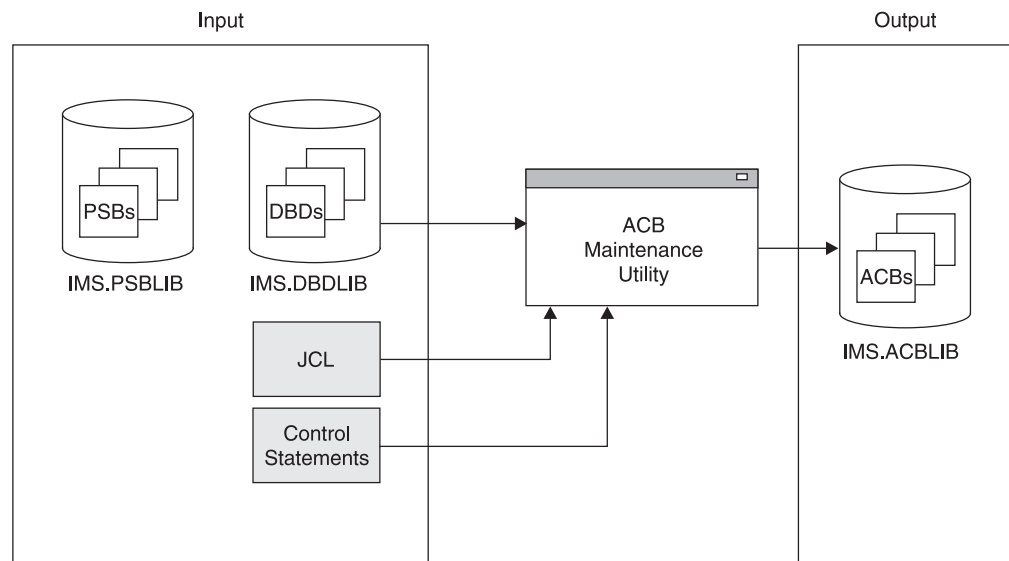


Figure 182. The ACB Generation Process

You can have the utility prebuild ACBs for all PSBs in IMS.PSBLIB, for a specific PSB, or for all PSBs that reference a particular DBD. Prebuilt ACBs are kept in the IMS.ACBLIB library. (IMS.ACBLIB is not used if ACBs are not prebuilt.) When ACBs are prebuilt and an application program is scheduled, the application

program's ACB is read from IMS.ACBLIB directly into storage. This means that less time is required to schedule an application program. In addition, less storage is used if prebuilt ACBs are used. Another advantage of using the ACB Maintenance utility is the initial error checking it performs. It checks for errors in the names used in the PSB and the DBDs associated with the PSB and, if erroneous cross-references are found, prints appropriate error messages.

IMS.ACBLIB has to be used exclusively. Because of this, the ACB Maintenance utility can only be executed using an IMS.ACBLIB that is not currently allocated to an active IMS system. Also, because IMS.ACBLIB is modified, it cannot be used for any other purpose during execution of the ACB Maintenance utility.

You can change ACBs or add ACBs in an “inactive” copy of ACBLIB and then make the changed or new members available to an active IMS online system by using the online change function. “Using the Online Change Function” in Chapter 16, “Modifying Databases,” on page 437 describes how you effectively change ACBLIB for an online system.

Detailed instructions for running the ACB Maintenance utility and examples of its use are contained in the *IMS Version 9: Utilities Reference: System*.

---

## Defining Generated Program Specification Blocks for SQL Applications

Generated PSBs (GPSB) are a type of PSB that do not require a PSBGEN or ACBGEN. A GPSB contains an I/O PCB and a single modifiable alternate PCB. GPSBs are not defined through a PSBGEN. Instead, they are defined by the system definition process through the APPLCTN macro. The GPSB parameter indicates the use of a generated PSB and specifies the name to be associated with it. The LANG parameter specifies the language format of the GPSB. For more information on defining GPSBs refer to the APPLCTN macro topic of the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

The I/O PCB can be used by the application program to obtain input messages and send output to the inputting terminal. The alternate PCB can be used by the application program to send output to other terminals or programs.

Other than the I/O PCB, an application that makes only Structured Query Language (SQL) calls does not require any PCBs. It does, however, need to define the application program name and language type to IMS. A GPSB can be used for this purpose.



---

## Chapter 12. Developing Test Databases

Before the application programs accessing your database are transferred to production status, they must be tested. To avoid damaging a production database, you need a test database.

IBM provides various programs that can help you develop your test database, including the DL/I Test Program (DFSDDLTO). For more information on the available IMS tools, go to [www.ibm.com/ims](http://www.ibm.com/ims) and link to the IBM® DB2 and IMS Tools web site.

### **Related Reading:**

- For guidance information about application program testing, see *IMS Version 9: Application Programming: Design Guide*.
- For information about testing an online system, see *IMS Version 9: Administration Guide: System*.

### **In this Chapter:**

“Test Requirements”

“Designing, Creating, and Loading a Test Database” on page 324

---

## Test Requirements

Depending on your system configuration, user requirements, and the design characteristics of your database and data communication systems, test for the following:

- That DL/I call sequences execute and the results are correct.
  - This kind of test often requires only a few records, and you can use the DL/I Test Program, DFSDDLTO, to produce these records.
  - If this is part of a unit test, consider extracting records from your existing database. To extract the necessary records, you can use programs such as the IMS DataRefresher™.
- That calls execute through all possible application decision paths.
  - You might need to approximate your production database. To do this, you can use programs such as the IMS DataRefresher and other IMS tools.
- How performance compares with that of a model, for system test or regression tests, for example.
  - For this kind of test, you might need a copy of a subset of the production database. You can use IMS tools to help you.

To test for these capabilities, you need a test database that approximates, as closely as possible, the production database. To design such a test database, you should understand the requirements of the database, the sample data, and the application programs.

To protect your production databases, consider providing the test JCL procedures to those who test application programs. Providing the test JCL helps ensure that the correct libraries are used.

### What Kind of Database?

Often, the test database can be a copy of a subset of the production database, or in some other way, a replica of it. If you have designed the production database, you should have firsthand knowledge of this requirement. Your DBDs for the production database can provide the details. If you have your production database defined in a data dictionary, that definition gives you much of the information you need. The topics in this chapter describe some aids available to help you design and generate your test database.

### What Kind of Sample Data?

It is important for the sample data to approximate the real data, because you must test that the system processes data with the same characteristics, such as the range of field values. The kind of sample data needed depends on whether you are testing calls or program logic.

- To test calls, you need values in only those fields that are sequence fields or which are referenced in SSAs.
- To test program logic, you need data in all fields accessed in the program logic such as adds or compares.

Again, you might use a copy of a subset of the real database. However, first determine which fields contain sensitive data and therefore must use fictitious data in the test database.

### What Kind of Application Program?

In order to design a test database that effectively tests the operational application programs being developed, you should know certain things about those programs. Much of the information you need is in the application program design documentation, the descriptors such as the PSBs, your project test plan, and in the Data Dictionary.

---

## Designing, Creating, and Loading a Test Database

You can develop a test database just as you would develop a production database. With that approach, you perform the tasks described throughout the other chapters of this manual, keeping in mind the special requirements for test databases. If your installation has testing standards and procedures, you should follow them in developing a test database.

### Using Testing Standards

Testing standards and procedures help you avoid the same kinds of problems for test database development as your IMS development standards do for production databases. Some of the subjects that might be included in your test system standards and that affect test database design are:

- Objectives of your test system
  - What you test for and at what development stages do you test for it
  - The kinds of testing—offline, online, integrated DB/DC or isolated
- Description of the test organization and definition of responsibilities of each group
- Relationship of test and production modes of operation
- How your test system development process deals with:
  - DB/TM structures

- Development tools
- DB/TM features
- Backup and recovery

**Related Reading:** The IMS test system is discussed in *IMS Version 9: Administration Guide: System*.

### Using IBM Programs to Develop a Test Database

If you use the same development aids to develop the test database that you use to develop your production databases, you will benefit from using familiar tools. Also, you will avoid problems caused by differences between test and production databases.

#### Using the Data Extraction, Processing, and Restructuring System

You can use this system (Program Number: 5796-PLH) to access a wide variety of data and restructure it into a test database. By means of control statements, you define the source and target files and specify the structure of the target files.

The data restructuring phase of the system allows you to:

- Combine components of different files to form new files
- Restructure a file to form different files
- Rearrange data within a file
- Alter values according to your needs
- Form hierarchies
- Decrease or increase the number of levels in a hierarchy

Details about using this system are in *Data Extraction, Processing, and Restructuring System, Program Description/Operations Manual*.

#### Using IBM VisualAge Generator

IBM VisualAge® Generator is the direct descendant of IBM's Cross System Product mainframe application development tool. VisualAge Generator provides a rapid application development environment for building and deploying multi-tier and text applications and applications for e-business. VisualAge Generator allows developers to implement end-to-end Java systems for e-business and enables OO and Java developers with little mainframe experience to implement systems on CICS and IMS transactional platforms that access DL/I or VSAM data.

VisualAge Generator systems can reuse existing legacy application programs, and VisualAge Generator application programs can access VSAM file systems and IMS and DL/I databases. This allows easy integration of new applications programs into existing IT infrastructures.

**Related Reading:** For information on how to use VisualAge Generator, see the *VisualAge Generator: User's Guide*.

VisualAge Generator supports both IMS and CICS.

#### IMS Application Development Facility II

The IMS Application Development Facility II (IMSADF II) is designed to increase the productivity of programmers developing applications for IMS systems. IMSADF II provides ISPF-based dialogs to work with IMS and DB2 to reduce the time and effort that is required to develop, maintain, and expand IMS database and data communications applications.

## Designing, Creating, and Loading a Test Database

If your installation uses IMSADF II to develop application programs, you can use it to create a simple test database. The interactive nature of the IMSADF II enables you to dynamically add segments to a database. By means of SEGM and FIELD statements, you can define a test database and update it as needed.

**Related Reading:** For information on how to use the IMS Application Development Facility II, see the *IMS Application Development Facility (ADF) II: User's Guide*.

### File Manager for z/OS for IMS Data

The IMS component of File Manager (FM/IMS) is an ISPF application with which you can manipulate data stored in IMS databases.

FM/IMS provides you with a number of flexible ways to connect to your IMS databases. For example, with BMP mode you can connect to an online multi-user database and manipulate the data. In DLI mode, you can work with data offline as a single user or you can share the data with others.

In addition, FM/IMS provides two functions that you can use in batch jobs. FM/IMS Edit Batch (IEB) runs a REXX procedure that can insert, update, retrieve, delete or print segments and create views. FM/IMS Batch Print (IPR) can print the entire database in one of several available display formats, or a selected subset of the database, based on a view.

**Related Reading:** For information on how to use the File Manager for z/OS for IMS Data, see the *File Manager for z/OS User's Guide and Reference for IMS Data*.

### Using the DL/I Test Program, DFSDDLTO

If you need a test database with relatively few database records, for example, you can use DFSDDLTO to test DL/I call sequences. If you have no machine-readable database to begin with, you can define a PCB, then use DFSDDLTO to insert segments. This step eliminates the need for a load program to generate your test database.

**Related Reading:** Information about this test program is in "Testing an Application Program," in *IMS Version 9: Application Programming: Design Guide*.

The DL/I Test Program cannot be used by CICS, but can be used for stand-alone batch programs. If used for stand-alone batch programs, it is useful to interpret the database performance as it might be implemented for online or shared database programs.



---

## Chapter 13. Loading Databases

After you implement your database design, you are ready to write and load your database. However, before writing a load program, you must estimate the minimum size of the database and allocate data sets.

This chapter examines the following areas of loading a database:

- “Estimating the Minimum Size of the Database”
- “Allocating Data Sets” on page 334
- “Writing a Load Program” on page 338
- “Loading Fast Path Databases” on page 349

---

### Estimating the Minimum Size of the Database

When you estimate the size of your database, you estimate how much space you need to initially load your data. Unless you do not plan to insert segments into your database after it is loaded, allocate more space for your database than you actually estimate for the initial load.

This topic contains the step-by-step procedure for estimating minimum database space. To estimate the minimum size needed for your database, you must already have made certain design decisions about the physical implementation of your database. Because these decisions are different for each DL/I access method, they are discussed under the appropriate access method in step 3 of the procedure.

If you plan to reorganize your HALDBs online, consider the extra space reorganization requires. Although online reorganization does not need any additional space when you first load a HALDB, the process does require additional space at the time of reorganization. For more information on HALDB online reorganization, see “HALDB Online Reorganization” on page 382.

#### Step 1. Calculate the Size of an Average Database Record

First, determine the size, then the average number of occurrences of each segment type in a database record. By multiplying these two numbers together, you get the size of an average database record.

##### Determining Segment Size

Segment size here is physical segment size, and it includes both the prefix and data portion of the segment. You define the size of the data portion. It can include unused space for future use. The size of the data portion of the segment is the number you specified in the BYTES= operand in the SEGM statement in the DBD.

The prefix portion of the segment depends on the segment type and on the options you are using. Table 23 on page 328 helps you determine, by segment type, the size of the prefix. Using the chart, add up the number of bytes required for necessary prefix information and for extra fields and pointers generated in the prefix for the options you have chosen. Segments can have more than one 4-byte pointer in their prefix. You need to factor all extra pointers of this type into your calculations.

**Related Reading:** For rules on using mixed pointers, see “Mixing Pointers” on page 91.

## Estimating the Minimum Size of the Database

Table 23. Required Fields and Pointers in a Segment's Prefix

| Type of Segment                       | Fields and Pointers Used in the Segment's Prefix                                        | Size of the Field or Pointer (in Bytes)    |
|---------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------|
| All types                             | Segment code (not present in a SHSAM, SHISAM, GSAM, or secondary index pointer segment) | 1                                          |
|                                       | Delete byte (not present in a SHSAM, SHISAM, or GSAM segment)                           | 1                                          |
| HDAM, PHDAM, HIDAM, and PHIDAM        | PCF pointer                                                                             | 4                                          |
|                                       | PCL pointer                                                                             | 4                                          |
|                                       | PP pointer                                                                              | 4                                          |
|                                       | PTF pointer                                                                             | 4                                          |
|                                       | PTB pointer                                                                             | 4                                          |
| HDAM and HIDAM only                   | HF pointer                                                                              | 4                                          |
|                                       | HB pointer                                                                              | 4                                          |
| DEADB                                 | PCF pointer                                                                             | 4                                          |
|                                       | PCL pointer                                                                             | 4                                          |
|                                       | Subset pointer                                                                          | 4                                          |
| Logical parent (for HDAM and HIDAM)   | LCF pointer                                                                             | 4                                          |
|                                       | LCL pointer                                                                             | 4                                          |
|                                       | Logical child counter                                                                   | 4                                          |
| Logical parent (for PHDAM and PHIDAM) | Logical child counter (only present for unidirectional logical parents)                 | 4                                          |
| Logical child                         | LTF pointer                                                                             | 4                                          |
|                                       | LTB pointer                                                                             | 4                                          |
|                                       | LP pointer                                                                              | 4                                          |
| Logical child (PHDAM and PHIDAM)      | EPS                                                                                     | 28                                         |
| Secondary index                       | Symbolic or direct-address pointer to the target segment                                | 4                                          |
| PSINDEX                               | EPS plus the target segment root key                                                    | 28 + length of the target-segment root key |
| All segments in PHDAM and PHIDAM      | ILK                                                                                     | 8                                          |

### Determining Segment Frequency

After you have determined the total size of a segment type, you need to determine segment frequency. Segment frequency is the average number of occurrences of a particular segment type in the database record. To determine segment frequency, first determine the average number of times a segment occurs under its immediate physical parent.

For example, in the database record in Figure 183 on page 329, the ITEMS segment occurs an average of 10 times for each DEPOSITS segment. The DEPOSITS

## Estimating the Minimum Size of the Database

segment occurs an average of four times for each CUSTOMER root segment. The frequency of a root segment is always one.

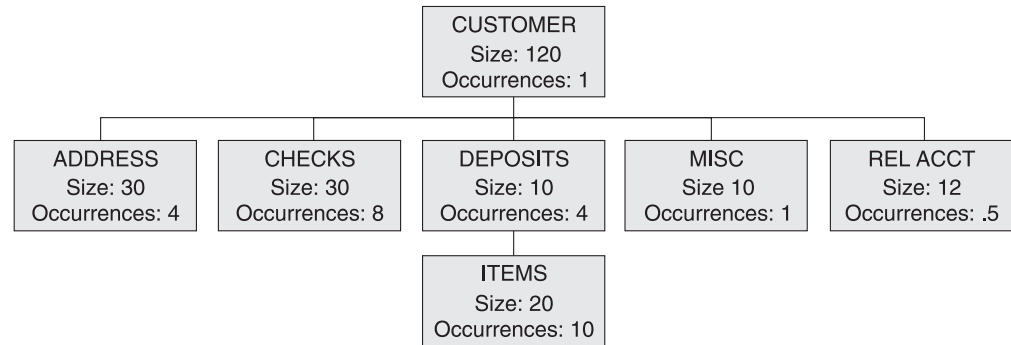


Figure 183. Segment Sizes and Average Segment Occurrences

To determine the average number of occurrences of a particular segment type in the database record, multiply together the segment frequencies of each segment in the path from the given segment back up to the root. For the ITEMS segment type, the path includes the ITEMS segment and the DEPOSITS segment. The segment frequency of ITEMS is 10, and the segment frequency of DEPOSITS is 4. Therefore, the average number of occurrences of the ITEMS segment in the database record is 40 (10 x 4). Another way of expressing this idea is that each customer has an average of 4 DEPOSITS, and each DEPOSIT has an average of 10 ITEMS. Therefore, for each customer, an average of 40 (10 x 4) ITEMS exist in the database record.

### Determining Average Database Record Size

Now that you have determined segment size and segment frequency, you can determine the average size of a database record. To determine average database record size for a HISAM database, multiply segment size and segment frequency together for each segment type in the database record, then add the results. For example, for the database record in Figure 183, the average database record size is calculated as shown in Table 24.

Table 24. Calculating the Average Database Record Size

| Segment Type | Segment Size | Average Occurrences | Total Size |
|--------------|--------------|---------------------|------------|
| CUSTOMER     | 120          | 1                   | 120        |
| ADDRESS      | 30           | 4                   | 120        |
| CHECKS       | 30           | 8                   | 240        |
| DEPOSITS     | 10           | 4                   | 40         |
| ITEMS        | 20           | 40 (10x4)           | 800        |
| MISC         | 10           | 1                   | 10         |
| REL ACCT     | 12           | .5                  | 6          |
| Record Total |              |                     | 1336       |

## Step 2. Determine Overhead Needed for CI Resources

If you are not using VSAM, you can skip this step. If you are using VSAM, you need to determine how much overhead is needed for a CI before you can do the remaining space calculations.

## Estimating the Minimum Size of the Database

Overhead is space used in a CI for two control fields. VSAM uses the control fields to manage space in the CI. The control fields and their sizes are shown in Table 25.

*Table 25. VSAM Control Fields*

| Field                                    | Size in Bytes |
|------------------------------------------|---------------|
| CIDF (Control interval definition field) | 4             |
| RDF (Record definition field)            | 3             |

If one logical record exists for each CI, CI overhead consists of one CIDF and one RDF (for a total of 7 bytes). HDAM and HIDAM databases and PHDAM and PHIDAM partitions use one logical record for each CI.

If more than one logical record exists for each CI, CI overhead consists of one CIDF and two RDFs (for a total of 10 bytes). HISAM (KSDS and ESDS), HIDAM and PHIDAM index, and secondary index databases can all use more than one logical record for each CI.

Step 3 tells you when to factor CI overhead into your space calculations.

### Step 3. Determine the Number of CIs or Blocks Needed

The calculations in this step are done by database type. To determine how many CIs or blocks are needed to hold your database records, go to the topic in this step that applies to the database type you are using. If you are using VSAM, the first CI in the database is reserved for VSAM.

#### **HISAM: Determining the Number of CIs or Blocks Needed**

A CI in HISAM can contain one or more logical records. In the primary data set a logical record can only contain one database record (or part of one database record). In the overflow data set a logical record can only contain segments of the same database record, but more than one logical record can be used for the overflow segments of a single database record.

In HISAM, you should remember how logical records work, because you need to factor logical record overhead into your calculations before you can determine how many CIs (control intervals) are needed to hold your database records. Logical record overhead is a combination of the overhead that is always required for a logical record and the overhead that exists because of the way in which database records are stored in logical records (that is, storage of segments almost always results in residual or unused space).

Because some overhead is associated with each logical record, you need to calculate the amount of space that is available after factoring in logical record overhead. Once you know the amount of space in a logical record available for data, you can determine how many logical records are needed to hold your database records. If you know how many logical records are required, you can determine how many CIs or blocks are needed.

For example, assume you need to load 500 database records using VSAM, and to use a CI size of 2048 bytes for both the KSDS and ESDS. Also, assume you need to store four logical records in each KSDS CI and two logical records in each ESDS CI.

1. First factor in CI overhead by subtracting the overhead from the CI size:  $2048 - 10 = 2038$  bytes for both the KSDS and the ESDS. The 10 bytes of overhead consists of a 4-byte CIDF and two 3-byte RDFs.
2. Then, calculate logical record size by dividing the available CI space by the number of logical records per CI:  $2038/4 = 509$  bytes for the KSDS and  $2038/2 = 1019$  bytes for the ESDS. Because logical record size in HISAM must be an even value, use 508 bytes for the KSDS and 1018 bytes for the ESDS.
3. Finally, factor in logical record overhead by subtracting the overhead from logical record size:  $508 - 5 = 503$  bytes for the KSDS and  $1018 - 5$  bytes for the ESDS. HISAM logical record overhead consists of 5 bytes for VSAM (a 4-byte RBA pointer for chaining logical records and a 1-byte end-of-data indicator).  
This means if you specify a logical record size of 508 bytes for the KSDS, you have 503 bytes available in it for storing data. If you specify a logical record size of 1018 bytes for the ESDS, you have 1013 bytes available in it for storing data.

Refer to the previous example. Because the average size of a database record is 1336 bytes, the space available for data in the KSDS is not large enough to contain it. It takes the available space in one KSDS logical record plus one ESDS logical record to hold the average database record ( $503 + 1013 = 1516$  bytes of available space). This record size is greater than an average database record of 1336 bytes. Because you need to load 500 database records, you need 500 logical records in both the KSDS and ESDS.

- To store four logical records per CI in the KSDS, you need a minimum of  $500/4 = 125$  CIs of 2048 bytes each for the KSDS.
- To store two logical records per CI in the ESDS, you need a minimum of  $500/2 = 250$  CIs of 2048 bytes each for the ESDS.

### HIDAM or PHIDAM: Determining the Number of CIs or Blocks Needed

With HIDAM or PHIDAM, one VSAM logical record exists per CI or block. In this context, logical record is the unit of transfer when invoking an access method (such as VSAM), to get or put records. Logical record overhead consists of an FSEAP (4 bytes). If you are using RAPs (HIDAM only), the logical record overhead consists of one RAP (4 bytes). For example, assume you need to load 500 database records using VSAM and to use a CI size of 2048 bytes and no RAP (specify PTR=TB on the root to suppress the RAP for HIDAM).

1. First, determine the size of a logical record by subtracting CI overhead from CI size:  $2048 - 7 = 2041$  bytes for the ESDS logical record size. The 7 bytes of overhead consists of a 4-byte CIDF and a 3-byte RDF.
2. Then, determine the amount of logical record space available for data by factoring in logical record overhead. In this example, logical record overhead consists of an FSEAP:  $2041 - 4 = 2037$  bytes. This means you have 2037 bytes available to store data in each logical record.

### HIDAM or PHIDAM Index: Calculating the Space Needed

Calculating space for a HIDAM or PHIDAM index is similar to calculating space for a HISAM KSDS. The difference is that no logical record overhead exists. One index record is stored in one logical record, and multiple logical records can be stored in one CI or block.

### HDAM or PHDAM: Determining the Amount of Space Needed

Because of the many variables in HDAM or PHDAM, no exact formula exists for estimating database space requirements. Therefore, you should use a space calculation aid to help determine the amount of space needed for HDAM or PHDAM databases.

If you are using VSAM, and you decide to estimate, without use of an aid, the amount of space to allocate for the database, the first CI in the database is reserved for VSAM. Because of this, the bit map is in the second CI.

With HDAM or PHDAM, logical record overhead depends on the database design options you have selected. You must choose the number of CIs or blocks in the root addressable area and the number of RAPs for each CI or block. These choices are based on your knowledge of the database.

A perfect randomizer requires as many RAPs as there are database records. Because a perfect randomizer does not exist, plan for approximately 20% more RAPs than you have database records. The extra RAPs reduces the likelihood of synonym chains. For example, assume you need to store 500 database records. Then, for the root addressable area, if you use:

- One RAP per CI or block, you need 600 CIs or blocks
- Two RAPs per CI or block, you need 300 CIs or blocks
- Three RAPs per CI or block, you need 200 CIs or blocks

Because of the way your randomizer works, you decide 300 CIs or blocks with two RAPs each works best. Assume you need to store 500 database records using VSAM, and you have chosen to use 300 CIs in the root addressable area and two RAPs for each CI. This decision influences your choice of CI size. Because you are using two RAPs per CI, you expect two database records to be stored in each CI. You know that a 2048-byte CI is not large enough to hold two database records ( $2 \times 1336 = 2672$  bytes). And you know that a 3072-byte CI is too large for two database records of average size. Therefore, you would probably use 2048-byte CIs and the byte limit count to ensure that on average you would store two database records in the CI.

To determine the byte limit count:

1. First, determine the size of a logical record by subtracting CI overhead from CI size:  $2048 - 7 = 2041$  bytes for the ESDS logical record size.
2. Then, determine the amount of logical record space available for data by factoring in logical record overhead. (Remember only one logical record exists per CI in HDAM or PHDAM.) In this example, logical record overhead consists of a 4-byte FSEAP and two 4-byte RAPs:  $2041 - 4 - (2 \times 4) = 2029$  bytes. This means you have 2029 bytes available for storing data in each logical record in the root addressable area.
3. Finally, determine the available space per RAP by dividing the available logical record space by the number of RAPs per CI:  $2029/2 = 1014$  bytes. Therefore, you must use a byte limit count of about 1000 bytes.

Continuing our example, you know you need 300 CIs of 2048 bytes each in the root addressable area. Now you need to calculate how many CIs you need in the overflow area. To do this:

- Determine the average number of bytes that will not fit in the root addressable area. Assume a byte limit count of 1000 bytes. Subtract the byte limit count from the average database record size:  $1336 - 1000 = 336$  bytes. Multiply the average

number of overflow bytes by the number of database records:  $500 \times 336 = 168000$  bytes needed in the non-root addressable area.

- Determine the number of CIs needed in the non-root addressable area by dividing the number of overflow bytes by the bytes in a CI available for data. Determine the bytes in a CI available for data by subtracting CI and logical record overhead from CI size:  $2048 - 7 - 4 = 2037$  (7 bytes of CI overhead and 4 bytes for the FSEAP). Overflow bytes divided by CI data bytes is  $168000/2037 = 83$  CIs for the overflow area.

You have estimated you need a minimum of 300 CIs in the root addressable area and a minimum of 83 CIs in the non-root addressable area.

### Secondary Index: Determining the Amount of Space Needed

Calculating space for a secondary index is similar to calculating space for a HISAM KSDS. The difference is that no logical record overhead exists in which factor. One index record is stored in one logical record, and multiple logical records can be stored in one CI or block.

## Step 4. Determine the Number of Blocks or CIs Needed for Free Space

In HDAM, HIDAM, PHDAM, and PHIDAM databases, you can allocate free space when your database is initially loaded. Free space is explained in Chapter 6, “Choosing Full-Function Database Types,” on page 55, “Specifying Free Space”. Free space can only be allocated for an HD VSAM ESDS or OSAM data set. Do not confuse the free space discussed here with the free space you can allocate for a VSAM KSDS using the DEFINE CLUSTER command.

To calculate the total number of CIs or blocks you need to allocate in the database, you can use the following formula:

$$A = B \times (\text{fbff} / (\text{fbff} - 1)) \times (100 / (100 - \text{fspf}))$$

Where the values are:

- A** The total number of CIs or blocks needed including free space.
- B** The number of blocks or CIs in your database.
- fbff** How often you are leaving a block or CI in the database empty for free space (what you specified in fbff operand in the DBD).
- fspf** The minimum percentage of each block or CI you are leaving as free space (what you specified in the fspf operand in the DBD).

## Step 5. Determine the Amount of Space Needed for Bit Maps

In HDAM, HIDAM, PHDAM, and PHIDAM databases, you need to add the amount of space required for bit maps to your calculations. Bit maps are explained in “General Format of HD Databases and Use of Special Fields” on page 94. To calculate the number of bytes needed for bit maps in your database, you can use the following formula:

$$A = D / ((B - C) \times 8)$$

Where the values are:

- A** The number of bit map blocks or CIs you need for the database.
- B** The CI or block size you have specified, in bytes, minus 4.



## Estimating the Minimum Size of the Database

Four is subtracted from the CI or block size because each CI or block has a 4-byte FSEAP.

**C** The number of RAPs you specified for a CI or block, times 4.

The number of RAPs is multiplied by 4 because each RAP is four bytes long. (B - C) is multiplied by 8 in the formula to arrive at the total number of bits that will be available in the CI or block for the bit map.

**D** The number of CIs or blocks in your database.

You need to add the number of CIs or blocks needed for bit maps to your space calculations.

---

## Allocating Data Sets

Once you have determined how much space you will need for your database, you can allocate data sets and then load your database.

You can allocate VSAM data sets by using the DEFINE CLUSTER command. You must specify the REUSE parameter when allocating HALDB data sets. Use of this command is described in *DFSMS Access Method Services for Catalogs*.

**Attention:** If you plan to use the Database Image Copy 2 utility to take image copies of your database, the data sets must be allocated on hardware that supports the DFSMS concurrent copy function.

When loading databases (excluding HALDB databases) that contain logical relationships or secondary indexes, DL/I writes a control record to a work file (DFSURWF1). This work file must also be allocated and in the JCL.

All other data sets are allocated using normal z/OS JCL. You can use the z/OS program IEFBR14 to preallocate data sets, except when the database is an MSDB. For MSDBs, you should use the z/OS program IEHPROGM.

## Allocating OSAM Data Sets

For databases other than HALDBs, you should use JCL to allocate OSAM data sets at the time the data set is loaded. This mode of allocation can be for single or multiple volumes, using the SPACE parameter.

For multi-volume HALDB database data sets, you should preallocate your OSAM data sets. For single-volume HALDB OSAM data sets, the allocation can be done either before or during the load step, although doing it in the load step is recommended.

If the installation control of direct-access storage space and volumes require that the OSAM data sets be pre-allocated, or if a message queue data set requires more than one volume, the OSAM data sets might be pre-allocated.

Observe the following restrictions when you preallocate with any of the accepted methods:

- DCB parameters should not be specified.
- Secondary allocation must be specified for all volumes if the data set will be extended beyond the primary allocation.
- Secondary allocation must be specified for all volumes in order to write to volumes pre-allocated but not written to by initial load or reload processing.



- Secondary allocation is not allowed for queue data sets because queue data sets are not extended beyond their initial or pre-allocated space quantity. However, queue data sets can have multivolume allocation.
- The secondary allocation size defined on the first volume will be used for all secondary allocations on all volumes regardless of the secondary allocation size specified on the other volumes. All volumes should be defined with the same secondary allocation size to avoid confusion.
- If the OSAM data set will be cataloged, use IEHPROGM or Access Method Services to ensure that all volumes are included in the catalog entry.

When a multiple-volume data set is pre-allocated, you should allocate extents on all the volumes to be used. The suggested method of allocation is to have one IEFBR14 utility step for each volume on which space is desired, as shown in Figure 184 on page 336.

### Restrictions:

- **Do not** use IEFBR14 and specify a DD card with a multi-volume data set, because this allocates an extent on only the first volume.
- **Do not** use a separate IEFBR14 utility step for each volume if you plan to use the Database Image Copy 2 utility (DFSUDMT0). Using a separate IEFBR14 step for each volume creates extents that have the same identifier (volume 1). The Database Image Copy 2 utility requires that you allocate your multi-volume data sets using the standard DFSMS methods.

For more information about the standard DFSMS methods for allocating data sets and about data sets in general, see:

- *z/OS: DFSMS: Using Data Sets*
- *z/OS: DFSMS Access Method Services for Catalogs*

## Example of Allocating Multi-Volume OSAM Data Sets on Non-SMS Managed DASD

The JCL in Figure 184 on page 336 is an example of allocating a multi-volume OSAM data set on a non-SMS managed direct-access storage device (DASD). The data sets allocated with this JCL are not compatible with the Database Image Copy 2 utility.

## Allocating Data Sets

```
//OSAMALLO JOB A,OSAMEXAMPLE
//S1 EXEC PGM=IEFBR14
//SYSPRINT DD SYSOUT=A
//EXTENT1 DD VOL=SER=AAAAAA,SPACE=(CYL,(20,5)),UNIT=3390,
// DSN=OSAM.SPACE,DISP=(,KEEP)
//S2 EXEC PGM=IEFBR14
//SYSPRINT DD SYSOUT=A
//EXTENT2 DD VOL=SER=BBBBBB,SPACE=(CYL,(30,5)),UNIT=3390,
// DSN=OSAM.SPACE,DISP=(,KEEP)
.
.
//LAST EXEC PGM=IEFBR14
//SYSPRINT DD SYSOUT=A
//EXTENTL DD VOL=SER=LLLLLL,SPACE=(CYL,(30,5)),UNIT=3390,
// DSN=OSAM.SPACE,DISP=(,KEEP)
// EXEC PGM=IEHPROGM
//SYSPRINT DD SYSOUT=*
//DD1 DD UNIT=3390,VOL=SER=AAAAAA,DISP=SHR
//DD2 DD UNIT=3390,VOL=SER=BBBBBB,DISP=SHR
.
.
//DDL DD UNIT=3390,VOL=SER=LLLLLL,DISP=SHR
//SYSIN DD *
CATLG DSN=OSAM.SPACE,VOL=3390=(AAAAAA,BBBBBB,LLLLLL)
/*
```

Figure 184. JCL allocating a multi-volume OSAM data set on non-SMS managed DASD

## Example of Allocating Multi-Volume OSAM Data Sets on SMS-Managed DASD

Figure 185 is an example of the JCL you can use to allocate multi-volume OSAM data sets that are compatible with the Database Image Copy 2 utility.

When allocating data sets using the method in Figure 185, you must specify an SMS storage class that has been defined by your installation with guaranteed space (GUARANTEED\_SPACE=YES) and specify the volume serial numbers. Without the guaranteed space attribute and the volume serial numbers, only the first volume will get a primary extent and the other volumes will get secondary extents.

```
// EXEC PGM=IEFBR14
//DD123 DD DSN=HIGHNODE.MIDNODE.ENDNODE,
// DISP=(NEW,CATLG),
// SPACE=(CYL,(200,100)),
// UNIT=3390
// VOL=SER=(VOL111,VOL222,VOL333),
// STORCLAS=MYSTRCLS
/*
```

Figure 185. Example JCL for Allocating a Multi-Volume OSAM Data Set on SMS-Managed DASD

Figure 186 on page 337 is an example of using DFSMS Access Method Services ALLOCATE command to allocate multi-volume OSAM data sets that are compatible with the Database Image Copy 2 utility.

```

// EXEC PGM=IDCAMS,REGION=4096K
//SYSPRINT DD SYSOUT=A
//SYSIN DD *
 DELETE 'HIGHNODE.MIDNODE.ENDNODE'

 IF LASTCC<=8 THEN SET MAXCC=0

 ALLOC DSN('HIGHNODE.MIDNODE.ENDNODE')-
 NEW CATALOG-
 SPACE(200,100)CYLINDERS-
 UNIT=3390-
 VOL(VOL111,VOL222,VOL333)-
 STORCLAS(MYSTRCLS)
/*

```

Figure 186. Example of **ALLOCATE** Command for Allocating a Multi-Volume OSAM Data Set on SMS-Managed DASD

## Cautions When Allocating OSAM Data Sets

1. Pre-allocating more volumes for OSAM data set extents than are used during initial load or reload processing might cause an abend if you attempt to extend the data set beyond the last volume written to at initial load or reload time under the following circumstances: the initial load or reload step did not result in the data being written to the last volume of the pre-allocated data set, and secondary allocation was not specified during data set pre-allocation.
2. It is recommended that you not reuse multivolume OSAM data sets without first scratching the data set and then reallocating the space. Failure to do this might cause an invalid EOF mark to be left in the DSCB of the last volume of the data set when the data set is:
  - a. First reused by an IMS utility (such as the Unload/Reload utility used in database reorganization).
  - b. Then opened by OSAM for normal processing.

For example, a data set might initially be allocated on three volumes, with the EOF mark on the third volume. However, after the reorganization utility is run, the data set might need only the first two volumes. Therefore, the new EOF mark is placed on the second volume. After reorganization, when the data set is opened by OSAM for normal processing, OSAM checks the last volume's DSCB for an EOF mark. When OSAM finds the EOF in the third volume, it inserts new data after the old EOF mark in the third volume instead of inserting data after the EOF mark created by the reorganization utility in the second volume.

Subsequent processing by another utility such as the Image Copy utility uses the EOF mark set by the reorganization utility on the second volume and ignores new data inserted by OSAM on volume three.

3. When loading this database, the order of the DD cards determines the order in which the data is loaded.
4. If you intend to use the Image Copy 2 utility (DFSUDMT0) to back up and restore multi-volume databases, they **MUST** be allocated using the standard DFSMS techniques.

For more information about the DFSMS methods of data set allocation, see *thez/OS V1R4: DFSMS: Using Data Sets*.

### Writing a Load Program

After you have determined how much space your database requires and allocated data sets for it, you can load the database.

#### The Load Process

Loading the database is done using an initial load program. Initial load programs must be batch programs, since you cannot load a database with an online application program. It is your responsibility to write this program.

Basically, an initial load program reads an existing file containing your database records. Using the DBD, which defines the physical characteristics of the database, and the load PSBs, the load program builds segments for a database record and inserts them into the database in hierarchic order.

Figure 187 on page 338 shows the load process.

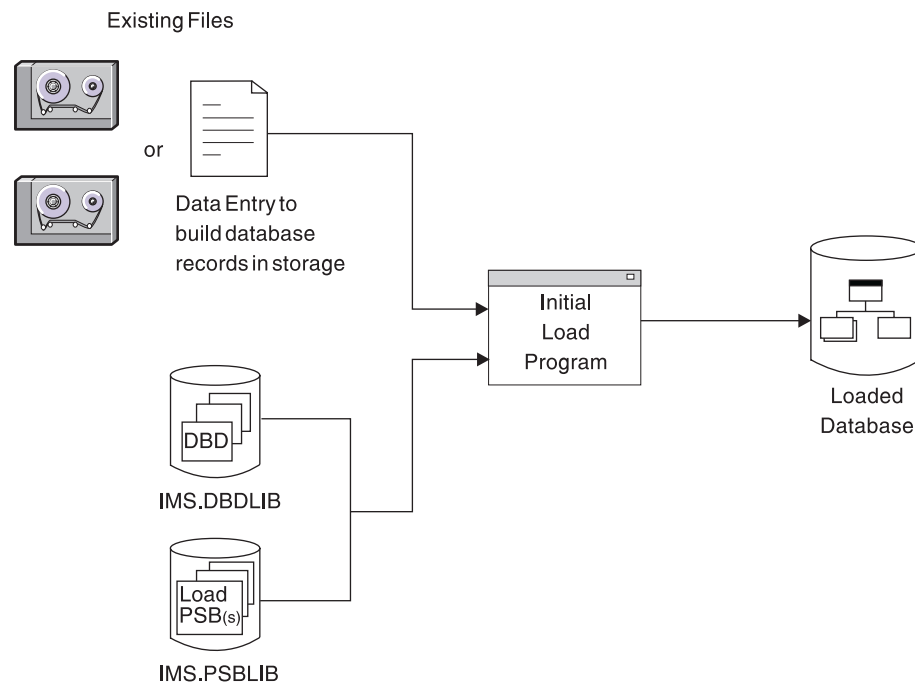


Figure 187. The Load Process

If the data to be loaded into the database already exists in one or more files, merge and sort the data, if necessary, so that it is presented to the load program in correct sequence. Also, if you plan to merge existing files containing redundant data into one database, delete the redundant data, if necessary, and correct any data that is wrong.

Figure 188 on page 339 illustrates loading a database using existing files.

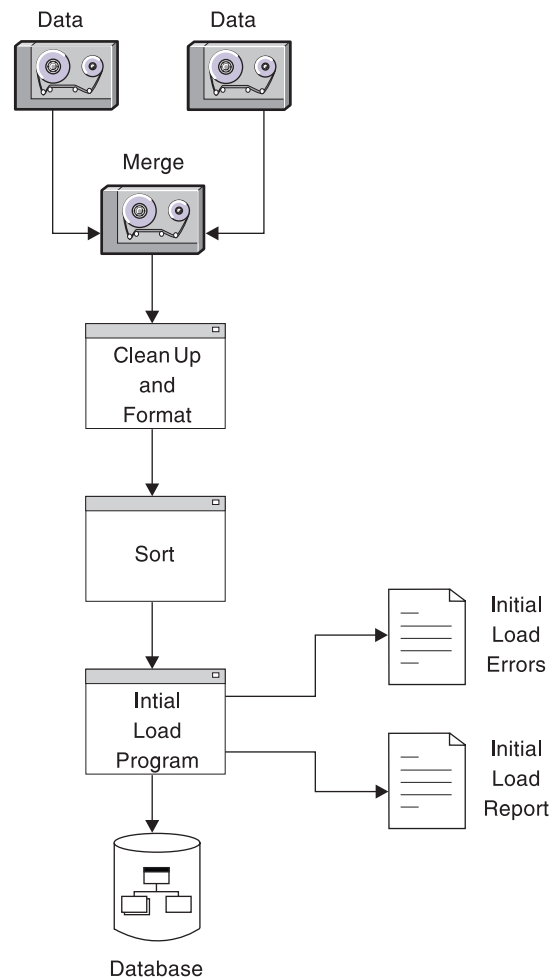


Figure 188. Loading a Database Using Existing Files

After you have defined the database, you load it by writing an application program that uses the ISRT call. An initial load program builds each segment in the program's I/O area, then loads it into the database by issuing an ISRT call for it. ISRT calls are the only DL/I requests allowed when you specify PROCOPT=L in the PCB. The only time you use the "L" option is when you initially load a database. This option is valid only for batch programs.

**Restriction:** A PSB that includes a PCB statement that specifies PROCOPT=L cannot contain other PCB statements that specify PROCOPT values of A, D, G, I, or R.

**Recommendation:** If a user load program using PROCOPT=L | LS is running in a DLI or DBB region, DBRC authorization is required for all databases logically related to the one being loaded. If DBRC is active when the database is loaded, DBRC sets the image copy status for this database to IC NEEDED in the DBDS record in the RECON data set.

The FIRST, LAST, and HERE insert rules do not apply when you are loading a database, unless you are loading an HDAM database. When you are loading a HDAM database, the rules determine how root segments with non-unique sequence fields are ordered. If you are loading a database using HSAM, the same rules apply.

## Writing a Load Program

**Recommendation:** Load programs do not need to issue checkpoints.

Most comprehensive databases are loaded in stages by segment type or by groups of segment types. Because there are usually too many segments to load using only one application program, you need several programs to do the loading. Each load program after the first load program is technically an “add” program, not a load program. Do not specify “L” as the processing option in the PCB for add programs. You should review any add type of load program written to load a database to ensure that the program's performance will be acceptable; it usually takes longer to add a group of segments than to load them.

For HSAM, HISAM, HIDAM, and PHIDAM, the root segments that the application program inserts must be pre-sorted by the key fields of the root segments. The dependents of each root segment must follow the root segment in hierarchic sequence, and must follow key values within segment types. In other words, you insert the segments in the same sequence in which your program would retrieve them if it retrieved in hierarchic sequence (children after their parents, database records in order of their key fields).

If you are loading an HDAM or PHDAM database, you do not need to pre-sort root segments by their key fields.

When you load a database:

- If a loaded segment has a key, the key value must be in the correct location in the I/O area.
- When you load a logical child segment, the I/O area must contain the logical parent's concatenated key, followed by the logical child segment to be inserted.
- After issuing an ISRT call, the current position is just before the next available space following the last segment successfully loaded. The next segment you load will be placed in that space.

**Recommendation:** You should always create an image copy immediately after you load, reload, or reorganize the database.

## Status Codes for Load Programs

If the ISRT call is successful, DL/I returns a blank status code for the program. If not, DL/I returns one of these status codes:

- |           |                                                                                                                                                                                                                      |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LB</b> | The segment you are trying to load already exists in the database. DL/I only returns this status code for segments with key fields.<br><br>In a call-level program, you should transfer control to an error routine. |
| <b>LC</b> | The segment you are trying to load is out of key sequence.                                                                                                                                                           |
| <b>LD</b> | No parent exists for this segment. This status code usually means that the segment types you are loading are out of sequence.                                                                                        |
| <b>LE</b> | In an ISRT call with multiple SSAs, the segments named in the SSAs are not in their correct hierarchic sequence.                                                                                                     |
| <b>LF</b> | Initial load of PHDAM or PHIDAM attempted ISRT of a logical child segment.                                                                                                                                           |
| <b>V1</b> | You have supplied a variable-length segment whose length is invalid.                                                                                                                                                 |

## Using SSAs in a Load Program

When you are loading segments into the database, you do not need to worry about position, because DL/I inserts one segment after another. The most important part of loading a database is the order in which you build and insert the segments.

The only SSA you must supply is the unqualified SSA giving the name of the segment type you are inserting.

Because you do not need to worry about position, you need not use SSAs for the parents of the segment you are inserting. If you do use them, be sure they contain only the equal (EQ, =b, or b=) relational operator. You must also use the key field of the segment as the comparative value.

For HISAM, HIDAM, and PHIDAM, the key X'FFFF' is reserved for IMS. IMS returns a status code of LB if you try to insert a segment with this key.

## Loading a Sequence of Segments with the D Command Code

You can load a sequence of segments in one call by concatenating the segments in the I/O area and supplying DL/I with a list of unqualified SSAs. You must include the D command code with the first SSA. The sequence that the SSAs define must lead down the hierarchy, with each segment in the I/O area being the child of the previous segment.

## Two Types of Initial Load Program

Two types of initial load programs exist: *basic* and *restartable*. The basic program must be restarted from the beginning if problems occur during execution. The restartable program can be restarted at the last checkpoint taken before problems occurred. Restartable load programs must be run under control of the Utility Control Facility (UCF) and require VSAM as the access method. The following topics describe both types of load programs:

- “Basic Initial Load Program”
- “Restartable Initial Load Program” on page 344

### Basic Initial Load Program

You should write a basic initial load program (one that is not restartable) when the volume of data you need to load is not so great that you would be seriously set back if problems occurred during program execution. If problems do occur, the basic initial load program must be rerun from the beginning.

Figure 189 on page 343 shows the logic for developing a basic initial load program. Following Figure 189 is a sample load program (Figure 190) that satisfies the basic IMS database loading requirements. A sample program showing how this can be done with the Utility Control Facility is also provided.

Fast Path Data Entry Databases (DEDBs) cannot be loaded in a batch job as can DL/I databases. DEDBs are first initialized by the DEDB Initialization Utility and then loaded by a user-written Fast Path application program that executes typically in a BMP region.

**Related Reading:** See *IMS Version 9: Utilities Reference: Database and Transaction Manager* for a description of how DEDBs are loaded.

## Writing a Load Program

Fast Path Main Storage Databases (MSDBs) are not loaded until the IMS control region is initialized. These databases are then loaded by the IMS start-up procedure when the following requirements are met:

- The MSDB= parameter on the EXEC Statement of Member Name IMS specifies a one-character suffix to DBFMSDB in IMS.PROCLIB.
- The member contains a record for each MSDB to be loaded.

The record contains a record for each MSDB, the number of segments to be loaded, and an optional “F” which indicates that the MSDB is to be fixed in storage.

**Related Reading:** For a description of the record format and the DBD keyword parameters, see the topics about member name IMS in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

- A sequential data set, part of a generation data group (GDG) with dsname IMS.MSDBINIT(0), is generated.

This data set can be created by a user-written program or by using the INSERT function of the MSDB Maintenance utility. Records in the data set are sequenced by MSDB name, and within MSDBs by key.

**Related Reading:** For a description of the record format and information on how to use the MSDB Maintenance utility, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.



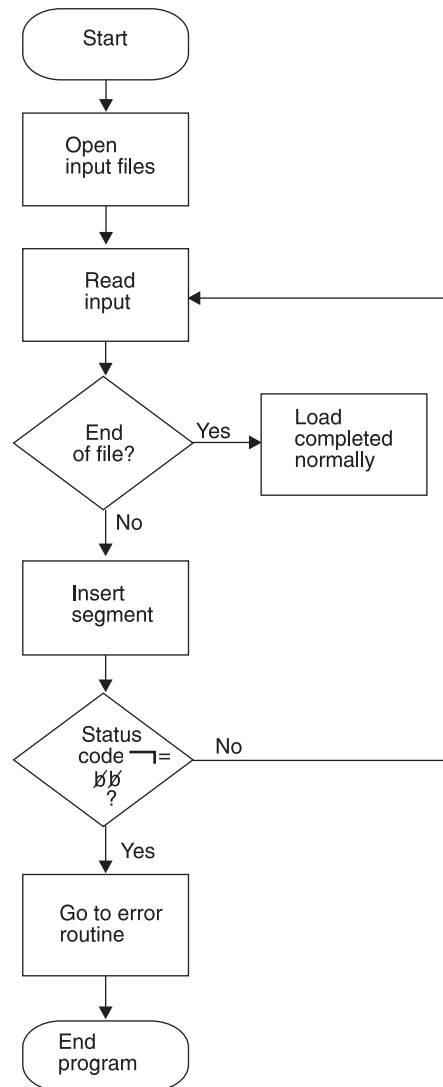


Figure 189. Basic Initial Load Program Logic

## Writing a Load Program

```

DLITCBL START
 PRINT NOGEN
 SAVE (14,12),,LOAD1.PROGRAM SAVE REGISTERS
 USING DLITCBL,10 DEFINE BASE REGISTER
 LR 10,15 LOAD BASE REGISTER
 LA 11,SAVEAREA PERFORM
 ST 13,4(11) SAVE
 ST 11,8(13) AREA
 LR 13,11 MAINT
 L 4,0(1) LOAD PCB BASE REGISTER
 STCM 4,7,PCBADDR+1 STORE PCB ADDRESS IN CALL LIST
 USING DLIPCB,4 DEFINE PCB BASE REGISTER
 OPEN (LOAD,(INPUT)) OPEN LOAD DATA SOURCE FILE
LOOP GET LOAD,CARDAREA GET SEGMENT TO BE INSERTED
INSERT CALL CBLTDLI,MF=(E,DLILINK) INSERT THE SEGMENT
 AP SEGCOUNT,=P'1' INCREMENT SEGMENT COUNT
 CLC DLISTAT,=CL2' ' WAS COMPLETION NORMAL?
 BE LOOP YES - KEEP GOING
ABEND ABEND 8,DUMP INVALID STATUS
EOF WTO 'DATABASE 1 LOAD COMPLETED NORMALLY'
 UNPK COUNTMSG,SEGCOUNT UNPACK SEGMENT COUNT FOR WTO
 OI COUNTMSG+4,X'F0' MAKE SIGN PRINTABLE
 WTO MF=(E,WTOLIST) WRITE SEGMENT COUNT
 CLOSE (LOAD) CLOSE INPUT FILE
 L 13,4(13) UNCHAIN SAVE AREA
 RETURN (14,12),RC=0 RETURN NORMALLY
 LTORG
SEGCOUNT DC PL3'0'
 DS 0F
WTOLIST DC AL2(LSTLENGT)
 DC AL2(0)
COUNTMSG DS CL5
 DC C' SEGMENTS PROCESSED'
LSTLENGT EQU (*-WTOLIST)
DLIFUNC DC CL4'ISRT' FUNCTION CODE
DLILINK DC A(DLIFUNC) DL/I CALL LIST
PCBADDR DC A(0)
 DC A(DATAAREA)
 DC X'80',AL3(SEGNAME)
CARDAREA DS 0CL80 I/O AREA
SEGNAME DS CL9
SEGKEY DS 0CL4
DATAAREA DS CL71
SAVEAREA DC 18F'0'
LOAD DCB DDNAME=LOAD1,DSORG=PS,EODAD=EOF,MACRF=(GM),RECFM=FB
DLIPCB DSECT , DATABASE PCB
DLIDBNAM DS CL8
DLISGLEV DS CL2
DLISTAT DS CL2
DLIPROC DS CL4
DLIRESV DS F
DLISEGFB DS CL8
DLIKEYLN DS CL4
DLINUMSG DS CL4
DLIKEYFB DS CL12
 END

```

Figure 190. Sample Load Program

## Restartable Initial Load Program

You should write a restartable initial load program (one that can be restarted from the last checkpoint taken) when the volume of data you need to load is great enough that you would be seriously set back if problems occurred during program

execution. If problems occur and your program is not restartable, the entire load program has to be rerun from the beginning.

Restartable load programs differ from basic load programs in their logic. Figure 191 on page 346 shows the logic for developing a restartable initial load program. If you already have a basic load program, usually only minor changes are required to make it restartable. The basic program must be modified to recognize when restart is taking place, when WTOR requests to stop processing have been made, and when checkpoints have been taken.

**Related Reading:** Detailed guidance information on what must be done to run a restartable load program under the control of UCF is contained in *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

To make your initial database load program restartable under UCF, consider the following points when you are planning and writing the program:

- If a program is being restarted, the PCB status code will contain a UR prior to the issuance of the first DL/I call. The key feedback area will contain the fully concatenated key of the last segment inserted prior to the last UCF checkpoint taken. (If no checkpoints were taken prior to the failure, this area will contain binary zeros.)
- The UCF does not checkpoint or reposition user files. When restarting, it is the user's responsibility to reposition all such files.
- When restarting, the first DL/I call issued must be an insert of a root segment. For HISAM and HIDAM Index databases, the restart will begin with a GN and a VSAM ERASE sequence to reinsert the higher keys. The resume operation then takes place. Space in the KSDS is reused (recovered) but not in the ESDS. For HDAM, the data will be compared if the root sequence field is unique and a root segment insert is done for a segment that already exists in the database because of segments inserted after the checkpoint. If the segment data is the same, the old segment will be overlaid and the dependent segments will be dropped since they will be reinserted by a subsequent user/reload insert. This occurs only until a non-duplicate root is found. Once a segment with a new key or with different data is encountered, LB status codes will be returned for any subsequent duplicates. Therefore, space is reused for the roots, but lost for the dependent segments.  
For HDAM with non-unique keys, any root segments that were inserted after the checkpoint at which the restart was made will remain in the database. This is also true for their dependent segments.
- When the stop request is received, UCF will take a checkpoint just prior to inserting the next root. If the application program fails to terminate, it will be presented the same status code at each of the following root inserts until normal termination of the program.
- For HISAM databases, the RECOVERY option must be specified. For HD organizations, either RECOVERY or SPEED can be defined to Access Method Services.
- UCF checkpoints are taken when the checkpoint count (CKPNT=) has expired and a root insert has been requested. The count refers to the number of root segments inserted and the checkpoint is taken immediately prior to the insertion of the root.

## Writing a Load Program

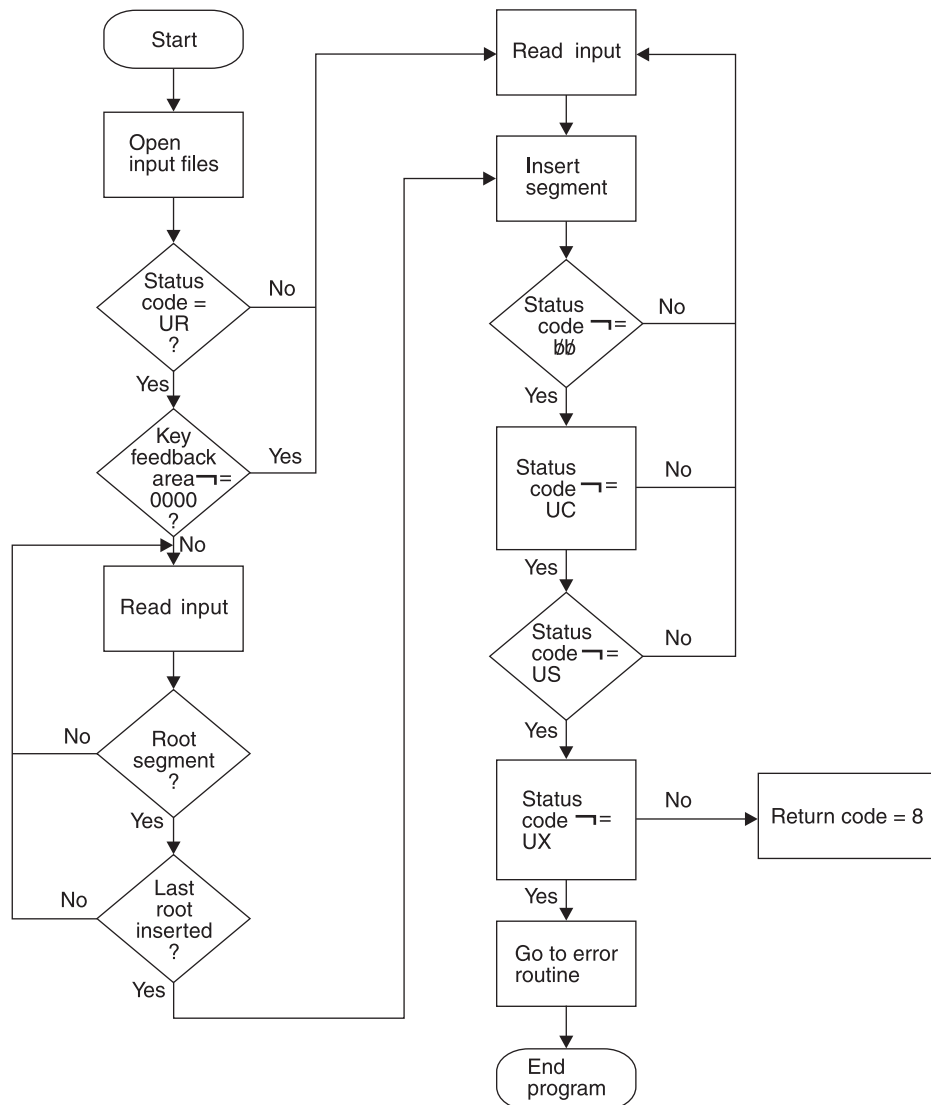


Figure 191. Restartable Initial Load Program Logic

The following lists explains the status codes shown in Figure 191:

- UR** Load program being restarted under control of UCF
- UC** Checkpoint record written to UCF journal data set
- US** Initial load program prepared to stop processing
- UX** Checkpoint record was written and processing stopped

|         |        |                                               |                                 |
|---------|--------|-----------------------------------------------|---------------------------------|
| DLITCBL | START  |                                               |                                 |
|         | PRINT  | NOGEN                                         |                                 |
|         | SAVE   | (14,12),,LOAD1.PROGRAM                        | SAVE REGISTERS                  |
|         | USING  | DLITCBL,10                                    | DEFINE BASE REGISTER            |
|         | LR     | 10,15                                         | LOAD BASE REGISTER              |
|         | LA     | 11,SAVEAREA                                   | PERFORM                         |
|         | ST     | 13,4(11)                                      | SAVE                            |
|         | ST     | 11,8(13)                                      | AREA                            |
|         | LR     | 13,11                                         | MAINT                           |
|         | L      | 4,0(1)                                        | LOAD PCB BASE REGISTER          |
|         | STCM   | 4,7,PCBADDR+1                                 | STORE PCB ADDRESS IN CALL LIST  |
|         | USING  | DLIPCB,4                                      | DEFINE PCB BASE REGISTER        |
|         | OPEN   | (LOAD,(INPUT))                                | OPEN LOAD DATA SOURCE FILE      |
|         | CLC    | DLISTAT,=C'UR'                                | IS THIS A RESTART?              |
|         | BNE    | NORMAL                                        | NO - BRANCH                     |
|         | CLC    | DLIKEYFB(4),=X'00000000'                      | IS KEY FEEDBACK AREA ZERO?      |
|         | BE     | NORMAL                                        | YES - BRANCH                    |
| RESTART | WTO    | 'RESTART LOAD PROCESSING                      | FOR DATABASE 1 IS IN PROCESS'   |
| RLOOP   | GET    | LOAD,CARDAREA                                 | GET A LOAD RECORD               |
|         | CLC    | SEGNAME(8),=CL8'SEGMA'                        | IS THIS A ROOT SEGMENT RECORD?  |
|         | BNE    | RLOOP                                         | NO - KEEP LOOKING               |
|         | CLC    | DLIKEYFB(4),SEGKEY                            | IS THIS THE LAST ROOT INSERTED? |
|         | BNE    | RLOOP                                         | NO - KEEP LOOKING               |
|         | B      | INSERT                                        | GO DO IT                        |
| NORMAL  | WTO    | 'INITIAL LOAD PROCESSING                      | FOR DATABASE 1 IS IN PROCESS'   |
| LOOP    | GET    | LOAD,CARDAREA                                 | GET SEGMENT TO BE INSERTED      |
| INSERT  | CALL   | CBLTDLI,MF=(E,DLILINK)                        | INSERT THE SEGMENT              |
|         | AP     | SEGCOUNT,=P'1'                                | INCREMENT SEGMENT COUNT         |
|         | CLC    | DLISTAT,=CL2' '                               | WAS COMPLETION NORMAL?          |
|         | BE     | LOOP                                          | YES - KEEP GOING                |
|         | CLC    | DLISTAT,=CL2'UC'                              | HAS CHECKPOINT BEEN TAKEN?      |
|         | BNE    | POINT1                                        | NO - KEEP CHECKING              |
| POINT0  | WTO    | 'UCF CHECKPOINT TAKEN FOR                     | LOAD 1 PROGRAM'                 |
|         | UNPK   | COUNTMSG,SEGCOUNT                             | UNPACK SEGMENT COUNT FOR WTO    |
|         | OI     | COUNTMSG+4,X'F0'                              | MAKE SIGN PRINTABLE             |
|         | WTO    | MF=(E,WTOLIST)                                | WRITE SEGMENT COUNT             |
|         | B      | LOOP                                          | NO - KEEP GOING                 |
| POINT1  | CLC    | DLISTAT,=CL2'US'                              | HAS OPERATOR REQUESTED STOP?    |
|         | BNE    | POINT2                                        | NO - KEEP CHECKING              |
|         | B      | LOOP                                          | KEEP GOING                      |
| POINT2  | CLC    | DLISTAT,=CL2'UX'                              | COMBINED CHECKPOINT AND STOP?   |
|         | BNE    | ABEND                                         | NO - GIVE UP                    |
|         | WTO    | 'LOAD1 PROGRAM STOPPING PER OPERATOR REQUEST' |                                 |
|         | B      | RETURN8                                       |                                 |
| ABEND   | ABEND  | 8,DUMP                                        | INVALID STATUS                  |
| EOF     | WTO    | 'DATABASE 1 LOAD COMPLETED NORMALLY'          |                                 |
|         | UNPK   | COUNTMSG,SEGCOUNT                             | UNPACK SEGMENT COUNT FOR WTO    |
|         | OI     | COUNTMSG+4,X'F0'                              | BLAST SIGN                      |
|         | WTO    | MF=(E,WTOLIST)                                | WRITE SEGMENT COUNT             |
|         | CLOSE  | (LOAD)                                        | CLOSE INPUT FILE                |
|         | L      | 13,4(13)                                      | UNCHAIN SAVE AREA               |
|         | RETURN | (14,12),RC=0                                  | RETURN NORMALLY                 |
| RETURN8 | WTO    | 'DATABASE 1 LOAD STOPPING                     | FOR RESTART'                    |
|         | UNPK   | COUNTMSG,SEGCOUNT                             | UNPACK SEGMENT COUNT FOR WTO    |
|         | OI     | COUNTMSG+4,X'F0'                              | BLAST SIGN                      |
|         | WTO    | MF=(E,WTOLIST)                                | WRITE SEGMENT COUNT             |
|         | CLOSE  | (LOAD)                                        | CLOSE INPUT FILE                |
|         | L      | 13,4(13)                                      | UNCHAIN SAVE AREA               |
|         | RETURN | (14,12),RC=8                                  | RETURN AS RESTARTABLE           |
|         | LTORG  |                                               |                                 |

Figure 192. Sample Restartable Initial Load Program (Part 1 of 2)

## Writing a Load Program

|          |       |                                                     |                |
|----------|-------|-----------------------------------------------------|----------------|
| SEGCOUNT | DS    | PL3'0'                                              |                |
|          | DS    | 0F                                                  |                |
| WTOLIST  | DC    | AL2(LSTLENGT)                                       |                |
|          | DC    | AL2(0)                                              |                |
| COUNTMSG | DS    | CL5                                                 |                |
|          | DC    | C' SEGMENTS PROCESSED'                              |                |
| LSTLENGT | EQU   | (*-WTOLIST)                                         |                |
| DLIFUNC  | DC    | CL4'ISRT'                                           | FUNCTION CODE  |
| DLILINK  | DC    | A(DLIFUNC)                                          | DL/I CALL LIST |
| PCBADDR  | DC    | A(0)                                                |                |
|          | DC    | A(DATAAREA)                                         |                |
|          | DC    | X'80',A13(SEGNAME)                                  |                |
| CARDAREA | DS    | 0CL80                                               | I/O AREA       |
| SEGNAME  | DS    | CL9                                                 |                |
| SEGKEY   | DS    | 0CL4                                                |                |
| DATAAREA | DS    | CL71                                                |                |
| SAVEAREA | DC    | 18F'0'                                              |                |
| STOPNDG  | DC    | X'00'                                               |                |
| LOAD     | DCB   | DDNAME=LOAD1,DSORG=PS,EODAD=EOF,MACRF=(GM),RECFM=FB |                |
| DLIPCB   | DSECT |                                                     | DATABASE PCB   |
| DLIDBNAM | DS    | CL8                                                 |                |
| DLISGLEV | DS    | CL2                                                 |                |
| DLISTAT  | DS    | CL2                                                 |                |
| DLIPROC  | DS    | CL4                                                 |                |
| DLIRESV  | DS    | F                                                   |                |
| DLISEGFB | DS    | CL8                                                 |                |
| DLIKEYLN | DS    | CL4                                                 |                |
| DLINUMSG | DS    | CL4                                                 |                |
| DLIKEYFB | DS    | CL12                                                |                |
|          | END   |                                                     |                |

Figure 192. Sample Restartable Initial Load Program (Part 2 of 2)

## JCL for the Initial Load Program

Figure 193 shows the JCL you will need to initially load your database. The //DFSURWF1 DD statement is present only if a logical relationship or secondary index exists.

```
// EXEC PGM=DFSRR00,PARM='DLI,your initial load program name,
// your PSB name'
//DFSRESLB DD references an authorized library that contains IMS
// SVC modules
//STEPLIB DD references library that contains your load program
// DD DSN=IMS.SDFSRESL
//IMS DD DSN=IMS.PSBLIB,DISP=SHR
// DD DSN=IMS.DBDLIB,DISP=SHR
//DFSURWF1 DD DCB=(RECFM=VB,LRECL=300,
// BLKSIZE=(you must specify),
// DSN=WF1,DISP=(MOD,PASS)
//DBNAME DD references the database data set to be
// initially loaded or referenced by
// the initial load program
//INPUT DD input to your initial load program
//DFSVSAMP DD input for VSAM and OSAM buffers and options
// :
// /*
```

Figure 193. JCL used to initially load a database

## Loading a HISAM Database

Segments in a HISAM database are stored in the order in which you present them to the load program. You must present all occurrences of the root segment in

ascending key sequence and all dependent segments of each root in hierarchic sequence. PROCOPT=L (for load) must be specified in the PCB.

## Loading a SHISAM Database

Segments in a SHISAM database are stored in the order in which you present them to the load program. You must present all occurrences of the root segment in ascending key sequence. PROCOPT=L (for load) must be specified in the PCB.

## Loading a GSAM Database

GSAM databases use logical records, not segments or database records. GSAM logical records are stored in the order in which you present them to the load program.

## Loading an HDAM or a PHDAM Database

In an HDAM or a PHDAM database, the user randomizing module determines where a database record is stored, so the sequence in which root segments are presented to the load program does not matter. All dependents of a root should follow the root in hierarchic sequence. PROCOPT=L (for load) or PROCOPT=LS (for load segments in ascending sequence) must be specified in the PCB.

## Loading a HIDAM or a PHIDAM Database

To load a HIDAM or a PHIDAM database, you must present root segments in ascending key sequence and all dependents of a root should follow the root in hierarchic sequence. PROCOPT=LS (for load segments in ascending sequence) must be specified in the PCB.

**Restriction:** PHIDAM databases cannot be loaded with a DBB region type. Attempts to do so result in an S0C4 abend. HIDAM databases do not have this restriction.

## Loading a Database with Logical Relationships or Secondary Indexes

If you are loading a database with logical relationships or secondary indexes, you will need to run, in addition to your load program, some combination of the reorganization utilities. You need to run them to put the correct pointer information in each segment's prefix. These reorganization utilities are described in Chapter 15, "Tuning Databases," on page 359.

---

## Loading Fast Path Databases

This topic describes how to load MSDBs, DEDBs, and sequential dependent segments.

### Loading an MSDB

Because MSDBs reside in main storage, you do not load them as you do other IMS databases, that is, by means of a load program that you provide. Rather, they are loaded during system initialization, when they are read from a data set. You first build this data set either by using a program you provide or by running the MSDB Maintenance utility.

#### Related Reading:

## Loading Fast Path Databases

- See *IMS Version 9: Utilities Reference: Database and Transaction Manager* for information on how to the MSDB Maintenance utility.
- See Figure 73 on page 146 for the record format of the MSDBINIT data set.

## Loading a DEDB

You load data into a DEDB database with a load program similar to that used for loading other IMS databases. Unlike other load programs, this program runs as a batch message program. The following five steps are necessary to load a DEDB:

1. Calculate space requirements.

The following example assures that root and sequential dependent segment types are loaded in one area.

Assume all root segments are 200 bytes long (198 bytes of data plus 2 bytes for the length field) and that there are 850 root segments in the area. On the average, there are 30 SDEP segments per record. Each is 150 bytes long (148 bytes of data and a 2-byte length field). The CI size is 1024 bytes.

A. Calculate the minimum space required to hold root segments:

|       |                                                              |
|-------|--------------------------------------------------------------|
| 1024  | CI length <i>minus</i>                                       |
| - 21  | CI control fields                                            |
| <hr/> |                                                              |
| 1003  | equals amount of space for root segments and their prefixes. |

|                  |                                                                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1003 / 214 = 4.6 | Amount of root and root prefix space divided by length of one root with its prefix equals the number of segments that will fit in one CI.<br>DEDB segments do not span CIs.<br>Therefore, only four roots will fit in a CI. |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                 |                                                                                                                     |
|-----------------|---------------------------------------------------------------------------------------------------------------------|
| 850 / 4 = 212.5 | The minimum amount of space to hold the defined number of roots to be inserted in this area (850) requires 213 CIs. |
|-----------------|---------------------------------------------------------------------------------------------------------------------|

After choosing a UOW size, you can determine the DBD specifications for the root addressable and independent overflow parts using the result of the above calculation as a base.

B. Calculate the minimum space required to hold the sequential dependent segments:

|       |                                                                      |
|-------|----------------------------------------------------------------------|
| 1024  | CI length <i>minus</i>                                               |
| - 17  | CI control fields                                                    |
| <hr/> |                                                                      |
| 1007  | equals amount of space for sequential dependents and their prefixes. |

|                  |                                                                                                                                                                                                             |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1007 / 160 = 6.2 | Amount of sequential dependent and prefix space divided by length of one sequential dependent plus its prefix equals the number of segments that will fit in one CI.<br>Six SDEP segments will fit in a CI. |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                |                                                                                                                                                                     |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 30 / 6 = 5 CIs | Minimum amount of space required to hold 30 sequential dependent segments from one root. For 850 roots, the minimum amount of space required is 850 * 5 = 4250 CIs. |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|



C. Factor into your calculations additional space to take into account:

- The “reorganization UOW”, which is the same size as a regular UOW
- Two control data CIs allocated at the beginning of the root addressable part
- One control data CI for each 120 CIs in the independent overflow part

Assuming a UOW size of 20 CIs, the minimum amount of space to be allocated is:  $213 + 4250 + 20 + 2 + 1 = 4486$  CIs.

2. Set up the DBD specifications according to the above results, and execute the DBD generation.
3. Allocate the VSAM cluster using VSAM Access Method Services.

The following example shows how to allocate an area that would later be referred to as AREA1 in a DBDGEN:

```
DEFINE -
 CLUSTER -
 (NAME (AREA1) -
 VOLUMES (SER123) -
 NONINDEXED -
 CYLINDERS (22) -
 CONTROLINTERVALSIZE (1024) -
 RECORDSIZE (1017) -
 SPEED) -
 DATA -
 (NAME(DATA1)) -
 CATALOG(USERCATLG)
```

The following keywords have special significance when defining an area:

|                            |                                                                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>NAME</b>                | The name supplied for the cluster is the name subsequently referred to as the area name. The name for the data component is optional. |
| <b>NONINDEXED</b>          | DEDB areas are non-indexed clusters.                                                                                                  |
| <b>CONTROLINTERVALSIZE</b> | The value supplied, because of a VSAM ICIP requirement, must be 512, 1024, 2048, or 4096.                                             |
| <b>RECORDSIZE</b>          | The record size is 7 less than the CI size. These 7 bytes are used for VSAM control information at the end of each CI.                |
| <b>SPEED</b>               | This keyword is recommended for performance reasons.                                                                                  |
| <b>CATALOG</b>             | This optional parameter can be used to specify a user catalog.                                                                        |

4. Run the DEDB initialization utility (DBFUMIN0).

This offline utility must be run to format each area to DBD specifications. Root-addressable and independent-overflow parts are allocated accordingly. The space left in the VSAM cluster is reserved for the sequential-dependent part. Up to 2048 areas can be specified in one utility run; however, the area initializations are serialized. After the run, check the statistical information report against the space calculation results.

5. Run the user DEDB load program.

A BMP program is used to load the DEDB. The randomizing routine used during the loading of the DEDB might have been tailored to direct specific ranges of data to specific areas of the DEDB.

If the load operation fails, the area must be scratched, reallocated, and initialized.

### Loading Sequential Dependent Segments

If the order of sequential dependent segments is important, you must consider the way sequential dependents might be loaded in a DEDB. The two alternatives are:

- Add a root and its sequential dependents.

All the sequential dependents of a root are physically written together, but their physical order does not reflect the original data entry sequence. This reflection is not necessarily the way the application needs to view the dependent segments if they are being used primarily as a journal of transactions.

- Add all roots and then the sequential dependents.

This technique restores the SDEP segments to their original entry sequence order. However, it requires a longer process, because the addition of each SDEP segment causes the root to be accessed.

---

## Chapter 14. Monitoring Databases

This chapter describes a number of IMS tools you can use to monitor the performance of your databases. Several tools this chapter does not discuss, but which you can also use for monitoring purposes include:

- IMS Performance Analyzer
- IMS DB Control Suite (On-Demand Space Monitor)
- IMS DB Tools Space Monitor Utilities
- DB Integrity Control Facility

### **Related Reading:**

- For information about these and other IMS tools, go to [www.ibm.com/ims](http://www.ibm.com/ims) and link to the IBM DB2 and IMS Tools web site.
- For information about using the IMS Monitor is found in *IMS Version 9: Administration Guide: System*.
- Additional information about monitoring can also be found in the topic on data sharing in *IMS Version 9: Administration Guide: System*.

### **In this Chapter:**

- “IMS Monitor”
- “Monitoring Fast Path Systems” on page 355

---

## IMS Monitor

The IMS Monitor is a tool that records data about the performance of your DL/I databases in a batch environment. The recorded data is produced in a variety of reports. The monitor's usefulness is twofold. First, when you run the monitor routinely, it gives you performance data over time. By comparing this data, you can determine whether the performance trend is acceptable. This helps you make decisions about tuning your database and determining when it needs to be reorganized.

The second use of the monitor is to assess how the changes you make effect performance. Once you have accumulated reports describing normal database processing, you can use them as a profile against which to compare the effect of your changes. Examples of changes you might make (then test for performance) include:

- Changes in the structure of your databases
- A change from one DL/I access method to another
- A change in database buffer pool number and size
- Changes in application program logic

In all these cases, your primary goal is probably to minimize the number of I/Os required to perform an operation. The monitor helps you determine whether you have met your objective.

The following example shows how to use the IMS Monitor: suppose you are performing a final test on a new or revised application. The monitor reports show that some DL/I calls in the program, which should have required a single I/O

retrieval, actually required a large database scan involving many I/Os. You might be able to correct this problem by making changes in the application program logic.

The monitor itself is actually two programs, as shown in Figure 194.

- The IMS Monitor (DFSMNTR0)
- The IMS Monitor Report Print utility (DFSUTR20)

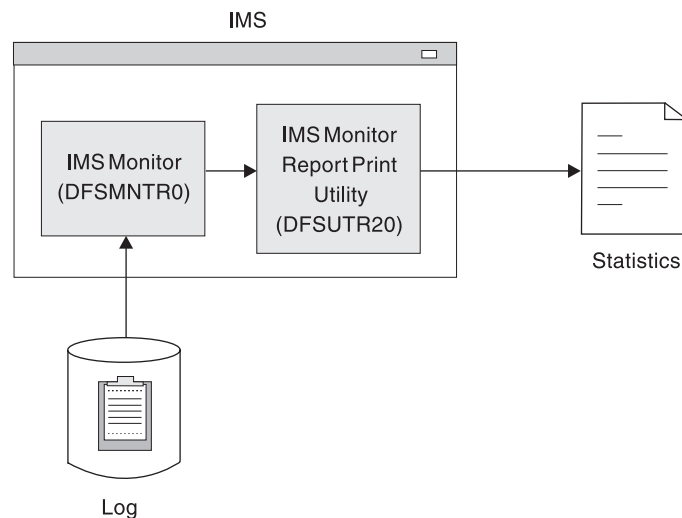


Figure 194. IMS Monitor Works

The IMS Monitor collects data from IMS control blocks (when DL/I is operating) and records the data either on an independent data set or in the IMS log. It collects data with minimum interference to the system. The monitor runs in the same address space as the IMS job, and it can be turned on or off with the MON= parameter in the execution JCL.

The IMS Monitor Report Print utility is an offline program that produces reports summarizing information collected by the IMS Monitor. It produces the following reports:

- VSAM Buffer Pool report
- VSAM Statistics report
- Database Buffer Pool report
- Program I/O report
- DL/I Call Summary report
- Distribution Appendix report
- Monitor Overhead report

Example output of each of these reports is in the *IMS Version 9: Utilities Reference: System*. Each field in the reports is explained, followed by a summary of how you can use the report. Many of these reports are also provided by the IMS Monitor, which is described in *IMS Version 9: Administration Guide: System*. Where the same report is produced by both the DB and IMS Monitor, the description of the report in the *IMS Version 9: Utilities Reference: System* is applicable for both.

Information on operating the IMS Monitor is contained in *IMS Version 9: Operations Guide*.

When the IMS Monitor is on, it remains on until the batch execution ends, requiring some overhead. It cannot be turned on and off from the system console. To minimize the monitor's impact, use the IMS Monitor in a single-thread test environment rather than multi-thread application environments.

This ensures that the data gathered by the IMS Monitor can be related to a particular program.

---

## Monitoring Fast Path Systems

The major emphasis for monitoring IMS online systems that include message-driven Fast Path applications is the balance between rapid response and high transaction rates. With Fast Path, performance data is made part of the system log information. Because the bulk of the online traffic is expected to be handled by expedited message handling and not be present on the message queues, the Fast Path Log Analysis utility (DBFULTA0) is the prime tool for monitoring Fast Path applications. The IMS Monitor can also be used to monitor Fast Path systems.

**Related Reading:** For information on using the IMS Monitor for Fast Path systems, see *IMS Version 9: Utilities Reference: System*.

Use the Fast Path Log Analysis utility (DBFULTA0) to prepare statistical reports for Fast Path based on data recorded on the IMS system log. This utility is offline and produces five reports useful for system installation, tuning, and troubleshooting:

- A detailed listing of exception transactions
- A summary of exception detail by transaction code for MPP (message-processing program) regions
- A summary by transaction code for MPP regions
- A summary of IFP, BMP, and CCTL transactions by PSB name or transaction code
- A summary of the log analysis

Do not confuse this utility with the IMS Monitor or the IMS Log Transaction Analysis utility.

### **Related Reading:**

- For more information on CCTL transactions, see the *IMS Version 9: Customization Guide*.
- For more detailed information on the Fast Path Log Analysis utility, see *IMS Version 9: Utilities Reference: System*.

As an administrator in the Fast Path environment, you should perform tasks, like establishing monitoring strategies, performance profiles, and analysis procedures. This topic highlights how to use the Analysis utility to do these tasks, and suggests some Areas where tuning activities might be valuable.

## Fast Path Log Analysis Utility

The Fast Path Log Analysis utility gathers statistics of Fast Path exclusive and potential transactions that are passed to Fast Path dependent regions. It reports information for other PSBs (including Fast Path PCBs and the programs that enter the sync point processing) and produces three types of output:

- Formatted summary and detail reports

## Monitoring Fast Path Systems

- A data set of fixed format records for the total traffic of Fast Path transactions extracted from the system logs that form the input to the utility
- A data set of records, in the same format, that are selected based on exception conditions (such as those transactions that exceed a certain fixed response time)

The latter data sets can be analyzed in more detail by your installation's programs. They can also be sorted to group critical transactions or events. The details of the record format and meaning of the fields are given in *IMS Version 9: Utilities Reference: System*.

### Fast Path Log Reduction

To reduce log volume you can use the LGNR parameter, which is specified during IMS startup. LGNR indicates the maximum number of DEDB buffer alterations that are held before the entire CI is logged.

#### Related Reading:

- Another way to reduce log volume is to designate the DEDB as nonrecoverable. No changes to the database are logged and no record of database updates is kept in the DBRC RECON data set. See “Non-Recovery Option” on page 130.
- For more information on log reduction and the LGNR parameter, see *IMS Version 9: Utilities Reference: System*.

### Fast Path Transaction Timings

For each Fast Path transaction, four time intervals are separately calculated. Figure 195 shows the boundary events and intervals.

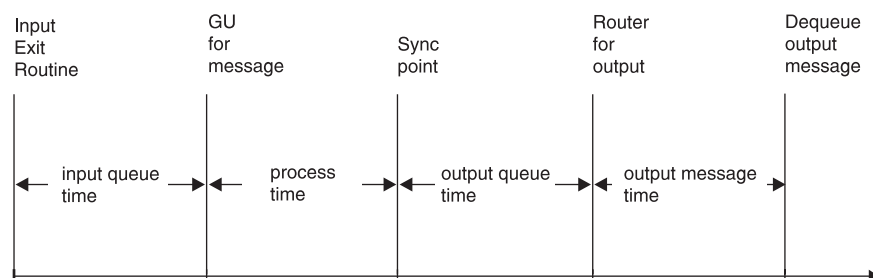


Figure 195. Fast Path Transaction Event Timings

The following list describes the four intervals shown in Figure 195:

1. Input queue time: reflects the transaction input queuing within the balancing group to distribute the work.
2. Process time: records the actual elapsed processing time for the individual transaction.
3. Output queue time: shows the effect of sync point in delaying the output message release until after logging.
4. Output message time: shows the line and device availability for receiving the output message. If the transaction originated from a programmable controller, the output time could reflect a delay in dequeue caused by the output not being acknowledged until the next input.

The sum of the first three intervals is termed the *transit time*. This time is slightly different from a response time, because it excludes the line activity for the message, message formatting, and the input edit processing up to the time the message segment leaves the exit routine.

## Monitored Events for Fast Path

The control program automatically collects Fast Path event data during system operation. Table 26 shows the information that is made part of the system log records for each Fast Path transaction.

Table 26. Monitor Data for Fast Path Transactions

| Monitored Data                   | Message-Driven Region | Other Region |
|----------------------------------|-----------------------|--------------|
| Transit and Output Message Times | x                     |              |
| LTERM Name                       | x                     |              |
| Routing Code                     | x                     |              |
| Balancing Group Queue Count      | x                     |              |
| Number of DEDB Calls             | x                     | x            |
| Number of I/O to DEDB            | x                     | x            |
| Number of MSDB Calls             | x                     | x            |
| Number of CI Contentions         | x                     | x            |
| Number of Buffers Allocated      | x                     | x            |
| Number of Waits for Buffer       | x                     | x            |
| Sync Point Failure Reason Code   | x                     | x            |

## Selecting Transactions

The analysis utility lets you select transactions to be reported in detail. You give the transaction code and a transit time that each transaction is to exceed, up to a maximum of 65.5 seconds. Several codes can be selected for each utility run. There is also a way to ask for all transactions that exceed the given transit time. In this case, the individual exception specification overrides the general one.

When you do not need to print all such occurrences of the exceptions, you can give a maximum number of detail records to be printed. The default is 1000 individual records, though you can specify up to 9999999 as the maximum number. When you cut off the number of *printed* records, the data set for the exception records contains all transactions that meet the selection criteria.

You can also specify a start time and end time for the transaction reporting interval. The start time corresponds to the earliest transaction that satisfies the clock time (format HH:MM:SS) specified by a utility input control statement. End time is set by the latest transaction that enters the sync point processing before the ending clock time that is specified on an input control statement.

Another selection technique that is available is to select only non-message-driven transactions for reporting. Use this to look at the activity (occurring against MSDBs or DEDBs) caused by calls from IMS programs or BMPs.

## Interpreting Fast Path Analysis Reports

The analysis reports show the origin, database activity, and processing events for each transaction code, although most reported items show average and maximum values. The reports produced are:

- Overall summary by transaction  
Summarized by transaction code, the transit times and input/output message lengths are given. The database calls and buffer usage are also included.
- Exception detail

## Monitoring Fast Path Systems

For those transactions selected, the terminal origin and routing code are given for each individual occurrence of the transaction. The detail also includes the data appearing in the overall summary.

- Summary of exception detail by transaction code  
This report is based on the transactions in the exception report. The items reported are the same as for the overall summary.
- Summary of transactions by PSB  
All programs that are in non-message-driven regions, MPP regions, and BMP regions that enter the sync point processing are reported. The items reported are the same as the summary of exception detail.
- Recapitulation of the analysis  
This is a documentation aid that gives the grand totals of transactions input to the analysis, and the I/O for online utilities.

The combination of the interval covered by the system log input to the utility and the exception criteria you define in the input control statements determines the content of these reports.

Examples of the reports format and the definition of the items reported can be found in *IMS Version 9: Utilities Reference: System*, within the description of the Fast Path Log Analysis utility.

Following are some suggestions for interpreting the reported events:

- Examine the summary reports and investigate the reasons for sync point failure.
- Examine the summary report to see if buffer usage was consistently under the NBA values. Check all negative differences that indicate the need for overflow buffers to see that they were unusual occurrences.
- Compare the database call counts to those of the expected profile. Select those transactions that show unusual patterns for a run to produce a detailed exception report.
- Examine the balancing group queue counts to see if they are conforming with the scheduling algorithm expectations.



---

## Chapter 15. Tuning Databases

Tune your database either to improve performance or to better use database space. This chapter introduces the reorganization utilities, which you can use to tune your database. The chapter also describes the various types of tuning changes you can make with the reorganization utilities, and also when and how to make the changes.

This chapter examines the following aspects of database tuning:

- “Reorganizing the Database” on page 360
- “Reorganizing HALDBs” on page 376, including:
  - “HALDB Offline Reorganization” on page 377
  - “HALDB Online Reorganization” on page 382
- “Changing DL/I Access Methods” on page 406
- “Changing the Hierarchic Structure” on page 416
- “Changing Direct-Access Storage Devices” on page 418
- “Tuning OSAM Sequential Buffering” on page 418
- “Adjusting HDAM and PHDAM Options” on page 419
- “Adjusting Buffers” on page 420
- “Adjusting VSAM Options” on page 423
- “Adjusting OSAM Options” on page 425
- “Changing the Amount of Space Allocated” on page 425
- “Changing Operating System Access Methods” on page 426
- “Changing the Number of Data Set Groups” on page 426
- “Tuning Fast Path Systems” on page 430

Keep in mind that when you tune your database, you are often making more than a simple change to it. For example, you might need to reorganize your database and at the same time change operating system access methods. This chapter has procedures to guide you through making each type of change. If you are making more than one change at a time, you should look at the flowchart, Figure 224 on page 428. When used in conjunction with the individual procedures in this chapter, the flowchart guides you in making some types of multiple changes to the database.

Also, some of the tuning changes you make can affect the logic in application programs. You can often use the dictionary to analyze the affect before making changes. In addition, some changes require that you code new DBDs and PSBs. If you initialize your changes in the dictionary, you can then use the dictionary to help create new DBDs and PSBs.

If you are using data sharing, additional information about tuning is in *IMS Version 9: Administration Guide: System*.

---

### Reorganizing the Database

Reorganizing a database means changing how the data in the database is organized to improve performance. In some cases, reorganizing a database might also refer to modifying the database's structure or the structure of the records and segments in the database. Although this chapter focuses on changing how data is organized, you can use many of the reorganization utilities discussed here to make structural changes as well.

Two database types, DEDB and HALDB, support online reorganization in addition to the offline methods of reorganization discussed here. For more information on the online reorganization of each of these types of databases, see:

- For HALDB, see "HALDB Online Reorganization" on page 382
- For DEDB, search for High-Speed DEDB Direct Reorganization utility (DBFUHDR0) in *IMS Version 9: Utilities Reference: Database and Transaction Manager*

For full-function databases, CI reclaim can also improve performance of DL/I calls to VSAM key sequenced data sets. CI reclaim reduces the number of empty CIs that are read on DL/I calls. For more information, see "VSAM KSDS CI Reclaim For Full-Function Databases" on page 254.

**Related Reading:** For information about making structural changes to your database, see Chapter 16, "Modifying Databases," on page 437.

### When You Should Reorganize

You should reorganize your database in the following circumstances:

- Database performance has deteriorated. This can happen either because segments in a database record are stored across too many CIs or blocks, or because you are running out of free space in your database.
- There is too much physical I/O to DASD.
- The database structure has changed. For example, you should reorganize a HALDB partition after changing its boundaries or high key.
- The HDAM or PHDAM randomizer has changed.
- The HALDB Partitions Selection exit routine has changed.

The DB Monitor can aid in monitoring a database to help you determine when it is time to reorganize your database. Information about the DB Monitor is found in Chapter 14, "Monitoring Databases," on page 353.

### Reorganizing Databases Offline

You perform three basic steps when reorganizing a database offline (unless you are not making structural changes to the database, in which case, see Chapter 16, "Modifying Databases," on page 437):

1. Unloading the existing database.
2. Deleting the old database space and defining new database space. (This practice is always good, but it is only necessary if you have multiple extents or volumes, or are using VSAM.) For VSAM, database space refers to the clusters defined to VSAM for database data sets.
3. Reloading the database.

## Protecting Your Database During an Offline Reorganization

When you reorganize your database offline, you delete it. Therefore, you should protect it from system or reorganization failure. You can protect your existing database by renaming the space it occupies and then defining new database space. You should take an image copy of your database as soon as it is reloaded and before any application programs are run against it. Taking an image copy provides you with a backup copy of the database and establishes a point of recovery with DBRC in case of system failure. You can create image copies of your database using the Database Image Copy utility or the Database Image Copy 2 utility, which are described in detail in *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

## Offline Reorganization Utilities

IMS utilities can help you reorganize your database. This topic introduces you to these utilities and explains how they work together.

**Related Reading:** For more information about reorganization utilities, see the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Note the following information about the utilities:

- You can use the following reorganization utilities with HALDB:

- HD Reorganization Unload utility (DFSURGU0)
- HD Reorganization Reload utility (DFSURGL0)
- Database Prereorganization utility (DFSURPR0)
- HALDB Partition Data Set Initialization utility (DFSUPNT0)

For HALDB, both the Database Prereorganization utility and the HALDB Partition Data Set Initialization utility (DFSUPNT0) initialize partitions.

If you are migrating an HDAM or HIDAM database to HALDB, the Prereorganization utility allows some reuse of your existing JCL by disabling full-function database utilities, such as Scan, Prefix Resolution and Prefix Update, in the DFSURCDS data set. After the database is migrated, you can use the HALDB Partition Data Set Initialization utility, which has additional functions such as unconditional specific partition initialization.

- The utilities cannot be used to reorganize HSAM, SHSAM, or GSAM databases. To reorganize these databases, you must write a program to read the old database and then create a new database.
- You are not required to use these reorganization utilities to reorganize your database. You can write your own programs to unload and reload data. You need to write your own programs only if you are making structural changes to your database that cannot be done using these utilities. Information about when these utilities can be used to make structural changes to a database is contained in Chapter 16, “Modifying Databases,” on page 437.
- Several of the reorganization utilities can be used when initially loading a database. They are not used to load the database but to collect and sort the pointer information needed in a segment's prefix. Therefore, as you read through the utilities you will find some described as “used for initial load or reorganization”.

The reorganization utilities can be classified into three groups, based on the type of reorganization you plan to do:

- Partial reorganization
- Reorganization using UCF

## Reorganizing the Database

- Reorganization without UCF

### Partial Offline Reorganization

If you are reorganizing an HD database, you can reorganize parts of it, rather than the whole database. You would need to reorganize parts, rather than all of it, for two reasons:

- Only parts of it need to be reorganized.
- By reorganizing only parts of it, you can break the amount of time it takes to do a total reorganization into smaller pieces.

The utilities you use to do a partial reorganization are:

- The Database Surveyor utility, which helps you determine which parts of your database to reorganize
- The Partial Database Reorganization utility, which does the actual reorganization

HALDB partitions do not support partial offline reorganization.

### Offline Reorganization Using UCF

Reorganization can be done using a single program, called the Utility Control Facility (UCF), or by using various combinations of utilities. When UCF is used, it acts as a controller, determining which of the various reorganization utilities need to be executed and then getting them executed. Using UCF reduces the number of JCL statements you must create and eliminates the need to sequence the various utilities for execution. It also reduces the number of decisions operations people must make.

### Offline Reorganization Without UCF

When you do not use UCF, reorganization of the database is done using a combination of utilities. Which utilities you need to use, and how many, depends on the type of database and whether it uses logical relationships or secondary indexes.

If your database does not use logical relationships or secondary indexes, you simply run the appropriate unload and reload utilities, which are as follows:

- For HISAM databases, the HISAM Reorganization Unload utility and the HISAM Reorganization Reload utility
- For HIDAM index databases (if reorganized separately from the HIDAM database), the HISAM Reorganization Unload utility and the HISAM Reorganization Reload utility
- For SHISAM, HDAM, and HIDAM databases, the HD Reorganization Unload utility and the HD Reorganization Reload utility

If your database does use logical relationships or secondary indexes, you need to run the HD Reorganization Unload and Reload utilities (even if it is a HISAM database). In addition, you must run a variety of other utilities to collect, sort, and restore pointer information from a segment's prefix. Remember, when a database is reorganized, the location of segments changes. If logical relationships or secondary indexes are used, update prefixes to reflect new segment locations. The various utilities involved in updating segment prefixes are:

- Database Prereorganization utility
- Database Scan utility
- Database Prefix Resolution utility
- Database Prefix Update utility

These utilities can also be used to resolve prefix information during initial load of the database.

In the discussion of the utilities in this section, the four unload and reload utilities are discussed first. The four utilities used to resolve prefix information are then discussed. When reading through the utilities for the first time, you need to understand that, if logical relationships or secondary indexes exist (requiring use of the latter four utilities), the sequence in which operations is as follows:

1. Unload
2. Collect more prefix information
3. Reload
4. Collect more prefix information
5. Updated prefixes

You will find, for instance, that the HD Reorganization Reload utility does not just reload the database if a secondary index or logical relationship exists. It reloads the database using one input as a data set containing some of the prefix information that has been collected. It then produces a data set containing more prefix information as output from the reload. When the various utilities do their processing, they use data sets produced by previously executed utilities and produce data sets for use by subsequently executed utilities. When reading through the utilities, watch the input and output data set names, to understand what is happening.

Figure 196 shows you the sequence in which utilities are executed if logical relationships or secondary indexes exist. Figure 197 on page 365 shows the sequence for these utilities when using HALDB partitions.

## Reorganizing the Database

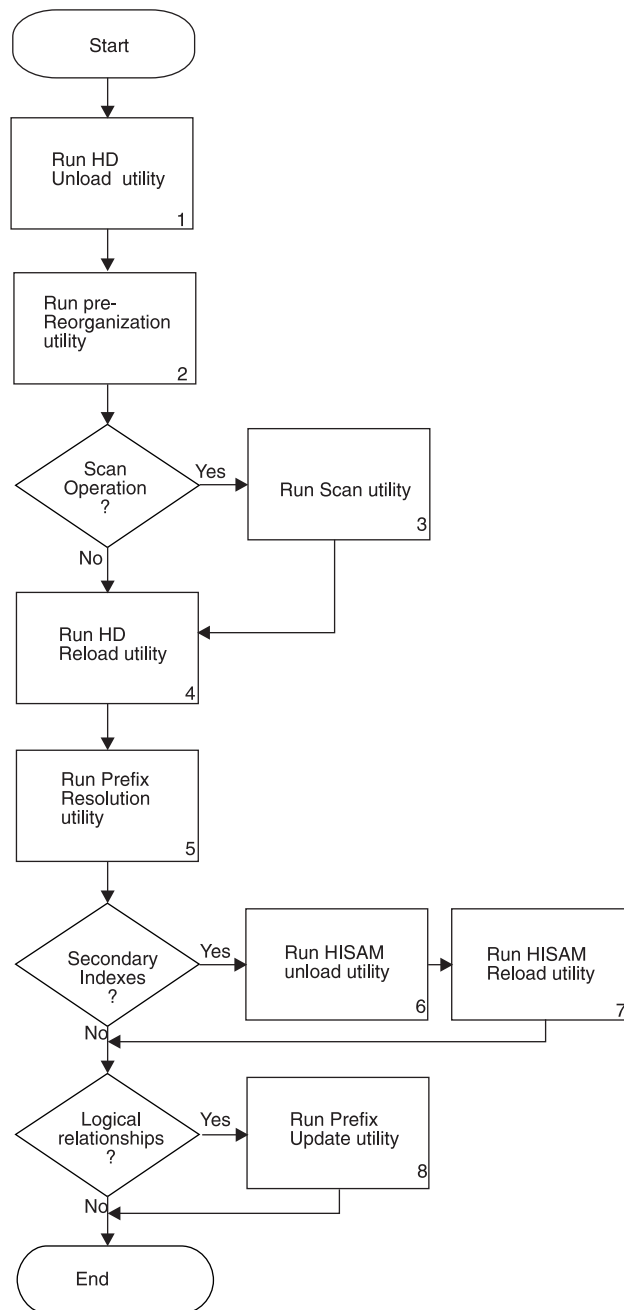


Figure 196. Steps in Reorganizing When Logical Relationships or Secondary Indexes Exist

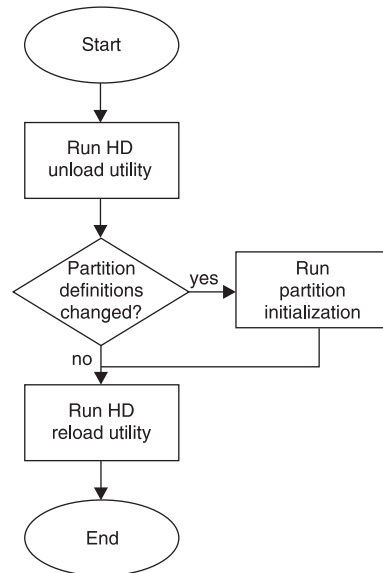


Figure 197. Steps for Reorganizing HALDB Partitions When Logical Relationships or Secondary Indexes Exist

As an alternative, where Figure 197 calls for the Partition Initialization utility, you can run the Prereorganization utility.

### HISAM Reorganization Unload Utility (DFSURUL0)

Figure 198 shows the input to and output from the HISAM Reorganization Unload utility.

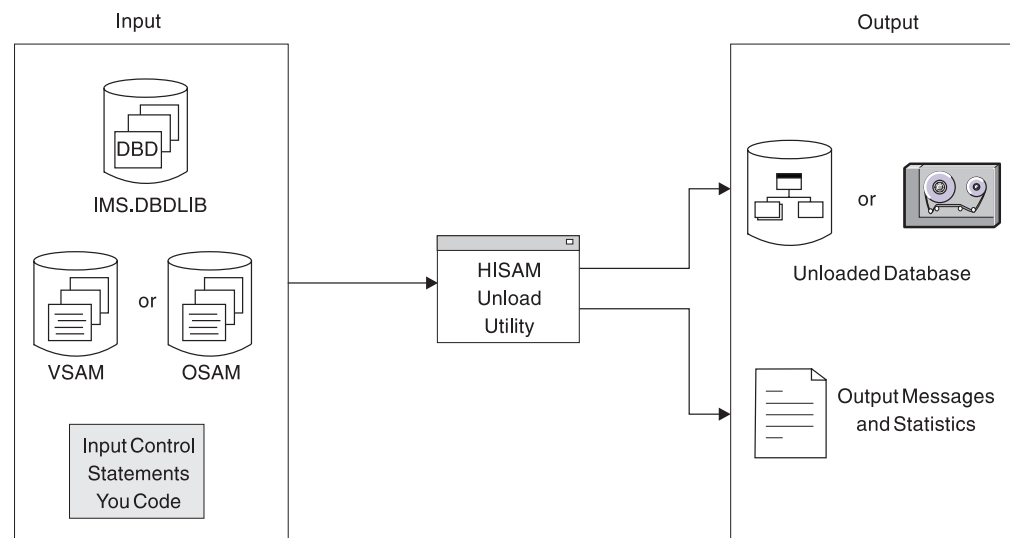


Figure 198. HISAM Reorganization Unload Utility (DFSURUL0)

You use the HISAM Unload utility to unload a HISAM database or HIDAM index database. (SHISAM databases are unloaded using the HD Reorganization Unload utility.) If your database uses secondary indexes, you also use the HISAM Unload utility (later in the reorganization process) to perform a variety of other operations associated with secondary indexes.

### HISAM Reorganization Reload Utility (DFSURRL0)

Figure 199 shows the input to and output from the HISAM Reorganization Reload utility.

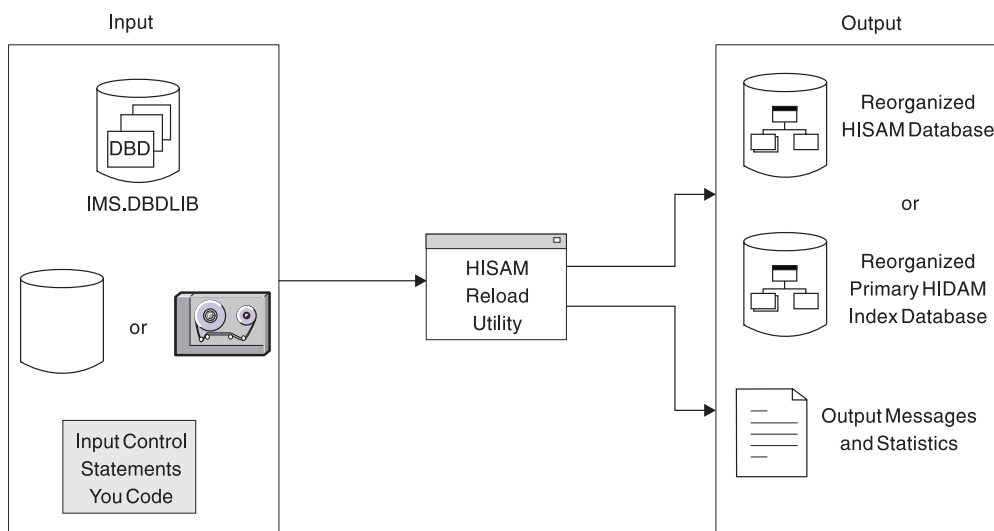


Figure 199. HISAM Reorganization Reload Utility (DFSURRL0)

You use the HISAM reload utility to reload a HISAM database. (SHISAM databases are reloaded using the HD Reorganization Reload utility.) You also use the HISAM reload utility to reload the primary index of a HIDAM database. If your databases use secondary indexes, you use the HISAM reload utility (later in the reorganization process) to perform a variety of other operations associated with secondary indexes.

### HD Reorganization Unload Utility (DFSURGU0)

Figure 200 shows the input to and output from the HD Reorganization Unload utility.

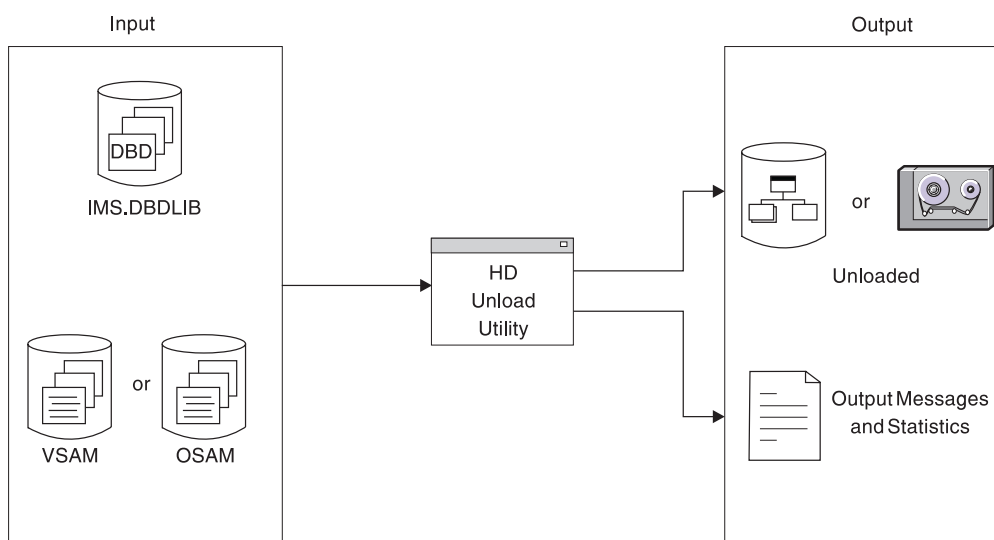


Figure 200. HD Reorganization Unload Utility (DFSURGU0)

You use the HD Reorganization Unload utility to unload:



- HDAM, HIDAM, or SHISAM databases
- HISAM databases that use secondary indexes
- HISAM databases that use symbolic pointers in a logical relationship
- HISAM databases without segment/edit compression that are being converted to HISAM databases with segment/edit compression.
- PHDAM databases or partitions
- PHIDAM databases or partitions
- PSINDEX databases or partitions

If you use the HD Reorganization Unload utility to unload a HALDB (a PHDAM, PHIDAM, or PSINDEX database), you do not need to include DD statements for the database data sets. The HD Reorganization Unload utility uses dynamic allocation for HALDB data sets.

### HD Reorganization Reload Utility (DFSURGL0)

Figure 201 shows the input to and output from the HD Reorganization Reload utility.

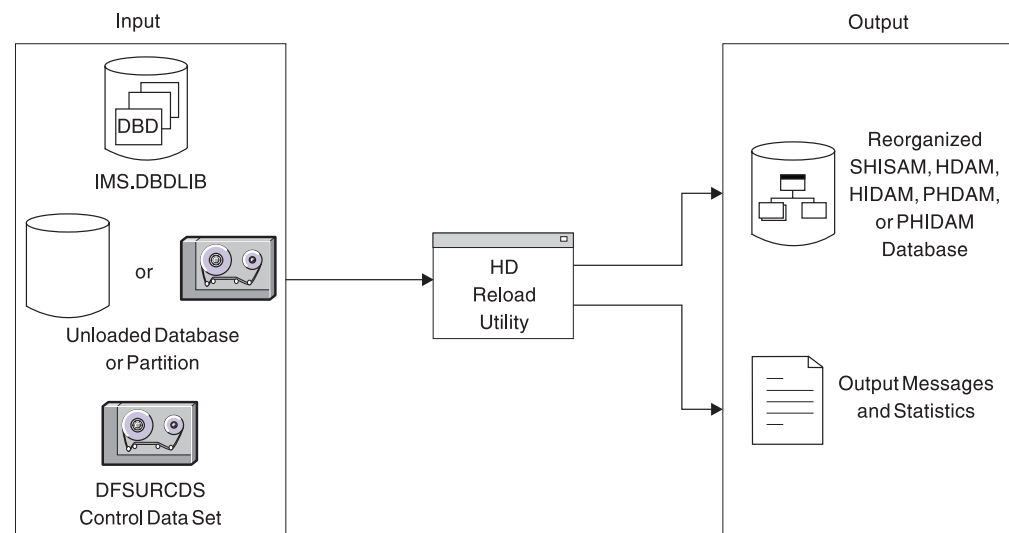


Figure 201. HD Reorganization Reload Utility (DFSURGL0)

You use the HD Reorganization Reload utility to reload:

- HDAM, HIDAM, PHDAM, PHIDAM, PSINDEX, or SHISAM databases
- HISAM databases that use logical relationships or secondary indexes
- HISAM databases without segment/edit compression that are being converted to HISAM databases with segment/edit compression

If logical relationships or secondary indexes exist in the database being reloaded, the DFSURCDS control data set created by the Prereorganization utility is used as one input to the HD Reorganization Reload utility. The DFSURCDS control data set contains information needed to resolve secondary index or logical relationship pointers.

When logical relationships or secondary indexes exist, the HD Reorganization Reload utility produces as output the DFSURWF1 work data set. DFSURCDS identifies the information that will be collected on DFSURWF1.

## Reorganizing the Database

The DFSURWF1 work data set will become input to the Database Prefix Resolution utility. Note in Figure 201 on page 367 that, if the database being reloaded has a primary index, it is reloaded automatically when the main database is reloaded. A HIDAM index database can also be reorganized as a separate operation using the HISAM unload and reload utilities.

**Exception:** DFSURWF1 is not used for HALDBs.

### Database Prereorganization Utility (DFSURPR0)

Figure 202 shows the input to and output from the Database Prereorganization utility.

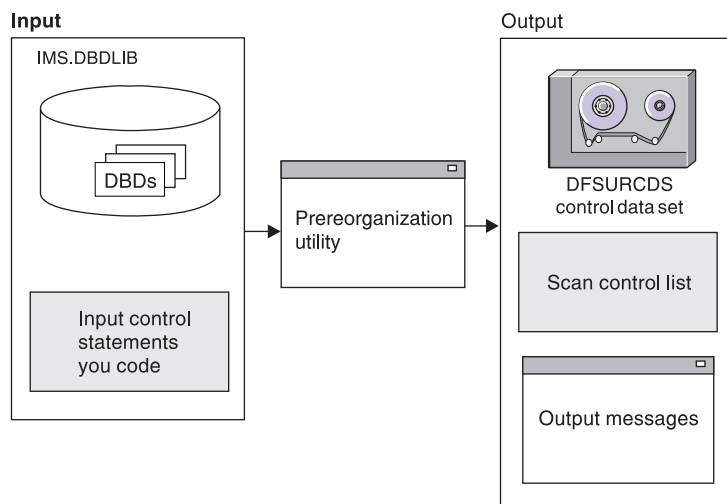


Figure 202. Database Prereorganization Utility (DFSURPR0)

You use the Database Prereorganization utility when:

- A database to be initially loaded or reorganized has secondary indexes or logical relationships
- A database *not* being initially loaded or reorganized contains segments involved in logical relationships with databases that are being loaded or reorganized

The Database Prereorganization utility produces the DFSURCDS control data set, which contains information about what pointers need to be resolved later if secondary indexing or logical relationships exist. The DFSURCDS control data set produced by the Prereorganization utility is used as input to the following:

- The Database Scan utility, if that utility needs to be run
- The HD Reorganization Reload utility, if secondary indexing or logical relationships exist
- The Database Prefix Resolution utility, after the database is loaded or reloaded

The Prereorganization utility also produces a list of which databases not being initially loaded or reorganized contain segments involved in logical relationships with the database that is being initially loaded or reorganized.

This utility is always run *before* the database is loaded (for initial load) or reloaded (for reorganization).

### Database Scan Utility (DFSURGS0)

Figure 203 shows the input to and output from the Database Scan utility.

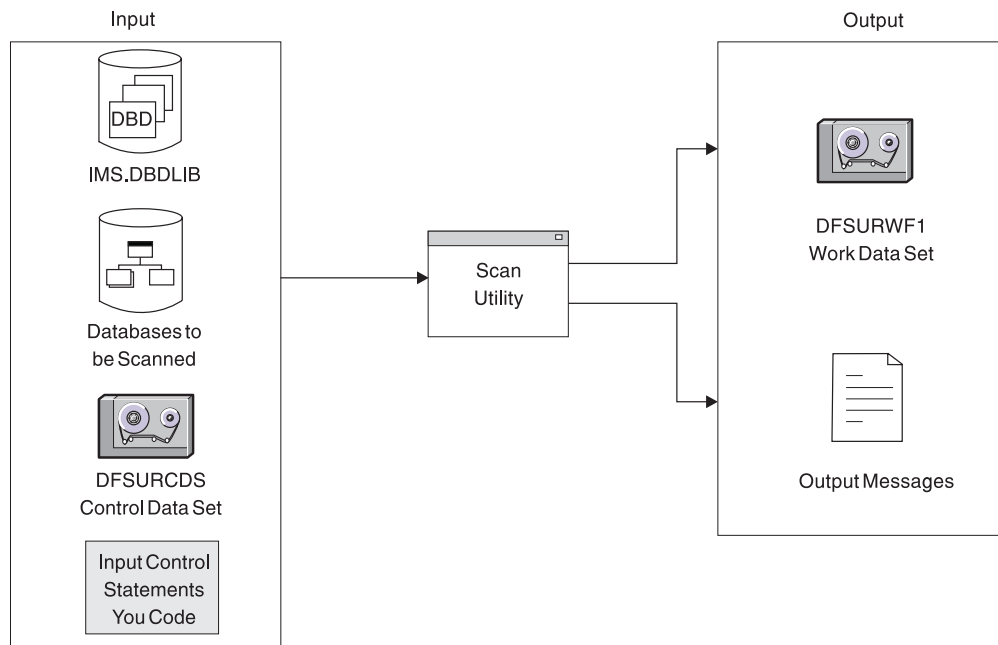


Figure 203. Database Scan Utility (DFSURGS0)

You use the Database Scan utility to scan databases that are not being initially loaded or reorganized but contain segments involved in logical relationships with databases that are being initially loaded or reorganized. For input, the utility uses the DFSURCDS control data set created by the Prereorganization utility. For output, the utility produces the DFSURWF1 work data set, which contains prefix information needed to resolve logical relationships. The DFSURWF1 work data set is used as input to the Database Prefix Resolution utility.

This utility is always run *before* the database is loaded (for initial load) or reloaded (for reorganization).

### Database Prefix Resolution Utility (DFSURG10)

Figure 204 shows the input to and output from the Database Prefix Resolution utility.

## Reorganizing the Database

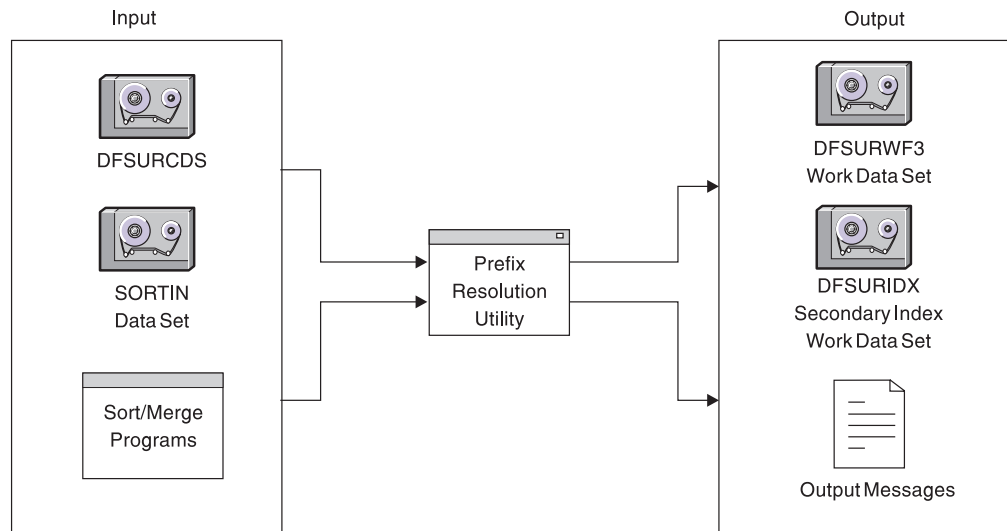


Figure 204. Database Prefix Resolution Utility (DFSURG10)

You use the Prefix Resolution utility to accumulate and sort the information that has been put on DFSURWF1 work data sets up to this point in the load or reload process. The various work data sets that could be input to this utility are:

- The DFSURCDS control data set produced by the Prereorganization utility
- The DFSURWF1 work data set produced by the scan utility
- The DFSURWF1 work data set produced by the HD Reorganization Reload utility

The DFSURWF1 work data sets must be concatenated to form an input data set for the Prefix Resolution utility. The name of the input data set is SORTIN.

The Prefix Resolution utility uses the z/OS sort/merge programs to sort the information that has been accumulated. For output, the utility produces the DFSURWF3 work data set, which contains the sorted prefix information needed to resolve logical relationships. The DFSURWF3 data set will become input to the Database Prefix Update utility.

If secondary indexes exist, the utility produces the DFSURIDX work data set, which contains the information needed to create a new secondary index or update a shared secondary index database. The DFSURIDX work data set is used as input to the HISAM unload utility. The HISAM unload utility formats the secondary index information before the HISAM reload utility creates a secondary index or updates a shared secondary index database.

This utility is always run *after* the database is loaded (for initial load) or reloaded (for reorganization).

### Database Prefix Update Utility (DFSURGP0)

Figure 205 shows the input to and output from the Database Prefix Update utility.

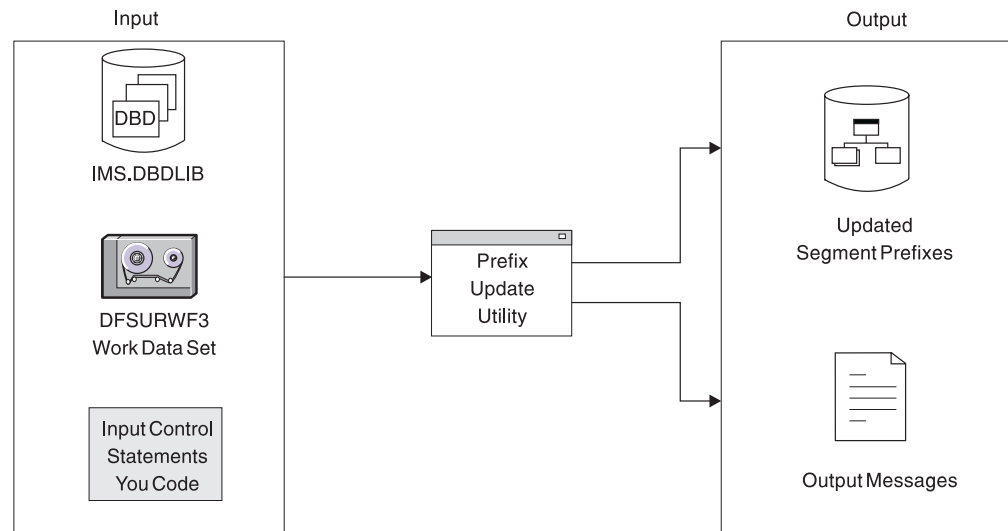


Figure 205. Database Prefix Update Utility (DFSURGP0)

You use the Prefix Update utility to update the prefix of each segment whose prefix was affected by the initial loading or reorganization of the database. The prefix fields that are updated include the logical parent, logical twin, and logical child pointer fields, and the counter fields for logical parents. The Prefix Update utility uses as input the DFSURWF3 data set created by the Prefix Resolution utility.

This utility is always run *after* the database is loaded (for initial load) or reloaded (for reorganization) and after the Prefix Resolution utility has been run.

## Using HISAM Unload and Reload Utilities for Secondary Indexing Operations

In addition to using the HISAM unload and reload utilities to unload and reload a database, you can also use them to:

- Build a secondary index database
- Merge a secondary index into a shared secondary index database
- Replace a secondary index in a shared secondary index database
- Extract a secondary index from a shared secondary index database

Each of these operations is done separately. That is, none of them can be done in conjunction with running the HISAM unload and reload utilities to unload or reload a regular database.

Figure 206 on page 372 shows the input to and output from the HISAM unload and reload utilities when performing the first three operations. The DFSURIDX work data set used as input to the HISAM unload utility was created by the Prefix Resolution utility. It contains the information needed to create or update a shared secondary index database. The HISAM unload utility formats the secondary index information for use by the HISAM reload utility. Note that the input control statement to the HISAM unload utility has an X in position 1 when the utility is used for secondary indexing operations rather than for unloading a regular database. Position 3 contains one of the following characters:

- M: means the operation is either to build a new secondary index database or merge a secondary index into a shared secondary index database

## Reorganizing the Database

- R: means the operation is to replace a secondary index into a shared secondary index database

The HISAM reload utility uses the output from the HISAM unload utility to create the new secondary index or merge or replace the secondary index in a shared secondary index database.

Figure 207 on page 373 shows the input to and output from the HISAM unload utility when an index is being extracted from a set of shared indexes. Note that the input can be one of the following:

- The DFSURIDX work data set created by the Prefix Resolution utility
- The shared secondary index database

Again, position 1 in the input control statement contains an X. Position 3 contains an E, which means the operation is to extract a secondary index.

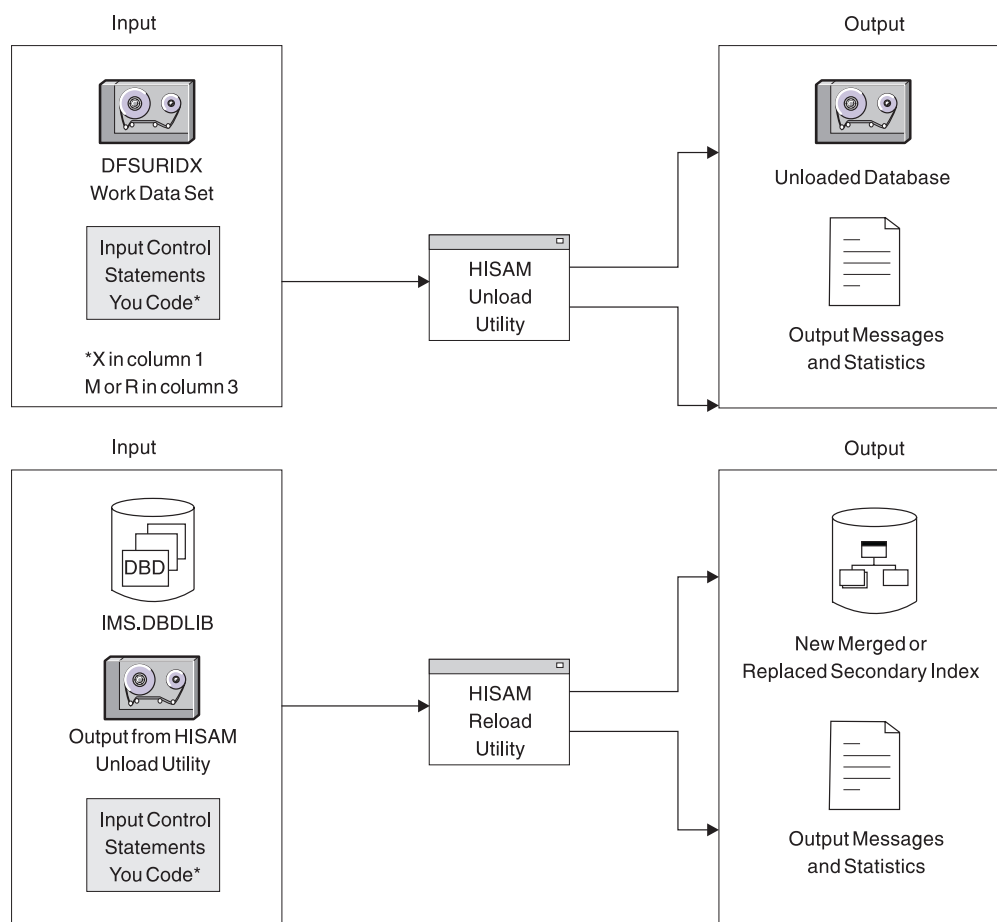


Figure 206. HISAM Reorganization Unload and Reload Utilities Used for Create, Merge, or Replace Secondary Indexing Operations

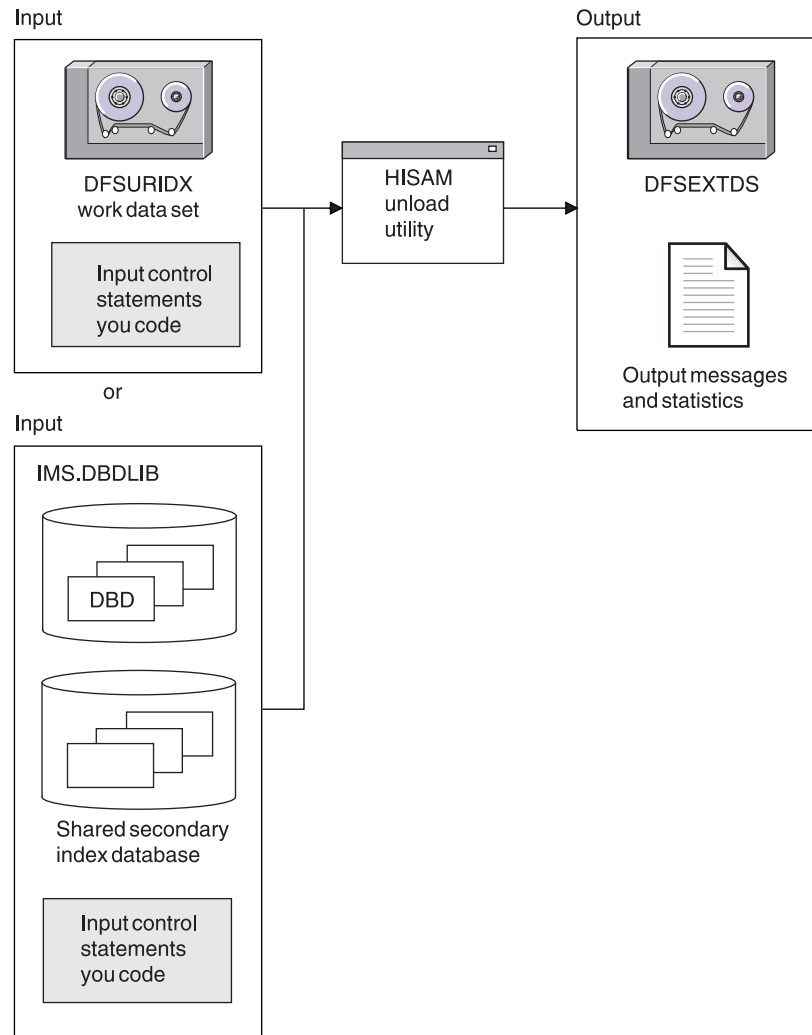


Figure 207. HISAM Reorganization Unload Utility Used for Extract Secondary Indexing Operations

### Utility Control Facility (DFSUCF00)

The Utility Control Facility is a program that controls the execution of reorganization and recovery utilities. Control here means that it generates many of the JCL statements you must create and eliminates the need to sequence the various utilities for execution. The only reorganization utilities that cannot be run under the control of UCF are the Database Surveyor utility and the Partial Database Reorganization utility. In addition to controlling the execution of other utilities, UCF allows you to stop and then later restart a job.

### Database Surveyor Utility (DFSPRSUR)

Figure 208 on page 374 shows the input to and output from the Database Surveyor utility.

## Reorganizing the Database

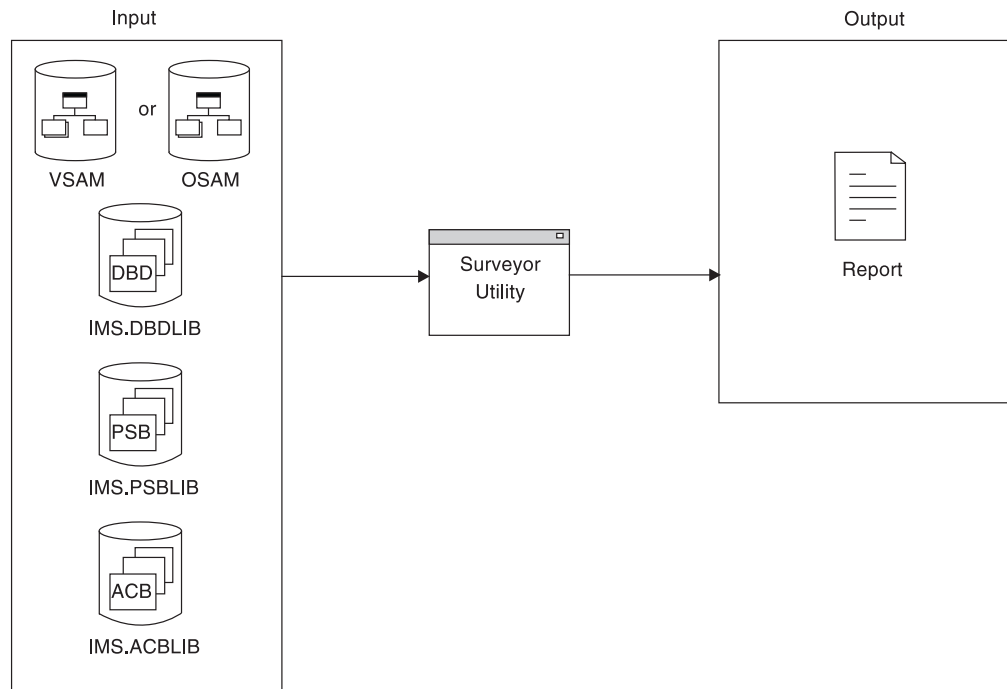


Figure 208. Database Surveyor Utility (DFSPRSUR)

Use the Surveyor utility to scan all or part of an HDAM or a HIDAM database to determine whether a reorganization is needed. The Surveyor utility produces a report describing the physical organization of the database. The report includes the size and location of areas of free space. When you do a partial reorganization, you will know where free space exists into which you can put your reorganized database records.

### Partial Database Reorganization Utility (DFSPRCT1)

Figure 209 on page 375 shows the input to and output from the Partial Database Reorganization utility.

You would use the Partial Database Reorganization utility to reorganize parts of your HD database. It can be used when HD databases use secondary indexes or logical relationships. You tell the utility what range of records you need reorganized.

- In an HDAM database, a range is a group of database records with continuous relative block numbers.
- In a HIDAM database, a range is a group of database records with continuous key values.

Generally, before using the Partial Database Reorganization utility, you would run the Database Surveyor utility (described in “Database Surveyor Utility (DFSPRSUR)” on page 373). The Surveyor utility helps you determine whether a reorganization is needed and find the location and size of areas of free space. You need to know the location and size of areas of free space so you will know where to put reorganized database records.

The Partial Database Reorganization utility reorganizes the database in two steps:

1. In the first step, the utility produces control tables for use in Step 2, which is when the actual reorganization is done. As an option, the utility can produce PSB source statements for creating a PSB for use in Step 2. The utility also



generates reports that show which logically related segments in logically related databases must be scanned in Step 2, and which can be optionally scanned in Step 2. (Some GSAM databases are involved in Step 2 for which a PSB is needed.)

2. In the second step, the utility does the actual reorganization. The database records you have specified are unloaded to a data set. The space they occupied in the database is freed. Then database records are reloaded into the database in the range of free space you specified. Finally, all pointers to database records with new locations are changed to point to the new location. A report is produced at the end of Step 2 to tell you what was done.

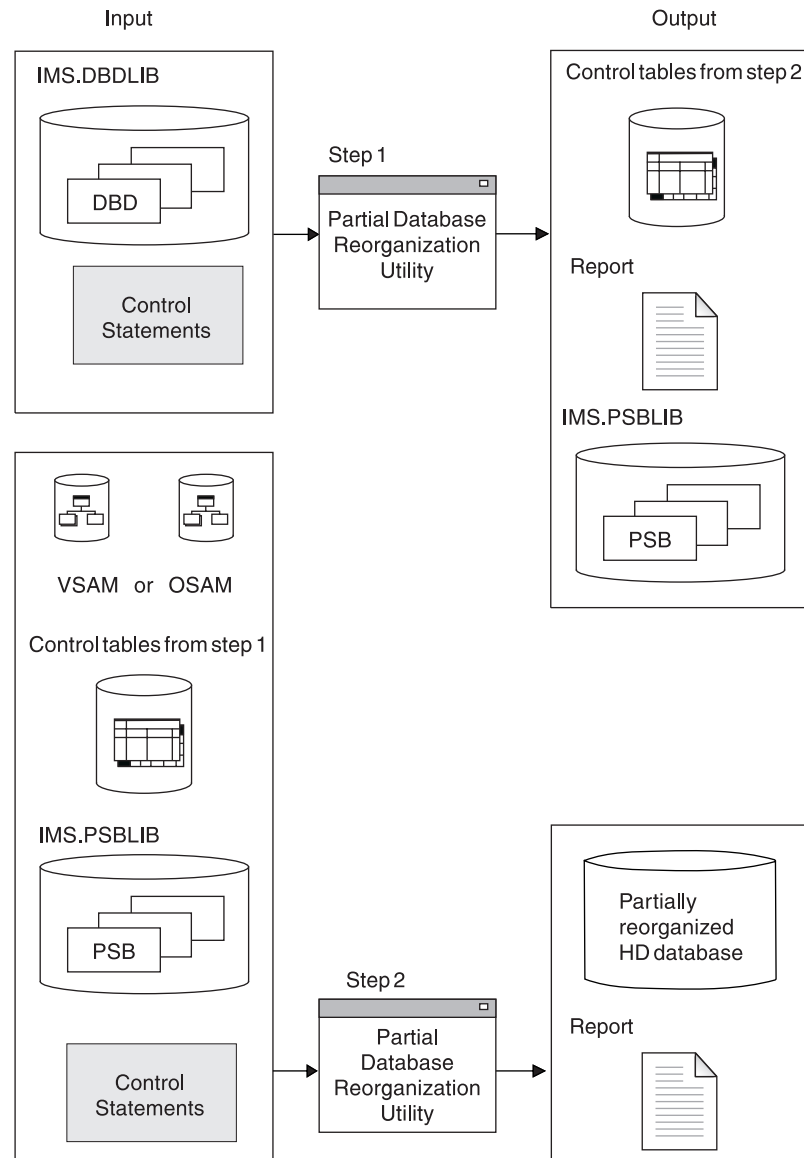


Figure 209. Partial Database Reorganization Utility (DFSPRCT1)

## Procedures for Offline Database Reorganizations

This topic describes how to reorganize offline the following database and index types:

- HISAM

## Reorganizing the Database

- HD (HDAM or HIDAM)
- Primary or Secondary Index

### Reorganizing a HISAM Database (No Secondary Indexes)

To reorganize a HISAM database when it does not use logical relationships or secondary indexes:

1. Unload the database using the HISAM Reorganization Unload utility.
2. Any time you unload a data set, you should delete and reallocate the data set before reloading.
3. Reload the database using the HISAM Reorganization Reload utility. Make an image copy of your database once it is reloaded.

### Reorganizing an HD (HDAM or HIDAM) Database (No Logical Relationships or Secondary Indexes)

To reorganize an HD database when it does not use logical relationships or secondary indexes:

1. Unload the database using the HD Reorganization Unload utility.
2. Any time you unload a data set, you should delete and reallocate the data set before reloading.
3. Reload the database using the HD Reorganization Reload utility. Make an image copy of your database once it is reloaded.

### Reorganizing a Primary or Secondary Index

HIDAM has a primary index. HISAM, HDAM, and HIDAM have separate secondary index databases when secondary indexing is being used. Both index types are reorganized in the same way:

1. Unload the index database using the HISAM Reorganization Unload utility.
2. Any time you unload a data set, you should delete and reallocate the data set before reloading.
3. Reload the index database using the HISAM Reorganization Reload utility. Make an image copy of your database as soon as it is reloaded.

---

## Reorganizing HALDBs

One of the primary advantages of HALDB is its simplified and shortened reorganization process and the ability to reorganize HALDB databases online using the integrated HALDB Online Reorganization function.

Both PHDAM and PHIDAM HALDBs can be reorganized online or offline. A PSINDEX HALDB can be reorganized only offline. Whether you are reorganizing your HALDB online or offline, the reorganization process is different from the reorganization processes used for other full-function databases.

Reorganizations of HALDBs with logical relationships and secondary indexes do not require the execution of utilities to update these pointers. Instead, HALDB uses a self-healing pointer process to correct these pointers when they are used.

These subjects are discussed in the following topics:

- “HALDB Offline Reorganization” on page 377
- “HALDB Online Reorganization” on page 382
- “The HALDB Self-Healing Pointer Process” on page 401

## HALDB Offline Reorganization

The offline reorganization processes for a HALDB database and other full-function IMS databases are similar: they both consist of an unload and reload of the database. The HALDB offline reorganization process has advantages over the reorganization process of other full-function databases, such as:

- You can reorganize one HALDB partition at a time or reorganize multiple partitions in parallel.
- The self-healing pointer process of HALDBs eliminates the need to manually update logical relationships and secondary indexes after reorganizing a HALDB.
- You do not need to include DD statements for HALDB data sets when you reorganize a HALDB. HALDB data sets are dynamically allocated.

### Overview of HALDB Offline Reorganization

A offline reorganization of a HALDB database can be done with one or more parallel processes. These processes unload one or more partitions and reload them. If the database has secondary indexes or logical relationships, additional steps are not required. The HALDB self-healing process makes updates of pointers during the reorganization unnecessary. The amount of time required for a reorganization depends on the sizes of the partitions. Smaller partitions reduce the time. You can reduce your reorganization time by creating more partitions and reorganizing them in parallel.

The basic steps involved in reorganizing a HALDB offline are:

1. Run the HD Reorganization Unload utility (DFSURGU0) to unload the entire database, a range of partitions, or a single partition.
2. Optionally, initialize the partitions by running either of the following utilities:
  - HALDB Partition Data Set Initialization utility (DFSUPNT0)
  - Database Prereorganization utility (DFSURPR0)
3. Run the HD Reorganization Reload utility to reload the database or partitions.
4. Make image copies of all reloaded partition data sets.

Figure 210 on page 378 shows the offline processes used to reorganize a HALDB database with logical relationships and secondary indexes. In this case, the partitions are reorganized by parallel processes. Each partition can be unloaded and reloaded in less time than unloading and reloading the entire database. This is much faster than the process for a non-HALDB full-function database. Additionally, no time is required for updating pointers in the logically related database or rebuilding secondary indexes. This further shortens the process.

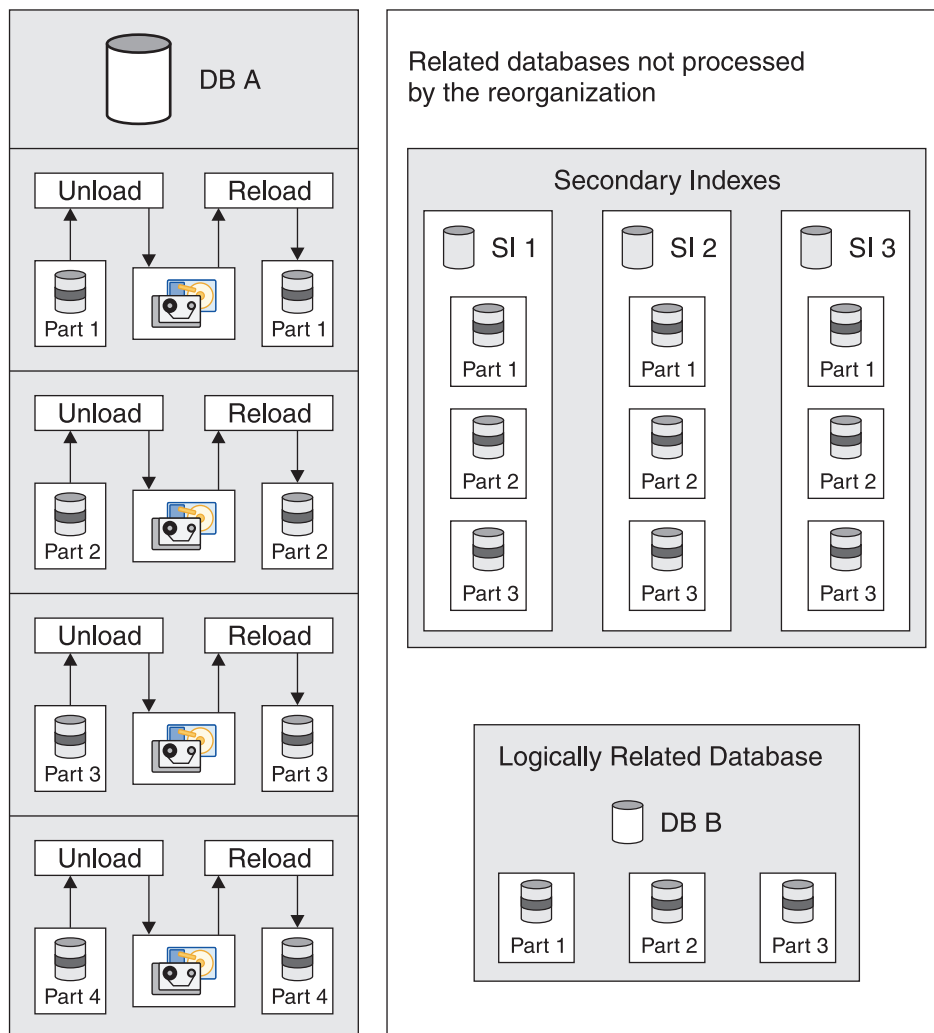


Figure 210. Offline Reorganization of a HALDB database

**Related Reading:** To compare the HALDB reorganization process illustrated in Figure 210 with the reorganization process for other full-function databases, see the flow chart of the steps for reorganizing non-HALDB databases that use logical relationships or secondary indexes in Figure 196 on page 364.

### Options for Offline Reorganization of HALDBs

You have several options when reorganizing a HALDB database:

- You can reorganize any number of partitions. If you need to reorganize only one partition, you can unload and reload it without processing other partitions.
- You can reorganize partitions in parallel or you can reorganize the database with one process. The degree of parallelism is determined by the number of reorganization jobs you run. Each job can process one or multiple partitions. To increase the parallelism, you can increase the number of reorganization jobs and decrease the number of partitions each job processes.
- You can reuse existing database data sets or you can delete them after they are unloaded and allocate new data sets for the reload.
- You can add partitions, delete partitions, or change partition boundaries.

**Related Reading:**

- For information on changing partition definitions, including partition boundaries, see “Modifying HALDB Databases” on page 474.
- For information on using the Partition Definition utility to change partition definitions in DBRC, see “Creating HALDB databases with the HALDB Partition Definition Utility” on page 310.

## Unloading HALDB Partitions and Databases for Offline Reorganization

HALDB partitions or databases can be unloaded with the HD Reorganization Unload utility (DFSURGU0).

To unload an entire HALDB database, do not include a SYSIN DD statement. To unload any other number of partitions, you must include a control statement in your SYSIN data set. The control statement identifies the name of the first partition to unload and, if you are unloading more than one partition, the number of partitions to unload.

Multiple partitions are unloaded consecutively. For key range partitioning, consecutive partitions are determined by the high keys. If you are using a partition selection exit routine, consecutive partitions are determined by the order assigned by the exit routine.

Do not include DD statements for the HALDB database data sets. The HD Reorganization Unload utility uses dynamic allocation for HALDB data sets. This is not true for non-HALDB databases.

**Requirement:** You must supply buffer pools for all data sets in the partitions that are unloaded. This includes the ILDSs.

**Recommendation:** Enable OSAM sequential buffering for databases that use OSAM.

Figure 211 shows a control statement to unload one partition.

```
SYSIN DD *
PARTITION=PE002
```

*Figure 211. Example: The HD Reorganization Unload Utility Control Statement to Unload One Partition*

Figure 212 shows a control statement to unload three partitions.

```
SYSIN DD *
PARTITION=PE004,NUMBER=3
```

*Figure 212. Example: The HD Reorganization Unload Utility Control Statement to Unload Multiple Partitions*

Figure 213 on page 380 shows a sample job that unloads a HALDB partition.

## Reorganizing HALDBs

```
//JOUK03C JOB (999,POK),JOUK03,CLASS=A,NOTIFY=&SYSUID,
// MSGLEVEL=(1,1),MSGCLASS=X,REGION=0M
//JOB LIB DD DSN=IMSPSA.IMS0.SDFSRESL,DISP=SHR
// DD DSN=IMSPSA.IM0A.MDALIB,DISP=SHR
//*****
//* HD UNLOAD FOR THE PARTITION PE002 OF PEOPLE DATABASE
//*****
//UNLOAD EXEC PGM=DFSRR00,REGION=1024K,
// PARM='ULU,DFSURGU0,PEOPLE,,,,,,Y,N'
//DFSRESLB DD DSN=IMSPSA.IMS0.SDFSRESL,DISP=SHR
//IMS DD DISP=SHR,DSN=JOUK03.HALDB.DBDLIB
//DFSURGU1 DD DSN=JOUK03.UNLOAD.PE002,UNIT=3390,VOL=SER=TOTIMN,
// SPACE=(CYL,(10,5),RLSE),DISP=(NEW,CATLG)
//DFSVSAMP DD *
IOBF=(4096,50)
VSRBF=8192,50
/*
//SYSPRINT DD SYSOUT=*
//DFSCTL DD *
SBPARM ACTIV=COND
/*
//SYSIN DD *
PARTITION=PE002
/*
```

Figure 213. Example: Sample JCL to Unload a HALDB Partition

The IMS High Performance Unload tool is an alternative to the HD Reorganization Unload utility. You can use the High Performance Unload tool to unload any number of partitions or the entire database.

**Related Reading:** For more information on the High Performance Unload tool, see *IBM DB2 and IMS Tools: IMS High Performance Unload for OS/390*.

### Reallocating HALDB Database Data Sets for Offline Reorganization

You do not have to delete and redefine HALDB database data sets before you reload them. This applies to both OSAM and VSAM data sets. VSAM data sets, other than ILDSs, must be specified with the REUSE option. HALDB supports this option.

If you delete and redefine partition data sets, but do not reload data into them, you must initialize the partition data sets. If you reload data into the partition data sets after deleting and redefining them, you do not need to initialize the partition data sets.

If you delete and redefine VSAM data sets, you receive a z/OS IEC161I system message when reloading a partition. This is not an error message. It indicates that a VSAM data set was empty when it was opened. Figure 214 shows the message for an ILDS.

```
IEC161I 152-061,JOUK03D,RELOAD,PE001L,,
IEC161I JOUK03.HALDB.DB.PEOPLE.L00001,
IEC161I JOUK03.HALDB.DB.PEOPLE.L00001.DATA,CATALOG.TOTICF2.VTOTCAT
```

Figure 214. Example: IEC161I message during reload

**Related Reading:** For more information on IEC system messages, see *z/OS V1R4: MVS System Messages, Vol 7 (IEB-IEE)*.

## Reloading HALDB Partitions and Databases for Offline Reorganization

HALDB partitions and databases can be reloaded with the HD Reorganization Reload utility (DFSURGL0). The HD Reorganization Reload utility reads the output file from the HD Reorganization Unload utility. You do not specify the partitions to be reloaded. They are determined by the records in the input file to the HD Reorganization Reload utility.

Do not include DD statements for the HALDB database data sets. The HD Reorganization Reload utility uses dynamic allocation for HALDB data sets. This is not true for non-HALDB databases.

The data sets allocated for the HD Reorganization Reload utility are always the A–J data sets, even when the active data sets prior to the offline reorganization were the M–V data sets as a result of using the HALDB Online Reorganization function previously.

You must supply buffer pools for all data sets in the partitions that are reloaded. This includes the ILDSs.

The HD Reorganization Reload utility sets the image copy needed flag for data sets in partitions that it loads. You should image copy them as you would any database data sets after they have been reloaded.

Figure 215 shows a sample job that reloads HALDB partitions. The partitions it reloads depend on the records in the input file.

```
//JOUK03D JOB (999,POK),JOUK03,CLASS=A,NOTIFY=&SYSUID,
// MSGLEVEL=(1,1),MSGCLASS=X,REGION=0M
//JOB LIB DD DSN=IMSPSA.IMS0.SDFSRESL,DISP=SHR
// DD DSN=IMSPSA.IM0A.MDALIB,DISP=SHR
//*****
//* HD RELOAD FOR THE PEOPLE DATABASE
//*****
//RELOAD EXEC PGM=DFSRR00,REGION=1024K,
// PARM='ULU,DFSURGL0,PEOPLE,,,,,,,Y,N'
//DFSRESLB DD DSN=IMSPSA.IMS0.SDFSRESL,DISP=SHR
//IMS DD DISP=SHR,DSN=JOUK03.HALDB.DBDLIB
//DFSUINPT DD DSN=JOUK03.UNLOAD.PEOPLE,DISP=OLD
//DFSVSAMP DD *
VSRBF=8192,50
IOBF=(4096,50)
/*
//SYSPRINT DD SYSOUT=*
//DFSSTAT DD SYSOUT=*
```

Figure 215. Example: JCL to Reload a HALDB Partition

**ILDS Reorganization Updates:** The HD Reorganization Reload utility updates the ILDS for partitions that contain targets of logical relationships or secondary indexes. The utility has three options for updating ILDSs:

- No control statement
- ILDSINGLE control statement
- NOILDS control statement
- ILDSMULTI control statement (for HALDB migration reloads only)

If you do not specify a control statement in the SYSIN data for the HD Reorganization Reload utility, an ILDS entry is updated or created when a target of

a secondary index or logical relationship is inserted in the partition. An entry exists if a previous reorganization loaded the target segment in the partition. The updates to the ILDS are done in VSAM update mode. When a CI or CA is filled, it must be split by VSAM. Free space in the ILDS can help avoid these splits. Updates can be random or sequential. This depends on the order in which these segments are inserted and their ILKs. The ILDS keys are based on the ILK that is based on the location of the target segment when it was created.

You can create free space in the ILDS by specifying the ILDSINGLE control statement. The ILDSINGLE option provides a number of performance benefits, including eliminating CI and CA splits, eliminating unused ILEs, and better performance for subsequent reorganizations and recoveries. The ILDS must be deleted and redefined prior to running the utility with the ILDSINGLE option.

If you specify a NOILDS control statement in the SYSIN data, the HD Reorganization Reload utility does not update or create entries in the ILDSs. They must be created by a separate process using the HALDB Index/ILDS Rebuild utility (DFSPREC0). Separate executions of DFSPREC0 are required for each partition. These executions can be done in parallel and on different machines.

The ILDSMULTI option applies only to migration reloads. For more information about ILDSMULTI, see the HD Reorganization Reload utility section of *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

**Reorganizing HALDB Partitioned Secondary Index Databases:** You might need to reorganize your partitioned secondary index (PSINDEX) database. Because the reorganization of HALDBs does not require the recreation of their secondary indexes, a PSINDEX database can become disorganized as entries are added to it over time.

The HD Reorganization Unload utility and the HD Reorganization Reload utility can be used to reorganize PSINDEX databases. The restrictions and recommendations for reorganizing other HALDB databases also apply to PSINDEX databases with one exception: HALDB secondary indexes have no ILDSs. The HD Reorganization Reload utility control statements should not be used with secondary indexes.

The steps for reorganizing a PSINDEX database are the same as those for reorganizing other types of HALDBs offline. See “Overview of HALDB Offline Reorganization” on page 377 for a list of these steps.

### HALDB Online Reorganization



Prior to IMS Version 9, you had to ensure that HALDB partitions were offline before you could perform database reorganization for them. IMS Version 9 introduced an integrated HALDB Online Reorganization function that allows HALDB partitions to remain online and available for IMS application programs during a database reorganization.

An online reorganization of a PHDAM or PHIDAM HALDB partition runs non-disruptively, allowing concurrent IMS updates, including updates by data-sharing IMS systems. The online reorganization is non-disruptive because IMS copies small amounts of data from the partition's original data sets (the input data sets) to separate output data sets. IMS tracks which data has been copied so that IMS applications can automatically retrieve or update data from the correct set of data sets.



As described in “Data Set Naming Conventions for HALDB Online Reorganization” on page 390, HALDB Online Reorganization extends the established data definition and data set naming convention for HALDBs. The data set groups in a HALDB database use the characters A-through-J in the DDNAMEs and data set names of the ten supported data set groups. The primary index for a PHIDAM database uses the character X in these names. This data definition and data set naming convention is extended so that IMS uses the characters M-through-V (and Y) for an alternate set of data sets.

The initial load or offline reorganization reload of a HALDB partition always uses the A-through-J (and X) data sets. Until the first time that you reorganize a HALDB partition online, only the A-through-J (and X) data sets are used.

There are three phases of online reorganization for a HALDB partition:

1. The initialization phase, during which IMS prepares the output data sets and updates the RECON data sets.
2. The copying phase, during which IMS performs the actual reorganization by copying the data from the input data sets to the output data sets.
3. The termination phase, during which IMS closes the input data sets and updates the RECON data sets.

### The Initialization Phase for HALDB Online Reorganization

You start the online reorganization of a HALDB partition using the INITIATE OLREORG command. See the *IMS Version 9: Command Reference* for more information about this command.

During the initialization phase, IMS updates the RECON data sets to establish the ownership of the online reorganization by the IMS system that is performing the online reorganization. This ownership means that no other IMS system can perform a reorganization of the HALDB partition until the current online reorganization is complete or until ownership is transferred to another IMS system. IMS adds the M-V (and Y) DBDSs to the RECON data sets if those DBDS records do not already exist. IMS also adds the M-V (and Y) DBDSs to any existing change accumulation groups and DBDS groups that include the corresponding A-J (and X) DBDSs.

Before online reorganization begins for a HALDB partition, there is a single set of *active* data sets for the HALDB partition. These active data sets are the input data sets for the copying phase. There might also be a set of *inactive* data sets from a prior online reorganization that are not used by IMS application programs.

During the initialization phase, IMS evaluates each of the inactive data sets to ensure that it meets the requirements for output data sets (see “HALDB Online Reorganization Requirements for Existing Output Data Sets” on page 585). If any of the output data sets does not exist, IMS creates it automatically during this phase.

At the end of the initialization phase, IMS treats the original active set of data sets as the input set and the inactive data sets as the output set. This use of the input and output sets of data sets is represented by the *cursor-active* status for the partition, which is recorded in online reorganization records in the RECON data sets. A listing of the partition's database record in the RECON data sets shows OLREORG CURSOR ACTIVE=YES. A listing of the partition also shows that both sets of DBDSs are active: the first set of DBDSs listed is for the input data set and the second set of DBDSs is for the output data set, for example, DBDS ACTIVE=A-J and

M-V. While the partition is in the cursor-active status, both sets of data sets must be available for the partition to be processed by any application.

Figure 216 shows part of a listing of the RECON data sets for a HALDB partition that has the cursor-active status.

[illegible]

Figure 216. Example RECON Listing: DB Record for a HALDB in Cursor-Active Status

During the initialization phase, various error conditions, such as an unacceptable preexisting data set or an insufficient amount of disk space for an automatically created data set, can cause the initialization to fail. However, if an error occurs during or after the data set creation and validation process, but before IMS records the cursor-active status in the RECON data sets, any automatically created output data sets are retained along with any preexisting ones.

Also during the initialization phase of an online reorganization, IMS dynamically creates a program specification block (PSB) for the reorganization. The PSB name is the 7-character HALDB partition name prefixed with the single character zero ('0'). For example, a HALDB partition with the name SSN5603 has a dynamic PSB with

the name 0SSN5603 for the reorganization work. This PSB does not exist in the PSBLIB or the ACBLIB, but the name can appear in a listing of RECON or in output from utilities.

### The Copying Phase for HALDB Online Reorganization

During the copying phase, the HALDB partition comprises the A-through-J (and X) data sets and the M-through-V (and Y) data sets. During this phase, both sets of data sets must be available in order for IMS applications to access the partition.

While IMS reorganizes a HALDB partition online, IMS applications can make database updates to the partition. Some of the database updates are made to the input data sets, while others are made to the output data sets, depending on which data is updated by the application. Which data sets are updated is transparent to the application program. Figure 217 illustrates the relationship between the input and output data sets at a point during the online reorganization.

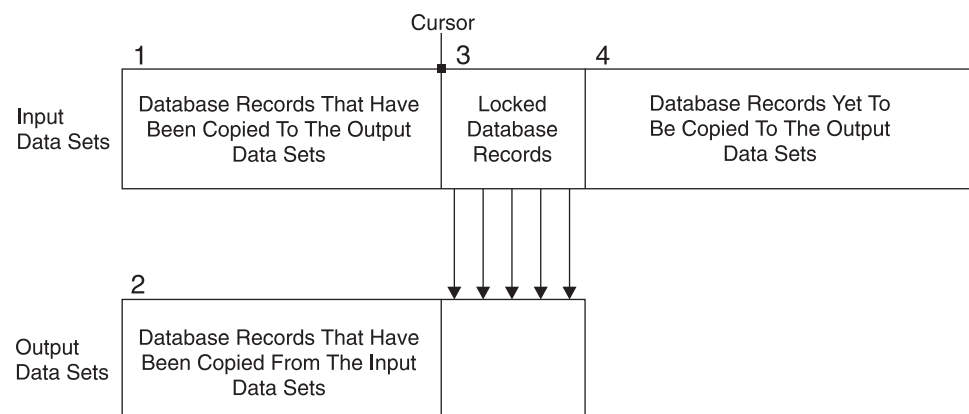


Figure 217. The Relationship between Input Data Sets and Output Data Sets during the Online Reorganization of a HALDB Partition

Figure 217 shows two sets of database data sets for a HALDB partition, the input data sets that have not been reorganized and the output data sets that have been (at least partially) reorganized. The figure shows the reorganization as progressing from left to right, from the input data sets above to the output data sets below. The data sets in the figure are divided into four areas:

1. Data within the input data sets that has been copied to the output data sets. This area reflects the old data organization (prior to the reorganization), and is not used again by IMS applications until the data sets are reused as the output data sets for a later online reorganization.
2. Data within the output data sets that has been copied from the input data sets. This data in this area has been reorganized, and can be used by IMS applications during the reorganization.
3. Data within both the input and output data sets that is locked and in the process of being copied and reorganized from the input data sets to the output data sets. This area of locked records is called a *unit of reorganization*. From a recovery point of view, this unit of reorganization is equivalent to a unit of recovery.

While IMS processes the current unit of reorganization, IMS applications that access any of the locked data records must wait until IMS completes the reorganization for those records. After the copying and reorganization completes for the unit of reorganization, IMS commits the changes and unlocks the records, thus making them available again for IMS applications.

4. Data within the input data sets that has not yet been copied to the output data sets. This data has also not yet been reorganized, and can be used by IMS applications during the reorganization.

As the online reorganization progresses, IMS uses a kind of pointer called a *cursor* to mark the end point of those database records that have already been copied from the input data sets to the output data sets. As the reorganization and copying proceeds, this cursor moves through the partition (from left to right in Figure 217 on page 385).

When an IMS application program accesses data from a HALDB partition that is being reorganized online, IMS retrieves the data record:

- From the output data sets if the database record is located “at or before” the cursor.
- From the input data sets if the database record is located “after” the cursor.

If the data record happens to fall within the unit of reorganization, IMS retries the data access after the records are unlocked. An application program does not receive an error status code for data within a unit of reorganization.

To allow recovery of either an input data set or an output data set, all database changes are logged during the online reorganization, including the database records that are copied from the input data set to the output data sets.

### The Termination Phase for HALDB Online Reorganization

The online reorganization of a HALDB partition terminates after the end of the copying phase, or when IMS encounters an error condition during the reorganization. You can also stop the online reorganization of a HALDB partition using the `TERMINATE OLREORG` command. See the *IMS Version 9: Command Reference* for more information about this command.

After the copying phase is complete for a HALDB partition, the output data sets become the *active* data sets, and the input data sets become the *inactive* data sets. The active data sets are used for all data access by IMS application programs. The inactive data sets are not used by application programs, but can be reused for a subsequent online reorganization. Unless you perform an initial load or a batch reorganization reload for the partition, successive online reorganizations for the partition alternate between these two sets of data sets.

IMS updates the partition's database record in the RECON data sets to reset the cursor-active status for the partition to reflect that there is now just one set of data sets. A listing of this record from the RECON data sets shows `OLREORG CURSOR ACTIVE=NO` and the `ACTIVE DBDS` field shows the active (newly reorganized) data sets. IMS also updates the online reorganization records in the RECON data sets with the timestamp of when the reorganization completed.

If you specified the `DEL` keyword for the `INITIATE OLREORG` command (or the `UPDATE OLREORG` command), IMS deletes the inactive data sets after resetting the cursor-active status for the partition. Before deleting the inactive data sets, IMS notifies all sharing IMS systems, including batch jobs, that the online reorganization is complete and is recorded in the RECON data sets. The IMS system that is performing the online reorganization waits until it receives an acknowledgment from each of these sharing IMS systems that they have closed and deallocated the now-inactive data sets, and then it deletes these data sets. However, if the acknowledgments are not received within 4.5 minutes, the owning

IMS system will attempt to delete the inactive data sets anyway. Without the acknowledgments, the deletion attempt is likely to fail.

Finally, at the end of the termination phase, IMS updates the RECON data sets to reset the ownership of the online reorganization so that no IMS system has ownership. This resetting of ownership means that any IMS system can perform a subsequent reorganization of the HALDB.

If online reorganization of a HALDB partition terminates prior to completion, either because of an error or because you issued the TERMINATE OLREORG command, you must restart the online reorganization or perform an offline reorganization for the partition.

Figure 218 shows the normal processing steps of a successful online reorganization of a HALDB partition. The columns represent the flow of control through the phases of the online reorganization, from the user to IMS, and the status of the data sets as the processing events occur.

| Phase          | User                             | IMS                                                              | Status of Data Sets                                                                      |
|----------------|----------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Initialization | Invokes INITIATE OLREORG command | Gets ownership from DBRC                                         |                                                                                          |
|                |                                  | Performs Init. steps (create data sets, etc.)                    |                                                                                          |
|                |                                  | Tells DBRC about cursor-active status                            | Now two active sets of data sets exists<br>OLREORG CURSOR ACTIVE=YES in RECON listing    |
| Copying        |                                  | Copies data from input to output data sets                       | Database records are locked, copied and then unlocked by UOR                             |
| Termination    |                                  | When copying is complete, tells DBRC to end cursor-active status | Now only one active set of data sets exists<br>OLREORG CURSOR ACTIVE=NO in RECON listing |
|                |                                  | Possibly deletes inactive set of data sets                       |                                                                                          |
|                |                                  | Relinquishes ownership through DBRC                              |                                                                                          |

Figure 218. Normal Processing Steps of HALDB Online Reorganization

### Migration and Coexistence Considerations for HALDB Online Reorganization

During migration from a prior IMS release to IMS Version 9, IMS marks the DB records in the RECON data sets for all existing HALDBs to indicate that they

## Reorganizing HALDBs

cannot be reorganized online. To allow online reorganization of a HALDB partition, use the DBRC CHANGE.DB DBD(*HALDB\_master*) OLRCAP command to change the status of the HALDB and all of its partitions to allow online reorganization for those partitions. You can also use the CHANGE.DB ALL OLRCAP command to enable online reorganization for all of your HALDB databases.

Table 27 shows the IMS versions that can access HALDBs that are capable of being reorganized online.

*Table 27. IMS Versions that Can Access HALDBs that Are Capable of Being Reorganized Online*

| IMS Version                                | Access to HALDB partitions that are capable of being reorganized online? |
|--------------------------------------------|--------------------------------------------------------------------------|
| IMS Version 7                              | No                                                                       |
| IMS Version 8                              | No                                                                       |
| IMS Version 8 with the OLR Coexistence SPE | Yes                                                                      |
| IMS Version 9                              | Yes                                                                      |

You must apply the IMS Version 8 OLR Coexistence SPE to allow full data sharing between IMS Version 8 and IMS Version 9 systems that have HALDBs that are capable of being reorganized online.

You must use the following IMS Version 9 (or later) utilities to process HALDBs that are capable of being reorganized online:

- Database Recovery
- Database Image Copy
- Database Image Copy 2
- Database Change Accumulation

### Fallback Considerations for HALDB Online Reorganization

For IMS Version 8 systems that have the OLR Coexistence SPE applied, you can access or share data with all Version 9 HALDBs. However, if any M-through-V (and Y) data sets are active, or if the HALDB Online Reorganization cursor is active for any partitions, you must use IMS Version 9 utilities whenever those partitions are processed, except for the Batch Backout, Log Recovery, and Log Archive utilities which must be run on the release of IMS that created the logs.

For any partitions with M-through-V (and Y) data sets active, or for any partitions with an active HALDB Online Reorganization cursor, you must run an offline reorganization before you can fall back to using the IMS Version 8 utilities.

Should fallback to a prior version become necessary, you must define all the HALDBs as no longer capable of being reorganized online. For IMS Version 7 systems and IMS Version 8 systems that do not have the OLR Coexistence SPE applied, you can access only those HALDBs that are not capable of being reorganized online. After fallback, HALDBs that are capable of being reorganized online are unavailable until you complete the following actions:

1. Using the IMS Version 9 offline reorganization utility, reorganize all partitions that have the M-through-V (and Y) data sets active; these data sets could be active either because the partition has the cursor-active status or because these are the only data sets for the partition.



2. Define the partitions as no longer capable of being reorganized online by using the command `CHANGE.DB DBD(HALDB_master) OLRNOCAP`.

## Restrictions for HALDB Online Reorganization

The following restrictions apply to HALDB Online Reorganization:

- You can perform an online reorganization only for a HALDB that is defined in the RECON data sets as capable of being reorganized online (OLRCAP). For more information about the OLRCAP parameter, see the INIT.DB command or the CHANGE.DB command in the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.
- You cannot start an online reorganization for a partition if another IMS system already owns an online reorganization for that partition.
- You cannot make data definitional changes during an online reorganization of a partition. HALDB Online Reorganization provides only reclustering and space distribution advantages.
- Image copy for a partition is not allowed if the partition is in the cursor-active status. This restriction applies even if the online reorganization terminated before the cursor-active status has been reset and the online reorganization for the partition is not owned by any IMS.
- To backout in-flight work from an online reorganization, you must run a batch backout using a DL/I region type.
- To use a type-2 command to start an online reorganization for a HALDB partition, you must have an IMS Common Service Layer that includes the Operations Manager and the Structured Call Interface. See the *IMS Version 9: Common Service Layer Guide and Reference* for more information.
- HALDB Online Reorganization runs only in a local storage option-subordinate (LSO=S) environment. IMS rejects attempts to initiate an online reorganization for a HALDB partition in a local storage option-yes (LSO=Y) environments. For more information about the LSO specification, see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- You cannot perform an online reorganization for a HALDB partition from an alternate IMS system in an XRF complex. However, after an XRF takeover, the new active IMS system will continue a reorganization that was active when the takeover process began.
- You cannot perform an online reorganization for a HALDB partition from a tracking IMS system in an RSR complex. However, for HALDBs that are registered as DBTRACK at the tracking IMS system, IMS tracks the effects of an online reorganization in the same way it tracks updates to any database. See “IMS Remote Site Recovery Processing for HALDB Online Reorganization” on page 396 for more information.
- You cannot issue the following commands for a HALDB partition while it is being reorganized online:
  - /START DATABASE or UPDATE DATABASE NAME(*name*) START(ACCESS)
  - /DBRECOVERY DATABASE or UPDATE DATABASE NAME(*name*) STOP(ACCESS)
  - /DBDUMP DATABASE or UPDATE DATABASE NAME(*name*) STOP(UPDATES)
  - /STOP DATABASE or UPDATE DATABASE NAME(*name*) STOP(SCHD)

If you issue any of these commands for a HALDB partition that is actively being reorganized online, IMS displays error message DFS0488I and does not process the command for the named partition. For more information about these commands, see the *IMS Version 9: Command Reference*. For more information about message DFS0488I, see the *IMS Version 9: Messages and Codes, Volume 2*.

## Reorganizing HALDBs

- You cannot issue the following commands for a HALDB master while any of its partitions is being reorganized online:

- /START DATABASE ACCESS UP or UPDATE DATABASE NAME(*name*) START(ACCESS)
- /DBRECOVERY DATABASE or UPDATE DATABASE NAME(*name*) STOP(ACCESS)
- /DBDUMP DATABASE or UPDATE DATABASE NAME(*name*) STOP(UPDATES)

For more information about these commands, see the *IMS Version 9: Command Reference*.

### Data Set Naming Conventions for HALDB Online Reorganization

As described in “Naming Conventions for HALDB” on page 22, the data sets for HALDB partitions use a specified naming convention. HALDB Online Reorganization extends this naming convention to include a second set of data sets. Data sets for partitions that are involved in HALDB Online Reorganization use the following naming convention: *bbbbbbb.dppppp*

**bbbbbbb** Represents a data set name prefix of up to 37 characters that you defined using the HALDB Partition Definition utility or DBRC batch command (INIT.DB, INIT.PART, CHANGE.DB, or CHANGE.PART). The same data set base name is used for every data set within a HALDB partition.

**d** Represents an IMS-assigned data set name type character that uniquely identifies a specific data set for a HALDB partition. The possible single-character values are:

#### A-through-J

“A” corresponds to the first, or possibly only, data set group that is defined in the DBD, “B” corresponds to the second data set group, and so on. The use of the characters A-through-J applies generally to HALDB partitions, regardless of whether they are capable of being reorganized online.

#### M-through-V

“M” corresponds to the first, or possibly only, data set group that is defined in the DBD, “N” corresponds to the second data set group, and so on. The use of the characters M-through-V applies only to HALDB partitions that are capable of being reorganized online.

**L** The indirect list data set (ILDS). The online reorganization process does not make a copy of this data set.

**X** The primary index of a PHIDAM database. This data set is the index for the A-through-J data sets and is replaced by the Y data set when the online reorganization process copies the database records from the A-through-J and X data sets into the M-through-V and Y data sets. The use of the X character applies generally to HALDB partitions, regardless of whether they are capable of being reorganized online.

**Y** The primary index of a PHIDAM database. This data set is the index for the M-through-V data sets and it is replaced by the X data set when the online reorganization process copies the database records from the M-through-V and Y data sets into the A-through-J and X data sets. The use of



the Y character applies only to HALDB partitions that are capable of being reorganized online.

**ppppp** Specifies the five-digit partition ID that is assigned by IMS.

The data set names for the output data sets are identical to the names of the corresponding input data sets, except for the IMS-assigned data set name type character (A-through-J, M-through-V, X, or Y). Table 28 shows example data set names.

*Table 28. Data Set Name Examples for HALDB Online Reorganization*

| Active Data Set Before Online Reorganization | Data Set Group or Index | Partition ID | Input Data Set Name | Output Data Set Name |
|----------------------------------------------|-------------------------|--------------|---------------------|----------------------|
| A-through-J (and X)                          | 1                       | 00003        | DH41.A00003         | DH41.M00003          |
| A-through-J (and X)                          | Index                   | 00065        | ACCT.X00065         | ACCT.Y00065          |
| M-through-V (and Y)                          | 2                       | 00005        | PAY.MST.N00005      | PAY.MST.B00005       |
| M-through-V (and Y)                          | 8                       | 00001        | PAY.EMP.T00001      | PAY.EMP.H00001       |

## Output Data Set Requirements for HALDB Online Reorganization

During the initialization phase for an online reorganization of a HALDB partition, IMS creates any output data sets that do not already exist. For example, when the input data sets are the A-through-J (and X) set, if the M and P output data sets already exist, but the N and O output data sets do not, IMS creates the N and O data sets and uses the existing M and P data sets.

Any existing output data sets must have the characteristics described in “HALDB Online Reorganization Requirements for Existing Output Data Sets” on page 585. Any data in the existing output data sets is overwritten during the copying phase of an online reorganization. Output data sets that IMS creates for the online reorganization have the characteristics described in “Attributes of Automatically-Created Output Data Sets” on page 585.

## Starting HALDB Online Reorganization

Table 29 describes the tasks and commands for starting or resuming an online reorganization for a HALDB partition.

*Table 29. Mapping Startup Tasks to Commands for HALDB Online Reorganization*

| Task                                                                | Command                                                                                    | Command Type |
|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------|
| Specify that a HALDB master is capable of being reorganized online. | INIT.DB OLRCAP or CHANGE.DB OLRCAP                                                         | DBRC         |
| Begin HALDB Online Reorganization for one or more partitions.       | INITIATE OLREORG                                                                           | Type 2       |
| Begin HALDB Online Reorganization for one or more partitions.       | /INITIATE OLREORG                                                                          | Type 1       |
| Resume HALDB Online Reorganization for one or more partitions.      | INITIATE OLREORG                                                                           | Type 2       |
| Resume HALDB Online Reorganization for one or more partitions.      | /INITIATE OLREORG                                                                          | Type 1       |
| Set the RATE for a HALDB Online Reorganization.                     | INITIATE OLREORG<br>SET(RATE( <i>rate</i> )) or UPDATE<br>OLREORG SET(RATE( <i>rate</i> )) | Type 2       |

## Reorganizing HALDBs

Table 29. Mapping Startup Tasks to Commands for HALDB Online Reorganization (continued)

| Task                                            | Command                                                                                      | Command Type |
|-------------------------------------------------|----------------------------------------------------------------------------------------------|--------------|
| Set the RATE for a HALDB Online Reorganization. | /INITIATE OLREORG<br>SET(RATE( <i>rate</i> )) or /UPDATE<br>OLREORG SET(RATE( <i>rate</i> )) | Type 1       |

### Related Reading:

- For more information about the INITIATE OLREORG, /INITIATE OLREORG, UPDATE OLREORG and /UPDATE OLREORG commands, see the *IMS Version 9: Command Reference*.
- For more information about the CHANGE.DB and the INIT.DB commands, see the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

## Monitoring HALDB Online Reorganization

Table 30 describes the tasks and commands for monitoring an online reorganization for a HALDB partition.

Table 30. Mapping Monitoring Tasks to Commands for HALDB Online Reorganization

| Task                                                                                                                                         | Command              | Command Type |
|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------|
| Display status and rate information about HALDB Online Reorganizations that are in progress.                                                 | QUERY OLREORG        | Type 2       |
| Monitor and display the status of the specified databases or partitions (including those HALDB Online Reorganizations that are in progress). | /DISPLAY DB OLR      | Type 1       |
| Display HALDB Online Reorganization status.                                                                                                  | QUERY DB             | Type 2       |
| List all of the databases for which HALDB Online Reorganizations are in progress.                                                            | QUERY DB STATUS(OLR) | Type 2       |

**Related Reading:** For more information about the /DISPLAY DB, /DISPLAY DB OLR, QUERY DB, and QUERY OLREORG commands, see the *IMS Version 9: Command Reference*.

## Modifying and Tuning HALDB Online Reorganization

Table 31 describes the tasks and commands for modifying and tuning an online reorganization for a HALDB partition.

Table 31. Mapping Modifying and Tuning Tasks to Commands for HALDB Online Reorganization

| Task                                                                                                        | Command                                    | Command Type |
|-------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------|
| Stop HALDB Online Reorganization for one or more partitions.                                                | TERMINATE OLREORG                          | Type 2       |
| Stop HALDB Online Reorganization for one or more partitions.                                                | /TERMINATE OLREORG                         | Type 1       |
| Change the impact of HALDB Online Reorganization on overall system performance, for one or more partitions. | UPDATE OLREORG<br>SET(RATE( <i>rate</i> )) | Type 2       |

Table 31. Mapping Modifying and Tuning Tasks to Commands for HALDB Online Reorganization (continued)

| Task                                                                                                        | Command                                     | Command Type |
|-------------------------------------------------------------------------------------------------------------|---------------------------------------------|--------------|
| Change the impact of HALDB Online Reorganization on overall system performance, for one or more partitions. | /UPDATE OLREORG<br>SET(RATE( <i>rate</i> )) | Type 1       |
| Specify whether to delete the inactive data sets after the copying phase completes.                         | UPDATE OLREORG OPTION(DEL   NODEL)          | Type 2       |
| Specify whether to delete the inactive data sets after the copying phase completes.                         | /UPDATE OLREORG OPTION(DEL   NODEL)         | Type 1       |

**Related Reading:** For more information about the TERMINATE OLREORG, /TERMINATE OLREORG, UPDATE OLREORG, and /UPDATE OLREORG commands, see the *IMS Version 9: Command Reference*.

**Example:** Figure 219 on page 394 shows the processing steps for an online reorganization of a HALDB partition and how it is affected by a TERMINATE OLREORG command that temporarily stops the reorganization:

- When you issue the TERMINATE OLREORG command, IMS terminates the reorganization by entering the termination phase.
- Later, when you issue the INITIATE OLREORG command, IMS restarts the reorganization from the initialization phase, then proceeds to the copying phase. In the figure, the reorganization then completes successfully through the termination phase.

Note that there are two sets of data sets for the second initialization phase because the reorganization is not complete.

In the figure, the columns represent the flow of control through the phases of the online reorganization, from the user to IMS, and the status of the data sets as the processing events occur.

## Reorganizing HALDBs

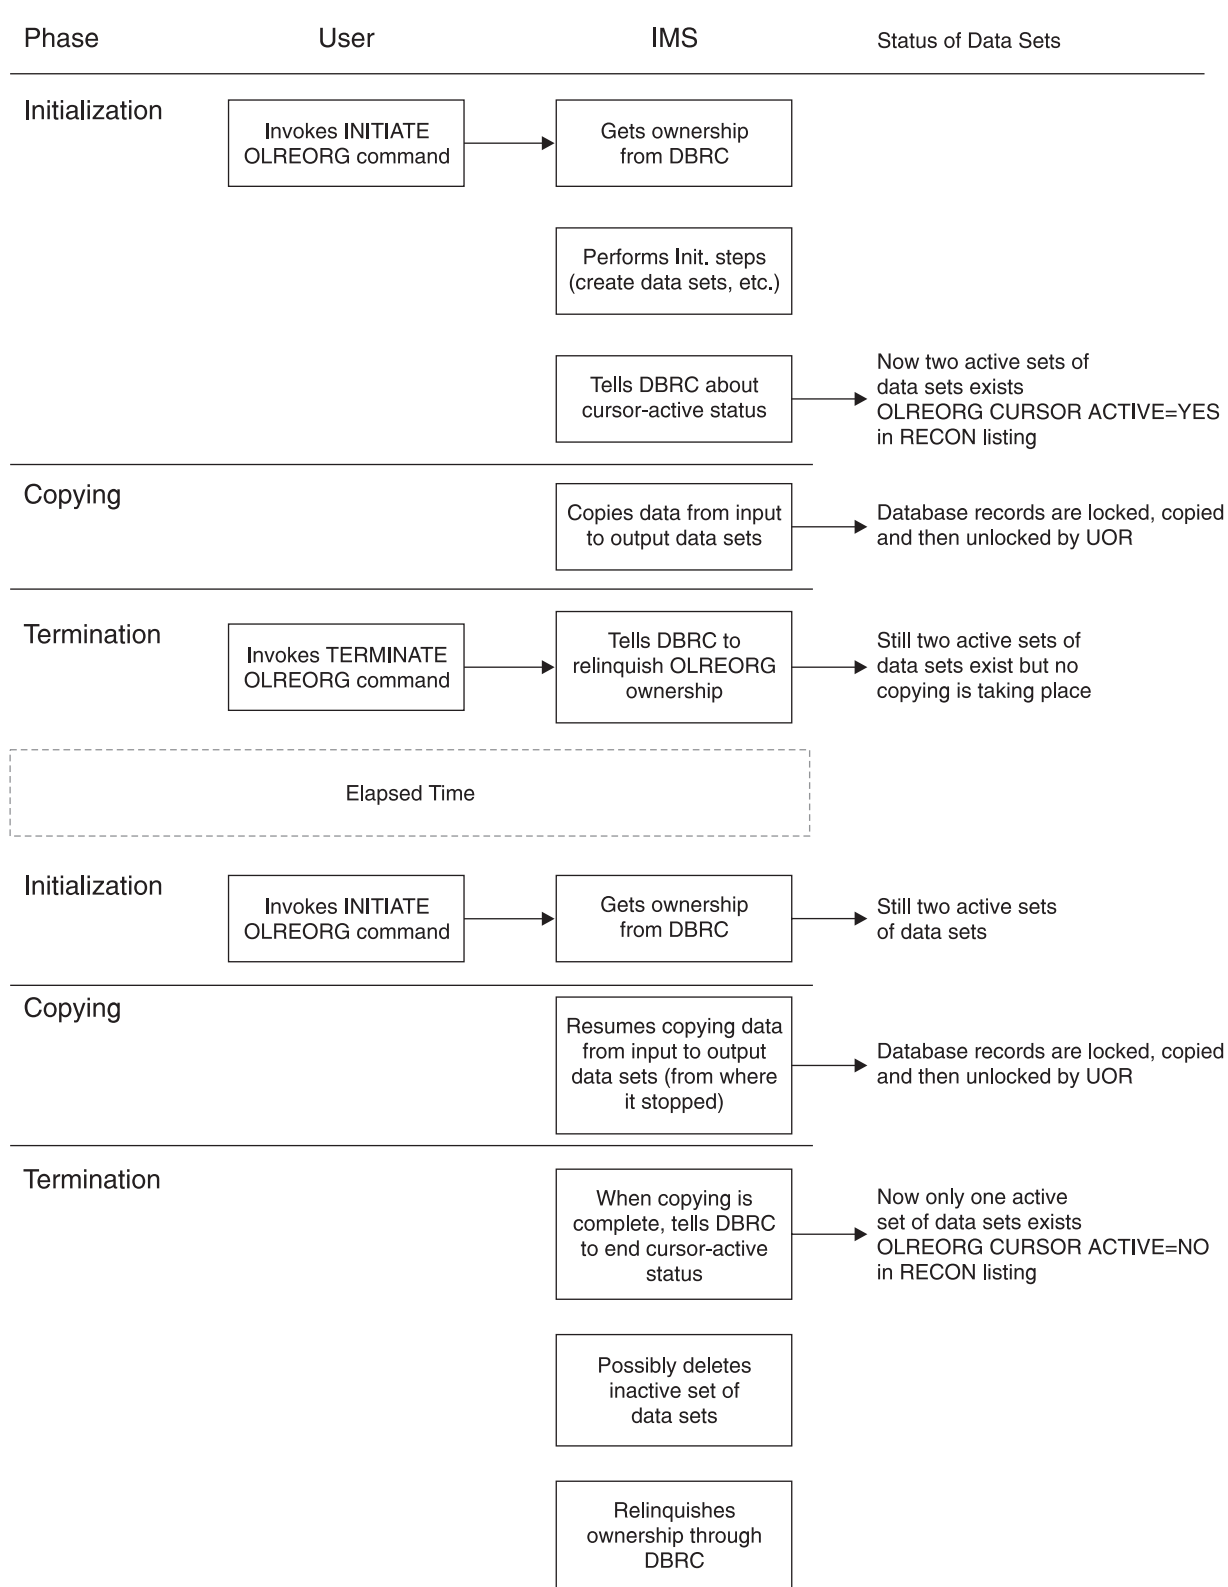


Figure 219. Processing Steps for an Interrupted Online Reorganization of a HALDB Partition

## How a HALDB Online Reorganization Impacts IMS Logging

The online reorganization of a HALDB partition generates X'50' database change log records for all of the data in the partition. IMS also logs other HALDB Online Reorganization information in a small number of X'29' log records. Thus, the total amount of log data generated by a HALDB Online Reorganization is considerably greater than the amount of data in the partition.

Reorganizing partitions online, especially reorganizing multiple partitions in parallel on the same IMS system, can generate sufficient log data to impact normal transaction processing. The large number of log records that are generated can also affect the rate of OLDS switches and log archiving.

## Controlling the Overall System Impact of a HALDB Online Reorganization

An online reorganization of a HALDB partition can impact the overall system performance of an IMS system, and likewise, other IMS work can affect the performance of an online reorganization.

Your options for controlling the impact of an online reorganization on your IMS system include:

- Specifying a separate buffer subpool for the data set being reorganized by using the DBD statement in the DFSVSMxx member in the IMS.PROCLIB data set.
- Adjusting the rate at which the online reorganization runs by using the RATE parameter of the INITIATE OLREORG and UPDATE OLREORG commands.

Specifying a separate buffer subpool for the data set being reorganized can reduce buffer contention between the online reorganization function and other processes that also require buffer resources.

Adjusting the value of the RATE parameter can also help minimize the impact of an online reorganization on the IMS system by introducing an intentional, periodic delay in the online reorganization process, which allows other IMS work to proceed.

You specify the RATE value as a percentage, with values less than 100 representing the addition of the intentionally introduced delay.

The default value for the RATE parameter is 100, which allows the online reorganization to run as fast as possible, depending on system resources, system contention, and log contention, with no intentionally introduced delay. However, if you set the RATE value to 25, for example, IMS adds a delay to the reorganization processing so that 25% of the total processing time for a unit of reorganization is spent copying the data, and the remaining 75% is spent in an intentionally introduced delay. Thus, RATE(25) would cause the online reorganization to take approximately four times as long to run as it would have run with RATE(100).

You can change the RATE value at any time by issuing the UPDATE OLREORG command.

## IMS Restart and XRF Processing for HALDB Online Reorganization

If you shut down IMS while any online reorganizations of HALDB partitions are running, IMS suspends the reorganizations before completing the shutdown checkpoint. After IMS restarts, IMS automatically resumes the online

reorganizations. IMS resumes the online reorganization even if you specified the NOPDBO option in the DFSVSMxx member.

If IMS terminates abnormally while any online reorganizations are running, IMS dynamically backs out all uncommitted changes for these reorganizations to the most recent sync point. After IMS restarts, IMS automatically resumes the online reorganizations.

Likewise, when an XRF takeover occurs, IMS automatically resumes the online reorganizations on the new active IMS system.

### **IMS Restart and Fast Database Recovery Processing for HALDB Online Reorganization**

When an FDBR takeover occurs, IMS performs the following actions:

- Backs out all uncommitted changes for these reorganizations to the most recent sync point
- Closes the partition
- Unauthorizes the partition

After the FDBR terminates, the failed IMS system no longer has ownership of the online reorganization. The online reorganization can be resumed by issuing the command INITIATE OLREORG on either another IMS system or on the failed IMS system after it is restarted.

### **IMS Remote Site Recovery Processing for HALDB Online Reorganization**

During Remote Site Recovery (RSR) tracking, IMS updates the tracking site RECON data sets with information for HALDB Online Reorganization. For HALDB partitions that are registered as database-level tracking (DBTRACK) at a Database Level Tracking (DLT) tracking IMS system, IMS performs the following steps during tracking of the online reorganization:

- Creates the output data sets for the shadow partition, as needed.
- Updates both the input and output data sets for the shadow partition.
- Marks the original input data sets as inactive, and marks the output data sets as the active data sets at the completion of the tracking of the online reorganization.
- Deletes the inactive data sets if delete option is in effect. You specify this option (or accept the default) by using the OPTION keyword of the INITIATE OLREORG command at the active site.

IMS stops the shadow partition if errors occur during the validation or creation of the output data sets. The tracked partition at the active site is unaffected by errors at the tracking site. After you correct the problem that caused the error, restart the shadow partition on the tracking IMS system to initiate online forward recovery for the partition and to continue tracking.

If the output data sets for the online reorganization already exist at the tracking site before tracking begins, ensure that these data sets have same characteristics (such as block size, record size, and control interval size) as those at the active site. See “HALDB Online Reorganization Requirements for Existing Output Data Sets” on page 585 for the data set characteristics. If you change output data set characteristics manually at the active site, you must make the same changes at the tracking site.

After an RSR takeover, IMS stops all HALDB partitions, including those that had online reorganizations in process. After you rebuild the primary index and indirect list data sets using the HALDB Index/ILDS Rebuild utility (DFSPPREC0) at the new active site, issue the INITIATE OLREORG command to resume the online reorganizations, if needed. The online reorganizations are not automatically restarted after takeover.

### Locking Impacts of HALDB Online Reorganization

During an online reorganization of a HALDB partition, HALDB Online Reorganization uses the active lock manager, IRLM or PI, to request global locks for each UOR to maintain partition integrity and recoverability. For example, in a system using IRLM, an online reorganization that is running with the RATE(100) specification can incur a significant number of IRLM lock structure accesses per second.

#### Recommendations:

- Use the IBM CFSizer to model the additional coupling facility activities to ensure that your coupling facility configuration is capable of handling the extra load introduced by the online reorganizations:
  - For IRLM 2.1 with PC=N0 specified, each additional 1000 concurrently held locks requires 256 KB of ECSA storage.
  - For IRLM 2.2, each additional 1000 concurrently held locks requires 540 KB obtained from IRLM private storage. No increase in ECSA storage is necessary.
- Review your LOGL latch contention rate, OLDS logging rate, IRLM lock structure access, and DBBP (for OSAM) latch contention.

### Using IMS Utilities with HALDB Online Reorganization

The following IMS utilities have special considerations when used with HALDB Online Reorganization: Batch Backout (DFSBB000), Database Change Accumulation (DFSUCUM0), Database Image Copy (DFSUDMP0), Database Recovery (DFSURDB0), and Primary Index and ILDS Rebuild (DFSPPREC0).

#### Batch Backout (DFSBB000)

If dynamic backout fails for a unit or reorganization, IMS creates a backout record in the RECON data sets that contains the dynamic PSB name. Run the Batch Backout utility (DFSBB000) for the listed PSB name.

If dynamic backout was not attempted, use the Log Recovery utility (DFSULTR0) with the PSB option to list those PSBs that require backout. If there is in-flight online reorganization work for a HALDB partition that requires backout, the Log Recovery utility lists the dynamic PSB name. Run the Batch Backout utility (DFSBB000) for each of the listed PSB names.

#### Database Change Accumulation (DFSUCUM0)

You can use the Database Change Accumulation utility (DFSUCUM0) to accumulate changes for HALDB partition A-through-J data sets and for the M-through-V data sets. You need to specify the DB0 control statement so that the Database Change Accumulation utility accumulates changes or purges changes from before the online reorganization started.

The Database Change Accumulation utility might create Database Change Accumulation header records (type X'25' records) for a corresponding A-through-J and M-through-V data set if the online reorganization checkpoint is not complete at the start of the database change accumulation.



### Database Image Copy (DFSUDMP0)

You can use the Database Image Copy utility (DFSUDMP0) to copy the currently active data set that is recorded in the RECON data sets. The Database Image Copy utility also determines if it should copy the M-through-V data sets or the A-through-J data sets. However, if a partition is in the cursor-active status, you cannot run the Database Image Copy utility for that partition.

It is not necessary to code a DD statement in the JCL when copying HALDB partition data sets, because they are dynamically allocated.

### Database Recovery (DFSURDB0)

The Database Recovery utility (DFSURDB0) expects the utility output data sets to exist, and makes no attempt to create them. See “Recovery for HALDB Online Reorganization.”

### Primary Index and ILDS Rebuild (DFSPREC0)

You can use the HALDB Index/ILDS Rebuild utility (DFSPREC0) to recover the primary index data set for both the input and output data sets. You can also use the HALDB Index/ILDS Rebuild utility to recover both the X and Y primary index data sets and the ILDS in a single run. You cannot specify a particular input or output data set, but if the partition is in the cursor-active status, the utility allocates and rebuilds all of the necessary data sets.

**Related Reading:** For more information about these utilities, see the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

## Recovery for HALDB Online Reorganization

After DBRC sets the cursor-active status for the partition in the RECON data sets, and until the copying phase completes and DBRC resets the cursor-active status, you can recover any of the input or output data sets using the Database Recovery utility (DFSURDB0). To restore the output data sets, the Database Recovery utility uses the database change records (type X'50' log records) and applies them to empty output data sets.

**Recommendation:** Make an image copy of the output data sets as soon as possible after the online reorganization completes. Recovering from this image copy is faster than recovering from the database change records that are logged during the online reorganization. However, you cannot make an image copy while the partition is in cursor-active status.

To recover an output data set before the online reorganization completes, perform the following tasks:

1. Stop the online reorganization by using the TERMINATE OLREORG command. If the online reorganization encountered an abend, it is stopped automatically.
2. Issue the /DBR or the UPDATE DB command for the HALDB partition.
3. Run database change accumulation, as necessary. You can create the JCL by issuing the GENJCL.CA command, or you can run the Database Change Accumulation utility (DFSUCUM0) from your own JCL. The purge time for the change accumulation must be equal to the time of the beginning of the online reorganization to represent restoring from the initial empty state of the data set. See “Specifying a Purge Time for the Database Change Accumulation Utility” on page 399.
4. Create the output data set to be recovered, either by using a JCL DD statement or by using Access Method Services, as appropriate.



5. Recover the database changes. You can create the JCL by issuing the GENJCL.RECOV command. Alternatively, you can run the Database Recovery utility (DFSURDB0) from your own JCL with the DD statement for DFSUDUMP specified as DUMMY to indicate that there is no image copy from which to restore.
6. Run the Batch Backout utility (DFSBB000), because you might need to back out uncommitted data.
7. After you have recovered, and possibly backed-out, all of the required data sets of the HALDB partition, issue the /STA DB or the UPDATE DB command for the HALDB partition.
8. Issue the INITIATE OLREORG command to resume the online reorganization.

You can also recover an output data set after the online reorganization completes but before an image copy has been made. Follow the same steps as for recovering an output data set before the online reorganization completes, except the steps for stopping and restarting the online reorganization.

In addition, you can recover an output data set from a point other than the beginning of the online reorganization, such as from a full dump of a DASD volume, using existing procedures if the online reorganization is either completed or terminated.

**Specifying a Purge Time for the Database Change Accumulation Utility:** When you run the Database Change Accumulation utility (DFSUCUM0) for one of the output data sets, specify a purge time that is equal to the online reorganization start time.

Specifying this purge time is necessary if change accumulation records (or an input log) that involve the output data set span the time that a online reorganization was started. Specifying the purge time eliminates database change records from before this point in time and is analogous to eliminating database change records from prior to the start time of an image copy.

**Specifying a Starting Point for the GENJCL.CA and GENJCL.RECOV Commands:** Even if no image copy exists for the output data sets, the RECON data sets reflect the beginning of the online reorganization as a starting point from which you can perform forward recovery of one of these data sets, even after the online reorganization is complete. Until you make an image copy of an output data set, the GENJCL.CA command treats this starting point as though it were the most recent image copy and causes changes to the output data set to be accumulated from that point. Similarly, the GENJCL.RECOV command prepares recovery of an output data set from this point, even if no physical image copy exists.

**Specifying the Active Data Sets for the Database Image Copy Utilities:** The database image copy utilities always copy from the currently active data sets that are recorded in the RECON data sets. Regardless of whether the A-through-J or the M-through-V data sets are active, you do not need to change the JCL or control statements for these utilities to specify which set of data sets to use.

On the utility control statement for the Database Image Copy utility (DFSUDMP0), the DDNAME does not need to refer to the currently active data set. Regardless of whether the A-through-J or the M-through-V data sets are active, the utility automatically uses currently active data sets.

## Reorganizing HALDBs

**Example:** Assume that the data set for a second data set group defined in the DBD is to be copied, and that the partition name is PARTNO3. Regardless of which set of data sets is active, you can code a DDNAME of either PARTNO3B or PARTNO3N on the control statement. If the A-through-J data sets are active, whether you specify PARTNO3B or PARTNO3N, the utility copies from PARTNO3B. Likewise, if the M-through-V data sets are active, the utility copies from PARTNO3N.

In the JCL statements for the Database Image Copy utility, you should omit the DD statement that refers to the input data set. Based on whether the A-through-J or the M-through-V data sets are active, the utility dynamically allocates the appropriate data set. A DD statement that refers to a specific data set name can cause the utility job to fail because of a “Data Set Not Found” condition during job-step initiation. This condition occurs if an inactive data set name is coded in the JCL and the data set does not exist.

### Offline Reorganizations after HALDB Online Reorganizations

HALDB Online Reorganization does not prevent you from performing offline reorganizations.

If an online reorganization is not currently in progress, you can perform an offline reorganization of a HALDB database by following the steps documented in “HALDB Offline Reorganization” on page 377.

If an online reorganization is currently in progress, you can perform an offline reorganization after stopping the online reorganization by issuing the TERMINATE OLREORG command and then stopping access to the partition by issuing either the /DBRECOVERY command or the UPDATE DB NAME(*partition\_name*) STOP(ACCESS) command. The HD Reorganization Unload utility (DFSURGU0) automatically unloads the records from the active portions of both the A–J and M–V data sets. The HD Reorganization Reload utility (DFSURGL0) loads all records into the A–J data sets and turns off the cursor-active status of the online reorganization in the RECON data set.

### Activating Sequential Buffering to Improve the Performance of HALDB Online Reorganization

You can use sequential buffering to improve the performance of online reorganization of OSAM databases by including the SBONLINE statement in the IMS.PROCLIB data set member DFSVSMxx.

Using the SBONLINE statement causes IMS to load the sequential buffering modules during initialization so that, whenever you start an online reorganization for an OSAM partition, IMS activates sequential buffering immediately. If you do not include the SBONLINE statement, IMS analyzes the DL/I calls to determine whether sequential buffering is suited for processing the reorganization.

The two forms of the SBONLINE control statement are:

```
SBONLINE
SBONLINE,MAXSB=nnnnn
```

where *nnnnn* is the maximum amount of storage (in kilobytes) that can be allocated to sequential buffers.

When the maximum amount of storage is reached, IMS stops allocating sequential buffers to online applications (including HALDB Online Reorganization) until these applications release sequential buffer space. If you do not specify the MAXSB=

keyword, the maximum amount of storage for sequential buffers is unlimited. For more information about the SBONLINE control statement, see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

## The HALDB Self-Healing Pointer Process

Reorganizations of HALDBs with logical relationships and secondary indexes do not require the execution of utilities to update pointers. Instead, HALDB uses a self-healing pointer process to correct logical relationship and secondary index pointers. This process is implemented by placing a target key and an extended pointer set (EPS) in the secondary index or logically related database and by using an indirect list data set (ILDS) in each partition of PHDAM and PHIDAM databases.

### How the Self-Healing Pointer Process Works

The elements of the self-healing pointer process can be seen in Figure 220, which shows the interrelationships between the elements prior to a database reorganization.

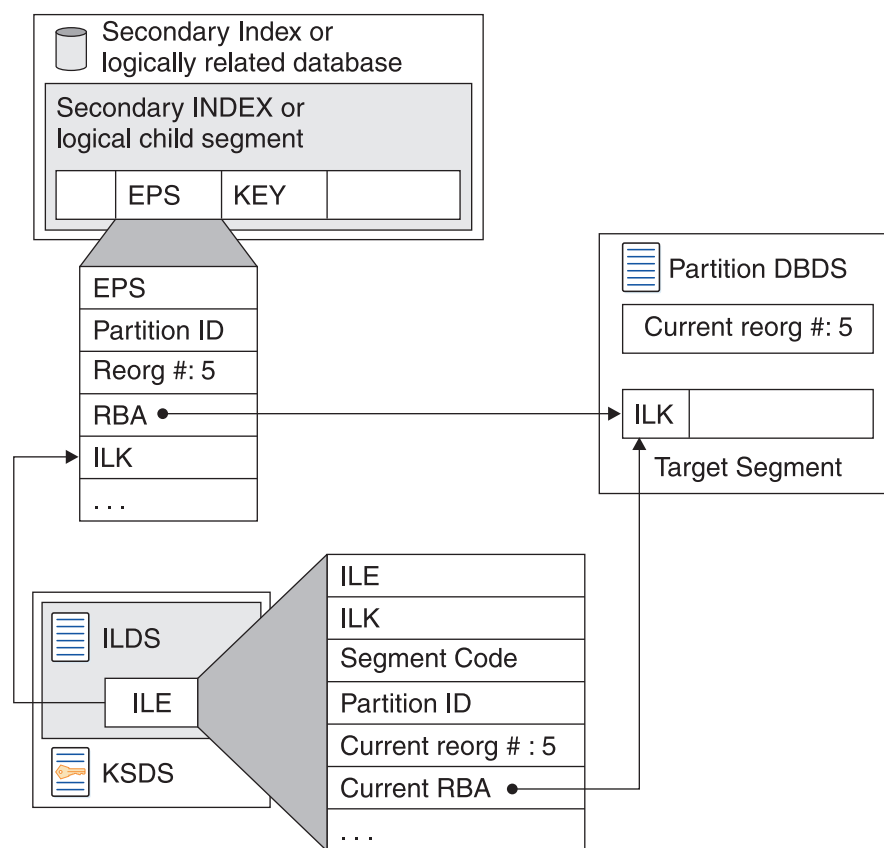


Figure 220. HALDB Pointer Before a Reorganization

Each secondary index entry and each logical child segment contains the key of its target record. For secondary indexes, the key of the target's root segment is included in the prefix. For logical child segments, the concatenated key of the logical parent is included in the segment data.

Each segment in a PHDAM or PHIDAM database has an indirect list key (ILK). The ILK is unique for the segment type across the entire database. It is composed of the relative byte address (RBA), partition ID, and partition reorganization

## Reorganizing HALDBs

number of the segment when it was first created. The ILK for a segment never changes. It is maintained across reorganizations.

Each secondary index entry or logical child segment has an extended pointer set (EPS). The EPS includes the ILK of its target segment. It also contains the RBA, partition ID, and partition reorganization number for the target segment. These parts of the EPS might not be accurate. That is, they might not reflect the current location of the target segment or the current reorganization number of the target segment's partition. In Figure 220 on page 401 they are accurate.

The target segment has an indirect list entry (ILE) in the ILDS for a partition. The ILE contains accurate information about the target segment. This includes its current RBA, the correct partition ID, and the current reorganization number for the partition. The key of the ILE is composed of the ILK and the segment code of the target segment.

The reorganization number for a partition is physically stored in the partition's first database data set. This number is initialized by partition initialization or load, and incremented with each reorganization that reloads segments in the partition.

### Finding Target Segments

When IMS accesses the target segment from the secondary index entry or logical child segment, it must first determine the partition in which the target resides. It uses the key in the secondary index or logical child to determine the partition. Next it must determine the location in the target partition database data set. It compares the partition ID and reorganization number of the target partition with the partition ID and reorganization number stored in the EPS. If they match, IMS uses the RBA in the EPS to locate the target segment. If they do not match, the RBA in the EPS cannot be used.

When the RBA in the EPS cannot be used, IMS uses the information in the ILE to locate the target segment. The ILE key is found by using the ILK from the EPS and the target's segment code. The ILE is read from the ILDS of the partition determined from the target's key.

Figure 221 on page 403 illustrates a situation in which the RBA in the EPS cannot be used. In the figure, the target partition has been reorganized three times since the EPS was accurate. This has moved the target segment and updated the reorganization number in the partition data set. The EPS still contains a reorganization number of 5, but the reorganization number in the partition data set is now 8. The information in the ILE has been updated by the HD Reorganization Reload utility. IMS uses the ILK from the EPS to find the ILE and uses the RBA in the ILE to find the target segment.

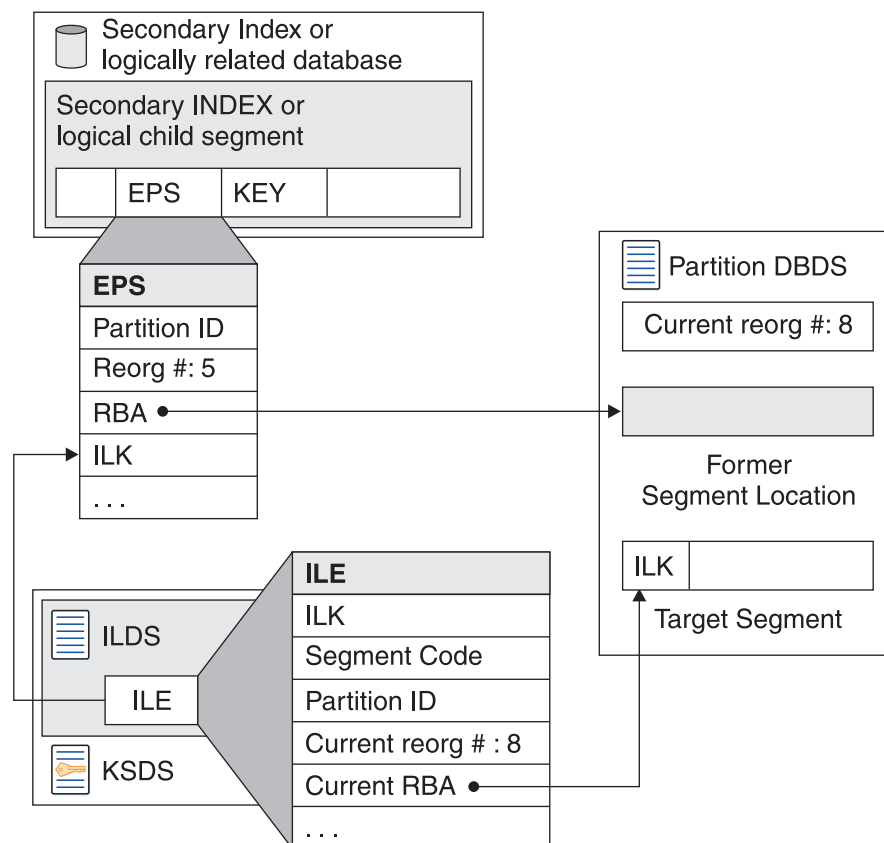


Figure 221. HALDB Pointer After a Reorganization

Even though the retrieval is indirect, often the CI containing the ILE will already be in IMS's buffer pool.

**Recommendation:** If possible, avoid the indirect process of locating target segments. Instead, get the target segment location from the EPS without reading the ILE. The self-healing process allows IMS to limit the use of ILEs.

## Healing Pointers

The self-healing process updates or corrects the information in EPSs. When the ILE is used, the information about the current location of the segment in the ILE is moved to the EPS. This allows IMS to avoid the indirect process if the EPS is used for a later retrieval. This correction to the EPS in the database buffer pool is always done.

Because of locking considerations, the update might not be written to the database on DASD. The buffer containing the entry or segment with the updated EPS is marked as altered if the application program is allowed to update the database. The call must be done with a PCB allowing updates, and the IMS system must have an access intent for the partition that allows updates. If updates are not allowed, the buffer is not marked as altered.

When the application reaches a sync point, it does not write buffers to DASD if they are not marked as altered. If the updated EPS is not written to DASD, the next time it is retrieved from DASD and used to find its target, IMS must use the indirect process. That is, IMS must read the ILE again.

## Reorganizing HALDBs

Figure 222 shows the EPS after it has been healed. The RBA points to the current location. The partition ID is correct. The partition reorganization number matches the number stored in the partition database data set.

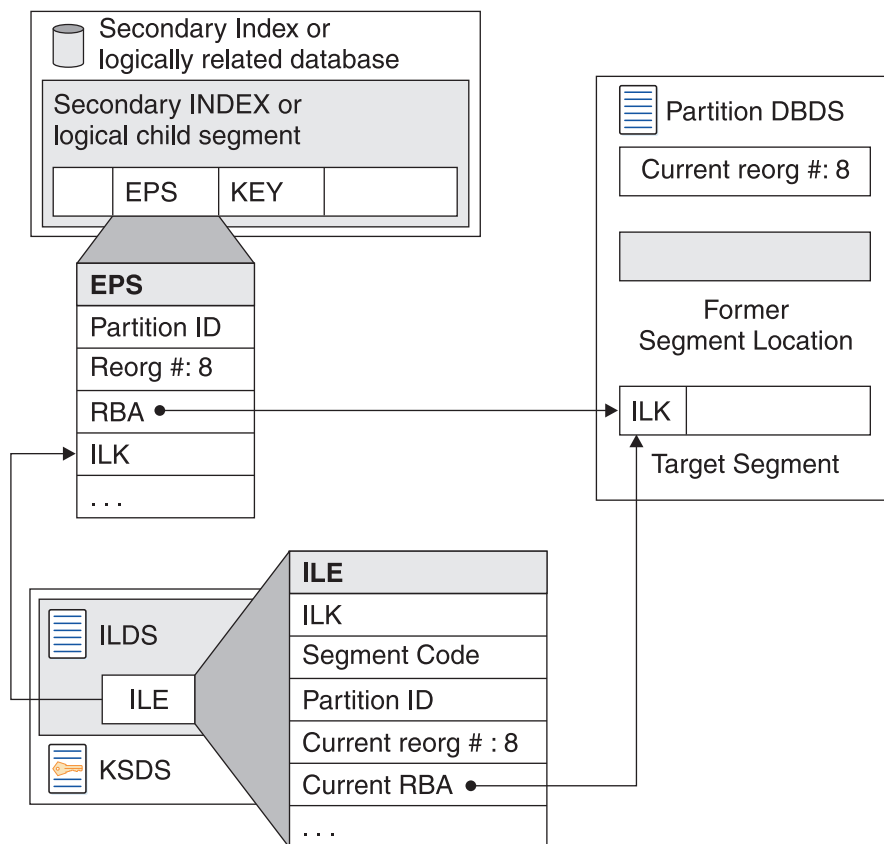


Figure 222. HALDB Pointer After the Self-Healing Process

### Performance of the Self-Healing Process

The performance of the self-healing process can be much more efficient than you might anticipate.

Many pointers can be healed with a small number of ILDS reads. This is due to the use of IMS database buffering. ILDSs are database data sets. They use database buffer pools in the same way that other database data sets use them. If a CI is already in its buffer pool, it does not have to be read from DASD.

Each ILE is 50 bytes. You specify the CI sizes for your ILDSs. An 8 KB ILDS CI holds up to 163 ILEs and a 16 KB CI holds up to 327 ILEs, so a single CI can hold many ILEs. After a reorganization, IMS might need to heal many pointers to the reorganized partitions.

When there are frequent uses of the CIs in an ILDS, they tend to remain in their buffer pool. One read of an ILDS CI might be sufficient to heal hundreds of pointers. As with most IMS database tuning, having a large number of buffers for frequently used data sets can be highly beneficial.

Another benefit of the self-healing process is that it does not waste resources healing pointers that are not used. In many secondary indexes, only a small number of entries are actually used. With a non-HALDB database, the entire index

is rebuilt every time the indexed database is reorganized. With HALDB, the index is not rebuilt and only a small number of referenced index entries are updated. HALDB does not use resources to update pointers that are never used.

When an EPS is updated, an application marks buffers as altered only if the application is allowed to make updates. If updates are allowed and a block-level data sharing environment is being used, a block lock is requested for the altered block. Block level data sharing environments exist when the IRLM is used and the share level for the database is either 2 or 3. The block locks are held until the application program commits its unit of work, which could cause a performance problem.

**Optimizing Self-Healing Performance:** Usually application programs with update authority commit frequently. This is good programming practice. Occasionally, an application program that is allowed to do updates does not actually do them. For example, a program with a PCB specifying PROCPT=A might only read. In this case, it might not commit frequently. Because it only reads, it never holds many locks. This could change with the implementation of HALDB. If the program runs in a block level data sharing environment and invokes the healing process, it will hold block locks until they are committed. This could cause two problems. First, it might hold the locks for a long time and cause other programs to wait before they can update the blocks. Second, it could hold many locks. This could cause a storage shortage in the IRLM or a lock structure.

If you have a program that holds locks for a long time or that holds many locks when performing the self-healing pointer process, you have four options:

- If the application program does not make updates, use PROCPT=G.
- Have your program commit frequently.
- Invoke the pointer healing process before you run application programs that use PROCPT=A, but do not do any updates. Run another program or utility before this type of application program. The HALDB Conversion and Maintenance Aid tool supplies a pointer healing utility.
- Rebuild secondary indexes with an index builder, such as the IMS Index Builder for z/OS. The IMS Index Builder for z/OS creates EPSs with accurate RBAs.

This scenario is not common. Most users can let the pointer healing process occur without taking any special precautions.

**Recommendation:** Do not rebuild your secondary indexes after a reorganization. Let the self-healing process of HALDB correct the pointers. This shortens the outage for reorganizations and tends to minimize the use of resources.

#### **Related Reading:**

- For more information about the IMS High Availability Large Database Conversion and Maintenance Aid, see the *IMS High Availability Large Database Conversion and Maintenance Aid for z/OS, User's Guide*.
- For more information about the IMS Index Builder, see the *IMS Index Builder for z/OS User's Guide*.



### Changing DL/I Access Methods

When you originally chose a DL/I access method (or type of database), you chose it based on such things as:

- The type of processing you needed to do (sequential, direct, or both)
- The volatility of your data

If the characteristics of your applications have changed over a period of time, performance might be improved by changing to another DL/I access method. Chapter 6, “Choosing Full-Function Database Types,” on page 55 describes which type of DL/I access method to choose given your application's characteristics. Assuming that you have decided to change access methods, this topic tells you:

- Given your existing DL/I access method, what things you need to change to convert to a different DL/I access method
- How to do the conversion

The reorganization utilities described earlier in this chapter can be used to change DL/I access methods among the HISAM, HDAM, and HIDAM access methods. One exception to this is that HDAM cannot be changed to HISAM or HIDAM unless HDAM database physical records are in root key sequence. This exception exists because HISAM and HIDAM databases must be loaded with database records in root key sequence. When the HD Reorganization Unload utility unloads an HDAM database, it unloads it using GN calls. GN calls against an HDAM database unload the database records in the physical sequence in which they were stored by the randomizing module. This will not be root key sequence unless you used a sequential randomizing module (one that put the database records into the database in physical root key sequence).

**Related Reading:** The procedures in this topic require you to reassess different aspects of your databases. See the following related readings for information to help you make the reassessments:

- For a description of free space and how it is specified, see “Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)” on page 257.
- For a description of types of pointers and how to specify them, see “Types of Pointers You Can Specify” on page 84.
- For information about what to consider in choosing a logical record length and how logical record lengths are specified, see “Choosing a Logical Record Length for HD Databases” on page 264.
- For information about what to consider in choosing a CI or block size and how CI and block size are specified, see “Determining the Size of CIs and Blocks” on page 264.
- For information about what to consider in choosing buffer number and size and how buffers are specified, see “Buffer Numbers” on page 267.
- For information about how to calculate database size, see “Estimating the Minimum Size of the Database” on page 327.
- For information about choosing HDAM or PHDAM options, see “Choosing HDAM or PHDAM Options” on page 260.
- For information about choosing and specifying a randomizing module, see “Determining Which Randomizing Module to Use (HDAM and PHDAM Only)” on page 259.



## Changing the DL/I Access Method From HISAM to HIDAM

You need the following before changing your DL/I access method from HISAM to HIDAM:

- Determine whether you are going to set aside free space in the HIDAM database. (Free space is space into which database records are not loaded when the database is initially loaded.)

Unlike HISAM, in a HIDAM database you can set aside periodic blocks or CIs of free space or a percentage of free space in each block or CI (in the ESDS or OSAM data set). This free space can then be used for inserting database records or segments into the database after initial load.

- Determine what type of pointers you are going to use in the database. Unlike HISAM, HIDAM uses direct-address pointers to point from one segment in the database to the next.
- Reassess your choice of logical record size. A logical record in HISAM can only contain segments from the same database record. In HIDAM, a logical record can contain segments from more than one database record.
- Reassess your choice of CI or block size. In HISAM, your choice of CI or block size should have been some multiple of the average size of a database record. In HIDAM, the size should be chosen because of the characteristics of the device and the type of processing you plan to do.
- Reassess your choice of database buffer sizes and the number of buffers you have allocated. If you have changed your CI or block size, you need to allocate buffers for the new size.
- Recalculate database space. You need to do this because the changes you are making will result in different requirements for database space.

Once you have determined what changes you need to make, you are ready to change your DL/I access method from HISAM to HIDAM. To do this:

1. Unload your database using the existing DBD and the HD Reorganization Unload utility.
2. Code a new DBD that reflects the changes you need to make. You must also code a DBD for the HIDAM index.
3. If you need to make change that are not specified in the DBD (such as changing database buffer sizes or the amount of space allocated for the database), make these changes.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload the database using the new DBD and the HD Reorganization Reload utility. Remember to make an image copy of your database as soon as it is reloaded.

If you are using logical relationships or secondary indexes, you will need to run additional utilities immediately before and after reloading your database. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing the DL/I Access Method From HISAM to HDAM

You need to do the following before changing your DL/I access method from HISAM to HDAM:

## Changing DL/I Access Methods

- Determine what type of pointers you are going to use in the database. Unlike HISAM, HDAM uses direct-address pointers to point from one segment in the database to the next.
- Determine which randomizing module you are going to use. Unlike HISAM, HDAM uses a randomizing module. The randomizing module generates information that determines where a database record will be stored.
- Determine which HDAM options you are going to use. Unlike HISAM, an HDAM database is divided into two parts: a root addressable area and an overflow area. The root addressable area contains all root segments and is the primary storage area for dependent segments in a database record. The overflow area is for storage of dependent segments that do not fit in the root addressable area. The HDAM options here are the ones that pertain to choices you make about the root addressable area. These are:
  - The maximum number of bytes of a database record to be put in the root addressable area when segments in the database record are inserted consecutively (without intervening processing operations).
  - The number of blocks or CIs in the root addressable area.
  - The number of RAPS (root anchor points) in a block or CI in the root addressable area. (A RAP is a field that points to a root segment.)
- Reassess your choice of logical record sizes. A logical record in HISAM can only contain segments from the same database record. In HDAM, a logical record can contain segments from more than one database record. In addition, HDAM logical records contain RAPs and two space management fields (FSEs and FSEAPs).
- Reassess your choice of CI or block size. In HISAM, your choice of CI or block size should have been some multiple of the average size of a database record. In HDAM, the size should be chosen because of the characteristics of the device and the type of processing you plan to do.
- Reassess your choice of database buffer sizes and the number of buffers you have allocated. If you have changed your CI or block size, you need to allocate buffers for the new size.
- Recalculate database space. You need to do this because the changes you are making will result in different requirements for database space.

Once you have determined what changes you need to make, you are ready to change your DL/I access method from HISAM to HDAM. To do this:

1. Unload your database, using the existing DBD and the HD Reorganization Unload utility.
2. Code a new DBD that reflects the changes you need to make.
3. If you need to make changes that are not specified in the DBD (such as changing database buffer sizes or the amount of space allocated for the database), make these changes. HDAM only requires one data set, whereas HISAM requires two.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload the database using the new DBD and the HD Reorganization Reload utility. Make an image copy of your database as soon as it is reloaded.

If you are using logical relationships or secondary indexes, you will need to run additional utilities before reloading your database. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing the DL/I Access Method From HIDAM to HISAM

You need to do the following before changing your DL/I access method from HIDAM to HISAM:

- Reassess your choice of logical record size. A logical record in HISAM can only contain segments from the same database record. In HIDAM, a logical record can contain segments from more than one database record.
- Reassess your choice of CI or block size. In HIDAM, your choice of CI or block size should be based on the characteristics of the device and the type of processing you plan to do. In HISAM, the size should be some multiple of the average size of a database record.
- Reassess your choice of database buffer sizes and the number of buffers you have allocated. If you have changed your CI or block size, you need to allocate buffers for the new size.
- Recalculate database space. You need to do this because the changes you are making will result in different requirements for database space.

Once you have determined what changes you need to make, you are ready to change your DL/I access method from HIDAM to HISAM. To do this:

1. Unload your database using the existing DBD and the HD Reorganization Unload utility.
2. Code a new DBD that reflects the changes you need to make. You will not be specifying direct-address pointers or free space in the DBD, because HISAM, unlike HIDAM, does not allow use of these. Also, HISAM has only one DBD whereas HIDAM had two.
3. If you need to make changes that are not specified in the DBD (such as changing database buffer sizes or the amount of space allocated for the database), make these changes.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload the database using the new DBD and the HD Reorganization Reload utility. Remember to make an image copy of your database as soon as it is reloaded.

If you are using logical relationships or secondary indexes, run additional utilities right before and after reloading your database. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing the DL/I Access Method From HIDAM to HDAM

You need to do the following before changing your DL/I access method from HIDAM to HDAM:

- Reassess your choice of direct-address pointers. Although both HIDAM and HDAM use direct-address pointers, you might need to change the type of direct-address pointer used:
  - Because of the changing needs of your applications.
  - Because pointers are partly chosen based on the type of database you are using. For example, if you used physical twin backward pointers on root segments in your HIDAM database to get fast sequential processing of roots, they will not have any use in an HDAM database. See Chapter 6, “Choosing Full-Function Database Types,” on page 55 under “Types of Pointers You Can Specify” for a description of types of pointers, their uses, and how to specify them.

## Changing DL/I Access Methods

- Determine which randomizing module you are going to use. Unlike HIDAM, HDAM uses a randomizing module. The randomizing module generates information that determines where a database record is to be stored.
- Determine which HDAM options you are going to use. Unlike HIDAM, an HDAM database does not have a separate index database. Instead the database is divided into two parts: a root addressable area and an overflow area. The root addressable area contains all root segments and is the primary storage area for dependent segments in a database record. The overflow area is for storage of dependent segments that do not fit in the root addressable area. The HDAM options here are the ones that pertain to choices you make about the root addressable area. These are:
  - The maximum number of bytes of a database record to be put in the root addressable area when segments in the database record are inserted consecutively (without intervening processing operations).
  - The number of blocks or CIs in the root addressable area.
  - The number of RAPs in a block or CI in the root addressable area.
- Reassess your choice of logical record size.
- Reassess your choice of CI or block size.
- Reassess your choice of database buffer sizes and the number of buffers you have allocated. If you have changed your CI or block size, you need to allocate buffers for the new size.
- Recalculate database space. You need to do this because the changes you are making will result in different requirements for database space.

After you have determined what changes you need to make, you are ready to change your DL/I access method from HIDAM to HDAM. To do this:

1. Unload your database using the existing DBD and the HD Reorganization Unload utility.
2. Code a new DBD that reflects the changes you need to make. You probably will not be specifying free space, but you will be specifying HDAM options. Note also that you'll need only one DBD for HDAM, whereas HIDAM required two DBDs.
3. If you need to make changes that are not specified in the DBD (such as changing database buffer sizes or the amount of space allocated for the database), make these changes. HDAM only requires one data set, whereas HIDAM requires two.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload the database using the new DBD and the HD Reorganization Reload utility. Remember to make an image copy of your database as soon as it is reloaded.

If you are using logical relationships or secondary indexes, you will need to run additional utilities right before and after reloading your database. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing the DL/I Access Method From HDAM to HISAM

You need to do the following before changing your DL/I access method from HDAM to HISAM:

- Reassess your choice of logical record size. A logical record in HISAM can only contain segments from the same database record. In HISAM, a logical record can contain segments from more than one database record.
- Reassess your choice of CI or block size. In HDAM, your choice of CI or block size should be based on the characteristics of the device and the type of processing you plan to do. In HISAM, the size should be some multiple of the average size of a database record.
- Reassess your choice of database buffer sizes and the number of buffers you have allocated. If you have changed your CI or block size, you need to allocate buffers for the new size.
- Recalculate database space. You need to recalculate database space because the changes you are making will result in different requirements for database space.

After you have determined what changes you need to make, you are ready to change your DL/I access method from HDAM to HISAM. Remember you must write your own unload and reload programs unless database records in the HDAM database are in physical root key sequence. In writing your own load program, if your HDAM database uses logical relationships, you must preserve information in the delete byte (for example, a segment that is logically deleted in the database might not be physically deleted).

To change from HDAM to HISAM:

1. Unload your database using the existing DBD and one of the following:
  - Your unload program
  - The HD Reorganization Unload utility if database records are in physical root key sequence
2. Code a new DBD that reflects the changes you need to make. You will not be specifying direct-address pointers or HDAM options.
3. If you need to make changes that are not specified in the DBD (such as changing database buffer sizes or the amount of space allocated for the database), make these changes. HDAM only requires one data set, whereas HISAM requires two.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload the database using the new DBD and:
  - Your load program, or
  - The HD Reorganization Reload utility if database records are in physical root key sequences

Remember to make an image copy of your database as soon as it is reloaded.

If you are using logical relationships or secondary indexes, you will need to run additional utilities right before and after reloading your database. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing the DL/I Access Method From HDAM to HIDAM

You need to make the following changes before changing your DL/I access method from HDAM to HIDAM:

- Determine whether you are going to set aside free space in the HIDAM database. (Free space is space into which database records are *not* loaded when the database is initially loaded.) In a HIDAM database, you can set aside periodic blocks or CIs of free space or a percentage of free space in each block or

CI (in the ESDS or OSAM data set). This free space can then be used for inserting database records or segments into the database after initial load. In an HDAM database, you generally get the free space you need by careful choice of HDAM options.

- Reassess your choice of direct-address pointers. Although both HIDAM and HDAM use direct-address pointers, you might need to change the type of direct-address pointer used:
  - Because of the changing needs of your applications.
  - Because pointers are partly chosen based on the type of database you are using. For example, you can choose to use physical twin forward and backward pointers on root segments in your HIDAM database to get fast sequential processing of roots.
- Reassess your choice of logical record size.
- Reassess your choice of CI or block size.
- Reassess your choice of database buffer sizes and the number of buffers you have allocated. If you have changed your CI or block size, you need to allocate buffers for the new size.
- Recalculate database space. You need to recalculate database space because the changes you are making will result in different requirements for database space.

Once you have determined what changes you need to make, you are ready to change your DL/I access method from HDAM to HIDAM. Remember you must write your own unload and reload programs unless database records in the HDAM database are in physical root key sequence. In writing your own load program, if your HDAM database uses logical relationships, you must preserve information in the delete byte (for example, a segment that is logically deleted in the database might not be physically deleted).

To change from HDAM to HIDAM:

1. Unload your database using the existing DBD and one of the following:
  - Your unload program
  - The HD Reorganization Unload utility if database records are in physical root key sequence
2. Code a new DBD that reflects the changes you need to make. You must also code a DBD for the HIDAM index. You will not be specifying HDAM options but you probably will be specifying free space.
3. If you need to make changes that are not specified in the DBD (such as changing database buffer sizes or the amount of space allocated for the database), make these changes. HDAM only requires one data set, whereas HIDAM requires two.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload the database using the new DBD and one of the following:
  - Your load program
  - The HD Reorganization Reload utility if database records are in physical root key sequence.

Remember to make an image copy of your database as soon as it is reloaded.



If you are using logical relationships or secondary indexes, you will need to run additional utilities before reloading your database. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing the DL/I Access Method From HDAM to PHDAM and HIDAM to PHIDAM

For a logical view of HDAM and HIDAM databases before and after changing to PHDAM and PHIDAM respectively, see Figure 223.

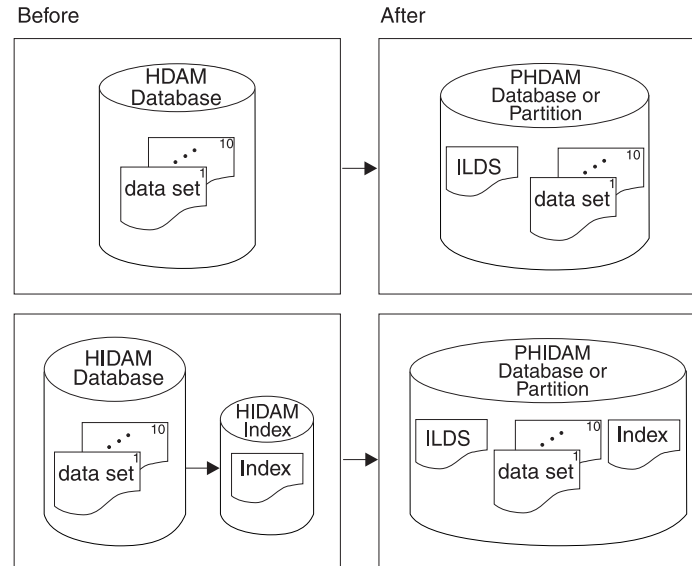


Figure 223. HDAM and HIDAM Databases Before and After Changing to PHDAM and PHIDAM

**Requirement:** You must concurrently migrate *all* databases that are logically related. All secondary indexes that point to these logically related databases must be migrated at the same time the databases they point to are migrated.

**Restriction:** HALDB support for logical relationships does not include support for virtual pairing. When converting a logically related database to HALDB, you can convert the logical relationships as follows:

- Unidirectional relationships in the database being converted can remain unidirectional in the HALDB database.
- Physically-paired logical relationships in the database being converted can remain physically-paired in the HALDB database.
- Virtually-paired logical relationships in the database being converted can be converted to physically-paired in the HALDB database.

Because non-keyed PHDAM root segments are not supported, you cannot migrate an HDAM database with non-keyed roots to HALDB.

There are two methods for changing a HDAM or HIDAM database to PHDAM or PHIDAM. The first method keeps the same database name. The second method changes the name of the physical database and uses a logical database with the old database name.

### Secondary Index Considerations

Migration of secondary index databases with non-unique keys requires separate JCL steps to sort and merge the unload records to create new /SX values prior to inputting them into the HD Reorganization Reload utility. User data is lost.

**Related Reading:** For more information about the HD Reorganization Reload Utility, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

Secondary indexes targeting HDAM or HIDAM databases that are changing to PHDAM or PHIDAM must be changed to PSINDEXs. The steps for doing this are the same as the steps for unload and reload. Run the HD Reorganization Unload and Reload utilities against the secondary index. The user data is preserved in the secondary index.

### Determining the Database Name

When migrating a database to a HALDB format, you must decide whether to change the database name.

If the new database is to have the same name as the old database:

1. Unload the old database with the migrate option before changing RECON or DBDLIB.
2. Create a RECON list before deleting the records for the database.
3. Remove the information from the old database RECON and DBDLIB.
4. Delete all MDA members
5. Define the HALDB by using DBDGEN, ACBGEN, and either the HALDB Partition Definition utility or the DBRC commands INIT.DB and INIT.PART.

After the definitions are complete, load the new database.

If the new database is to have a different name from the old database:

1. Create a RECON list before deleting the records for the database. The old information is retained in RECON as long as necessary.
2. Unload the old database.
3. Remove the DBD from DBDLIB and ACBLIB.
4. Delete all MDA members that refer to the old database.
5. Perform a DBDGEN on the old database name as a logical database with the source being the new HALDB.
6. Define the HALDB by using DBDGEN, ACBGEN, and either the HALDB Partition Definition utility or the DBRC commands INIT.DB and INIT.PART.

### Performing the Migration Unload

Use the HD Reorganization Unload utility (DFSURGU0) to unload the database. Specify the migrate option to unload the database.

### Performing the Migration Reload

To reload the database:

1. Run the DBDGEN utility for the new HALDB DBD.
2. Use either the HALDB Partition Definition utility or the DBRC commands INIT.DB and INIT.PART to define the new HALDB partitions.
3. Run the HALDB Partition Data Set Initialization utility (DFSUPNT0) or the Database Prereorganization utility (DFSURPR0).
4. Reload the database by using HD Reorganization Reload utility (DFSURGL0).



5. Make an image copy of all partitions.

The user data is preserved in the secondary index.

### Changing the DL/I Access Method From PHDAM and PHIDAM to HDAM and HIDAM

The process of restoring HDAM or HIDAM databases that were migrated to PHDAM or PHIDAM is known as fallback. Fallback supports the following types of logical relationships:

- Unidirectional HALDB to current unidirectional database
- Physically paired HALDBs to current physically paired databases

The order of physical twin segments is maintained when a fallback from HALDBs occurs. This includes segments that are non-keyed and that have a non-unique key.

Primary indexes are recreated, not unloaded. Secondary indexes are recreated by the reload utility process. User data is not preserved.

**Requirements:** The requirements for a fallback include:

- You must perform a concurrent fallback of all databases that are logically related.
- You must have prefix resolution and prefix update utilities, if logical children or secondary indexes are present when a database falls back from HALDB.
- Before you use the database, but after you reload and perform any prefix resolution or prefix update, take an image copy of all data sets, including the prime index, by using one of the image copy utilities. The image copy utilities invoke DBRC to validate input and record results, which ensures that you have a backup copy of the database that can serve as an effective point of recovery in case of failure.
- You must complete the fallback of all related databases and secondary index databases before any database can be used.

**Restriction:** You cannot perform a fallback on physically paired HALDBs to current virtually paired databases and preserve the logical sequence of the virtual logical child. The step to accomplish this conversion are:

1. Perform a fallback on current physically paired databases.
2. Reorganize the current database.
3. Change the logical relationship to virtually paired databases.

The steps in the fallback process are:

1. Unload all related databases using the HD Reorganization Unload utility (DFSURGU0) with the FALLBACK option. DFSURGU0 locates the paired logical children and saves information needed for fallback in the prefix of the output data. The prefix created by DFSURGU0 contains the information required to create the new segment prefix when the data is reloaded.
2. Perform DBDGENs to define the current format databases.
3. Re-register all databases to be controlled by DBRC. If keeping the same database name, first use the HALDB partition Definition utility to delete the HALDB.
4. Perform the prereorganization step with the databases listed as DBR.
5. Reload all the unloaded databases using the new definitions.

Logical children have some special considerations. There are three cases to consider: unidirectional, virtually paired, and physically paired databases. DL/I offers an option to not store the logical parent's concatenated key in the logical child (virtual key storage option); in normal retrieval the key is built and the user application always sees the concatenated key in the data. For all logical children unloaded, you must drop the logical parent's concatenated key if the virtual key storage option is chosen. The unloaded segments are reloaded as real segments that are part of a physically paired relationship. This type of unload, dropping the logical parent's concatenated key, only occurs when DFSURGU0 performs a fallback unload.

### Procedure for Changing to DEDBs

If your database requires logical relationships, a secondary index, or fixed-length segments, DEDBs cannot be used.

You need to do the following before changing your database to DEDBs:

- Determine whether or not your application programs can tolerate the FH (data unavailable) status code.
- Determine whether or not your database can tolerate a randomizing routine (might not be a problem when changing from HDAM).
- Recalculate database space, particularly when using DEDB features such as partitioning and data set replication.
- Determine which pointers are available to use.

To change to DEDBs:

1. Unload your database using the existing DBD and one of the following:
  - Your unload program
  - The HD Reorganization Unload utility if database records are in physical root key sequence
2. Code a new DBD for the DEDBs.
3. Execute the DBD generation.
4. For non-VSAM data sets, delete the old database space and define the new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Run the DEDB initialization utility (DBFUMIN0).
6. Run the user DEDB load program.

---

## Changing the Hierarchic Structure

There are two types of tuning changes you might need to make that involve changes to the structure of your database record. The first is changing the hierarchic sequence of segment types in your database record to improve performance. The second is combining segments to maximize the use of space.

Changes involving adding and deleting segments in the hierarchy are covered in Chapter 16, "Modifying Databases," on page 437.

### Changing the Sequence of Segment Types

In general, performance is best if frequently used dependent segments are close to the root segment and infrequently used dependent segments are toward the end of the database record. This arrangement maximizes performance because all types of

databases (except HSAM) have direct (therefore, fast) access to root segments. But, after the root is located, dependent segments are found by one of the following:

- Searching sequentially through the database record (HSAM and HISAM)
- Following pointers from the root segments to a dependent path and then searching through twin chains until the correct segment is reached (HDAM, HIDAM, PHDAM, and PHIDAM).

One way to determine whether the order of dependent segment types in your hierarchy is an efficient one is to examine the IWAITS/CALL field on the DL/I Call Summary report.

**Related Reading:** For detailed information on the DL/I Call Summary report, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

The IWAITS/CALL field tells you, by DL/I call against a specific segment, the average number of times a segment had to wait for I/O operations to finish before the segment could be processed. A high number (and high, of course, is relative to the application) indicates that multiple I/O operations were required to process the segment.

If the database does not need to be reorganized, the high number can mean this is a frequently used segment type placed too far from the beginning of the database record. If you determine this is the situation, you can change placement of the segment type. The change can increase the value in the IWAITS/CALL field for other segments.

To change the placement of a segment type, you must write a program to unload segments from the database in the new hierarchic sequence. (The reorganization utilities cannot be used to make such a change.) Then you need to load the segments into a new database. Again, you must write a program to reload.

## Combining Segments

The second type of change you might need to make in the structure of your database record is combining segment types to maximize use of space. For example, having two segment types, a dependent segment for college classes with a dependent segment for instructors who teach the classes, is an inefficient use of space if typically only one or two instructors teach a class. Rather than having a separate instructor segment, you can combine the two segment types, thereby saving space.

Combining segments also requires that you write an unload and reload program. (The reorganization utilities cannot be used to make such a change.)

## Procedure for Changing the Hierarchic Structure

To change the hierarchic structure, you need to:

1. Determine whether the change you are making will affect the code in any application programs. If so, make sure the code gets changed.
2. Unload your database using your unload program and the existing DBD.
3. Code a new DBD.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.

## Changing the Hierarchic Structure

5. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
6. Reload your database using your load program and the new DBD. Remember to make an image copy of your database as soon as it is reloaded.
7. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

---

## Changing Direct-Access Storage Devices

Several situations might warrant tuning your database by changing DASDs (direct-access storage devices). First, when application requirements change, you might require a faster or slower device. Second, you might want to take advantage of new devices offering better performance. Finally, you might need to change devices to get database data sets on two different devices, so as to minimize contention for device use.

You can change your database (or part of it) from one device to another using the reorganization utilities. To change direct-access storage devices:

1. Unload your database using the existing DBD and the appropriate unload utility.
2. Recalculate CI or block size to maximize use of track space on the new device. Information on calculating CI or block size is contained in Chapter 9, "Designing Full-Function Databases," on page 257 under "Determining the Size of CIs and Blocks".
3. Code a new DBD.
4. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
5. Reload your database, using the new DBD and the appropriate reload utility. Remember to make an image copy of your database as soon as it is reloaded.
6. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

---

## Tuning OSAM Sequential Buffering

If you are using OSAM Sequential Buffering, you can do two things to help ensure that it processes your databases efficiently:

- Keep your databases well organized; that is, the logical (database record) sequence is nearly the same as the physical (DASD block) sequence.
- Select the right number of SB buffer sets (Tuning of SB buffers is discussed "OSAM Sequential Buffering" on page 423).

### Well-Organized Database

Well-organized databases are by far the most important of these two factors. When the databases SB processes are well organized, you note elapsed time improvements. This is because your programs process IMS database segments and records, and they do not process DASD blocks directly. Processing a well-organized database in logical-record sequence results in an I/O reference pattern that accesses

most DASD blocks in physical sequence. SB can take advantage of these sequential I/O patterns by issuing many sequential reads. Extensive use of sequential reads considerably reduces the elapsed time for your job.

### Badly-Organized Database

Processing a badly-organized database in logical-record sequence typically results in an I/O reference pattern that accesses many DASD blocks in a random sequence. This happens because many segments were stored in randomly scattered blocks after the database was loaded or reorganized. When your database is accessed in a predominantly random pattern, most I/O operations issued by the SB buffer handler are random reads. SB is not able to issue many sequential reads, and the elapsed time for your job is not considerably reduced.

You can use the SB buffering statistics in the optional //DFSSTAT reports to see if your database is well-organized. Your database is likely to be badly organized if a large percentage of the blocks were read with random reads during sequential processing. You can monitor this percentage over a period of time to see if it increases as the database ages.

**Related Reading:** For details on //DFSSTAT reports, see *IMS Version 9: Utilities Reference: System*.

### Ensuring a Well-Organized Database

You can ensure your databases are reasonably well-organized by:

- Providing enough embedded free space at database load or reorganization time. IMS can then use this free space to insert new segments near their related segments (segments in the same database record).

**Related Reading:** For details on how to provide enough embedded free space, see “Specifying Free Space (HDAM, PHDAM, HIDAM, and PHIDAM Only)” on page 257.

**Tip:** Choose the amount of free space based on the growth and performance characteristics of your database. For new databases, use a value of 25% and increase or decrease this value as needed. It is a good idea to schedule a reorganization for the database when the reusable free space is less than 5%.

- Selecting an appropriate database reorganization frequency.

**Related Reading:** For more information on when and how to reorganize your databases, see “Reorganizing the Database” on page 360.

- Using efficient HDAM and PHDAM randomizing modules and randomizing parameters. Information on this can be found in “Determining Which Randomizing Module to Use (HDAM and PHDAM Only)” on page 259.

---

## Adjusting HDAM and PHDAM Options

To assess any design choices you have previously made or to improve performance, read “Choosing HDAM or PHDAM Options” on page 260. This topic discusses the HDAM and PHDAM options you can choose and the performance implications each.

You can adjust HDAM and PHDAM options using the reorganization utilities:

1. Determine whether the change you are making will affect the code in any application programs. It should only do so if you are changing to a sequential randomizing module.

## Adjusting HDAM and PHDAM Options

2. Unload your database, using the existing DBD and the appropriate unload utility.
3. Code a new DBD (for non-PHDAM) using the TSO Partition Definition Utility. If you changed your CI or block size, you need to allocate buffers for the new size.

**Related Reading:** See Chapter 9, “Designing Full-Function Databases,” on page 257 for a discussion of what things to consider in choosing buffer number and size and how they are specified.

4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.

5. Determine whether you need to recalculate database space.

**Related Reading:** See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate space.

6. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
7. Reload your database or partition using the new DBD (if any) and the appropriate reload utility. Make an image copy of your database as soon as it is reloaded.

---

## Adjusting Buffers

The size and number of buffers you can choose are described in “Multiple Buffers in Virtual Storage” on page 266. This topic also discusses the performance implications of choosing a buffer size and number. To improve performance, reread that topic and reassess the original choices you made before you adjust your buffers.

### VSAM Buffers

IMS builds the VSAM buffer pool based on the number of buffers and the subpool sizes specified in the DFSVSMxx PROCLIB member or, in batch or utility environments, in the DFSVSAMP data set.

When a DL/I call, such as an ISRT or GU, is issued against a VSAM data set, IMS issues either a PUT or GET request, respectively, to VSAM. The VSAM buffer pool is managed and manipulated by DFSMS, not by IMS.

This topic contains the following information about VSAM buffers:

- “Monitoring VSAM Buffers”
- “When to Adjust VSAM Buffers” on page 421
- “VSAM Buffer Adjustment Options” on page 421

For descriptions of the various buffer options, see “DFSVSMxx” under “IMS PROCLIB member data sets” in the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

### Monitoring VSAM Buffers

If you are using VSAM, you can monitor buffers using the DB monitor reports described in Chapter 14, “Monitoring Databases,” on page 353. For each buffer size you define, a VSAM subpool report is produced. The VSAM Buffer Pool report



tells the number of buffers in the subpool and their size (in the SUBPOOL BUFFER SIZE and TOTAL BUFFERS IN SUBPOOL fields).

### When to Adjust VSAM Buffers

Adjust VSAM buffers when you see buffer performance begin to degrade, or if you wish to add options to boost performance in anticipation of increased buffer activity.

### VSAM Buffer Adjustment Options

1. If background write is turned on and the number in the NUMBER OF VSAM WRITES TO MAKE SPACE IN THE POOL field is not zero, you probably do not have enough buffers allocated in the subpool. Try allocating more buffers to decrease the number or reduce it to zero.
2. If you need to improve performance for a specific application, you can reserve subpools for certain data sets by:
  - Defining multiple local shared resource pools.
  - Dedicating subpools to a specific data set.
  - Defining separate subpools for index and data components of VSAM data sets. *IMS Version 9: Installation Volume 2: System Definition and Tailoring* tells you how to specify these options.
3. If VSAM sequential mode processing is not used, the number of VSAM buffers specified in the DFSVSAMP DD statement can dramatically affect performance. This problem occurs when the number of VSAM KSDS indexes that must be read, plus one for the data portion, is equal to or greater than the number of VSAM buffers allocated. This problem can be alleviated either by increasing the number of buffers or by using VSAM sequential mode. With VSAM sequential mode, the need to read indexes above the sequence set is reduced. However, VSAM sequential mode can only be obtained in a batch environment with a DBD referenced by a single PCB and with a processing option of LOAD or RETRIEVE only. VSAM sequential mode is not available in data sharing.
4. VSAM buffers can take advantage of z/OS Hiperspace buffering.

**Hiperspace Buffering Parameters:** To use Hiperspace buffering, you must specify one or two optional parameters on the VSRBF subpool definition statement:

#### HSO|HSR

Specifies the action IMS takes if Hiperspace buffering requested for a subpool is unavailable.

**HSO** Hiperspace buffering is optional. IMS continues to run.

**HSR** Hiperspace buffering is required. IMS terminates.

**HSn** Specifies the number of Hiperspace buffers to build for a subpool. The number *n* is a 1- to 8-digit number.

Hiperspace parameters are valid only for buffer sizes of 4K or multiples of 4K. Specifying Hiperspace parameters on buffers smaller than 4K causes an error. To use Hiperspace buffering you might need to unload your database and then reload it into 4K or multiples of 4K CI sizes to accommodate Hiperspace requirements.

If you decide to leave intact databases with CI sizes of less than 4K, do not allocate any buffers less than 4K. The CIs that are less than 4K are placed in 4K or larger buffer pools. However, the CIs compete with VSAM data sets already there. This method might be expedient in the short term.

### Related Reading:

## Adjusting Buffers

- For more information on coding the HSO|HSR and HSn parameters to activate Hiperspace buffering on VSAM buffers, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- For more information about VSAM buffers, including Hiperspace buffers, see *z/OS V1R4: DFSMS: Using Data Sets*.

## OSAM Buffers

If you are using OSAM, individual subpool buffer reports do exist. However, you can monitor the number of buffers you are using by using the Enhanced OSAM Buffer Subpool statistics function which supports the following values:

### DBESF

Provides the full OSAM Subpool statistics in a formatted form.

### DBESU

Provides the full OSAM Subpool statistics in an unformatted form.

### DBESS

Provides a summary of the OSAM database buffer pool statistics in a formatted form.

### DBESO

Provides a the full OSAM database buffer pool statistics in a formatted form for online statistics returned as a result of a /DIS POOL command.

**Related Reading:** For detailed information on these values, see the *IMS Version 9: Application Programming: Design Guide*.

Another way to improve performance, this time for a specific application, is to reserve subpools for use by certain data sets. For example, if you have an index data set with a block size of 512 bytes, reserve a subpool for it that contains 512-byte buffers. You can do this by *not* defining 512-byte block sizes for any other data sets in the database. (Remember, block sizes are specified *by data set* in the BLOCK= operand in the DATASET statement in the DBD.) If you then allocate enough 512-byte buffers to hold all the blocks in your index, all blocks read into the buffer pool will remain in the buffer pool.

Performance can also be improved through the use of the *co* (caching option) parameter of the IOBF control statement specified either in the DFSVSMxxx member of IMS.PROCLIB or in DFSVSAMP.

### **Related Reading:**

- For detailed information about the DB Monitor Database Buffer Pool report, see the *IMS Version 9: Utilities Reference: System*.
- For more information on the *co* (caching option) parameter of the IOBF control statement, OSAM buffer pools and the use of the coupling facility for OSAM data caching see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

## Procedure for Adjusting VSAM and OSAM Database Buffers

To adjust VSAM and OSAM database buffers, change the control statements that specify buffer size and number. Then put the new control statements in the:

- DFSVSAMP data set in batch and utility environments
- IMS.PROCLIB data set with the member name DFSVSMnn in IMS TM and DBCTL environments



**Related Reading:** Detailed information on how to code these control statements is in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

## OSAM Sequential Buffering

If you are using OSAM Sequential Buffering, you can use the Sequential Buffering Summary report and the Sequential Buffering Detail report to see how the SB buffers were used during a your program's execution.

By default, four buffer sets exist in each SB buffer pool. If the reports indicate that a large percentage of random read I/O operations were used, and you know that the program was processing your database sequentially, increasing the number of buffer sets to six or more can improve performance. By increasing the number of buffer sets, it is more likely that a block is still in an SB buffer when requested, and a read I/O operation is not necessary.

If only a few random reads were used during your program's execution, it indicates that the database is very well organized and most requests were satisfied from the SB buffer pool or with sequential reads. If this happens, you can save virtual storage space by decreasing the number of buffer sets in each SB buffer pool to two or three.

## Procedure for Adjusting Sequential Buffers

You can change the number of buffer sets allocated to each SB buffer pool in two ways:

- Coding an SBPARM control statement with the BUFSETS keyword.
- Using an SB Initialization Exit Routine.

Once you have changed the number of buffer sets, you can use the SB Test Utility to reprocess the SB buffer handler call sequence that was issued during your program's execution. Then you can study the resulting //DFSSTAT reports to see the impact of the change.

### **Related Reading:**

- The Sequential Buffering Summary report and the Sequential Buffering Detail reports are described and instructions on how to use the SB Test Utility are in the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.
- Detailed instructions on how to code an SBPARM control statement are in the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.
- Details on the SB Initialization Exit Routine are in the *IMS Version 9: Customization Guide*.

---

## Adjusting VSAM Options

The VSAM options you can choose are described in "VSAM Options" on page 277. In Chapter 6, "Choosing Full-Function Database Types," on page 55, the performance implications of each VSAM option are also discussed. To improve performance, reread that topic and reassess the original choices you made.

The only VSAM option you can specifically monitor for is background write. If you are not using background write, you can look at the VSAM Buffer Pool report described in *IMS Version 9: Utilities Reference: System*. The report, in the Number of VSAM Writes To Make Space in the Pool field, documents the number of times data in a buffer had to be written to the database before the buffer could be used.

## Adjusting VSAM Options

If you use background write, you might find that you are able to reduce this number and therefore the size of the buffer pool.

If you are already using background write, the VSAM Buffer Pool report tells you how many times background write is invoked in the Number of Times Background Write Function Invoked field. The VSAM Statistics report (another report produced by the DB monitor) tells you in the BKG WTS field if background write was invoked. It also tells you, in the USR WRTS field, among other things, how many times background write was invoked.

Two types of adjustable VSAM options exist:

- Options specified in the OPTIONS control statement
- Options specified in the Access Method Services DEFINE CLUSTER command

### Procedure for Adjusting VSAM Options Specified in the OPTIONS Control Statement

To adjust these VSAM options, change the appropriate parameters in the OPTIONS control statement. Then put the new control statement in the:

- DFSVSAMP data set in a batch system
- IMS.PROCLIB data set with the member name DFSVSMnn in an online system

Detailed information on how to code these control statements is in *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

### Procedures for Adjusting VSAM Options Specified in the Access Method Service DEFINE CLUSTER Command

To adjust these VSAM options, change the appropriate parameters in the DEFINE CLUSTER command. What additional things you must do depends on which VSAM parameter you are changing, as described in this topic.

#### Changing the FREESPACE Parameter

You can use the reorganization utilities to change the use of free space or to change the percent of free space you have specified. To make this change:

1. Unload your database using the existing DBD and the appropriate unload utility.
2. Recalculate database space. You need to do this because the change you are making will result in different requirements for database space. See Chapter 13, "Loading Databases," on page 327, "Estimating the Minimum Size of the Database" on page 327 for a description of how to calculate database space.
3. Delete the old database cluster and define the new database cluster with a change to the FREESPACE parameter.
4. Reload your database, using either the existing DBD (if no changes were made to the DBD) or the new DBD. Use the appropriate reload utility.
5. If the database being reorganized is a secondary index with direct pointers, you must run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

#### Changing the SPEED / RECOVERY Parameter

Do not unload and reload your database merely to change the SPEED/RECOVERY parameter. Rather, if you have RECOVERY specified, change the parameter to SPEED to improve performance when the database is reloaded and restart of the

load program is not used. IMS does not support the RECOVERY parameter. Recovery can only be done when the database load program is run under control of UCF.

Because it is assumed you would only change the parameter when making other database changes that require you to unload and reload your database, no procedure for changing it is provided here.

---

## Adjusting OSAM Options

The OSAM options you can choose are described in “OSAM Options” on page 281. Performance implications of each OSAM option are also discussed there. To improve performance, reread that topic and reassess the original choices you made.

You cannot specifically monitor any OSAM options. To adjust OSAM options, change the appropriate parameters in the OPTIONS control statement. Then put the new control statement in the:

- DFSVSAMP data set in a batch system
- IMS.PROCLIB data set with the member name DFSVSMnn in an online system

Detailed information on how to code these control statements is in *IMS Version 9: Installation Volume 1: Installation Verification*.

---

## Changing the Amount of Space Allocated

Change the amount of space allocated for your database in two situations. The first is when you are running out of primary space. Do not use your secondary space allocation because this can greatly decrease performance. Also change the amount of space allocated for your database when the number of I/O operations required to process a DL/I call is large enough to make performance unacceptable. Performance can be unacceptable if data in the database is spread across too much DASD space.

One way to routinely monitor use of space is by watching the IWAITS/CALL field in the DL/I Call Summary report. The DL/I Call Summary report is described in *IMS Version 9: Utilities Reference: System*. If the IWAITS/CALL field has a relatively high number in it, the high number can be caused by space problems. If you suspect space is the problem, you can verify such problems in two specific ways:

- For VSAM data sets, you can get a report from the VSAM catalog using the LISTCAT command. In the report, check CI/CA splits, EXCPs, and EXTENTS (LISTCAT ALL report is described in Chapter 14, “Monitoring Databases,” on page 353).
- For non-VSAM data sets, you can get a report on the VTOC using the LISTVT0C command. In the report, check the NOEXT field (LISTCAT ALL report is described in Chapter 14, “Monitoring Databases,” on page 353).

If you decide to change the amount of space allocated for your database, do it with JCL or with z/OS utilities. The reorganization utilities must be run to put the database in its new space. The procedure for putting the database in its new space is as follows:

1. Unload your database, using the existing DBD and the appropriate unload utility.
2. Recalculate database space.

## Changing the Amount of Space Allocated

**Related Reading:** See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate database space.

3. Delete the old database space for non-VSAM data sets and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
4. If you are changing the space in the root addressable area of an HDAM database, you might need to adjust other HDAM parameters. In this case, you must code a new DBD before reloading (a new DBD is not needed when a PHDAM partition is changed). To change the space in the root addressable area of a PHDAM partition, you must use the HALDB Partition Definition utility.
5. Reload your database, using either the existing DBD (if no changes were made to the DBD) or the new DBD. Use the appropriate reload utility.
6. You must run some of the reorganization utilities before and after reloading to resolve prefix information if your non-HALDB database uses logical relationships or secondary indexes. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

---

## Changing Operating System Access Methods

You can use the reorganization utilities to change access methods from OSAM to VSAM, or from VSAM to OSAM.

To change access methods:

1. Unload the database.
2. Code a new DBD (unless you have already done this as described in Step 1).
3. Delete the old data sets and define the new clusters when changing from non-VSAM to VSAM. Delete the old clusters and define new database data sets when changing from VSAM to non-VSAM.
4. You need to change from OSAM options and buffers to VSAM options and buffers or vice versa. These topics are covered in preceding sections of this chapter:
  - “Adjusting Buffers” on page 420
  - “Adjusting VSAM Options” on page 423
  - “Adjusting OSAM Options” on page 425
5. Reload your database, using the new DBD. Remember to make an image copy of your database as soon as it is reloaded.
6. If your non-HALDB database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after loading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

---

## Changing the Number of Data Set Groups

Normally, a database is physically stored on one data set or, as in HISAM, on a pair of data sets. However, databases can be physically stored on more than one data set or pair of data sets. If so, each data set or pair of data sets is called a data set group. “Multiple Data Set Groups” on page 248 tells you:

- What data set groups are
- When they can be used
- What situations might prompt you to use them
- How they are specified in the DBD

You should be familiar with these topics. You should also have decided to change to multiple data set groups to tune your database. It is not possible for you to specifically monitor your database to determine whether multiple data set groups will improve performance or better utilize space. Rather, knowledge of your application's requirements along with many types of statistics about database use might help you make this decision.

To change the number of data set groups in your database, (see Figure 224 on page 428) you:

1. Unload your database using the existing DBD.
2. If your database is PHDAM or PHIDAM, delete the database definition from the DBRC RECON data sets using the HALDB Partition Definition Utility.
3. Code a new DBD.
4. Recalculate database space. You need to recalculate database space because the change you are making will result in different requirements for database space.  
**Related Reading:** See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate database space.
5. Delete the old database space and define new database space for non-VSAM data sets. Delete the space allocated for the old clusters and define space for the new clusters for VSAM data sets.
6. If your new database is PHDAM or PHIDAM, run the HALDB Partition Definition utility to define the partition data sets for the database.
7. Reallocate data sets because the number and size of data sets you are using will change.

Related Reading: See “Allocating Data Sets” on page 334 for information on allocating data sets.

8. Reload your database using the new DBD. Take an image copy of your database as soon as the database is reloaded.
9. Run some of the reorganization utilities before and after reloading to resolve prefix information if your database uses logical relationships or secondary indexes. The flowchart in Figure 196 on page 364 shows you which utilities to use and the order in which they must be run.

## Changing the Number of Data Set Groups

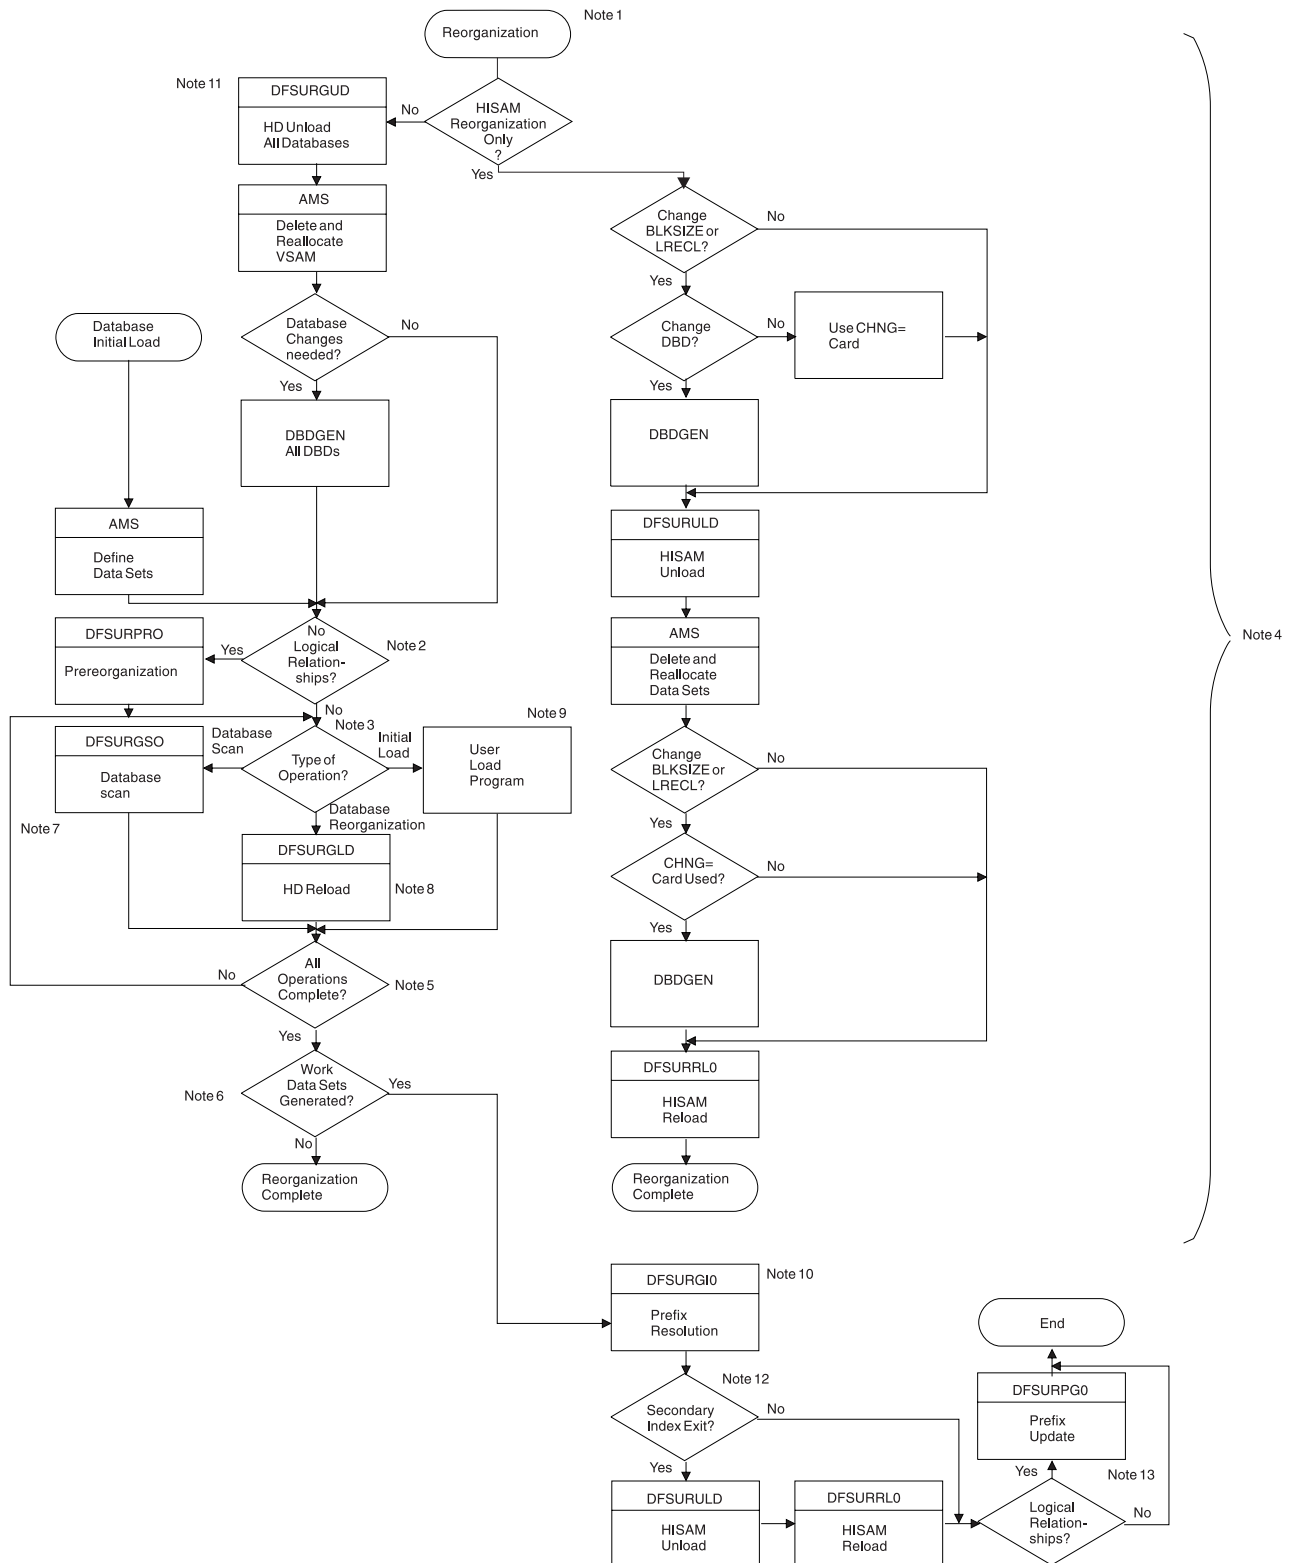


Figure 224. Utility Sequence of Execution When Making Database Changes during Reorganization

### Notes to Figure 224:

1. You can use the database reorganization/load processing utilities (that is, the HISAM Unload/Reload, HD Unload/Reload, Prefix Resolution and Prefix Update utilities) to operate on one or more databases concurrently. For

example, you can reorganize one or more existing databases at the same time that other databases are being initially loaded. Any or all of the databases being operated on can be logically interrelated. A database operation is defined as an initial database load, a database unload/reload (reorganization), or a database scan.

2. If one or more segments in any or all of the databases being operated upon is involved in either a logical relationship or a secondary index relationship, the YES branch must be taken. You can also use the Prereorganization utility to determine which database operations must be performed.
3. Based upon the information given to it on control statements, the database Prereorganization utility provides a list of databases that must be initially loaded, reorganized, or scanned. You must not change the number and sequence of databases specified on the prereorganization control statement between reload and prefix resolution.
4. This area of the flowchart must be followed once for each database to be operated upon, whether the operation consists of an initial load, reorganization, or scan. The operations can be done for all databases concurrently, or one database at a time. If the various database operations are performed sequentially, work data set storage space can be saved and processing efficiency increased if DISP=(MOD,KEEP) is specified for the DFSURWF1 DD statement associated with each database operation. The attributes of the work data set for the database initial load, reorganization, and scan programs must be identical.

When using the HD Reorganization Reload utility, first do all unloads and scans of logically related databases if logical parent concatenated keys are defined as virtual in the logical child.

5. You must ensure that all operations indicated by the Prereorganization utility (if it was executed) are completed prior to taking the YES branch.
6. If any work data sets were generated during any of the database operations that were executed by you, the YES branch must be taken. The presence of a logical relationship in a database does not guarantee that work data sets will be generated during a database operation. The reorganization/load processing utilities determine the need for work data sets dynamically, based upon the actual segments presented during a database operation. If any segments that participate in a logical relationship are loaded, work data sets will be generated and the YES branch must be taken.

If for any specific database operation no work data set was generated for the database, processing of that database is complete and ready to use.

When a HIDAM database is initially loaded or reorganized, its primary index will be generated at database load time.

7. You must run the DB Scan utility before a database is unloaded when logical parent concatenated keys are defined as virtual in the logical child database to be unloaded.

This program should be executed against each database listed in the output of the Prereorganization utility. A work data set can be generated for each database scanned by this utility. Databases for scanning are listed after the characters "DBS=" in one or more output messages of the Prereorganization utility.

8. The HD Reorganization Reload utility can cause the generation of a work data set to be later used by the Prefix Resolution utility. Databases to be reorganized using the HD Reorganization Unload utility and the HD Reorganization Reload utility are listed after the character "DBR=" in one or more output messages of the Prereorganization utility.



## Changing the Number of Data Set Groups

9. The user-provided initial database load program can automatically cause the generation of a work data set to be later used by the Prefix Resolution utility. You do not need to add code to the initial load program for work data set generation. Code is added automatically by IMS through the user program issuing ISRT requests. You must, however, provide a DD statement for this data set along with the other JCL statements necessary to execute the initial load program. Databases for initial loading are listed after the characters DBIL= in one or more output messages of the Prereorganization utility.
10. The database Prefix Resolution utility combines the work file output from the Database Scan utility, the HD Reorganization Reload utility, and the user's initial database load execution to create an output data set for use by the Prefix Update utility. The Prefix Update utility then completes all logical relationships defined for the databases that were operated upon.
11. This path must be taken for HISAM databases with logical relationships. This path must also be taken if structural changes are required (for example, HISAM to HDAM, pointer changes, additional segments, or adding a secondary index).
12. If a secondary index needs to be created or if two secondary indexes need to be combined, you must run the HISAM Unload/Reload utilities. After the HISAM Unload/Reload utilities are run, if logical relationships exist in the database, you must execute the Prefix Update utility before the reorganization or load process is considered to be complete.
13. For information on scratching and allocating OSAM data sets, see the topic about designing the IMS online system in *IMS Version 9: Administration Guide: System*.

---

## Tuning Fast Path Systems

Your objective in tuning the IMS online system when Fast Path applications are present depends upon the importance of the message-driven programs and their criteria for acceptable response time. The performance analysis studies that you should undertake are:

- Examining the availability of sufficient real storage
- Checking the effectiveness of the balancing groups
- Investigating the number of Fast Path dependent regions and the possibility of parallel processing
- Monitoring of the required frequency of DEDB reorganization to reduce fragmented units of work
- Monitoring of the use of DEDB overflow buffers
- Monitoring the forced serialization of programs that concurrently need to use overflow buffers specified by the EXEC statement DBFX parameter
- Examining the area key ranges and whether the randomizing algorithm can be refined
- Reducing the amount of mixed mode processing

Fast Path performance can also be improved by eliminating unnecessary delays caused by the following:

- Transaction volume to a particular Fast Path application program
- DEDB structure considerations
- Contention for DEDB Control Interval (CI) resources
- Exhaustion of DEDB DASD space
- Utilization of available real storage



- Sync point processing and physical logging
- Contention for output threads (OTHR)
- Overhead resulting from reprocessing
- Dispatching priority of processor-dominant and I/O-dominant tasks
- DASD contention caused by I/O on DEDBs
- Resource locking considerations with block level sharing
- Buffer pool usage and not grouping Fast Path application programs with similar buffer use characteristics together into one or more message classes

Statistics on transaction processing and contention for CIs can be obtained from the output of the Fast Path Log Analysis utility (DBFULTA0), which retrieves (from system log input) data relating to the usage of Fast Path resources.

**Related Reading:** For information on the Fast Path Log Analysis utility, see *IMS Version 9: Utilities Reference: System*.

### Transaction Volume to a Particular Fast Path Application Program

If a disproportionately high number of transactions are queued to a particular balancing group, consider increasing the number of regions associated with that particular balancing group. The Fast Path Log Analysis report provides information about balancing group queuing.

### DEDB Structure Considerations

Several characteristics of DEDB usage affect an application's response time:

- Data replication
- Subset pointers
- Number of areas
- Complexity of hierarchic structure
- Complexity of DL/I calls
- Use of sharing across IMS
- Last child pointers
- Recoverability

The first three characteristics are unique to DEDBs; the last five apply generally to databases. Data replication allows up to seven data sets for an individual area. When reading from an area represented by multiple data sets, performance is not impacted, unless the CI is defective. When updating, up to seven additional writes could be required. Although the physical write is performed asynchronously to transaction processing, there could be delays caused by access paths to a variety of DASD devices.

Up to eight subset pointers allow an application program to separate the children of a parent into groups in a DEDB, with the subset pointer pointing to the start of each group. Use of such pointers can help improve performance by reducing the time needed to access segments whose position is significantly displaced in a chain of sequential dependent segments.

### Usage of Buffers from a Buffer Pool

The Fast Path buffer pool is used by all Fast Path programs except the DEDB online utilities, which have their own buffer pool. The Fast Path buffer pool is used

to support the processing of MSDBs and DEDBs. The Fast Path buffer pool comprises buffers of a size defined at system startup by the BSIZ parameter. The buffer size selected must be capable of holding the largest CI from any DEDB area that is to be opened. The number of buffers page-fixed is based upon the value of supplied parameters:

- The normal buffer allocation (NBA) value causes the defined number of buffers to be fixed in the buffer pool at startup of the dependent region. (This number can be specified for the dependent region startup procedure using the NBA parameter.) The application program in this dependent region is eligible to receive up to this number of buffers within a given sync interval before one of the following occurs:
  - The buffer manager acquires unmodified buffers from the requesting application program.
  - No more buffers can be acquired on behalf of the requesting application program (a number of buffers equal to NBA have been requested, received, and modified). In this case, the buffer manager must acquire access to the overflow buffer allocation (OBA) if this value was specified for this program. If no OBA was specified, then all resources acquired for this program during sync interval processing to date are released.
- The OBA value is the number of buffers that a program can serially acquire when NBA is exceeded. (This number can be specified for the dependent region startup procedure using the OBA parameter.) The overflow interlock function serializes the overflow buffer access, and only one application program at a time can gain access to the overflow buffer allocation. Therefore, the overflow buffer can be involved in deadlocks.
- The DBFX value, which is a system startup parameter, defines a reserve of buffers that are page-fixed upon start of the first Fast Path application program. These buffers are used when asynchronous OTHREAD processing is not releasing buffers quickly enough to support the requests made in sync interval processing.

It follows that:

- BSIZ should be set equal to the largest DEDB CI that will be online. Because the buffer manager does not split buffers to accommodate multiple control intervals, making all DEDB CIs of a same size will provide more optimum use of storage. Even though large block sizes (up to 28K) can be used, this would cause only partial use of the buffer pool if there were many smaller CI sizes.
- The NBA value should be set approximately equal to the normal number of buffer updates made during a sync interval. The NBA value for inquiry-only programs should be small, because the buffers that are never modified can be reused and will all be released at sync time.
- The OBA should be used only in relation to a limited proportion of sync intervals. OBA is not required for inquiry-only programs. In general, the user should be careful to use the OBA value as intended. It should be used to support sync intervals where application program logic demands a variation in total modified buffer needs, thereby requiring access to OBA on an exceptional basis. With BMPs, OBA values greater than 1 should be unnecessary because the 'FW' status code that is returned when the NBA allocation is exceeded can be used to invoke a SYNC call. Invoking a SYNC call would then release all resources. Such application design reduces the serialization and possible deadlocks inherent in using the overflow interlock function.

- The DBFX value should be set, taking into account the total number of buffers that are likely to be in OTHREAD processing at peak load time. If this value is too low, an excessive number of wait-for-buffer conditions are reflected in the IMS Fast Path Log Analysis report.

To optimize the buffer usage, group message processing application programs with similar buffer use characteristics and assign them to a particular message class, so that the applications share the region's buffers.

**Related Reading:** See *IMS Version 9: Installation Volume 2: System Definition and Tailoring* for details of APPLCTN and TRANSACT class specifications.

## Contention for DEDB Control Interval (CI) Resources

Queuing takes place on the DEDB CI resource to maintain serialized access on DEDB data. When two independent application programs concurrently request access to a particular CI, one requestor is required to wait. When such a wait would cause a deadlock, one of the application programs is selected to have its resources released and its processing returned to the previous sync point. (It should be noted that the overflow buffer interlock can also be involved in a deadlock). The rules for selection of the program to be interrupted because of a deadlock are:

- If the deadlock involves one or more message-driven programs, one of the programs is abnormally terminated, reinstated to its previous sync point, and rescheduled.
- If a BMP deadlocks with another BMP, the BMP that went through sync point last is abnormally terminated, has its resources released, is sent back to its previous sync point, and is given a return code.
- If a deadlock involves a DEDB utility, the other program is terminated and rescheduled. Two utilities cannot be involved in a deadlock, because two utilities cannot concurrently access the same DEDB area.

The number of contention and deadlock situations can be decreased by taking the following steps:

- Ensure that CIs contain no more segments than necessary. (CI size is specified in the DBD.)
- Limit the use of the overflow buffer interlock, which, in conjunction with CI usage, can be involved in a deadlock.
- Limit the value of NBA to the value necessary to cope with the majority of cases and use OBA to deal with the exceptional conditions. When the full buffer allocation (NBA or NBA and OBA) for a program has been exceeded, the buffer manager can begin stealing unmodified buffers from this program. When all buffers associated with a CI have been stolen, the CI can be released, providing it is not currently in use by a PCB. The buffer stealing and associated CI releasing is triggered by exceeding the full buffer allocation. Minimizing NBA and OBA will assist the timely release of CIs, thereby reducing CI contention.
- Ensure that BMPs accessing DEDBs issue SYNC calls at frequent intervals. (BMPs could be designed to issue many calls between sync points and so gain exclusive control over a significant number of CIs.)
- BMPs that do physical-sequential processing through a DEDB should issue a SYNC call when crossing a CI boundary (provided it is possible to calculate this point). This ensures that the application program never holds more than a single CI.

Reports produced by the Fast Path Log Analysis utility give statistics about CI contention.

### Exhaustion of DEDB DASD Space

An out-of-space condition (with consequent stoppage of the DEDB area) can occur in the root addressable and sequential dependent portions of an area. Such situations will affect the operation of the system as a whole and can necessitate lengthy recovery procedures. The number of out-of-space conditions can be decreased by:

- Attempting to restrict the number of uses of independent overflow CIs through randomizing algorithm design or regular reorganization
- Deleting sequential dependent CIs on a regular basis
- Using display commands or DEDB POS calls to track space usage

An out-of-space condition can be relieved without bringing IMS down by following the procedures in “Extending DEDB Independent Overflow Online” on page 472.

### Utilization of Available Real Storage

The amount of page-fixed storage defined will be a significant consideration in limited storage systems. The factors influencing real storage utilization are summarized in Appendix B, “Insert, Delete, and Replace Rules for Logical Relationships,” on page 507.

### Synchronization Point Processing and Physical Logging

Some 'clustering' of output and release of updated CIs and buffers occurs because DEDB updates are deferred until after physical logging is complete. In BMPs, it helps to minimize the number of updates performed in any one sync interval, particularly if the program is to be run concurrent with the main bulk of message processing.

It is likely that, for performance reasons, the physical log record will be large, so that the log record might not be written for some time during low logging activity. However, IMS varies the interval between the periodic invoking of physical logging. This interval is directly related to the total logging activity in the IMS system. (Low activity causes a smaller interval to be set.)

The physical logging process can be relatively slow because of small physical log buffers or channel or control unit contention for the WADS/OLDS data sets.

The Fast Path environment can have high transaction rates and logging activity. Therefore, the physical configuration supporting the logging process must also be analyzed and altered for optimum performance.

### Contention for Output Threads

Each OTHR defined provides for the possibility of scheduling a separate service request block (SRB) to control the writing of the modified buffers associated with a particular sync interval. If the OTHR value is low, then queuing of write buffers waiting for an output thread can occur. In general, it is probably best to have one OTHR for each started dependent region that will cause modification of a DEDB.

## Overhead Resulting from Reprocessing

Overhead will result from the necessity to perform reprocessing in either the message-driven or non-message-driven environments. The following conditions will necessitate reprocessing:

- Deadlocks involving CIs and (possibly) overflow interlock
- Verify failures at sync point time
- User-initiated rollback caused by such conditions as verify failure at call time

In the case of deadlocks, the application program is pseudo abended for dynamic backout. The program controller subtask is detached, and subsequently, reattached. For verify failures or rollback calls, rescheduling involves only the release of resources held and returned to the application program.

Excessive incidence of the above conditions will add to response time and total overhead. Conditions resulting in abend interception followed by dump and application program reinstatement will add to overhead.

## Dispatching Priority of Processor-Dominant and I/O-Dominant Tasks

Because MSDB processing within a sync interval is processor-dominant, application programs processing solely or mainly MSDBs should be dispatched at a lower priority than those programs processing solely or mainly DEDBs (I/O dominant).

## DASD Contention Due to I/O on DEDBs

As always, I/O contention for DEDB areas will act as a limitation upon performance. To minimize this impact:

- Limit the number of heavily-used areas per device.
- Limit the number of application programs accessing any one DEDB area. One possibility here is to design the transaction, input edit/routing exit, and randomizing algorithm combination so that the access to any one area is limited to a particular application program or programs.
- Limit the incidence and effect of stealing unmodified buffers by appropriate application program design. Buffer stealing can necessitate a second I/O to recover the stolen buffer/control interval. This can happen if the logic of the application program requires processing of a buffer when a significant number of calls have been made following the first retrieval.

## Resource Locking Considerations with Block Level Sharing

Resource locking can occur either locally in a non-sysplex environment or globally in a sysplex environment.

In a non-sysplex environment, local locks can be granted in one of three ways:

- **Immediately** because of either of the following reasons:
  - IMS was able to get the required IRLM latches, and there is no other interest on this resource.
  - The request is compatible with other holders or waiters.
- **Asynchronously** because the request could not get the required IRLM latches and was suspended. (This can also occur in a sysplex environment.) The lock is granted when latches become available and one of two conditions exist:
  - No other holders exist.
  - The request is compatible with other holders or waiters.

- **Asynchronously** because the request is not compatible with the holders or waiters and was granted after their interest was released. (This could also occur in a sysplex environment.)

In a sysplex environment, global locks can be granted in one of three ways:

- **Locally by the IRLM** because either of the following two reasons:
  - There is no other interest for this resource.
  - This IRLM has the only interest, this request is compatible with the holders or waiters on this system, and XES already knows about the resource.
- **Synchronously on the XES CALL** because:
  - Either XES shows no other interest for this resource.
  - Or XES shows only SHARE interest for the hash class.
- **Asynchronously on the XES CALL** because of one of two conditions:
  - Either XES shows EXCLUSIVE interest on the hash class by an IRLM, but the resource names do not match (FALSE CONTENTION by RMF).
  - Or the request is incompatible with the other HOLDERS and is granted by the CONTENTION Exit after their interest is released (IRLM REAL CONTENTION).

### Resource Name Hash Routine

The Fast Path Resource Name Hash routine generates the hash value used by the IRLM. You can specify the name of such a routine with the USRHASH parameter on the FPCTRL macro, but it is ignored.

One technique used by the IMS-supplied Fast Path Resource Name Hash routine (DBFLHSH0) increases the range of values implicit with the relative CI numbers by combining parts of the 31-bit CI number with values derived from a database's DMCB number and its area number as follows: Bits 11 through 15 of DMCB number are XOR'd with bits 7, 6, 5, 4, 3 of the area number to give a combination 5-bit position number. (Using the area number's bits in reverse order helps make both DMCB number and area number vary the combination value.)

For the relative CI number (bits 0 through 15 are not used):

- Bits 16 through 20 are XOR'd with the combination value.
- Bits 21 through 25 are XOR'd with the combination value.
- Bits 26 through 29 are used unchanged.
- Bits 30 and 31 are not used—thus a hashed CI number used as a GHT entry represents four CIs.

For the hashed resource name:

- Bits 16 through 29 of the hashed relative CI become bits 18 through 31 of the hash value that is passed to the IRLM.
- Bits 18 through 26 of the hash value are used as the displacement into the resource hash table (RHT).
- Bits 18 through 31 are used as the displacement into the GHT.



---

## Chapter 16. Modifying Databases

Under several circumstances, you must modify your database. Over time, user requirements can change, necessitating changes in the database design. Or you might choose to use new or different options or features. Or perhaps you have simply found a more efficient way to structure the database. This chapter describes the various types of structural changes you can make to your database and tells you when and how you can make the changes using the reorganization utilities.

This chapter examines the following areas of modifying a database:

- “Modifying Record Segments”
- “Adding Logical Relationships” on page 442
- “Adding a Secondary Index” on page 459
- “Adding or Converting to Variable-Length Segments” on page 459
- “Converting to the Segment Edit/Compression Exit Routine” on page 460
- “Converting Databases for Data Capture Exit Routines and Asynchronous Data Capture” on page 461
- “Converting a Logical Parent Concatenated Key from Virtual to Physical or Physical to Virtual” on page 462
- “Using the Online Change Function” on page 462
- “Extending DEDB Independent Overflow Online” on page 472
- “Modifying HALDB Databases” on page 474

When you modify your database, you often make more than a simple change to it. For example, you might need to add a segment type and a secondary index. This topic has procedures to guide you through making each type of change. If you make more than one change at a time, you should look at Figure 224 on page 428. The flowchart, when used with the individual procedures in this chapter, will guide you in making some types of multiple changes to the database.

**Attention:** If the DBD for an existing MSDB is changed, the header information (BHDR) might change, even though the database segments do not. In this case, the headers in the MSDBCPx data sets are invalid or the wrong length. A change in the MSDB headers causes message DFS2593I. If ABND=Y is specified in the MSDB PROCLIB member, ABENDU1012 is also issued. Correct this problem by using the MSDBLOAD option on a warm start or cold start to load the MSDBs from an MSDBINIT data set.

**Related Reading:** If you share data, additional information about modifications is in *IMS Version 9: Administration Guide: System*.

---

### Modifying Record Segments

You can modify record segments in a variety of ways, including adding deleting, or moving segment types, changing the size of a segment, and changing the data stored in a segment.

The following topics describe modifying record segments:

- “Adding Segment Types” on page 438
- “Deleting Segment Types” on page 439

- “Moving Segment Types” on page 440
- “Changing Segment Size” on page 440
- “Changing Data in a Segment (Except for Data at the End of a Segment)” on page 441
- “Changing the Position of Data in a Segment” on page 441
- “Changing the Name of a Segment” on page 442

## Adding Segment Types

There are three ways to add a segment type to a database:

- Unloading and reloading using the reorganization utilities
- Without unloading or reloading
- Using your own unload and reload program

### Unloading and Reloading Using the Reorganization Utilities

You can add segment types to a database record using the reorganization utilities if:

- The segment type to be added is at the bottom level of a path in the hierarchy. Figure 225 shows an existing database record (indicated by solid lines) and the places where a new segment type can be added (indicated by dashed lines).
- The existing relative order of segments in the database record does not change. In other words, the existing parent to child relationships cannot change.
- The existing segment names do not change.

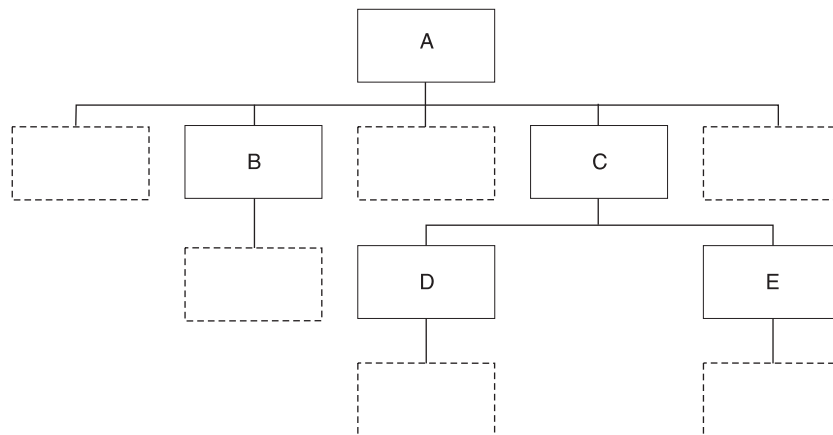


Figure 225. Where Segment Types Can Be Added in a Database Record

To use the reorganization utilities to add a segment type to the database:

1. Determine if the change you are making affects the code in any application programs. If the code is affected, make the necessary changes to the application program.
2. Unload your database, using the existing DBD.
3. Code a new DBD. You need to add SEGM= statements to the DBD for the new segment type. No database updates are allowed between unload and reload.
4. If the change you are making affects the code in application programs, make any necessary changes to the PSBs for those application programs.



5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space. You need to do this because the change you are making will result in different requirements for database space.

**Related Reading:** See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate database space.

7. For non-VSAM data sets, delete the old database space and define the new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Reload your database, using the new DBD. Make an image copy of your database as soon as it is reloaded.
9. If your database uses logical relationships or secondary indexes, run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.
10. Code and execute an application program to insert the new segment types into the database.

### Without Unloading or Reloading

You can add segment types to a database record without unloading the database under the following circumstances:

- In a HISAM database, the segment type to be added must be the last segment in the hierarchy. In addition, the segment type to be added must fit in the existing logical record.
- In an HD database, the segment type to be added must also be the last segment in the hierarchy. The parent of the new segment type must use hierarchic pointers. Also, the segment type cannot be the largest segment type in the data set group.

To add a segment type to the database without unloading and reloading:

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Code a new DBD. You need to add a SEGM= statement to the DBD for the new segment type.
3. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
4. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
5. Code and execute an application program to insert the new segment type.

### Using Your Own Unload and Reload Program

You must write your own unload and reload program to add a segment type to the database, if the segment type does not meet the qualifications described in “Unloading and Reloading Using the Reorganization Utilities” on page 438 and “Without Unloading or Reloading.”

## Deleting Segment Types

You can delete a segment type from a database by:

- Using the reorganization utilities
- Using your own unload and reload program

## Deleting Segment Types

You can delete a segment type from a database, using the reorganization utilities, if:

- The existing relative order of segments in the database record does not change. In other words, the existing parent to child relationships cannot change.
- The existing segment names do not change.

To use the reorganization utilities to delete a segment type from the database:

1. Code and execute an application program to delete all occurrences of the segment type being deleted. You must code and execute the application program before the database is unloaded.
2. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
3. Unload your database, using the existing DBD.
4. Code a new DBD. You need to remove SEGM= statements from the DBD for:
  - The segment type being deleted
  - The children of the deleted segment.
5. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
6. Recalculate database space. You need to do this because the change you are making will result in different requirements for database space.  
**Related Reading:** See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate database space.
7. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
8. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
9. Reload your database using the new DBD. Remember to make an image copy of your database as soon as it is reloaded.
10. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Moving Segment Types

Because segment types cannot be moved using the reorganization utilities, you must write your own unload and reload program to move them.

## Changing Segment Size

Using the reorganization utilities, you can increase or decrease segment size at the end of a segment type. When increasing segment size, you are adding data to the end of a segment. When decreasing segment size, IMS truncates data at the end of a segment.

If you are increasing the size of a segment, you cannot predict what is at the end of the segment when it is reloaded. Also, new data must be added to the end of a segment using your own program after the database is reloaded.

To increase or decrease segment size:

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload your database, using the existing DBD. If you are changing a HISAM database, you must use the HD UNLOAD/RELOAD utility since the HISAM utilities cannot be used to make structural changes.
3. Code a new DBD. You need to change the BYTES= operand on the SEGM statement in the DBD to reflect the new segment size. If you are eliminating data from a segment for which FIELD statements are coded in the DBD, you need to eliminate the FIELD statements. If you are adding data to a segment and the data is referenced in the SSA in application programs, you need to code FIELD statements. No database updates are allowed between unload and reload.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than build dynamically.
6. Recalculate database space. You need to do this because the change you are making results in different requirements for database space.

**Related Reading:** See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate database space.

7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Reload your database, using the new DBD. Make an image copy of your database as soon as it is reloaded.
9. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

## Changing Data in a Segment (Except for Data at the End of a Segment)

Data in a segment cannot be increased or decreased in size using the reorganization utilities. To increase or decrease the size of fields, you must write your own unload and reload programs.

## Changing the Position of Data in a Segment

You cannot change the position of data in a segment using the reorganization utilities. To make this kind of change, you must write your own unload and reload program, use field-level sensitivity, or use a tool, such as the IMS High Performance Pointer Checker for z/OS, which includes a DB Segment Restructure utility.

### **Related Reading:**

- For information about how to use field-level sensitivity, see “Field-Level Sensitivity” on page 238
- For information about the IMS High Performance Pointer Checker for z/OS, see *IBM IMS High Performance Pointer Checker for z/OS User's Guide Volume 2*

### Changing the Name of a Segment

If you change the name of a segment without changing anything else about the segment, you do not need to unload and reload the database or otherwise reorganize the database.

To change the name of a segment, you must:

1. Change the segment name in the DBD statement that defines the segment.
2. If the segment is referenced in a logical relationship or secondary index, you must change the segment name in the DBD for the logical or index database.
3. Update the DBDLIB by running the DBD Generation utility.
4. Change the segment name in the PSB statements that reference the segment.
5. Update the PSBLIB by running the PSB Generation utility.
6. Update the ACBLIB by running the ACB Maintenance utility and performing Online Change.
7. Update all application code that references the segment.

#### Related Reading:

- For information about the DBD, PSB, and ACB utilities, see the *IMS Version 9: Utilities Reference: System*
- For information about Online Change, see “Using the Online Change Function” on page 462

---

## Adding Logical Relationships

Logical relationships are explained in detail in “Logical Relationships” on page 169. This topic contains examples and procedures for adding a logically-related database to an existing database. Not all situations in which you might need to add a logical relationship are described in this topic. However, if the examples do not fit your specific requirements, you should be able to gather enough information from them to decide:

- If adding a logical relationship to your existing database is possible
- How to add the relationship

The examples in this topic are followed by Table 32 on page 455, which tells you what to do when reorganizing a database to add a logical relationship. Following the table, “Some Restrictions on Modifying Existing Logical Relationships” on page 457 discusses some restrictions on modifying existing logical relationships.

The examples in this topic show the logical parent as a root segment, although this is not a requirement. The examples are still valid when the logical parent is at a lower level in the hierarchy.

When adding logical relationships to existing databases, you should always make the change on a test database. Thoroughly test the change before implementing it using production databases.

In the following examples, these conventions are used:

- Existing databases are shown using solid lines.
- The database being added is shown using dashed lines.
- The logical parent and logical child relationship is labeled for the database being added. They are labeled LP and LC.
- The terms DBX, DBY, and DBZ refer to database 1, database 2, and database 3.

**Related Reading:** For example procedures 1 through 13, the following related readings provide more detailed information for some of the steps:

- See “Estimating the Minimum Size of the Database” on page 327 for a description of how to calculate database space.
- See “Writing a Load Program” on page 338 for a description of how to write an initial load program.

## Example 1. DBX Exists, DBY Is to Be Added

Example 1 is shown in Figure 226.




Figure 226. DBX Exists, DBY Is to Be Added

DBX must be reorganized to add the counter field to the segment prefix for A. DBIL must be specified in the control statement for DBX. In the following “Example 1 Procedure,” the counter field for segment A is updated to show the number of C segments because segment C is loaded with a user load program.

### Example 1 Procedure

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBX, using the existing DBD and the HD Unload utility.
3. Code a new DBD for DBX and DBY. “How to Specify Use of Logical Relationships in the Logical DBD” in Chapter 8, “Choosing Optional Database Functions,” on page 169, explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBX and calculate space for DBY.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Prereorganization utility, specifying DBIL in the control statements for DBX and DBY.
9. Reload DBX, using the new DBD and the HD Reload utility.
10. Load DBY, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.

## Adding Logical Relationships

12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of both databases as soon as they are loaded.

### Example 2. DBX and DBY Exist, DBZ Is to Be Added

Example 2 is shown in Figure 227.

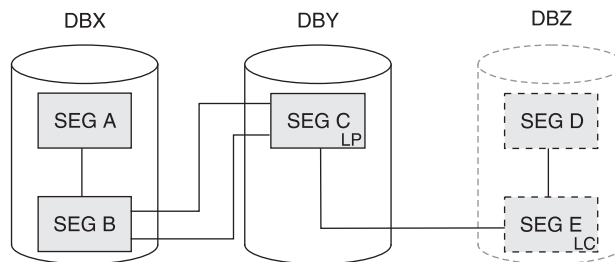


Figure 227. DBX and DBY Exist, DBZ Is to Be Added

In this example, the counter exists in the segment C prefix. DBX and DBY must be reorganized to calculate the new value for the counter in the segment C prefix. DBIL must be specified in the control statement for DBX and DBY. In the following “Example 2 Procedure,” the segment A counter field is updated to show the number of C segments because segment C is loaded with a user load program.

#### Example 2 Procedure

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBX and DBY, using the existing DBDs and HD Unload utility.
3. Code a new DBD for DBY and DBZ. “How to Specify Use of Logical Relationships in the Logical DBD” in Chapter 8, “Choosing Optional Database Functions,” on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBX and DBY, and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Prereorganization utility, specifying DBIL in the control statements for DBX, DBY and DBZ.
9. Reload DBX and DBY, using the new DBDs and the HD Reload utility.
10. Load DBZ, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.

13. Remember to make an image copy of all three databases as soon as they are loaded.

### Example 3. DBX and DBY Exist, DBZ Is to Be Added

Example 3 is shown in Figure 228.

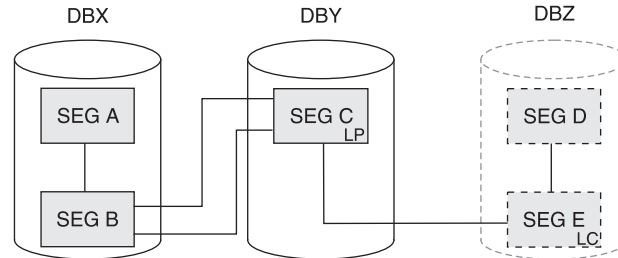


Figure 228. DBX and DBY Exist, DBZ Is to Be Added

DBY must be reorganized to add the counter field to the segment C prefix. DBIL must be specified in the control statement for DBY. DBX must be reorganized because an initial load (DBIL) of the logical parent (segment C) assumes an initial load (DBIL of the logical child). The procedure for this example (and all conditions and considerations) is exactly the same as example 2.

### Example 4. DBX and DBY Exist, DBZ Is to Be Added

Example 4 is shown in Figure 229.

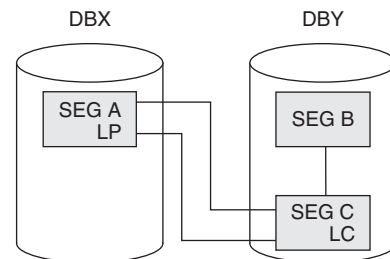


Figure 229. DBX and DBY Exist, DBZ Is to Be Added

The procedure for this example (and all conditions and considerations) is exactly the same as for example 2.

### Example 5. DBX Exists, DBY Is to Be Added

Example 5 is shown in Figure 230.

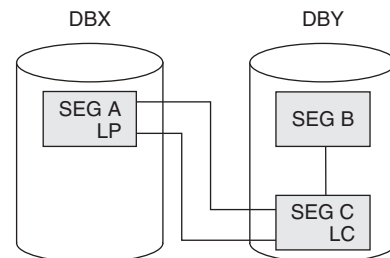


Figure 230. DBX Exists and DBY Is to Be Added



## Adding Logical Relationships

DBX must be reorganized to add the logical child pointers in the segment A prefix.

### Procedure

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBX, using the existing DBD and the HD Unload utility.
3. Code a new DBD for DBX and DBY. “How to Specify Use of Logical Relationships in the Logical DBD” in Chapter 8, “Choosing Optional Database Functions,” on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBX, and calculate space for DBY.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Prereorganization utility, specifying DBR in the control statement for DBX, and DBIL in the control statement for DBY.
9. Reload DBX, using the new DBD and the HD Reload utility.
10. Load DBY, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of both databases as soon as they are loaded.

### Example 6. DBX and DBY Exist, DBZ Is to Be Added

Example 6 is shown in Figure 231.

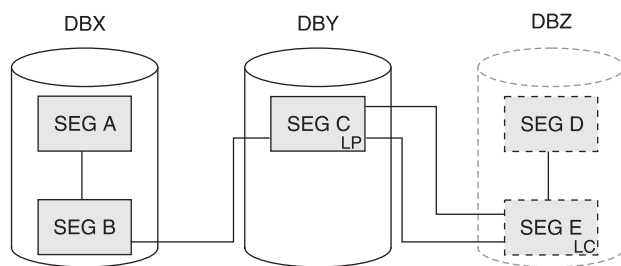


Figure 231. DBX and DBY Exist, DBZ Is to Be Added

DBY must be reorganized to add the logical child pointers to the segment C prefix. One of the following three procedures should be used:

- “Procedure When Reorganizing DBY (Segment B Contains a Symbolic Pointer)” on page 447
- “Procedure When Reorganizing DBY and Scanning DBX (Segment B Contains a Direct Pointer)” on page 447
- “Procedure When Reorganizing DBX and DBY” on page 448



### Procedure When Reorganizing DBY (Segment B Contains a Symbolic Pointer)

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBY, using the existing DBD and HD Unload utility.
3. Code a new DBD for DBY and DBZ. "How to Specify Use of Logical Relationships in the Logical DBD" in Chapter 8, "Choosing Optional Database Functions," on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBY, and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Preorganization utility, specifying DBR in the control statement for DBY, and DBIL in the control statement for DBZ. (The output from the Preorganization utility indicates that a scan of DBX is required.)
9. Reload DBY, using the new DBD and the HD Reload utility.
10. Load DBZ, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of both databases as soon as they are loaded.

When DBY is reloaded, two type 00 records are produced for each occurrence of segment C. One contains a logical child database named DBZ and matches the type 10 record produced for segment E. The other contains a logical child database named DBX. Because a scan or reorganization of DBX was not done, a matching 10 record was not produced for segment B. The Prefix Resolution utility produces message DFS878 when this occurs. The message can be ignored as long as the printed 00 record refers to DBY and DBX. Any messages for DBY and DBZ should be investigated.

### Procedure When Reorganizing DBY and Scanning DBX (Segment B Contains a Direct Pointer)

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBY, using the existing DBD and HD Unload utility.
3. Code a new DBD for DBY and DBZ. "How to Specify Use of Logical Relationships in the Logical DBD" in Chapter 8, "Choosing Optional Database Functions," on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.

## Adding Logical Relationships

5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBY, and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Preorganization utility, specifying DBR in the control statement for DBY, and DBIL in the control statement for DBZ. (The output from the Preorganization utility says that a scan of DBX is required.)
9. Run the scan utility against DBX.
10. Reload DBY, using the new DBD and the HD Reload utility.
11. Load DBZ, using an initial load program.
12. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9, 10, and 11 as input.
13. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 12 as input.
14. Remember to make an image copy of both databases as soon as they are loaded.

### Procedure When Reorganizing DBX and DBY

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBX and DBY, using the existing DBDs and HD Unload utility.
3. Code a new DBD for DBY and DBZ. “How to Specify Use of Logical Relationships in the Logical DBD” in Chapter 8, “Choosing Optional Database Functions,” on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBX and DBY, and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Preorganization utility, specifying DBR in the control statements for DBX and DBY, and DBIL in the control statement for DBZ. (The output from the Preorganization utility says that a scan of DBX is required.)
9. Reload DBX and DBY, using the new DBDs and the HD Reload utility.
10. Load DBZ, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of all three databases as soon as they are loaded.

### Example 7. DBX and DBY Exist, DBZ Is to Be Added

Example 7 is shown in Figure 232 on page 449.

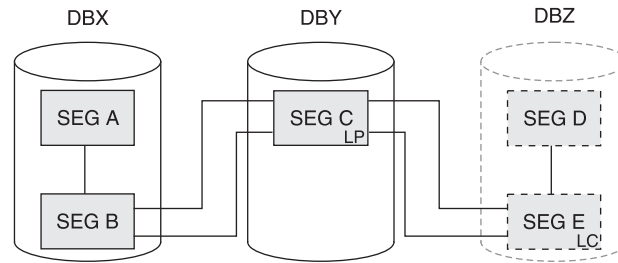


Figure 232. DBX and DBY Exist, DBZ Is to Be Added

DBY must be reorganized to add the logical child pointers to the segment C prefix. Logical child pointers from segment C to segment B are not unloaded, therefore, DBX must be reorganized or scanned. DBX must be reorganized to add the logical child pointers in the segment A prefix.

### Procedure Using Scan

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBY, using the existing DBD and HD Unload utility.
3. Code a new DBD for DBY and DBZ. "How to Specify Use of Logical Relationships in the Logical DBD" in Chapter 8, "Choosing Optional Database Functions," on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBY and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Preorganization utility, specifying DBR in the control statements for DBY, and DBIL in the control statement for DBZ. (The output from the Preorganization utility indicates that a scan of DBX is required.)
9. Run the scan utility against DBX.
10. Reload DBY, using the new DBDs and the HD Reload utility.
11. Load DBZ, using an initial load program.
12. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9, 10, and 11 as input.
13. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 12 as input.
14. Remember to make an image copy of both databases as soon as they are loaded.

### Procedure When Reorganizing DBX and DBY

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBY and DBY using the existing DBDs and the HD Unload utility.

## Adding Logical Relationships

3. Code a new DBD for DBY and DBZ. “How to Specify Use of Logical Relationships in the Logical DBD” in Chapter 8, “Choosing Optional Database Functions,” on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBX and DBY and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Prereorganization utility, specifying DBR in the control statements for DBX and DBY, and DBIL in the control statement for DBZ. (The output from the Prereorganization utility indicates that a scan of DBX is required.)
9. Reload DBX and DBY, using the new DBDs and the HD Reload utility.
10. Load DBZ, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of both databases as soon as they are loaded.

### Example 8. DBX and DBY Exist, DBZ Is to Be Added

Example 8 is shown in Figure 233.

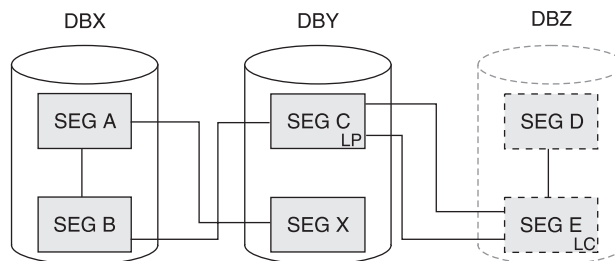


Figure 233. DBX and DBY Exist, DBZ Is to Be Added

DBY must be reorganized to add the logical child pointers in the segment C prefix. The procedure for this example (and all conditions and considerations) is exactly the same as the procedures for example 6.

### Example 9. DBY Exists, DBZ Is to Be Added

Example 9 is shown in Figure 234 on page 451.

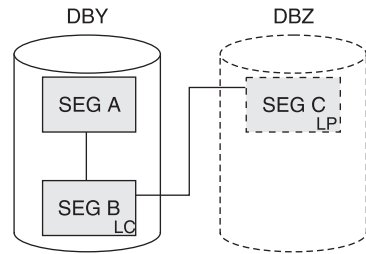


Figure 234. DBY Exists, DBZ Is to Be Added

DBY must be reorganized. DBZ must be loaded using an initial load program. DBIL must be specified in the control statement for DBY. Do not specify DBR in the control statement for DBY.

### Procedure

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBY, using the existing DBD and HD Unload utility.
3. Code a new DBD for DBY and DBZ. "How to Specify Use of Logical Relationships in the Logical DBD" in Chapter 8, "Choosing Optional Database Functions," on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space for DBY and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Preorganization utility, specifying DBIL in the control statements for DBY and DBZ.
9. Reload DBY, using the new DBDs and the HD Reload utility.
10. Load DBZ, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of both databases as soon as they are loaded.

### Example 10. DBY Exists, DBZ Is to Be Added

Example 10 is shown in Figure 235 on page 452.

## Adding Logical Relationships

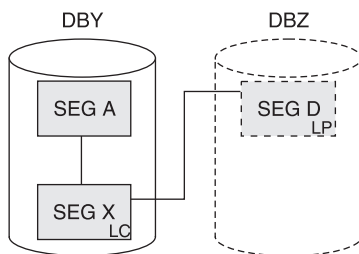


Figure 235. DBY Exists, DBZ Is to Be Added

Segment X might be considered a logical child if the key of segment D is at the correct location in segment X. DBY must be reorganized, because an initial load (DBIL) of the logical parent (segment D) assumes an initial load (DBIL) of the logical child.

In this example, you could use symbolic or direct pointers for segment X. Do **not** under any circumstances specify DBR in the control statement for DBY. If you do, the reload utility will not generate work records for segment D; the logical child pointer in segment D would never be resolved. The procedure for this example (and all conditions and considerations) is exactly the same as the procedures for example 9.

### Example 11. DBX and DBY Exist, DBZ Is to Be Added

Example 11 is shown in Figure 236.

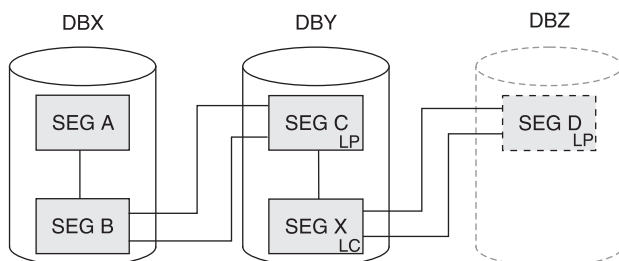


Figure 236. DBX and DBY Exist, DBZ Is to Be Added

DBX and DBY must be reorganized. DBZ must be loaded using an initial load program. Because you must specify DBIL in the control statement for DBZ (a logical parent database), you must also specify DBIL for DBY (a logical child database). DBY is also a logical parent database. Therefore, you must specify DBIL in the control statement for DBX (a logical child database). The procedure for this example (and all conditions and considerations) is exactly the same as for Example 2.

### Example 12. DBX and DBY Exist, DBZ Is to Be Added

Example 12 is shown in Figure 237 on page 453.

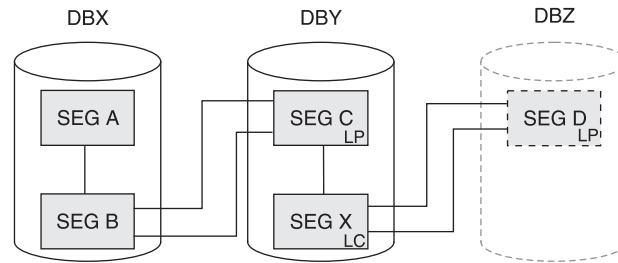


Figure 237. DBX and DBY Exist, DBZ Is to Be Added

In this example, segment B has a symbolic pointer. The procedure for this example (and all conditions and considerations) is exactly the same as for example 2.

### Example 13. DBX and DBY Exist, Segment Y and DBZ Are to Be Added

Example 13 is shown in Figure 238.

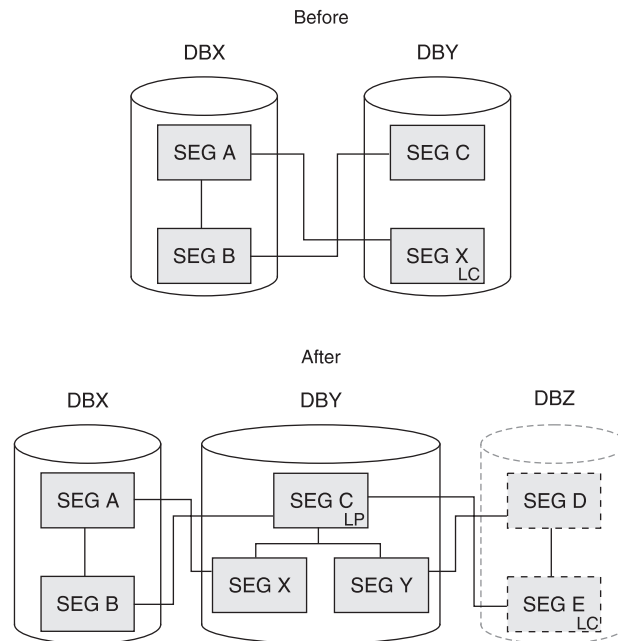


Figure 238. DBX and DBY Exist, Segment Y and DBZ Are to Be Added

#### Procedure

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload DBX, using the existing DBD and HD Unload utility.
3. Code a new DBD for DBY and DBZ. "How to Specify Use of Logical Relationships in the Logical DBD" in Chapter 8, "Choosing Optional Database Functions," on page 169 explains how the DBD is coded for logical relationships.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for these application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.



## Adding Logical Relationships

6. Recalculate database space for DBX and DBY, and calculate space for DBZ.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Run the Preorganization utility, specifying DBIL in the control statements for DBX, DBY and DBZ.
9. Reload DBX, using the new DBD and the HD Reload utility.
10. Load DBY and DBZ, using an initial load program.
11. Run the Prefix Resolution utility, using the DFSURWF1 work files that are output from Steps 9 and 10 as input.
12. Run the Prefix Update utility, using the DFSURWF3 work file that is output from Step 11 as input.
13. Remember to make an image copy of both databases as soon as they are loaded.

## Steps in Reorganizing a Database to Add a Logical Relationship

Table 32 on page 455 shows you:

- When a logically related database must be scanned
- When both sides of a logical relationship must be reorganized
- When the Prefix Resolution and Prefix Update utilities must be run

The figure applies to reorganizations only. When initially loading databases, you must run the Prefix Resolution and Update utilities whenever work data sets are generated.

Table 32 covers all reorganization situations, whether or not database pointers are being changed. In using the figure, a bidirectional physically paired relationship should be treated as two unidirectional relationships. Unless otherwise specified, DBR should be specified for the reorganized databases when the Preorganization utility is run.

The following two examples guide you in use of the figure.

### Example 1. How to use Table 32

Assume your database has unidirectional symbolic pointers and you are not changing pointers. On the left side of Table 32, in the FROM column, find unidirectional symbolic pointers. The follow across to the right in the TO row and find unidirectional symbolic pointers. The figure tells you what you must do to reorganize with one of the following:

- The database containing the logical parent
- The database containing the logical child
- Both databases, if necessary

In all three situations, it is not necessary to run the Prefix Resolution or Update utilities (this is what is meant by “finished”).

### Example 2. How to use Table 32

Assume your database has bidirectional symbolic pointers and you need to change to bidirectional direct pointers. Table 32 shows that:



- Reorganizing only the logical parent database cannot be done, because a logical parent pointer must be created in the logical child segment in the logical child database.
- Reorganizing the logical child database can be done. To scan the logical child database, you must scan the logical parent database. The control statements for the Prereorganization utility must specify DBIL for the logical child database. Also, the Prefix Resolution and Update utilities must be run.
- Reorganizing both databases can also be done. In this case, the control statements for the Prereorganization utility must specify DBIL for the logical child database and DBR for the logical parent database. Again, the Prefix Resolution and Update utilities must be run.

*Table 32. Steps in Reorganizing a Database to Add a Logical Relationship*

| Type of Database                      | Type of Reorganization       | What You Must Do to Reorganize When You Need: |                                                                                                                               |                                                                                                                                                                           |                                                                                                                               |
|---------------------------------------|------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
|                                       |                              | Unidirectional Symbolic Pointers              | Unidirectional Direct Pointers                                                                                                | Bidirectional Symbolic Pointers                                                                                                                                           | Bidirectional Direct Pointers                                                                                                 |
| Unidirectional with symbolic pointers | Logical parent database only | Finished <sup>1</sup>                         | Not valid, because symbolic LP pointers exist now and direct LP pointers must be added to the logical child database.         | 1. Scan logical child data base.<br>2. Run prefix resolution and update.<br><br><b>Note:</b> Logical child segment will not contain LT pointers unless it is reorganized. | Not valid, because direct LP and LT pointers must be put in the logical child database.                                       |
|                                       | Logical child database only  | Finished                                      | 1. Scan logical parent data base.<br>2. Run prefix resolution and update.<br><br>Specify DBIL for the logical child database. | Not valid, because a counter exists now and LCF/LCL pointers must be put into the logical parent database.                                                                | Not valid, because a counter exists now and LCF/LCL pointers must be put into the logical parent database.                    |
|                                       | Both databases               | Finished <sup>2</sup>                         | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database. | Run prefix resolution and update.<br><br>Specify DBR for both databases.                                                                                                  | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database. |

## Adding Logical Relationships

Table 32. Steps in Reorganizing a Database to Add a Logical Relationship (continued)

| Type of Database                     | Type of Reorganization       | What You Must Do to Reorganize When You Need:                                                                                               |                                                                                                                                          |                                                                                                                                                                                       |                                                                                                                                                                                     |
|--------------------------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                      |                              | Unidirectional Symbolic Pointers                                                                                                            | Unidirectional Direct Pointers                                                                                                           | Bidirectional Symbolic Pointers                                                                                                                                                       | Bidirectional Direct Pointers                                                                                                                                                       |
| Unidirectional with direct pointers  | Logical parent database only | Not valid, because a direct LP pointer exists now and symbolic LP pointers must be added to the logical child database.                     | 1. Scan logical child data base.<br><br>2. Run prefix resolution and update.                                                             | Not valid, because a direct LP pointer exists now and symbolic LP pointers must be added to the logical child database. LT pointers must also be added to the logical child database. | 1. Scan logical child data base.<br><br>2. Run prefix resolution and update.<br><br><b>Note:</b> Logical child segment will not contain LT pointers unless database is reorganized. |
|                                      | Logical child database only  | Finished                                                                                                                                    | Finished                                                                                                                                 | Not valid, because LCF/LCL pointers must be put in the logical parent database.                                                                                                       | Not valid, because LCF/LCL pointers must be put in the logical parent database.                                                                                                     |
|                                      | Both databases               | Finished <sup>2</sup>                                                                                                                       | Run prefix resolution and update.                                                                                                        | Run prefix resolution and update.                                                                                                                                                     | Run prefix resolution and update.                                                                                                                                                   |
| Bidirectional with symbolic pointers | Logical parent database only | Not valid, because the counter in the logical parent database will not be resolved and LT pointers exist now in the logical child database. | Not valid, because symbolic LP and LT pointers exist now and a direct LP pointer must be added to the logical child database.            | 1. Scan logical child data base.<br><br>2. Run prefix resolution and update.<br><br><b>Note:</b> LCF/LCL pointers are not unloaded and reloaded.                                      | Not valid, because a symbolic LP pointer exists now and a direct LP pointer must be added to the logical child database.                                                            |
|                                      | Logical child database only  | Not valid, because LCF/LCL pointers exist now in the logical parent database and a counter must be added to the logical parent database.    | Not valid, because LCF/LCL pointers exist now in the logical parent database and a counter must be added to the logical parent database. | 1. Scan logical parent data base.<br><br>2. Run prefix resolution and update.                                                                                                         | 1. Scan logical parent data base.<br><br>2. Run prefix resolution and update.<br><br>3. Specify DBIL for the logical child data base.                                               |
|                                      | Both databases               | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database.               | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database.            | Run prefix resolution and update.                                                                                                                                                     | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database.                                                       |

Table 32. Steps in Reorganizing a Database to Add a Logical Relationship (continued)

| Type of Database                   | Type of Reorganization       | What You Must Do to Reorganize When You Need:                                                                                        |                                                                                                                                                         |                                                                                                                        |                                                                                                                                                 |
|------------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
|                                    |                              | Unidirectional Symbolic Pointers                                                                                                     | Unidirectional Direct Pointers                                                                                                                          | Bidirectional Symbolic Pointers                                                                                        | Bidirectional Direct Pointers                                                                                                                   |
| Bidirectional with direct pointers | Logical parent database only | Not valid, because direct LP and LT pointers exist in the logical child database and symbolic LP pointers must be added.             | Not valid, because the counter in the logical parent database will not be resolved and LT pointers will not be removed from the logical child database. | Not valid, because a direct LP pointer exists in the logical child database and the change is to symbolic LP pointers. | 1. Scan logical child database.<br><br>2. Run prefix resolution and update.<br><br><b>Note:</b> LCF/LCL pointers are not unloaded and reloaded. |
|                                    | Logical child database only  | Not valid, because LCF/LCL pointers exist in the logical parent database and a counter must be added to the logical parent database. | Not valid, because LCF/LCL pointers exist now in the logical parent database and a counter must be added to the logical parent database.                | 1. Scan logical parent data base.<br><br>2. Run prefix resolution and update.                                          | 1. Scan logical parent data base.<br><br>2. Run prefix resolution and update.                                                                   |
|                                    | Both databases               | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database.        | Run prefix resolution and update.<br><br>Specify DBIL for the logical child database and DBR for the logical parent database.                           | Run prefix resolution and update.                                                                                      | Run prefix resolution and update.                                                                                                               |

**Notes:**

1. The Prereorganization utility says to scan the logical child database and the DFSURWF1 records will be produced if scan is run.
2. DFSURWF1 records are produced; however, the prefix resolution and update utilities need *not* be run.

## Some Restrictions on Modifying Existing Logical Relationships

In some cases, the IMS utilities cannot be used to modify an existing logical relationship. When an existing logical relationship cannot be modified, you must write your own program. Two examples are as follows:

### Example 1: Changing from Bidirectional Virtual to Bidirectional Physical Pairing

Figure 239 on page 458 shows the change in pairing from virtual to physical:

## Adding Logical Relationships

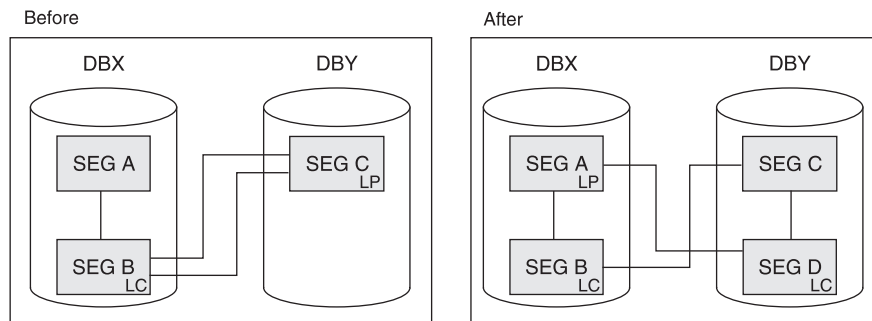


Figure 239. The Change in Pairing from Virtual to Physical

### Example 2: Changing the Location of the Real Logical Child in a Bidirectional Logical Relationship

Figure 240 shows the position change of a real logical child from one logically related database to another:

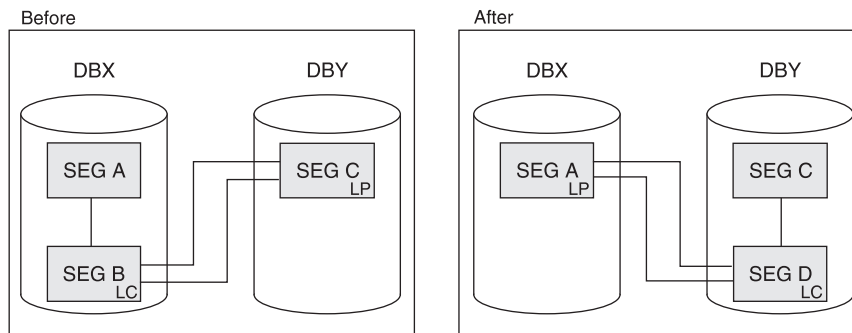


Figure 240. The Position Change of a Real Logical Child from One Logically Related Database to Another

In both of these “before” examples, occurrences of segment B can exist that are physically, but not logically, deleted. The logical child can be accessed from the logical path but not the physical path. When unloading DBX, the HD Unload utility cannot access occurrences of segment B that are physically, but not logically, deleted. Therefore, you must write your own program to do this type of reorganization.

## Summary on Use of Utilities When Adding Logical Relationships

- Counters are increased by counting logical children loaded using an initial load program or, when logically related databases are reorganized, by using DBIL in the control statement.
- Counter problems can be corrected by reorganizing databases. When correcting counter problems, DBIL must be specified in the control statement for the databases involved.
- LCF and LCL pointers are not unloaded and reloaded. They must be recreated by the Prefix Resolution and Update utilities.
- Unless DBIL is specified for all its logical child databases, never specify DBIL in the control statement for a logical parent database.

- To change from symbolic to direct pointers, specify DBIL on the control statement for the logical child database.

---

## Adding a Secondary Index

Secondary indexes are explained in Chapter 8, “Choosing Optional Database Functions,” on page 169. If you need to add a secondary index to your database:

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload your database, using the existing DBD and the HD Unload utility.
3. Code new DBDs. “How to Specify Use of Secondary Indexing in the DBD” in Chapter 6, “Choosing Full-Function Database Types,” on page 55 explains how the DBD is coded for secondary indexes. You need two new DBDs, one for the existing database and one for the new secondary index database.
4. If the change you are making affects the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Delete the old database space and define new database space (non-VSAM), or delete the space allocated for the cluster and define space for the new cluster. In addition, define space for the secondary index.
7. Reload the database, using the new DBD and the HD Reload utility.
8. Run the Prefix Resolution utility, using the DFSURWF1 work file that is output from Step 7 as input.
9. Run the HISAM unload utility, using the DFSURIDX work file that is output from Step 8 as input. Be sure to indicate in the utility control statement that HISAM unload is being used to build a secondary index.
10. Run the HISAM reload utility using as input the output from HISAM unload.
11. When you add a secondary index, remember to change your JCL. You need a DD statement for the secondary index data set even when you are not using the secondary index to process the main database. You also need to change your reorganization procedures when adding a secondary index. Whenever you reorganize the data set the secondary index points to, you must execute the reorganization utilities to rebuild the secondary index.

---

## Adding or Converting to Variable-Length Segments

Variable-length segments are explained in Chapter 8, “Choosing Optional Database Functions,” on page 169. If you need to change selected segments in your database from fixed to variable length—or convert the entire database to variable-length segments—two ways exist to do it. Regardless of which way you use, the object in conversion is to put a size field in the segment you need to make variable length and then get the segment defined as variable length in the DBD.

### Method 1. Converting Segments or a Database

To convert selected segments or the entire database this way, you must:

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Code and generate a new DBD that identifies the segment types that will be variable length, and their size.

## Adding or Converting to Variable-Length Segments

3. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
4. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
5. Write a program that sequentially retrieves from the database all segments that are to be variable length. Your program must add the 2-byte size field to each segment retrieved and then insert the segment back into the database.

## Method 2. Converting Segments or a Database

To convert selected segments or the entire database this way, you must:

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload your database, using the existing DBD.
3. Code and generate a new (interim) DBD. This DBD should specify fixed-length segments for all segments being converted to variable length. It should also specify use of the segment edit/compression exit routine for each segment to be converted. (The interim DBD is used, as explained in Step 9, to add a size field to the existing fixed-length segments.)
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space if necessary. You need to do this when the change you are making results in different requirements for database space.
7. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
8. Write an edit routine to which the segment edit/compression exit routine can exit. Your edit routine should add a size field to each segment it receives. (Information on the segment edit/compression exit routine and the edit routine you must write is contained in "Segment Edit/Compression Exit Routine" on page 230.)
9. Reload the database, using the interim DBD. As each occurrence of a segment type that needs to be converted is presented for loading, your edit routine gets control and adds the size field to the segment. When your edit routine returns control, the segment is loaded into the database. Remember to make an image copy of your database as soon as it is loaded.
10. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. The flowchart in Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.
11. After the database is loaded, code and generate a new DBD that specifies the segment types in the database that are variable, and their size.

---

## Converting to the Segment Edit/Compression Exit Routine

You might need to make changes to your database before you can use a Segment Edit/Compression exit routine, such as the IMS sample exit routine DFSCMPX0.

## Converting to the Segment Edit/Compression Exit Routine

To convert an existing database to support a Segment Edit/Compression exit routine, follow these steps:

1. Determine whether the change you are making affects the code in any application programs. If the code is affected, make sure it gets changed.
2. Unload your database, using the existing DBD and the HD Unload utility.
3. Code a new DBD. The new DBD must specify the name of your edit routine for the segment types you need edited.
4. If the change you are making affected the code in application programs, make any necessary changes to the PSBs for those application programs. If you have the DB/DC Data Dictionary, it can help you determine which application programs and PCBs are affected by the DBD changes you have made.
5. Rebuild the ACB if you have ACBs prebuilt rather than built dynamically.
6. Recalculate database space. You need to do this because the change you are making results in different requirements for database space.
7. Delete the old database space and define new database space. If you are using VSAM, use the Access Method Services DEFINE CLUSTER command to define VSAM data sets.
8. Reload the database, using the new DBD. Remember to make an image copy of your database as soon as it is reloaded.
9. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.

**Related Reading:** For more information on Segment Edit/Compression exit routines, see:

- “Segment Edit/Compression Exit Routine” on page 230
- *IMS Version 9: Customization Guide*

---

## Converting Databases for Data Capture Exit Routines and Asynchronous Data Capture

This topic contains general-use programming interface information.

Data Capture exit routines are explained in “Data Capture Exit Routines” on page 233. To convert an existing database for use with Data Capture exit routines or Asynchronous Data Capture:

1. Determine whether the change requires revisions to the logical delete rules in a database. If so, change the delete rules, which might require reorganizing your database.
2. Code a new DBD. On the DBD or SEGM statements, specify the name of each exit routine you need called against a segment in the database.

**Related Reading:**

- See *IMS Version 9: Utilities Reference: System* for details on the DBD parameters required for Data Capture exit routines or Asynchronous Data Capture.
  - *IMS Version 9: Customization Guide* explains the exit routines in detail, how to code them, and how they work.
3. Run DBDGEN.
  4. If you use prebuilt ACBs rather than dynamically built ACBs, rebuild the ACB.



---

### Converting a Logical Parent Concatenated Key from Virtual to Physical or Physical to Virtual

You can convert a logical parent concatenated key from virtual to physical or from physical to virtual by using DBDGEN and the HD reorganization utilities. To do this conversion:

1. Unload your database, using the existing DBD.
2. Code a new DBD, changing the concatenated key physical/virtual specification.
3. If you use prebuilt ACBs rather than dynamically built ACBs, rebuild the ACB.
4. Recalculate the database space. You need to do this because the change you are making changes database space requirements.
5. For non-VSAM data sets, delete the old database space and define new database space. For VSAM data sets, delete the space allocated for the old clusters and define space for the new clusters.
6. If your database uses logical relationships or secondary indexes, you must run some of the reorganization utilities before and after reloading to resolve prefix information. Figure 196 on page 364 tells you which utilities to use and the order in which they must be run.
7. Reload your database using the new DBD. Remember to make an image copy of your database as soon as it is reloaded.
8. If required, run reorganization utilities to resolve prefix information.

---

### Using the Online Change Function

Using the online change function, you can add, change, and delete full-function databases, HALDB master databases, and DEDB databases online without stopping IMS. MSDBs do not support the online change function.

The online change function for DEDBs allows both database-level and area-level changes. A database-level change affects the structure of the DEDB and includes such changes as adding or deleting an area, adding a segment type, or changing the randomizing routines. An area-level change involves increasing or decreasing the size of an area (IOVF, DOVF, CI). An area-level change requires the user to stop only that area with the /DBRECOVERY command; a database-level change requires the user to stop all areas of the DEDB.

Unlike standard randomizers which distribute database records across the entire DEDB, two-stage randomizers distribute database records within an area. By using a two-stage randomizer, changes to an individual area's root addressable allocation are area-level changes, and only the areas affected need to be stopped.

To use online change with full-function databases, HALDB master databases, and DEDB databases, perform the following steps:

1. Allocate the required new data sets (see *IMS Version 9: Installation Volume 1: Installation Verification* for planning these data sets).
2. Run a MODBLKS system definition if additions, changes, or deletions to the system definition DATABASE (and possibly APPLCTN) statements need to be made (see *IMS Version 9: Administration Guide: System* for more information).
3. Run the necessary DBDGEN (see *IMS Version 9: Utilities Reference: Database and Transaction Manager*), PSBGEN, and ACBGEN (see *IMS Version 9: Utilities Reference: System*).



**Note:** All changes to ACBLIB members resulting from the ACBGEN execution are available to the online system after the online change (provided that the changed resources—PSBs and DBDs—are defined in the online system).

4. Update the security definitions of the IMS system's security facilities to include any new databases. Security facilities can include RACF, another external security product, the IMS Security Maintenance utility, and exit routines. For more information on IMS security, see *IMS Version 9: Administration Guide: System*.
5. Allocate the database data sets for databases to be added.
6. Load your database.
7. For Fast Path, online change must be completed before the database can be loaded. Also, Fast Path can only load databases online; batch jobs cannot be used.
8. If dynamic allocation is used in a z/OS environment, run the dynamic allocation utility.
9. Use the online change utility to copy your updated staging libraries to the inactive libraries (see *IMS Version 9: Utilities Reference: System* for information on running this utility).
10. Issue the operator commands to cause your inactive libraries to become your active libraries (see *IMS Version 9: Command Reference* for the commands used).

If a database in a z/OS environment needs to be reorganized because of changes to the active ACBLIB data set, the /DBR command must be issued to deallocate the database prior to the /MODIFY COMMIT command that introduces the ACBGEN changes. The commands /DBR, /DBD, or /STA DATABASE ACCESS= must be completed to take the areas of the database to be changed or deleted offline prior to issuing the /MODIFY COMMIT command.

**Restriction:** For HALDB databases, if you delete a database name from IMS using online change, you cannot reuse that name for another HALDB partition without first performing a cold start. Similarly, if you delete a partition name from DBRC, you cannot use online change to reuse that name for another database without first performing a cold start.

## Online Change, DEDBs, and Availability of IFP and MPP Regions

Changes can be made to DEDBs using online change while maintaining the availability of IFP and MPP regions that access the DEDBs. If database level changes are made to the DEDB while an IFP/MPP is running, then the application will pseudoabend and the PSB will be rescheduled on the next DL/I call to the DEDB.

Two level changes can be made to DEDBs. The database level changes allow:

1. Add or Delete DEDBs.
2. Add or Delete segment types.
3. Add, Change, or Delete a segment and its fields.
4. Add, Change, or Delete segment compression routines.
5. Add, Change, or Delete data capture exit routines.
6. Change randomizers.
7. Add or Delete areas.

## Using the Online Change Function

8. Change area RAP space allocation and the randomizer is not a 2-stage randomizer.

The area level changes allow:

1. Change area RAP space allocation and the randomizer is a 2-stage randomizer.
2. Change DOVF or IOVF space allocation.
3. Change SDEP space allocation.
4. Change CI size.

Area level changes and items 4 through 8 of the database level change require a BUILD DBD (not a BUILD PSB). In this case, with exception to items 4 and 5 when the defined PSB SENSEGs have reference to exit routines that are added or deleted, the PSB does not change. Changes can be made to DEDBs using online change while maintaining the availability of IFP and MPP regions that access the DEDBs only if there is no change to the scheduled PSB. The application will then pseudoabend with ABENDU0777 and the PSB will be rescheduled on the next DL/I call to DEDB. The message DFS2834I is issued. Other changes to the PSBs such as items 1 through 5 of the DEDB database changes, full-function database changes, or PSB changes using online change require that the IFP and MPP regions be brought down.

The following procedure describes the steps necessary to make database level changes to a DEDB with an IFP / MPP running:

1. Use a specific user-developed application program or OEM utility to unload the DEDB through existing system definitions.
2. DBDGEN, PSBGEN and ACBGEN to generate the application control blocks to implement the DEDB structural changes. The changed or new application control blocks must be built into the active IMS system's staging copy of ACBLIB, which is offline.
3. Run the online change utility, DFSUOCU0, to move the changed ACBLIB from the staging ACBLIB to the inactive (A or B) copy of the ACBLIB that is online to the active IMS system.
4. Enter the normal /DBR command sequence to remove access to the DEDB from the active IMS system.
5. Enter and follow the online change command sequence for PREPARE processing for ACBLIB changes.
6. Enter and follow the online change command sequence for COMMIT/ABORT processing for ACBLIB changes. The online IMS system will switch from using the active (A or B) copy of the ACBLIB to the inactive (A or B) copy.
7. Delete, define and initialize all of the DEDB AREA data sets with the new system definitions.
8. Enter the normal /START DATABASE and /START AREA commands to make the DEDB and its AREAs accessible to the active IMS system.
9. Use a specific user-developed application program or OEM utility to reload the DEDB through the change system definitions for the DEDB.
10. On the first access to the newly changed DEDB, the application will pseudoabend and the PSB will be rescheduled. Message DFS2834I will be displayed.

The transaction will be tried again for both IFPs and MPPs when the PSB is rescheduled. If the application attempts to access the DEDB before commit

processing has completed, an 'FH' status will be returned to the application. The DEDB is inaccessible because the randomizer for the DEDB is unloaded by the /DBR command.

If either database level or area level changes are made to DEDBs while a BMP or DBCTL thread is active, then commit processing fails and the message DFS3452 is issued.

**Related Reading:** See the *IMS Version 9: Messages and Codes, Volume 2* for more information on message DFS3452 and other messages.

## Online Change and DEDB Randomizer and Exit Routines

Randomizing routines determine the location of database records by AREA within the DEDB and by root anchor point (RAP) within the AREA. A change of the DEDB randomizer is a database level change. A new randomizing routine affects the location (AREA and RAP) of every database record within the DEDB. The randomizer is defined for the DEDB in the DBD parameter: RMNAME=.

A randomizer change can involve introducing a brand new randomizer into the active IMS system or changing an existing randomizer in use by one or more DEDBs.

### Introducing a New DEDB Randomizing Routine Using Online Change

The name of the randomizer is specified in the DBD parameter: RMNAME=. If a new randomizer is introduced for an existing DEDB, a DBDGEN and ACBGEN of the database with the new randomizer name is required in addition to the following procedural steps:

1. Use a specific customer-developed application program or original equipment manufacturer (OEM) utility to unload the DEDB with the current randomizer.
2. Assemble and link edit the new randomizer into the IMS SDFSRESL or one of the libraries in the IMS SDFSRESL STEPLIB concatenation.
3. Run a DBDGEN for the DEDB with the new randomizer designated in the DBD parameter: RMNAME=.
4. ACBGEN is also needed to build the application control blocks to implement the DEDB definition that includes the new randomizer. The changed or new application control blocks must be built into the active IMS system's staging copy of ACBLIB, which is offline.
5. ACBLIB Run the online change utility, DFSUOCU0, to move the changed ACBLIB from the staging ACBLIB to the inactive (A or B) copy of the ACBLIB that is online to the active IMS system.
6. Enter the normal /DBR operator command sequence to remove access to the DEDB from the active IMS system.
7. Enter and follow the online change command sequence for PREPARE processing for ACBLIB changes.
8. Enter and follow the online change command sequence for COMMIT/ABORT processing for ACBLIB changes. The online IMS system will switch from using the active (A or B) copy of the ACBLIB to the inactive (A or B) copy.
9. Delete, define and initialize all of the DEDB AREA data sets with the new system definitions.
10. Enter the normal /START DATABASE and /START AREA commands to make the DEDB and its areas accessible to the active IMS system.

11. Use a specific customer-developed application program or OEM utility to reload the DEDB with the new randomizing routine in effect.

### Changing DEDB Randomizing Routines Using Online Change

If a change is made to a randomizer already in use by one or more DEDBs, then all of the DEDBs using the subject randomizer must be included in the change process.

The changed randomizer will not be introduced if an existing version is already loaded for any DEDB in the active IMS system. You can determine that the existing version is no longer used by locating the keyword GONE in message DFS2838I. Also, you can determine that the randomizer module is brought from any library to the storage by locating the keyword LOADED in the message DFS2842I.

Changing DEDB randomizers requires the procedures described below. Because the name of the randomizer remains the same, DBDGEN, ACBGEN and the online change command sequence are not applicable.

1. Use a specific customer-developed application program or OEM utility to unload the DEDB with the existing randomizer. This should be done for all of the DEDBs that use the randomizer to be changed.
2. Enter the normal /DBR DATABASE operator command sequence to remove access to the DEDBs from the active IMS system. The /DBR DATABASE command unloads the randomizer for the DEDBs designated as operands. When all the DEDBs that reference the randomizer are stopped, the randomizer is removed from the active IMS system. If a DEDB is not stopped and references a randomizer that has been removed from the IMS system, then a U1021 abend results on the next DL/I call.
3. Assemble and link edit the changed randomizer into the IMS SDFSRESL or one of the libraries of the IMS SDFSRESL STEPLIB concatenation.
4. Delete, define and initialize all of the DEDB AREA data sets to prepare for reloading the DEDB with the changed randomizer.
5. Enter the /START DATABASE command for each of the DEDBs that use the changed randomizer. For DEDBs, the /START DATABASE command causes the randomizer to be loaded.
6. Use a specific customer-developed application program or OEM utility to reload the DEDB with the changed randomizing routine in effect.

### Deleting a DEDB Randomizing Routine Using Online Change

To delete a randomizer from the active IMS system, follow the procedural steps that are documented under "Introducing a New DEDB Randomizing Routine Using Online Change" on page 465. Once all the DEDBs that were using the old randomizer have been unloaded and had the /DBR command run successfully against them, then the randomizer can be deleted. Customers with data sharing IMS systems that do not share SDFSRESLs must be careful to delete the randomizer from both systems. A message (DFS2838) is generated when the randomizer is deleted.

### Online Change and DEDB Segment Compression Routines

Segment compression routines are segment specific and are defined for the DEDB in the DBD SEGM parameter ("COMPRTN="). Adding, changing or deleting segment compression routines is procedurally the same and involves the same restrictions as DEDB randomizing routines.

## Online Change and DEDB Data Capture Exit Routines

Data Capture exit routines can be defined for the DEDB on the DBD statement, for a specific segment on the SEGM statement ("EXIT="), or for both. Multiple exit routines can be specified on a single DBD or SEGM statement.

**Adding a New DEDB Data Capture Exit Routine Using Online Change:** To add a new Data Capture exit routine, follow the procedure below:

1. Assemble and link edit the new exit routine into the IMS.SDFSRESL or one of the libraries in the IMS.SDFSRESL STEPLIB concatenation.
2. Run a DBDGEN for the DEDB with the new exit routine designated in the DBD or SEGM parameter: "EXIT=".
3. ACBGEN is also needed to build the application control blocks to implement the DEDB definition that includes the new exit routine. The changed or new application control blocks must be built into the active IMS system's staging copy of ACBLIB, which is offline.
4. Run the online change Utility, DFSUOCU0, to move the changed ACBLIB from the staging ACBLIB to the inactive (A or B) copy of the ACBLIB that is online to the active IMS system.
5. Enter the normal /DBR command sequence to remove access to the DEDB from the active IMS system.
6. Enter and follow the online change command sequence for PREPARE processing for ACBLIB changes.
7. Enter and follow the online change command sequence for COMMIT/ABORT processing for ACBLIB changes. The online IMS system will switch from using the active (A or B) copy of the ACBLIB to the inactive (A or B) copy.
8. Enter the normal /START DATABASE and /START AREA commands to make the DEDB and its areas accessible to the active IMS system.

## Changing an Existing DEDB Data Capture Exit Routine Using Online Change:

To change an existing Data Capture exit routine, follow these steps:

1. Allow the dependent regions that are accessing DEDBs with the particular Data Capture exit to end normally.
2. Assemble and link edit the changed exit routine into the IMS SDFSRESL or one of the libraries of the IMS SDFSRESL STEPLIB concatenation.
3. Start the dependent regions. Data Capture exits are loaded at dependent region initialization time, so the new version of the exit will take effect when the region is started. Data Capture exit routines that were linked as reentrant or reusable are unloaded at dependent region termination time. Otherwise, they are unloaded after every DL/I call.

**Deleting a DEDB Data Capture Exit Routine Using Online Change:** To delete a Data Capture exit routine, execute the following steps:

1. Run a DBDGEN for the DEDB with the old exit routine omitted from the DBD or SEGM statement.
2. Build the application control blocks by using the Application Control Block Maintenance utility to implement the DEDB definition that excludes the old exit routine. The changed or new application control blocks must be built into the active IMS system's staging copy of ACBLIB, which is offline.
3. Run the Online Change Copy utility, DFSUOCU0, to move the changed ACBLIB from the staging ACBLIB to the inactive (A or B) copy of the ACBLIB that is online to the active IMS system.

## Using the Online Change Function

4. Enter the normal /DBR command sequence to remove access to the DEDB from the active IMS system.
5. Enter and follow the online change command sequence for PREPARE processing for ACBLIB changes.
6. Enter and follow the online change command sequence for COMMIT/ABORT processing for ACBLIB changes. The online IMS system will switch from using the active (A or B) copy of the ACBLIB to the inactive (A or B) copy.
7. Enter the normal /START DATABASE and /START AREA commands to make the DEDB and its areas accessible to the active IMS system.

### Changing DEDB Root Addressable Space with Two Stage Randomizer Using Online Change

The UOW structure and root addressable allocation is specific to each area within each DEDB. However, a change to the number of root addressable CIs within one area can affect the number of root anchor points within the whole DEDB. If the DEDB uses a standard randomizing routine that randomly distributes database records across the entire database, changes to the root addressable allocation are *Database Level* changes and procedurally must be handled as such. This topic is not applicable to such changes.

If, however, a two-stage randomizer is used for the DEDB, a change to an individual area UOW root addressable definition is an *AREA Level* change. A two-stage randomizer does not attempt to evenly distribute database records across all areas based on the total number of root anchor points in the entire DEDB. A two-stage randomizer is designated in the DBDGEN by coding the randomizer name as follows:

RMNAME=(mmmmmmmm,2)

In prior releases of IMS, customers would get the following error message if a DEDB DBD had more than one operand in the RMNAME parameter:

8, DBD130 - RMNAME OPERAND IS OMITTED OR INVALID

The same message will appear for this release of IMS if anything but a two is specified as the second operand of RMNAME. Customers can still specify RMNAME=(mmmmmmmm) for standard randomizing routines.

### Changing the DEDB AREA UOW Structural Definition Using Online Change

Changing the DEDB AREA UOW structural definition requires the following procedural steps:

1. Use a specific customer-developed application program or original equipment manufacturer (OEM) utility to unload the area through existing system definitions.
2. DBDGEN, PSBGEN and ACBGEN to generate the application control blocks to implement the DEDB structural changes. The "UOW=(x,y)" parameter on the AREA DBDGEN macro statement defines the amount of space allocated to overflow within a DEDB UOW. The "ROOT=(nnn,mmm)" parameter on the AREA DBDGEN macro statement defines the amount of space allocated to Independent Overflow.

The changed or new application control blocks must be built into the active IMS system's staging copy of ACBLIB, which is offline.

3. Run the online change utility, DFSUOCU0, to move the changed ACBLIB from the staging ACBLIB to the inactive (A or B) copy of the ACBLIB that is online to the active IMS system.



4. Enter the /DBR AREA command to remove access to the area from the active IMS system.
5. Enter and follow the online change command sequence for PREPARE processing for ACBLIB changes.
6. Enter and follow the online change command sequence for COMMIT/ABORT processing for ACBLIB changes.
7. Delete, define and initialize the area with the new system definitions.
8. Enter the /START AREA command to make the area accessible to the active IMS system.
9. Use a specific customer-developed application program or OEM utility to reload the DEDB through the changed system definitions for the DEDB.

## Making Online Changes at the DEDB and Area Level

This topic contains the following information about making online changes to DEDB and DEDB areas:

- “Adding or Deleting DEDBs Using Online Change”
- “Adding or Deleting DEDB Segments Using Online Change” on page 470
- “Adding or Deleting DEDB Areas Using Online Change” on page 471
- “Changing DEDB Root Addressable Space Allocation Using Online Change” on page 471
- “Online Change and DEDB Dependent and Independent Overflow Space Allocation” on page 472
- “Changing DEDB CI Size Using Online Change” on page 472

## Adding or Deleting DEDBs Using Online Change

Figure 241 shows the overall process for adding a database using online change.

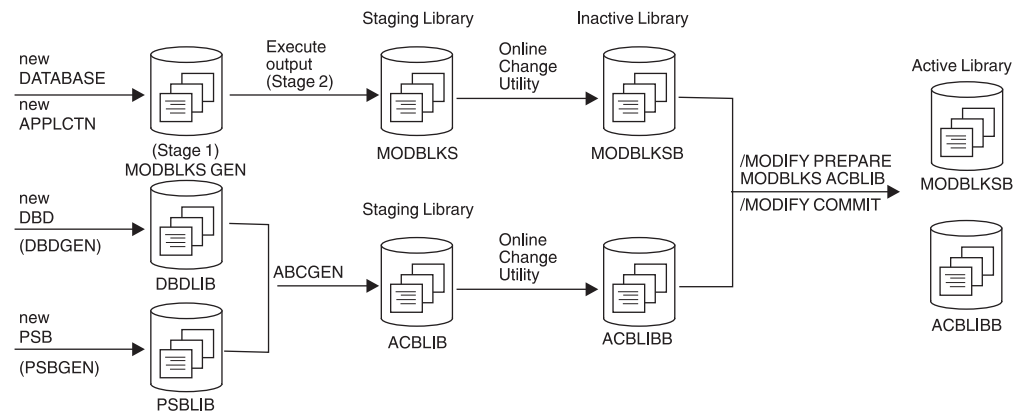


Figure 241. Adding a Database Using Online Change

Adding or deleting a DEDB and implementing the change by means of the IMS online change facility requires that you follow the steps described below. See Figure 241 for an overall picture.

1. MODBLKs Level system definition (Stage 1 and Stage 2) to add or delete the DEDB. The changed MODBLKs should be generated into the active IMS system's staging copy of MODBLKs, which is offline.
2. DBDGEN, PSBGEN and ABCGEN to generate the application control blocks to add or delete the DEDB and PSBs that access it. The changed or new application control blocks must be generated into the active IMS system's staging copy of ACBLIB, which is offline.

## Using the Online Change Function

3. Run the online change utility, DFSUOCU0, to move the changed MODBLKs and ACBLIB changes from the staging libraries to the inactive (A or B) copies of these libraries that are online to the active IMS system.
4. Enter and follow the online change command sequence for PREPARE processing. If a DEDB is being added to an IMS system that does not have Fast Path installed, the DFS2833 error message will appear and the PREPARE process will be aborted.

If a DEDB is added whose areas have CI sizes that exceed the system buffer size (BSIZ= ), then message DFS2832 will appear and the PREPARE process aborts.

Finally, if a DEDB is added to an IMS system that was initialized without any DEDBs, then message DFS2837 appears and the PREPARE process aborts.

Output threads are initialized during Fast Path initialization only if DEDBs are currently generated in the system. In order for the user to be able to add DEDBs with online change, IMS must be initialized with DEDBs to begin with.
5. If the DEDB is to be deleted, any BMP region or DBCTL thread scheduled for access to the DEDB must first be stopped. Full function transactions scheduled for access to the DEDB will be placed in a QSTOP state and as a result, MPP or IFP dependent regions need not be stopped to implement the online change to delete the DEDB.
6. If the DEDB is to be deleted, access to it from the active IMS system must be removed by means of a /DBR DB command. The commit will fail with a DFS3452 message if the DEDB has not had the /DBR command successfully run against it beforehand.
7. Execute the online change command sequence for COMMIT/ABORT processing.
8. If the DEDB is newly added, execute the following additional steps at any appropriate time prior to making the DEDB generally available for normal user access:
  - a. Execute the normal procedures for defining the new DEDB and its areas and area data sets to DBRC and the RECON data sets.
  - b. Define and initialize all of the area data sets belonging to the new DEDB.
  - c. Execute the procedures to include the required Dynamic Allocation definitions that will enable the DEDB and its areas to be allocated to the active IMS system. Or register the DEDB and its areas to DBRC, and DBRC will dynamically allocate them during IMS initialization.
  - d. Enter the /START DATABASE and /START AREA commands to make the DEDB and its areas accessible to the active IMS system.
  - e. Run the necessary application load programs.

**Related Reading:** See the *IMS Version 9: Messages and Codes, Volume 2* for information on the types of messages you might receive while adding or deleting DEDBs.

### Adding or Deleting DEDB Segments Using Online Change

Adding or deleting segment types or changing segment formats affects the structure of a DEDB and constitutes a Database Level change. The addition or deletion of segment types (including the DEDB Sequential Dependent Segment type) affects the hierarchical structure and the segment prefix layout to implement this structure. Similarly, the change of individual segment formats changes the structure of the entire database and space allocations within each AREA of the DEDB.



To make structural changes to an existing DEDB, execute the procedural steps described below.

1. Use a specific customer-developed application program or OEM utility to unload the DEDB through existing system definitions.
2. DBDGEN, PSBGEN and ACBGEN to generate the application control blocks to implement the DEDB structural changes. The changed or new application control blocks must be built into the active IMS system staging copy of ACBLIB, which is offline.
3. Run the online change utility, DFSUOCU0, to move the changed ACBLIB from the staging ACBLIB to the inactive (A or B) copy of the ACBLIB that is online to the active IMS system.
4. Enter the normal /DBR command sequence to remove access to the DEDB from the active IMS system. This command may be issued any time prior to the /MODIFY COMMIT.
5. Enter and follow the online change command sequence for PREPARE processing for ACBLIB changes.
6. Enter and follow the online change command sequence for COMMIT/ABORT processing for ACBLIB changes.
7. Delete, define and initialize all of the AREA data sets belonging to the DEDB with the new system definitions.
8. Enter the normal /START DATABASE and /START AREA commands to make the DEDB and its areas accessible to the active IMS system.
9. Use a specific customer-developed application program or OEM utility to reload the DEDB through the changed system definitions for the DEDB.

### Adding or Deleting DEDB Areas Using Online Change

Adding or deleting an area can affect the location of every database record throughout the DEDB. Changing the number of areas will alter the number of root anchor points (RAPs) within the DEDB. DEDB randomizing routines attempt to randomly distribute database records throughout the entire DEDB based first on the area and then on the root anchor point (RAP) within the area.

Adding or deleting one or more areas to a DEDB constitutes a structural change such as adding a segment type. The steps described in “Adding or Deleting DEDB Segments Using Online Change” on page 470 should be followed to change the number of areas defined in the DEDB. If areas are newly added, the required DBRC definitions for areas and area data sets must be processed and dynamic allocation blocks must be prepared before the new areas can be accessed by the active IMS system.

### Changing DEDB Root Addressable Space Allocation Using Online Change

There are different implications depending on whether you randomly distribute DEDB records or use a standard randomizer to evenly distribute DEDB records. In either case, you can distribute DEDB records across an entire DEDB or just a single DEDB area.

**Random Distribution of Database Records Across All DEDB Areas:** Changes to the DEDB unit of work (UOW) structure that affect the number of DEDB control intervals defined to the Root Addressable portion impact the number of root anchor points within the entire DEDB. This type of change potentially affects the location of every database record within the DEDB.

## Using the Online Change Function

**Standard DEDB Randomizing Routines:** Standard DEDB randomizing routines attempt to evenly distribute database records across all areas and within the selected AREA. Such randomizers determine the record location based on the total number of root anchor points in the entire DEDB.

A change to the UOW structure that changes the number of CIs defined to the root addressable area constitutes Database Level change when a standard DEDB randomizing routine is used. This type of change should be treated the same as a DEDB structural change in terms of online change procedures.

### Online Change and DEDB Dependent and Independent Overflow Space Allocation

Starting in IMS Version 3, Fast Path has provided limited support for extending DEDB AREA Independent Overflow space allocation. That support continues unchanged. Additionally, DEDB online change will allow changes to the overflow space allocation both within each UOW (Dependent Overflow) and outside the root addressable portion (Independent Overflow) of the AREA. Both Dependent and Independent Overflow changes are considered to be Area-level changes. However, such changes must not alter the number of CIs defined to the root addressable portion. Changing the number of root addressable CIs will change the number of root anchor points and could affect the DEDB randomizing routine in locating database records.

Changing DEDB AREA overflow allocation requires the same procedural steps as those defined for changing the root addressable area.

**Related Reading:** See “Changing the DEDB AREA UOW Structural Definition Using Online Change” on page 468 for details on changing the DEDB AREA overflow.

### Changing DEDB CI Size Using Online Change

DEDB online change can be used to change DEDB AREA control interval size. However, CI size changes must not alter the number of CIs allocated to the root addressable portion of an AREA because this could affect the DEDB randomizer in locating database records across the DEDB. The SIZE= parameter on the AREA statement of DBDGEN defines the CI size of the data set that constitutes the AREA.

---

## Extending DEDB Independent Overflow Online

You can extend the independent overflow (IOVF) portion of a DEDB area while IMS is online by following the procedure described in this topic. The first time the area is opened after this procedure is completed, a message is issued to verify that Fast Path recognizes and accepts the change to the area and normal open processing completes. You can also modify the IOVF portion of a DEDB using DEDB online change.

You cannot decrease the size of the IOVF with this procedure. However, the size of the sequential dependent part might increase or decrease depending on the total amount of space allocated to the area. The steps in this procedure also reorganize the area.

To increase the size of the IOVF portion of a DEDB online you must:

1. Run the DBDGEN utility to obtain an updated DBD. Update *only* the following operands on the ROOT= keyword of the AREA statement:

### **number**

Specifies the total number of units of work (UOWs) allocated to the root addressable and the IOVF parts of the area. Increase **number** to reflect the number of UOWs you need to add to the IOVF.

### **overflow**

Specifies the space reserved for the IOVF, expressed as the number of UOWs. Increase the number on this operand by the same amount you increase the **number** operand. For example, if the original values were **number**= $x$  and **overflow**= $y$ , and if **number** is changed to  $x + 2$ , then **overflow** must be changed to  $y + 2$ .

All other control statements must remain identical to those on the existing DBD. Changing other control statements might damage data and create unpredictable results.

2. Run the ACBGEN utility using the updated DBD. You should run PSB=ALL to create a new and complete ACBLIB with the new ROOT= parameters. The output should be a different data set from the one currently used by the control region. The new ACBLIB is identical to the old ACBLIB, except for the ROOT= changes. You can use the staging ACBLIB, but do not switch with the online change function.
3. Ensure that the area is in good condition. The area must not have any in-doubts, and must not be in a recovery-needed condition. Also, at least one copy of the area (one area data set) must have no error queue elements (EQEs). Use the /DIS AREA command to display EQEs and the condition. Use the /DIS CCTL INDOUBT command to display all in-doubt threads. Eliminate potential defects before continuing to the next step so that data is not lost or damaged.
4. Process SDEPs using the SDEP scan and delete utilities. This step is required because the IOVF extension procedure requires an unload and load of the area. Some unload and load utilities are unable to process SDEPs. Unload/load utilities that do process SDEPs might reload them in root order rather than time order, which can interfere with subsequent SDEP scan and delete operations.

### **Related Reading:**

- For more information on the DBRC definitions for the shared AREAs with SDEP segments, see the *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.
  - For more information on DEDB Sequential Dependent Scan utility keywords and change boundaries, see the *IMS Version 9: Utilities Reference: Database and Transaction Manager*.
  - For more information on the DEDB Sequential Dependent Scan utility user-written exit routine parameter interface, see the *IMS Version 9: Customization Guide*.
5. If multiple copies of the area (MADS) exist, stop all copies of the area except one using the /STOP ADS command. Ensure that the remaining copy does not have any EQEs and is not in a recovery-needed condition. Multiple ADSs must be stopped to ensure that DBRC has accurate information when the area is brought online after the IOVF is extended.
  6. Issue a /DBR or /STO AREA command against the area.
  7. Take an image copy of the area.
  8. If the area is registered with DBRC, set the recovery-needed flag on for the area. This flag is required by the DEDB Initialization utility and can be set using a CHANGE.DBDS RECOV command.

9. Unload the area.
10. Execute the IDCAMS utility to delete and redefine the data set. The amount of space you allocate for the area in the Define procedure should reflect the increased size of the IOVF. The number of SDEP CIs in the area might change because this number represents the difference between the total amount of space allocated to the area and the amount used by the other parts. These other parts are the root addressable part, the IOVF, the reorganization UOW, and two control CIs.

**Related Reading:** See *DFSMS Access Method Services for Catalogs* for a description of the IDCAMS Delete and Define functions.

11. Execute the Fast Path initialization utility against the new area using the new ACBLIB.
12. Issue the /START AREA command to bring the area online.
13. Reload the area.

**Note:** It is recommended that you reload the area in batch. If you reload the area using a BMP, the BMP might fail with message DFS3709A and reason code 5. If this failure occurs, issue the CHANGE.DBDS command to set ICOFF and restart the BMP.

*IMS Version 9: Messages and Codes, Volume 2* explains message DFS3709A and the reason for this failure.

14. Take an image copy of the area after the reload.

When the area is next accessed, message DFS3703I is issued. This message alerts you that discrepancies were found during open processing. However, open processing continues because the discrepancies indicate to IMS that you used an accepted procedure to increase the size of the IOVF. DFS3703I is not issued during subsequent opens of the area as long as IMS remains online. DFS3703I is also issued by any sharing subsystem the first time the area is opened on that subsystem after the IOVF is extended.

During emergency restart or extended recovery facility (XRF) takeover, the updated area information is picked up from the log. Therefore, DFS3703I is not issued.

Use the new ACBLIB for any subsequent normal restarts of the online system. Ensure that the new ACBLIB reflects *only* the changes made to the ROOT= keyword. Any other changes you make might cause damage to the area. If you do not use the new ACBLIB, open logic allows the discrepancy between information from the old ACBLIB and information from the area data set, but issues message DFS3703I each time the discrepancy is encountered.

**Note:** Remember that you cannot use the online change function to update the ACBLIB with the altered ROOT= parameter.

---

## Modifying HALDB Databases

You can modify existing HALDB databases just as you can modify any other full-function database; however, you must perform some modification tasks differently for HALDB and other modification tasks are unique to HALDB. You should also familiarize yourself with the many unique HALDB concepts and characteristics before performing any of the modification tasks described in this topic.

This topic includes the following subtopics related to modifying HALDB databases and partitions:

- “What You Need to Know About Modifying HALDB Databases”
- “Changing the High Key of a Partition” on page 484
- “Adding Partitions to a HALDB” on page 485
- “Disabling and Enabling HALDB Partitions” on page 489
- “Deleting Partitions From a HALDB” on page 491
- “Changing the Name of a HALDB Partition” on page 496
- “Modifying the Number of Root Anchor Points in a PHDAM Partition” on page 496
- “Modifying HALDB Segments” on page 497
- “Modifying HALDB Partition Data Sets” on page 497
- “Exit Routine Modifications and HALDBs” on page 498
- “Adding a Secondary Index to a HALDB” on page 500
- “Modifying a HALDB PSINDEX” on page 501

### What You Need to Know About Modifying HALDB Databases

Many of the changes that you can make to HALDB databases are the same as those that you can make to other IMS full-function database types. However, some changes are unique to HALDB databases, such as adjusting the distribution of records across the partitions in a HALDB.

You specify most changes to HALDB databases in either the database definition statements that define the HALDB master database or in the DBRC RECON data set where the partition definitions are stored. Where you specify changes depends on the type of change you are making. For example, to change the hierarchical structure of records you would specify the changes in the DBD using the DBDGEN process, but to modify the range of records stored in a partition you would specify the change in the DBRC RECON data set using either the Partition Definition utility or batch DBRC commands.

For additional information about what you should know before modifying HALDBs, see:

- “The Scope of Changes for HALDB Databases”
- “Record Distribution and Partition Boundaries in HALDBs” on page 477
- “Online Partition Structures and Partition Definitions in DBRC” on page 480
- “Partition ID Numbers” on page 481
- “Automatic Update of HALDB Secondary Index and Logical Relationship Pointers” on page 483
- “Online Change with HALDB” on page 484

### The Scope of Changes for HALDB Databases

When modifying HALDBs, you also need to be aware of the scope of your changes. Some of the changes that you can make affect only one partition or a subset of partitions. Other changes to HALDBs affect the entire HALDB and all of the partitions it contains. Table 33 on page 476 provides a list of some of the elements of a HALDB you might modify, where you would specify the modification, and the scope of the modification.

## About modifying HALDB databases

Table 33. Examples of HALDB modifications, where you specify them, and what their scope is

| What you are modifying                                   | Where you specify the change  | The scope of the change                                                                                                        | Notes                                                                                                                                |
|----------------------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Field definition, adding or deleting                     | DBD statements                | Entire HALDB and all partitions                                                                                                | Requires an unload of the HALDB only if the modification changes any field offsets or the length of a segment                        |
| Data capture exit routine                                | DBD statements                | Entire HALDB and all partitions                                                                                                | Does not require an unload of the HALDB                                                                                              |
| Segment type, adding or deleting                         | DBD statements                | Entire HALDB and all partitions                                                                                                | Requires an unload of the HALDB                                                                                                      |
| Pointer options                                          | DBD statements                | Entire HALDB and all partitions                                                                                                | Requires an unload of the HALDB                                                                                                      |
| Segment Edit/Compression exit routine                    | DBD statements                | Entire HALDB and all partitions                                                                                                | Requires an unload of the HALDB                                                                                                      |
| Selection criteria of a Partition Selection exit routine | DBD statements and DBRC       | All partitions affected by the change in record distribution introduced by the new or changed Partition Selection exit routine | Requires an unload of only those partitions affected by the change in record distribution                                            |
| Data set name prefix                                     | DBRC                          | Only the specified partition                                                                                                   | Only the affected partition is unauthorized, access to all other partitions is unaffected                                            |
| Randomizing module or randomizing parameters             | DBD statements, DBRC, or both | If made in the DBD, all partitions in the database. If made in DBRC, only the specified partition                              | For changes to the specifications in DBRC, only the affected partition is unauthorized, access to all other partitions is unaffected |
| High keys of partitions                                  | DBRC                          | All partitions affected by the change in record distribution introduced by the new or changed high key                         | Requires an unload of only those partitions affected by the change in record distribution                                            |

The following topics provide additional information about the scope of changes for HALDB databases:

- “Changes That Affect All of the Partitions in a HALDB Database”
- “Changes You Can Apply to a Single Partition” on page 477

**Changes That Affect All of the Partitions in a HALDB Database:** Certain characteristics of HALDB partitions are common to all partitions in a HALDB. Before you can change these characteristics, you must take all of the partitions in



the HALDB offline by issuing the `/DBRECOVERY DB HALDB_master_name` command or the `UPDATE DB NAME(HALDB_master_name) STOP(ACCESS)` command.

You can change the following characteristics of HALDB partitions only after taking all partitions offline:

- DBD definition
- The HALDB Partition Selection exit routine
- Share level
- Nonrecoverable attribute status
- RSR GSG name or tracking level

For example, suppose a HALDB has an existing HALDB Partition Selection exit routine that needs to be replaced with a HALDB Partition Selection exit routine that selects partitions based on a new algorithm. This change requires the entire HALDB to be offline because partition selection exit routines can affect the placement of records in every partition in the database.

**Changes You Can Apply to a Single Partition:** Certain characteristics of HALDB databases are specific to each partition in the database. To change these characteristics, you do not need to take the entire HALDB database offline; you only need to take the partition in which you are making changes offline. Before making changes to a partition, issue a `/DBRECOVERY DB partition_name` command or an `UPDATE DB NAME(partition_name) STOP(ACCESS)` command against the partition.

You can change the following characteristics of a single partition:

- DSN prefix
- Randomizing module name
- Number of root anchor points (RAPs)
- Bytes parameter
- OSAM block size
- VSAM CI size

### Record Distribution and Partition Boundaries in HALDBs

You can adjust the distribution of records in your HALDB database by redefining the range of records that a partition holds. You redefine the range of records for a partition by changing the boundaries between the partitions. Because the number of records that a partition contains can change over time, you would typically adjust the distribution of records in a HALDB database when one or more partitions in the HALDB database become too large or too small.

How you change partition boundaries depends on how your HALDB performs partition selection. HALDB performs partition selection by using either partition high keys, which are based on the root keys of the records, or a Partition Selection exit routine, which is based on a user-defined partition selection string.

If your HALDB selects partitions based on high keys, you change the range of records in a partition by changing its high key. For information on how to do this, see “Record Distribution and High Key Partitioning” on page 478.

If your HALDB selects partitions using a Partition Selection exit routine, you change the range of records in a partition by modifying the exit routine itself. These modifications are typically installation specific and are therefore not



## About modifying HALDB databases

documented here. However, for important information about adding new or modified Partition Selection exit routines to a HALDB, see “Record Distribution and the Partition Selection Exit Routine” on page 480.

Changes to partition boundaries can affect one or more partitions. If a change to one partition causes records to be moved to or from any other partitions, the change also affects those other partitions. If you use high keys for partition selection, IMS automatically sets the initialization-required flag for the partitions affected by a boundary change. If you use a HALDB Partition Selection exit routine, you are responsible for flagging the partitions that are affected by a boundary change as requiring initialization. In either case, before you change the partition boundaries, you must issue the /DBR command against all of the partitions that will be affected by the change.

Adding, disabling, and deleting partitions from a HALDB can also affect the distribution of records. Adding, disabling, and deleting partitions are discussed in the following topics:

- “Adding Partitions to a HALDB” on page 485
- “Disabling and Enabling HALDB Partitions” on page 489
- “Deleting Partitions From a HALDB” on page 491

**Record Distribution and High Key Partitioning:** If you use key range partitioning, you can change the distribution of records across HALDB partitions by changing the high key of one or more partitions. The high key of a partition specifies the highest root key of a record that a partition can contain.

The high key of a partition also defines the boundary between the partition that owns the high key and the partition with the next higher high key, if such a partition exists. If you change a high key that defines a boundary between two partitions, both partitions are affected by the change. For example, lowering a high key of a partition usually reduces the number of records in the partition that owns the high key and increases the number of records in the partition with the next higher high key.

**Recommendation:** Before you adjust the distribution of records in your HALDB:

- Analyze the current distribution of records across the partitions in the HALDB.  
For an accurate report of the records in an existing HALDB, you can use the IBM IMS HALDB Conversion and Maintenance Aid, a separately licensed software tool available from IBM.  
For more information about the IBM IMS High Availability Large Database (HALDB) Conversion and Maintenance Aid, see the IBM DB2 & IMS Tools library.
- Enable the HALDB reorganization number verification function, which prevents the reorganization numbers of partitions from being regressed by the movement of records between partitions.  
For more information about the HALDB reorganization number verification function, see “HALDB Partition Reorganization Numbers” on page 114.

You can change the high key of a partition either by using the Partition Definition utility or by using batch DBRC commands. These changes generally require that you unload the affected partitions before changing the partition definitions, and then initialize and reload the partitions when you are done making changes. An affected partition is any partition whose range of keys has increased or decreased, even if you did not directly change the definition of the partition in DBRC.

You typically change the high key of a partition when the amount of data in a HALDB database is not balanced from one partition to the next. Changing a high key of a partition changes the boundary of the partition and causes some records to be moved from one partition to another.

Figure 242 shows the change of the high key for partition B from 4M to 5M, which results in the movement of records with keys from 4M+1 to 5M from partition C to partition B.

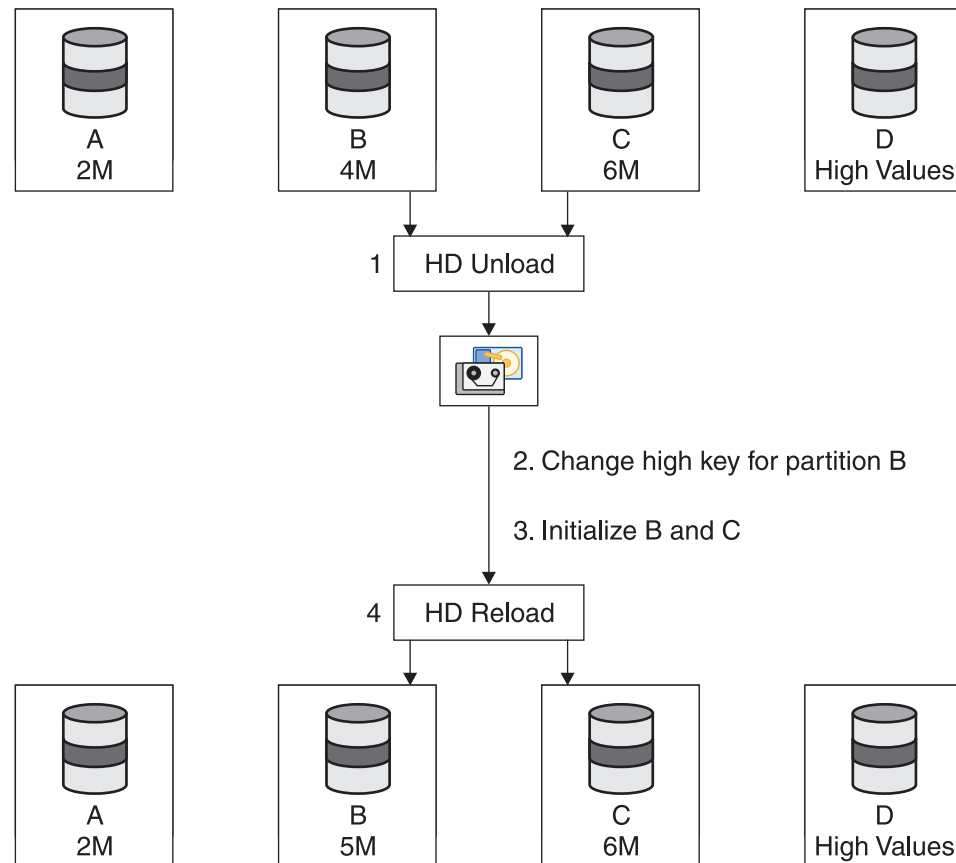


Figure 242. Changing a high key with key range partitioning

The change to the high key of partition B in Figure 242 is therefore a change that affects both partition B and partition C. When the definition of partition B is changed, IMS sets the PINIT flag for both partition B and partition C to indicate that they both must be initialized. Partitions A and D are not affected by the change.

**Note:** The online IMS system is not aware of the changes to the partition definitions of partitions B and C in Figure 242 until one of the following events occur:

- A `/START DB HALDB_Master OPEN` command is issued.
- An `UPDATE DB NAME(HALDB_Master) START(ACCESS) OPTION(OPEN)` command is issued.
- A DL/I call causes an authorization call to DBRC for partition C. The first DL/I call goes through HALDB partition selection again to properly select and authorize either partition B or C.

## About modifying HALDB databases

**Record Distribution and the Partition Selection Exit Routine:** If you are using a Partition Selection exit routine, the distribution of records across partitions is managed by the exit routine and not by IMS. To adjust the distribution of records across partitions, you must modify the exit routine.

IMS cannot detect changes in the exit routine to the distribution of records. Nor does IMS know which partitions are affected by those changes. Consequently, you must understand which partitions are affected by any changes you make and initialize them accordingly.

When a change causes records to be moved from one partition to another, you must run HD Unload, set PINIT flags, initialize, and run HD Reload for every partition affected by the movement of records.

You should also be sure that any Partition Selection exit routine you are using contains code that processes the structure initialization and structure modification calls that IMS issues when updating online partition structures after partitions are added or modified. The sample Partition Selection exit routine (DFSPSE00) delivered with IMS includes code that supports these calls.

For detailed information the sample Partition Selection exit routine (DFSPSE00) provided with IMS, see *IMS Version 9: Customization Guide*.

For the steps you need to follow to reintroduce a modified Partition Selection exit routine into your HALDB, see “Adding or Changing a HALDB Partition Selection Exit Routine (DFSPSE00)” on page 499.

### Online Partition Structures and Partition Definitions in DBRC

The online IMS system creates an internal *partition structure* for each HALDB partition you define. Any time you change HALDB partition definitions in DBRC's RECON data set, IMS must rebuild the partition structure of all partitions affected by the change before the partitions can be used.

To detect when IMS needs to rebuild a partition structure, IMS tracks changes to HALDBs using a *change version number*. Each time you change the partition definitions recorded in the RECON data set, DBRC increases the change version number for the HALDB master database by one. When the online IMS system detects an increase in the change version number for a HALDB, IMS rebuilds the partition structure of each partition affected by the change.

Online change is not used for changing HALDB partition definitions or rebuilding partition structures. IMS recognizes any increases in HALDB change version numbers and dynamically reflects the new definitions in the online IMS system.

If you are using XRF, the alternate IMS system sees the dynamic change and automatically updates the definitions in the alternate system, requiring no action from you.

**Related reading:** For more information about the HALDB change version number, see “HALDB Partition Names and Numbers” on page 112.

**Events That Trigger an Online Structure Rebuild:** IMS checks the HALDB change version numbers to detect changes to partition definitions and rebuild partition structures, if necessary, in the following events:

- When a partition is authorized for use. This would detect a change in an existing partition or in a partition which was not already authorized. This occurs

commonly when a partition is taken offline, changes are made to its definition in the RECON data set, and the partition is made available again. The first use of the updated partition triggers partition structure rebuild.

- When an invalid key is detected by partition selection or by a Partition Selection exit routine. This can occur, for example, when a new partition is added beyond the high key of the last partition and all existing partitions are already authorized. In this case, IMS partition selection or the Partition Selection exit routine detects the new partition. After the new partition is detected, IMS performs partition structure rebuild automatically.
- When a `/START DB HALDB_Master OPEN` or `UPDATE DB NAME(HALDB_Master) OPTION(OPEN)` command is issued. For example, if a new partition has been added beyond the high key of the last partition and all existing partitions are already authorized, these commands will initiate a partition structure rebuild. For more details on the `/START DB` command and the `UPDATE DB` command, see *IMS Version 9: Command Reference*.

**Additional Considerations for Online Structure Rebuild:** When making changes to HALDB partition definitions, consider the following points:

- If you use a HALDB Partition Selection exit routine, you must issue either the `/DBRECOVERY` command or the `UPDATE STOP(ACCESS)` command and then, after making the changes to the partition definition, the `/START` command or the `UPDATE START(ACCESS)` command. When the HALDB Partition Selection exit routine selects a HALDB partition, IMS is not aware of HALDB partition boundaries until a partition structure rebuild is complete. For more information on when IMS rebuilds partition structures, see “Events That Trigger an Online Structure Rebuild” on page 480.
- If you are using a HALDB Partition Selection exit routine and IMS notifies you of a structure modification, you might need the exit routine to select partitions correctly based on the current partition structure.
- Issuing a `/START DB` command with the `OPEN` keyword might fail after the definition of a partition structure has been changed. This is because the online partition structure needs to be rebuilt. To invoke a structure rebuild, an application program that uses the partition must be run or the type-1 command `/START DB HALDB_Master OPEN` must be issued.
- Newly added partitions will not be known by the online IMS system until partition structure rebuild has been invoked and the new structure has been created.
- If you are using a Partition Selection exit routine, be sure that it contains code that processes the structure initialization and structure modification calls that IMS issues when updating online partition structures after partitions are added or modified. The sample Partition Selection exit routine (DFSPSE00) delivered with IMS includes code that supports these calls.

For detailed information the sample Partition Selection exit routine (DFSPSE00) provided with IMS, see *IMS Version 9: Customization Guide*.

### Partition ID Numbers

IMS assigns a partition ID number to each partition when the partition is defined. The partition ID of each new partition is generated by incrementing the partition ID number of the last partition defined to IMS. Therefore, each new partition in a HALDB database is assigned a new higher number. The last partition ID assigned is stored in the RECON data set. Previously assigned partition ID numbers are not reused.

## About modifying HALDB databases

If you delete the definition of a partition, the partition ID of that partition is permanently lost. If you try to restore the partition by redefining it, the redefined partition will have a new higher partition ID.

The assignment of new partition IDs when deleting and redefining partitions has important implications for your ability to back out of such changes. Partition IDs are physically stored in partition data sets. Consequently, data sets created for one partition cannot be used with other partitions or with the same partition if it is deleted and redefined. Similarly, image copies cannot be used if the partition ID in the image copies does not match the partition ID of the partition you are trying to apply them to.

**Recommendation:** Disable partitions before you delete them. Disabled partitions are removed from active use, but can be re-enabled. Re-enabled partitions retain their original partition ID. Disabled partitions can be deleted later, after their removal from the active HALDB database has been thoroughly tested.

The following figure illustrates the assignment of partition IDs in a HALDB database with three partitions by showing how the partition IDs change as a partition is deleted and then recreated.

In step 1 in Figure 243 on page 483, the HALDB database has three partitions. The three partitions have partition IDs of 001, 002, and 003.

In step 2 in Figure 243 on page 483, partition C is deleted from the same HALDB database, leaving only partitions A and B with partition IDs of 001 and 002, respectively. Deleting partition C requires the unload of both partitions B and C, the deletion of partition C, the initialization of partition B, and then the reload of the records that used to be in both partition B and C into partition B. This changes the database to two partitions.

In step 3 in Figure 243 on page 483, the user attempts to recover partition C by redefining it; however, the original partition ID of partition C was permanently lost when the partition was deleted. When partition C is redefined, IMS assigns a partition ID of 004, which was obtained by incrementing the previously assigned partition ID number. Because partition C now has partition ID 004, image copies of the partition C data sets taken before the partition was deleted cannot be used. These image copies contain partition ID 003.

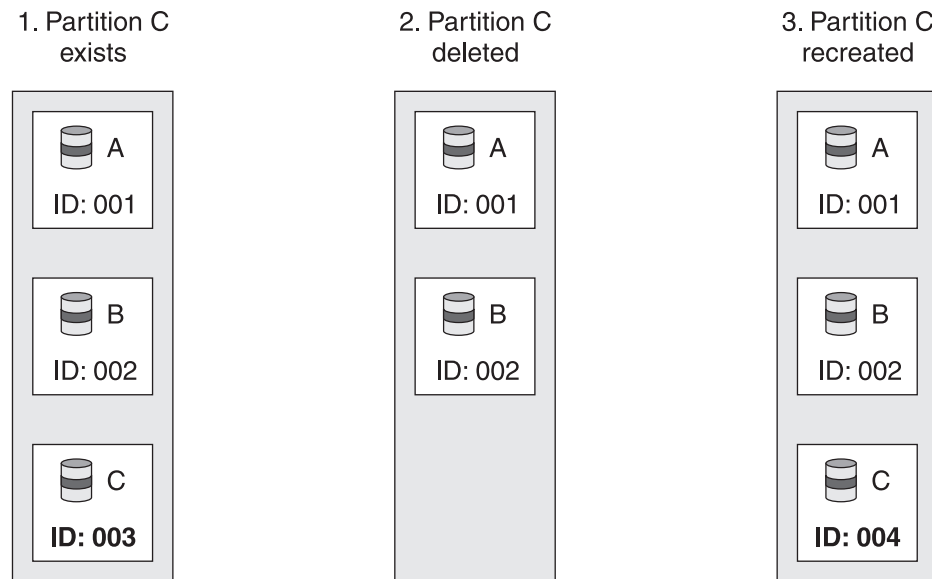


Figure 243. Partition IDs after deleting and redefining a partition

### Related reading:

- For more information about disabling partitions, see “Disabling and Enabling HALDB Partitions” on page 489.
- For more information about deleting partitions, including the precautions you should take prior to doing so, see “Deleting Partitions From a HALDB” on page 491.
- For more information about restoring deleted partitions, see “Restoring Deleted Partitions” on page 495.

### **Automatic Update of HALDB Secondary Index and Logical Relationship Pointers**

If you modify a HALDB database or partition that uses logical relationships or secondary indexes, IMS automatically corrects the pointers for you by using the HALDB self-healing pointer process. You do not need to update the pointers used in the logical relationships nor do you need to rebuild your secondary indexes.

For example, when you make changes to an indexed database that do not require changes to secondary index definitions, you do not need to make any changes to the secondary indexes. They do not need to be unloaded, reloaded, or rebuilt. The self-healing pointer scheme of HALDB provides this capability. The reload process for the indexed database updates the ILDSs. This is all that is required to ensure that the secondary index pointers can be used to find the moved target segments.

Also, you can change the partitions of a logically related database without making any changes to other logically related databases. When you add, delete, or modify partitions in a database, you do not need to unload and reload any logically related database. The self-healing pointer scheme of HALDB provides this capability.

The self-healing pointer process is described in detail in “The HALDB Self-Healing Pointer Process” on page 401.

### Online Change with HALDB

DBD changes for HALDB databases can be implemented in online systems with online change. The database cannot be in use during the online change process. You should stop access to the entire HALDB database by issuing either a `/DBRECOVERY DB HALDB_master_name` command or an `UPDATE DB NAME(HALDB_master_name) STOP(ACCESS)` command.

After the change is committed, you can resume access to the database by issuing either a `/START DB HALDB_master_name` command or a `UPDATE DB NAME(HALDB_master_name) START(ACCESS)` command. DBD changes affect every partition, so the master database name must be used for these commands.

**Restriction:** If you delete a database name from IMS using online change, you cannot reuse that name for another HALDB partition without first performing a cold start. Similarly, if you delete a partition name from DBRC, you cannot use online change to reuse that name for another database without first performing a cold start.

For more information:

- About using the online change function, see “Using the Online Change Function” on page 462
- About the online commands that you can use with HALDB, see *IMS Version 9: Command Reference*

### Changing the High Key of a Partition

You can change the high key of a partition to either increase or decrease the number of records the partition contains.

**Recommendation:** Prior to changing the high keys of partitions in your HALDB database, enable the HALDB reorganization number verification function. The HALDB reorganization number verification function, protects the integrity of data when records are moved by a change in a high key or by database reorganizations.

**Related reading:** For more information:

- About the effects of changing a high key on the distribution of records, see “Record Distribution and High Key Partitioning” on page 478.
- About the reorganization number and the HALDB reorganization number verification function, see “HALDB Partition Reorganization Numbers” on page 114.

To change the high key of a partition:

1. Take all partitions offline that will be affected by the change to the high key by issuing either the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME(partition_name) STOP(ACCESS)` command.
2. Unload all partitions that will be affected by the change.
3. Change the high key definition for the partition by using either the Partition Definition utility or DBRC commands.
4. Initialize all partitions affected by the change by running either of the following utilities:
  - HALDB Partition Data Set Initialization utility (DFSUPNT0)
  - Database Prereorganization utility (DFSURPR0)
5. Reload all partitions affected by the change using the output of step 2. The image copy needed flag is set for the data sets in the reloaded partitions.



6. Create image copies of the data sets in the affected partitions. DBRC does not allow updates to the data after the image copy required flag is set and before the image copies have been recorded in the RECON data sets.
7. Make the affected partitions available again by issuing either the `/START DB partition_name` command or the `UPDATE DB NAME (partition_name) START (ACCESS)` command.

An online IMS system is not aware of the changes to partition definitions in DBRC until one of the following events occur:

- A `/START DB HALDB_Master OPEN` command is issued
- An `UPDATE DB NAME (HALDB_Master) START (ACCESS) OPTION (OPEN)` command is issued
- A DL/I call causes an authorization call to DBRC for a partition affected by the change. The first DL/I call goes through HALDB partition selection again to properly select and authorize the correct partition.

## Adding Partitions to a HALDB

You can add partitions to your existing HALDBs. You would typically do this when a partition grows too large. Adding a partition usually causes records in an existing partition to be moved to the new partition. When adding a new partition, you should:

- Determine whether your HALDB performs partition selection using high keys or a Partition Selection exit routine. If your HALDB is using a Partition Selection exit routine you must take extra steps when adding a partition.
- Identify all existing partitions that contain records that will be redistributed to the new partition. You will have to unload, initialize, and reload these partitions to add the new partition.
- After you add the partition, ensure that the online IMS system recognizes the new partition and updates its online database structures. IMS rebuilds its online structures when any of the following events occur:
  - A `/START DB HALDB_Master OPEN` command is issued
  - An `UPDATE DB NAME (HALDB_Master) START (ACCESS) OPTION (OPEN)` command is issued
  - A DL/I call causes an authorization call to DBRC for a partition affected by the change. The first DL/I call goes through HALDB partition selection again to properly select and authorize the correct partition.

Figure 244 on page 486 shows the addition of a partition to a database that uses high keys.

In Figure 244 on page 486, partition D is added to database that uses high keys for partition selection. The high key of partition D is 3M. Previously defined partitions A, B, and C had high keys of 2M, 4M, and high values. The addition of the new partition requires the movement of records with keys above 2M and up to 3M from partition B to partition D. This means that partition B is affected by the change. When partition D is defined with a high key of 3M, IMS sets the PINIT flag for partitions B and D. Partition initialization will initialize these two partitions. Partitions A and C are not affected by the change.

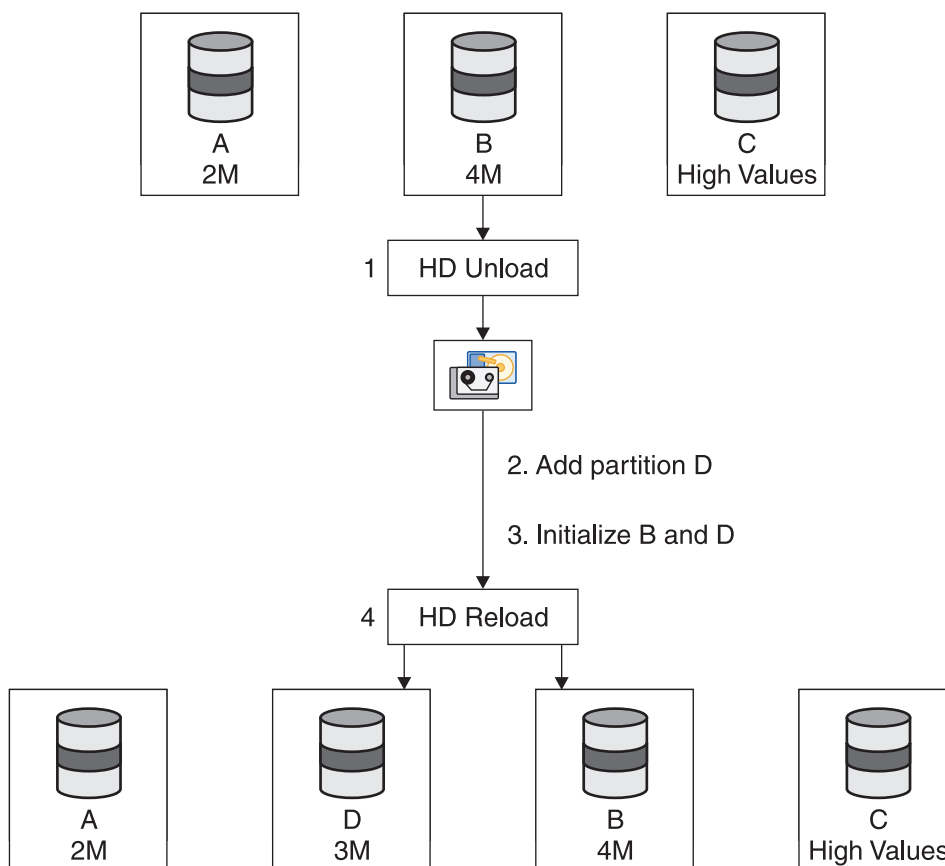


Figure 244. Adding a partition with key range partitioning

### Adding a Partition to a HALDB that Uses High Key Partition Selection

Unless you use a Partition Selection exit routine, your HALDB uses high keys for partition selection. IMS automatically sets the PINIT flag for new partitions you add, as well as for any existing partitions affected by the redistribution of records to the new partition.

To add a partition to a HALDB that uses high keys for partition selection:

1. Take all partitions offline that contain records that will be redistributed by issuing either the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME(partition_name) STOP(ACCESS)` command.
2. Unload all partitions that contain records that will be redistributed to the new partition.
3. Define the new partition with the Partition Definition utility or DBRC commands
4. Allocate the data sets for the new partition.
5. Initialize the new partition and the existing partitions affected by the redistribution of records to the new partition.
6. Reload using the output of step 1. This loads partitions B and D. The image copy needed flag is set for the data sets in B and D.

7. Make the partitions available again by issuing either the `/START DB partition_name` command or the `UPDATE DB NAME (partition_name) START (ACCESS)` command.
8. If the online IMS system does not immediately recognize the new partition, issue either a `/START DB HALDB_Master OPEN` or `UPDATE DB NAME (HALDB_Master) OPTION (OPEN)` command to rebuild all of the online partition structures of the HALDB database specified in the command.

### Adding a Partition That Defines a New Highest High Key


You might add a partition that has a higher high key than any existing partition, if the keys in your HALDB are based on time or on an ascending value. As the key values increase, you can add new partitions to hold new records.

To add a partition that will define a new highest high key for your HALDB:

1. If records from any other partition will be moved into the new partition, stop access to the partitions from which records will be moved by issuing either the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME (partition_name) STOP (ACCESS)` command.
2. If records from any other partition will be moved into the new partition, unload the partitions from which records will be moved.
3. Define the new partition, specifying an appropriate high key, such as `X'FF'`.
4. If necessary, modify the high key of the partition that previously had the highest high key to avoid two partitions with a high key of `X'FF'`.
5. Initialize the new partition and any partitions from which records were moved.
6. If necessary, load the new partition and any partitions from which records were moved.
7. The image copy needed flag is set for the data sets in the new partition.
8. Make the partitions available again by issuing either the `/START DB partition_name` command or the `UPDATE DB NAME (partition_name) START (ACCESS)` command.
9. If the online IMS system does not immediately recognize the new partition, issue either a `/START DB HALDB_Master OPEN` or `UPDATE DB NAME (HALDB_Master) OPTION (OPEN)` command to rebuild all of the online partition structures of the HALDB database specified in the command.

Figure 245 on page 488 illustrates the addition of a partition that defines a new highest high key for a HALDB. The key for the database is based on time. The high order part of the key contains the year. There is a partition for each year. A new partition is required for each new year. There are no records with keys above 2003zzz. Before they are added to the database, partition D with a high key of 2004zzz is added. Since no records are moved from an existing partition, they are not affected.

## Adding Partitions to a HALDB

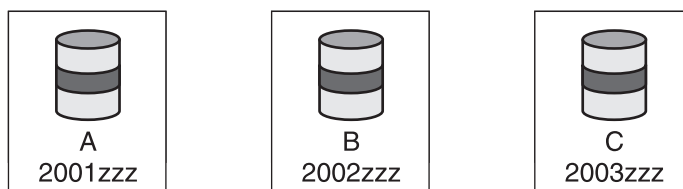

1. Add partition D

2. Initialize partition D

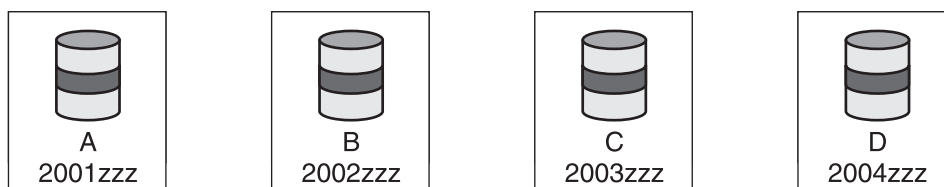


Figure 245. Adding a higher key partition with key range partitioning

### Adding a Partition When Using a Partition Selection Exit Routine

When you add a partition to a HALDB that uses a Partition Selection exit routine, you have to manually set the PINIT flag in any partition from which records will be moved to the new partition. You might also have to modify the exit routine to recognize the new partition, as well as change the partition selection criteria used by the exit routine.

When you use a partition selection exit routine, IMS cannot know which existing partitions are affected by the addition of the partition. Consequently, IMS does not set the PINIT flag for existing partitions affected by the redistribution of records to the new partition. You must set the PINIT flag for the existing partitions.

You should also be sure that any Partition Selection exit routine you are using contains code that processes the structure initialization and structure modification calls that IMS issues when updating online partition structures after partitions are added or modified. The sample Partition Selection exit routine (DFSPSE00) delivered with IMS includes code that supports these calls.

To add a new partition to a HALDB that uses a Partition Selection exit routine:

1. Stop access to the database as appropriate:
  - If you need to modify the Partition Selection exit routine, stop access to the HALDB master database by issuing either the `/DBRECOVERY DB HALDB_master_name` command or the `UPDATE DB NAME(HALDB_master_name) STOP(ACCESS)` command. Stopping access to the HALDB master unloads the existing Partition Selection exit routine from storage.
  - If you do not need to modify the Partition Selection exit routine, stop access only to those partitions from which records will be moved to the new partition by issuing either the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME(partition_name) STOP(ACCESS)` command.

**Note:**

2. If necessary, modify the Partition Selection exit routine to use the new partition. The exit routine should be able to process the
3. Unload the partition or partitions from which records will be moved.
4. Define the new partition. IMS sets the PINIT flag for the new partition.
5. Set the PINIT flag in the appropriate existing partitions.
6. Initialize the partitions that have the PINIT flag set.
7. Load the new partition and any partition from which records were moved.
8. Take an image copy of the reloaded data sets. The image copy needed flag is set for the data sets in the partitions that are initialized or loaded by HD Reload.
9. Resume access to the database as appropriate:
  - If you stopped the entire database, resume access by issuing either the `/START DB HALDB_master_name` command or the `UPDATE DB NAME(HALDB_master_name) START(ACCESS)` command. Stopping access to the HALDB master unloads the existing Partition Selection exit routine from storage.
  - If you stopped only selected partitions, resume access by issuing either the `/START DB partition_name` command or the `UPDATE DB NAME(partition_name) START(ACCESS)` command.
10. If you did not stop access to the entire database and the online IMS system does not immediately recognize the new partition, issue either a `/START DB HALDB_Master OPEN` or `UPDATE DB NAME(HALDB_Master) OPTION(OPEN)` command to rebuild all of the online partition structures of the HALDB database specified in the command.

For more information about the sample Partition Selection exit routine (DFSPSE00), see *IMS Version 9: Customization Guide*.

## Disabling and Enabling HALDB Partitions

You can temporarily remove partitions from an active HALDB database by *disabling* the partition. Disabled partitions appear to be deleted from the HALDB database and are unavailable for use by IMS and most utilities; however all of the records related to the partition, such as the partition ID number and image copy records, are retained by DBRC in the RECON data set.

You would normally disable a partition that you plan to delete. Disabling the partition allows you to test the proposed deletion without actually deleting the partition and all of the recovery information associated with it. After disabling a partition, you can delete it or restore the partition to the HALDB database by *enabling* and recovering the partition.

The following subtopics describe the specific steps you must follow to disable and enable HALDB partitions:

- “About Disabled Partitions”
- “Disabling HALDB Partitions” on page 490
- “About Enabling Partitions” on page 491
- “Enabling HALDB Partitions” on page 491

### About Disabled Partitions

In a RECON listing, the flag `PARTITION DISABLED=YES` identifies a partition as disabled. The HALDB Partition Definition utility identifies a disabled partition by showing its status as `DISABLED`.

## Disabling and Enabling HALDB Partitions

In most situations, a disabled partition is not known to IMS and is treated as if it is not registered in DBRC. However, you can still view all information about a disabled partition by using either the DBRC LIST command or the HALDB Partition Definition utility (PDU). A disabled partition still counts towards the maximum number of partitions which may be defined for a HALDB.

Disabled partitions are not removed from the DBRC groups CAGROUP, DBDSGRP, DBGROUP and RECOVGRP; however, disabled partitions are generally not processed as part of the group when the group is used in a DBRC command. This is also true of implied groups used in a command. An exception to this is that changes are accumulated for disabled partitions that are members of a change accumulation group when you issue the GENJCL.CA command and execute the IMS Database Change Accumulation utility.

The GENJCL.IC and GENJCL.RECOV commands fail for disabled partitions. If the commands specify a group of any kind, disabled partitions are simply skipped, JCL is not generated and no message is issued.

Here is an example of disabling a partition by using the DBRC CHANGE.PART command:

```
//CHGPART JOB
...
...
//SYSIN DD *
CHANGE.PART DBD(DB3) PART(PART3) DISABLE
/*
```

All of the steps for disabling a partition are described in “Disabling HALDB Partitions.”

### Disabling HALDB Partitions

To disable a HALDB partition:

1. Take an image copy of the partition you intend to disable and any partitions in to which records will be moved from the disabled partition.
2. Stop access to the partition you are disabling and the other affected partitions by issuing either the /DBRECOVERY DB *partition\_name* command or the UPDATE DB NAME(*partition\_name*) STOP(ACCESS) command.
3. Unload the partition you are disabling and the other affected partitions.
4. Disable the partition by either of the following methods:
  - The HALDB Partition Definition utility
  - The DBRC command CHANGE.PART DBD(*HALDB\_master\_name*) PART(*partition\_name*) DISABLE
5. If the HALDB database uses high-key partitioning, ensure that the high key values defined to DBRC for each partition are still appropriate.
6. Initialize the remaining partitions affected by the change.
7. Reload the remaining partitions affected by the change.
8. Take an image copy of the reloaded data sets. The image copy needed flag is set for the data sets in the partitions that are initialized or loaded by HD Reload.
9. Issue the /START DB *partition\_name* command or the UPDATE DB NAME(*partition\_name*) START(ACCESS) command to make the affected partitions available again.

## About Enabling Partitions

You can restore a disabled partition to the active HALDB database by issuing the `CHANGE. PART` command with the `ENABLE` parameter to enable the partition. Then, you can either recover the enabled partition and any other affected partitions to their state when the partition was disabled or, if you are not enabling the partition as part of recovery, you can reload the partition. Enabling a disabled partition makes it available for use by IMS again and is essentially the same as adding a new partition to a HALDB database.

When you enable a partition, DBRC flags the partition as needing recovery and you must recover the partition before IMS can use it. If the HALDB database uses a partition selection exit routine, DBRC flags all of the partitions in the database as needing partition initialization. If the HALDB database uses high key partitioning, DBRC flags the partition with the next higher high key value as needing partition initialization.

## Enabling HALDB Partitions

To enable a partition:

1. Take all partitions offline that contain records that will be redistributed by issuing either the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME(partition_name) STOP(ACCESS)` command.
2. If you are not performing a recovery, unload all partitions that contain records that will be redistributed to the new partition.
3. Enable the partition by using one of the following methods:
  - The HALDB Partition Definition utility
  - The DBRC command `CHANGE. PART DBD(HALDB_master_name) PART(partition_name) ENABLE`
 DBRC marks all of the database data sets in the enabled partition as needing recovery.
4. If the HALDB database uses high-key partitioning, ensure that the high key values defined to DBRC for each partition are appropriate.
5. Allocate the data sets for the enabled partition and any other affected partitions.
6. Initialize the enabled partition and the existing partitions affected by the redistribution of records to the new partition.
7. Reload the partitions. The image copy needed flag is set for the data sets.
8. Take an image copy of the reloaded partitions.
9. Make the partitions available again by issuing either the `/START DB partition_name` command or the `UPDATE DB NAME (partition_name) START(ACCESS)` command.
10. If the online IMS system does not immediately recognize the enabled partition, issue either a `/START DB HALDB_Master OPEN` or `UPDATE DB NAME(HALDB_Master) OPTION(OPEN)` command to rebuild all of the online partition structures of the HALDB database.

## Deleting Partitions From a HALDB

You can delete partitions from an existing HALDB. This is typically done when a partition has little data. Deleting a partition usually causes its records to be moved to another partition. When deleting a partition, you should:



## Deleting Partitions From a HALDB

- Determine whether your HALDB performs partition selection using high keys or a Partition Selection exit routine. If your HALDB is using a Partition Selection exit routine you must take extra steps when deleting a partition.
- Identify all other partitions that will receive records previously stored in the deleted partition. You will have to unload, initialize, and reload these partitions in addition to the deleted partition.
- Determine if the HALDB uses a secondary index (PSINDEX). You might need to rebuild the index after deleting a partition.

Before you delete a partition, you should take the following precautionary measures:

- Make an image copy of the partition.
- Export the partition definition of the partition you are going to delete by using the Partition Definition utility.
- Disable the partitions that you intend to delete. Disabling a partition effectively removes the partition from the HALDB database without deleting any information about the partition from the RECON data set. The partition definition, including the partition ID number, are retained in the RECON data set. If you need to restore the partition, you can easily enable it again and any prior image copies are still usable. After you are certain you will not need to restore the partition, you can then delete the partition record from the RECON data set.

Figure 246 on page 493 shows the deletion of a partition from a HALDB that performs partition selection using high keys. The HALDB has partitions A, B, C, and D. Partition B, with a high key of 4M, is deleted. The records in partition B move to partition C, meaning that partition C is affected by the deletion of Partition B. When the definition of Partition B is deleted, IMS sets the PINIT flag for Partition C. Partition initialization initializes Partition C. Partitions A and D are not affected by the change.

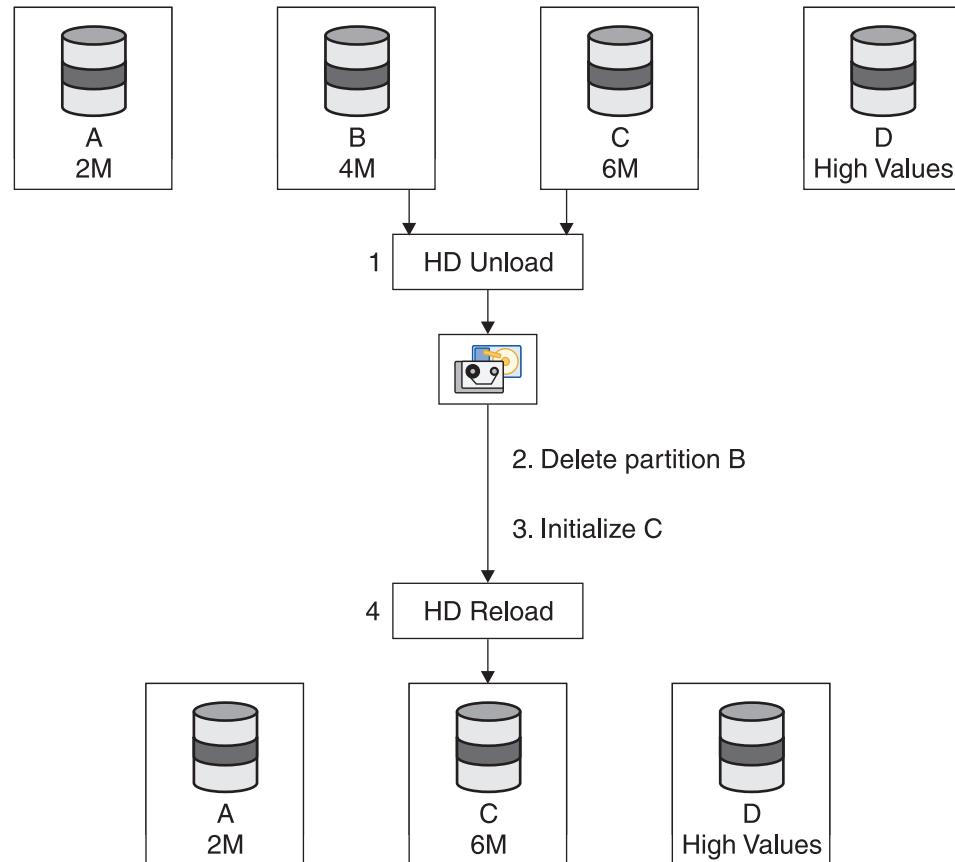


Figure 246. Deleting a partition with key range partitioning

## Deleting a Partition

To delete a partition from a HALDB that selects partitions using high keys:

1. Take an image copy of the partition you intend to delete and any partitions in to which records from the deleted partition will be moved.
2. Issue either the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME(partition_name) STOP(ACCESS)` command to stop access to the partition you are deleting and the other affected partitions.
3. Unload both the partition you are deleting and the other partitions affected by the deletion.
4. Delete the definition of the partition from DBRC by either of the following methods:
  - The HALDB Partition Definition utility
  - The DBRC command `DELETE.PART DBD(HALDB_master_name) PART(partition_name)`
5. Ensure that the high key values defined to DBRC for each partition are still appropriate.
6. Initialize the remaining partitions that will contain the records of the deleted partition.
7. Reload the remaining partitions using the output of step 1.
8. Take an image copy of the reloaded partitions. The image copy needed flag is set for the data sets of the reloaded partition.

## Deleting Partitions From a HALDB

9. Issue the `/START DB partition_name` command or the `UPDATE DB NAME(partition_name) START(ACCESS)` command to make the affected partitions available again.

After you have completed the deletion process, IMS issues message DFS0415W with reason code 90 for the deleted partition when IMS rebuilds the online partition structures for the HALDB database.

### Deleting the Lowest Key Partition and All of Its Records

You can delete the partition that has the lowest key range. This is likely to happen if the keys are based on time or an ascending value. As the key values increase, you can delete a partition that has become empty or whose records are no longer of interest.

For example, in Figure 247 the key for the database is based on time. The high order part of the key contains the year. There is a partition for each year. In this example, partition A with a high key of 2001zzz is no longer needed. Either all of its records have been deleted or they are no longer needed. In fact, this is an efficient way to delete all the records in partition A. Because no records are moved either to or from any other partitions, no other partitions are affected. No partitions need to be unloaded, reloaded, or initialized. There is only one step in the process. It is to delete partition A.

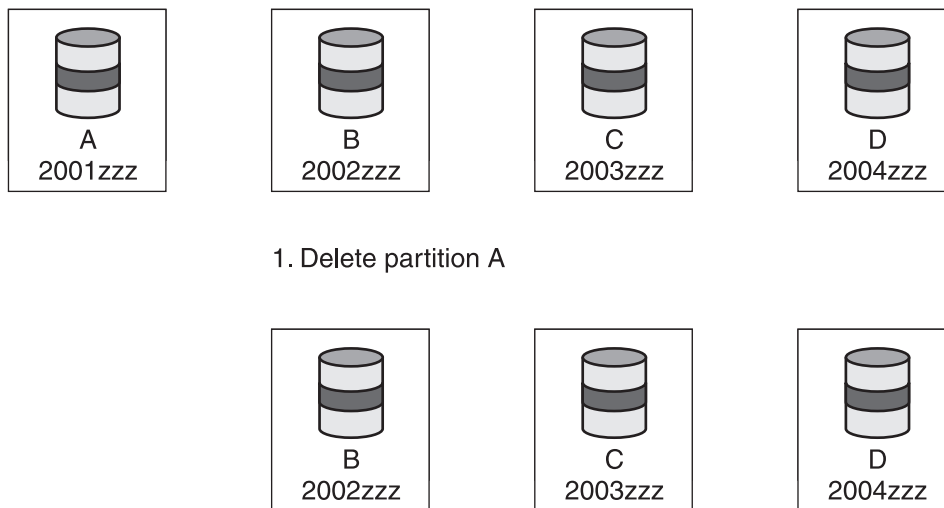


Figure 247. Deleting the lowest key partition with key range partitioning

### Deleting a Partition that Uses a Secondary Index

If there is a secondary index, you must be careful when deleting a partition. If the secondary index has entries pointing to the deleted partition, the secondary index becomes invalid. You must rebuild it with a tool such as the IMS Index Builder. If the secondary index does not have entries pointing to the deleted partition, it is not affected and does not have to be rebuilt. If there are no records in the deleted partition, the secondary index does not have to be rebuilt. It is unaffected by the partition deletion.

### Deleting a Partition When Using a Partition Selection Exit Routine

When you delete a partition from a HALDB that uses a Partition Selection exit routine, you have to manually set the PINIT flag in any partition into which

records will be moved from the deleted partition. You might also have to modify the exit routine to recognize the new partition, as well as change partition strings in some partitions.

When you use a partition selection exit routine, IMS cannot know which partitions are affected by the deletion of a partition. Consequently, IMS does not set the PINIT flag for the partitions affected by the redistribution of records from the deleted partition. You must set the PINIT flag for these partitions manually.

To delete a partition from a HALDB that uses a Partition Selection exit routine:

1. Issue the `/DBRECOVERY DB partition_name` command or the `UPDATE DB NAME(partition_name) STOP(ACCESS)` command to take offline the partition you are going to delete and any partition into which the records from the deleted partition will be moved.
2. Unload the partition you are going to delete and any partition into which the records from the deleted partition will be moved.
3. Delete the definition of the partition you are deleting from DBRC.
4. Make any necessary changes to the Partition Selection exit routine.
5. Change the partition strings for partitions, as necessary.
6. Set the PINIT flag in the partitions that will receive records from the deleted partition.
7. Initialize the partitions that have the PINIT flag set.
8. Run HD Reload.
9. Take an image copy of the reloaded data sets. The image copy needed flag is set for the data sets in the partitions that are initialized or loaded by HD Reload.
10. Issue the `/START DB partition_name` command or the `UPDATE DB NAME(partition_name) START(ACCESS)` command to make the affected partitions available again.

### Restoring Deleted Partitions

How you restore a deleted partition depends on whether or not you took certain precautions prior to deleting the partition.

If you made image copies and used the Partition Definition utility to export the partition definitions, including their partition IDs, before deleting the partition, you can restore a deleted partition by importing the partition definition and applying the image copies.

To import only the deleted partition by using the Partition Definition utility, specify “Try all partitions” when you import the partition definition. Only the definition of the deleted partition would be imported. Any definitions for partitions that were not deleted, are not imported. The restored partition would have the same partition ID that it had prior to being deleted. This allows you to use the image copies of the partition data sets that you made before deleting the partition.

Another option, although it does not actually restore the deleted partition, is to define a new partition to hold the records previously held by the deleted partition. In this case, the partition would have a new partition ID and you would not be able to use any existing image copies of the deleted partition.

For more information about adding partitions, see “Adding Partitions to a HALDB” on page 485.

### Changing the Name of a HALDB Partition

You can change the name of partition only by deleting the partition and redefining it with a new name. Deleting and redefining a partition has a number of other consequences that you should be aware of:

- The partition ID number will also change. The implications of changing partition ID numbers are explained in “Partition ID Numbers” on page 481.
- The image copy records for the partition are also deleted from the RECONs.
- The ALLOC records for the partition are also deleted from the RECONs.

**Note:** Using the online change function, a HALDB partition name that has been deleted from DBRC cannot be reused by the online change function to name a database without also performing a cold start of IMS. The opposite is also true: a database name that has been deleted from IMS cannot be reused to name a HALDB partition without also performing a cold start.

To change a partition name:

- Issue the `/DBRECOVERY DB partition_name command or the UPDATE DB NAME(partition_name) STOP(ACCESS) command to take the partition offline.`
- Unload the partition
- Delete the partition definition from DBRC
- Redefine the partition in DBRC with the new name
- Initialize the partition
- Reload the partition
- Issue the `/START DB partition_name command or the UPDATE DB NAME(partition_name) START(ACCESS) command to make the partition available again.`

After you have completed the name change process, IMS issues message DFS0415W with reason code 90 for the deleted partition when IMS rebuilds the online partition structures for the HALDB database.

### Modifying the Number of Root Anchor Points in a PHDAM Partition

If a PHDAM partition has many roots that randomize to the same root anchor point, lock contention problems can occur that negatively impact performance. To remedy this problem, you can increase the number of RAPs in the partition.

The following steps describe how to change the number of RAPs in a partition:

1. Issue the `/DBRECOVERY DB partition_name command or the UPDATE DB NAME(partition_name) STOP(ACCESS) command to take the partition offline.`
2. Unload the data from the partition.
3. Use the Partition Definition utility or DBRC commands to change the number of RAPs in the partition.
4. Reload the partition.
5. Take an image copy of the data sets for the partition.
6. Issue the `/START DB partition_name command or the UPDATE DB NAME(partition_name) START(ACCESS) command to make the partition available again.`

## Modifying HALDB Segments

Making changes to segments and segment hierarchies in a HALDB is no different than it is for other full-function databases. Changes to segments and segment hierarchies in a HALDB are made in the DBD statements of the DBDGEN process. Most changes to segments and segment hierarchies in a HALDB require you to first unload all of the partitions in the HALDB and reload the partitions after the changes are complete.

The following list includes typical changes you can make to HALDB segments and segment hierarchies and whether or not they require a complete unload of the HALDB database:

- Adding a field definition that does not increase the size of a segment does not require an unload of the database.
- Deleting a field definition that does not decrease the size of a segment and that is not used with a secondary index does not require an unload of the database.
- Adding or deleting a segment type requires an unload of the database.
- Changing the definition of a segment size requires an unload of the database.
- Changing the definition of a sequence field requires an unload of the database.
- Changing the location of a segment in the hierarchy requires an unload of the database.
- Changing pointer options requires an unload of the database.

For detailed information about modifying database segments, see “Modifying Record Segments” on page 437.

## Modifying HALDB Partition Data Sets

In a HALDB database, each partition has its own data sets. Changes to the database data sets of one partition do not affect the database data sets in any other partitions. Moreover, only the partition in which you are making the change needs to be unavailable for processing. All other partitions in the HALDB database can remain available.

Before making any of the following changes to HALDB partition data sets, you must stop access to the partition by issuing a `/DBRECOVERY DB partition_name` command or a `UPDATE DB NAME(partition_name) STOP(ACCESS)` command against the partition. All other partitions in the HALDB can remain available:

- Changing HALDB Data set name prefixes
- Changing OSAM block sizes
- Changing VSAM CI sizes

Subsections:

- “Changing HALDB Data Set Name Prefixes”
- “Changing the Free Space Parameters for a Database Data Set” on page 498
- “Changing the OSAM Block Size for a HALDB Database Data Set” on page 498
- “Changing the VSAM CI Size for a HALDB Database Data Set” on page 498

### Changing HALDB Data Set Name Prefixes

The data set name prefix for each partition is stored in the RECON data set. You can change it using either the Partition Definition utility or the `DSNPREFX(string)` parameter of the DBRC batch command `CHANGE.PART`. If you change a data set name prefix, the partition initialization needed (PINIT) flag is set for the partition.

## Modifying HALDB Partition Data Sets

### Changing the Free Space Parameters for a Database Data Set

The free space specifications are stored in the RECON data set. You can change them using either the Partition Definition utility or by using the free space parameters FBFF(*value*) or FSPF(*value*) of the DBRC batch command CHANGE.PART.

You cannot change the free space parameters of a partition while the partition is being reorganized by the integrated HALDB Online Reorganization function, as indicated by OLREORG CURSOR ACTIVE = YES in the RECON record, or while the partition is owned by an IMS system for the integrated HALDB Online Reorganization process.

### Changing the OSAM Block Size for a HALDB Database Data Set

The OSAM block size is stored in the RECON data set. You can change it using either the Partition Definition utility or the BLOCKSIZE(*nnnnn*) parameter of the DBRC batch command CHANGE.PART. After changing the OSAM block size of a data set, the partition initialization needed (PINIT) flag is set for the partition.

### Changing the VSAM CI Size for a HALDB Database Data Set

VSAM CI sizes are not stored in the DBRC RECON data set, consequently you cannot change them using the Partition Definition utility or the DBRC CHANGE commands. You can change VSAM CI sizes only by using z/OS DFSMS commands. After changing the VSAM CI size, the partition initialization needed (PINIT) flag is set for the partition.

For information about the z/OS DFSMS commands used for VSAM data sets, see *DFSMS Access Method Services for Catalogs*.

## Exit Routine Modifications and HALDBs

This topic discusses what you need to do when you introduce a new or modified exit routine into your HALDB database system. This topic does not address how to write exit routines or make changes to the internal logic of existing exit routines. For information about writing exit routines, see *IMS Version 9: Customization Guide*.

For most exit routines that you can use with HALDBs, the methods for modifying them are no different from modifying exit routines for a non-HALDB database. With the exception of PHDAM randomizing routines, any changes you make to database exit routines apply to the whole HALDB database and all of its partitions.

You make most specifications for HALDB exit routines as you would for non-HALDB databases, in the database definition statements and not in DBRC. Exceptions to this rule are modifications to the Partition Selection exit routine (DFSPSE00) and PHDAM randomizing modules, which you can specify in both the DBD and in DBRC. Specifications in DBRC override any specifications made in the database definition.

After making changes to some exit routines, such as the PHDAM Randomizing routines or the HALDB Partition Selection exit routine, consider reorganizing your database.

The exit routines that are commonly used with HALDBs include:

- HALDB Partition Selection Exit Routine. For information about making changes to this exit routine, see “Adding or Changing a HALDB Partition Selection Exit Routine (DFSPSE00)” on page 499.
- Data Capture Exit Routine. For information about this exit routine, see “Data Capture Exit Routines” on page 233.



- Data Conversion User Exit Routine. For information about this exit routine, see the *IMS Version 9: Customization Guide*.
- Segment Edit/Compression Exit Routine. For information about this exit routine, see “Segment Edit/Compression Exit Routine” on page 230.
- Secondary Index Database Maintenance Exit Routine. For information about this exit routine, see *IMS Version 9: Customization Guide*.
- HDAM and PHDAM Randomizing Routines. For information about this exit routine, see “Changing the Randomizing Module or the Randomization Parameters for a PHDAM Partition” on page 500.

### Adding or Changing a HALDB Partition Selection Exit Routine (DFSPSE00)

If your installation uses a HALDB Partition Selection exit routine (DFSPSE00), you might need to modify the exit routine to adjust the distribution of records across the partitions in your HALDB. You would typically need to do this when the amount of data in each partition is not balanced across all partitions in the HALDB. You can change the distribution of records by switching exit routines or modifying the existing exit routine while the entire HALDB database is offline.

To introduce a new or modified Partition Selection exit routine to your HALDB:

1. Take the entire HALDB database offline by issuing either the type-1 command `/DBRECOVERY DB` or the type-2 command `UPDATE DB NAME(dbname) STOP(ACCESS)`.
2. Unload all of the partitions that will be affected by the new or changed Partition Selection exit routine.
3. Change the partition definitions, such as the partition strings or randomizing parameters, as necessary. Changing the definition of a partition sets the PINIT flag for it and therefore might save you time in the next step.
4. Set or unset the PINIT flags of each partition as necessary by using either the Partition Definition utility or the batch DBRC command `CHANGE.DB`:
  - If you are adding a new Partition Selection exit routine and are therefore introducing a new distribution of records across all partitions, you do not need to change any of the PINIT flags. The PINIT flag is correctly set in all of the partitions.
  - If you are changing only the name of an existing Partition Selection exit routine and the distribution of records across all partitions remains the same, you should turn off the PINIT flags in all partitions. IMS views this as a new Partition Selection exit routine and, therefore, sets the PINIT flag all partitions.
  - If you are changing the name of an existing Partition Selection exit routine and you have also changed how the Partition Selection exit routine distributes records across partitions, you should turn off the PINIT flags in any partitions that are not affected by the change in the distribution of records.
  - If you are changing only the way an existing Partition Selection exit routine distributes records across partitions, but you have not changed the name of the Partition Selection exit routine, you must set the PINIT flag in all partitions affected by the change in the distribution of records.
5. Initialize the partitions affected by any changes in the distribution of records.
6. Reload the partitions affected by any changes in the distribution of records using HD Reorganization Reload utility.
7. Take an image copy of the reloaded partitions. The image copy needed flag is set for the data sets in the partitions that are initialized or loaded by HD Reload.

## Exit Routine Modifications and HALDBs

8. Restore access to the HALDB database by issuing either the type-1 command `/START DB` or the type-2 command `UPDATE DB NAME(dbname) START(ACCESS)`.

For more information:

- About the HALDB Partition Selection exit routine, see *IMS Version 9: Customization Guide*.
- About the HD Reorganization Reload utility, see *IMS Version 9: Utilities Reference: Database and Transaction Manager*.

### Changing the Randomizing Module or the Randomization Parameters for a PHDAM Partition

The specifications for PHDAM randomizing modules can be stored in two places: the DBD for the HALDB database and the DBRC RECON record for each partition. The specifications in the DBD apply to all of the partitions in the HALDB database. The specifications in the RECON record for a partition apply only to that partition and override the specifications in the DBD.

To change a randomizing module or randomizing parameters of a PHDAM partition, perform the following steps:

1. Back up the current randomization specifications by issuing the DBRC command `LIST.DB DBD(partition_name)` against the partition and saving the output.
2. Stop access to the partition by issuing either the type-1 command `/DBRECOVERY` or the type-2 command `UPDATE DB NAME(partition_name) STOP(ACCESS)` command against the partition. All other partitions in the database can remain available.
3. Unload the partition.
4. If you are modifying the randomization parameters, modify them by using either the Partition Definition utility or the DBRC command `CHANGE.PART`.
5. If you are replacing the randomizing module, specify the name of the new randomizing module by using either the Partition Definition utility or the DBRC command `CHANGE.PART DBD(name) PART(name) RANDOMZR(name)`.
6. Initialize the partition by using either the HALDB partition data set initialization utility (DFSUPNT0) or the Database Prereorganization utility (DFSURPR0). The partition initialization needed (PINIT) flag is set for the partition after you change the parameters.
7. Reload the partition.
8. Restart the partition by issuing either the type-1 command `/START DB` or the type-2 command `UPDATE DB NAME(partition_name) START(ACCESS)`.

### Adding a Secondary Index to a HALDB

IMS does not provide a utility to add a secondary index to an existing HALDB database. The easiest way to add one is with a tool, such as the IMS Index Builder. This tool reads an existing HALDB database and creates one or more secondary indexes for it. It requires new definitions in the indexed database DBD, but does not require changes in the database data sets. It does not need to add any entries to the ILDSs because the pointers in the newly created secondary index are accurate. Later, when the database or any of its partitions are reorganized, entries for target segments will be added to the ILDSs.

To add a secondary index manually without using a tool:

1. Create an unload file for the indexed database. You can use HD Unload or an application program that you write.

2. Add the secondary index definitions to the indexed database DBD.
3. Create the DBD for the secondary index.
4. Define the partitions for the secondary index.
5. Allocate the data sets for the secondary index.
6. Initialize the secondary index partitions.
7. Load the indexed database. You must provide the program to do this. It reads the file created in step 1. When the indexed database is loaded, secondary index entries are created. This is a random process so it might significantly elongate the load time.

If you use HD Unload in step 1, the output file contains a header record, one record for each segment, and a trailer record. The segment record includes the segment name and the segment data. Your load program for step 7 may map the records in this file by using the DSECT in the IMS DFSURGUP macro in SDFSMAAC.

## Modifying a HALDB PSINDEX

Changes to partitioned secondary indexes (PSINDEXes) are like changes to other HALDB databases. You can add, delete, or modify their partitions. Affected partitions must be unloaded, initialized, and reloaded. The indexed database is unaffected by changes to secondary index partitions.

As with non-HALDB databases, if changes to the secondary index require changes to the definition of the indexed database, you might have to unload and reload the indexed database.

An example of a change to a secondary index is a change in a subsequence field. If you add or modify a subsequence field, you also have to change the DBD of the indexed database. If the field in the indexed database already exists or does not require other changes to the DBD, you do not have to unload and reload the indexed database. Of course, you need to recreate the secondary index using the new definitions.

Reorganizations of an indexed database do not cause its secondary indexes to be recreated, you must use other means for this. You can use a tool such as the IMS Index Builder. Alternatively, you can use a technique similar to one used to add a secondary index. This is described in “Adding a Secondary Index to a HALDB” on page 500.

Initialize partitions in a PSINDEX as you would partitions in a PHDAM or PHIDAM database. Use the HALDB Partition Data Set Initialization utility (DFSUPNT0). DFSUPNT0 automatically generates recovery points for the PSINDEX. Recovery points are not created if you delete and redefine your PSINDEX partitions and then turn off their PINIT flags.

When you make changes to an indexed database that do not require changes to secondary index definitions, you do not need to make any changes to the secondary indexes. They do not need to be unloaded, reloaded, or rebuilt. The self-healing pointer scheme of HALDB provides this capability. The reload process for the indexed database updates the ILDSs. This is all that is required to ensure that the secondary index pointers can be used to find the moved target segments.

## Modifying a HALDB PSINDEX

---

## Part 3. Appendixes



---

## Appendix A. Meaning of Bits in the Delete Byte

This appendix examines the meanings of:

- “Bits in the Delete Byte”
- “Bits in the Prefix Descriptor Byte”

---

### Bits in the Delete Byte

This topic contains diagnosis, modification or tuning information.

The meaning of each bit in the delete byte, when turned on, is as follows:

| Bit | Meaning When Delete Byte is Turned On                                                                                                                          |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | Segment has been marked for deletion. This bit is used for segments in a HISAM or secondary index database or segments in primary index.                       |
| 1   | Database record has been marked for deletion. This bit is used for segments in a HISAM or secondary index database or segments in a primary index.             |
| 2   | Segment has been processed by the delete routine.                                                                                                              |
| 3   | This bit is reserved.                                                                                                                                          |
| 4   | Prefix and data portion of the segment are separated in storage. (The delete byte preceding the separated data portion of the segment has all bits turned on.) |
| 5   | Segment has been marked for deletion from a physical path. This bit is called the PD (physical delete) bit.                                                    |
| 6   | Segment has been marked for deletion from a logical path. This bit is called the LD (logical delete) bit.                                                      |
| 7   | Segment has been marked for removal from its logical twin chain. This bit should only be set on if bits 5 and 6 are also on).                                  |

---

### Bits in the Prefix Descriptor Byte

This topic contains diagnosis, modification, or tuning information.

The delete byte is also used for the root segment of a DEDB, only there it is called a prefix descriptor byte. The meaning of each bit, when turned on, is as follows:

| Bit | Meaning When Root Segment Prefix Descriptor is Turned On                                                                                       |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | Sequential dependent segment is defined.                                                                                                       |
| 1-3 | These bits are reserved.                                                                                                                       |
| 4-7 | If the number of defined segments is 8 or less, bits 4 through 7 contain the highest defined segment code. Otherwise, the bits are set to 000. |

Appendix B, “Insert, Delete, and Replace Rules for Logical Relationships,” on page 507, discusses replacing, inserting, and deleting rules for logical relationships, which includes how to specify rules in a physical DBD and a rules summary.



## Bits in the Prefix Descriptor Byte

---

## Appendix B. Insert, Delete, and Replace Rules for Logical Relationships

You need to examine all your application requirements and decide who can insert, delete, and replace segments involved in logical relationships and how those updates are to be made (physical path only or physical and logical path). The insert, delete, and replace rules in the physical DBD determine how updates apply across logical relationships.

This appendix examines the following information on rules:

- “Specifying Rules in the Physical DBD”
- “Insert Rules” on page 508
- “Replace Rules” on page 511
- “Using the DLET Call” on page 516

This appendix contains general-use programming interface information.

---

### Specifying Rules in the Physical DBD

Insert, delete, and replace rules are specified using the RULES= keyword of a SEGM statement in the DBD for logical relationships. Figure 248 contains a diagram of the RULES= keyword and its parameters.




Figure 248. Insert, Delete, and Replace Rules in the DBD

The valid parameter values for the RULES= keyword are:

- B** Specifies a bidirectional virtual delete rule. It is not a valid value for either the first or last positional parameter of the RULES= keyword.
- L** Specifies a logical insert, delete, or replace rule.
- P** Specifies a physical insert, delete, or replace rule.
- V** Specifies a virtual insert, delete, or replace rule.

The RULES= keyword accepts three positional parameters:

- The first positional parameter sets the insert rule
- The second positional parameter sets the delete rule
- The third positional parameter sets the replace rule

For example, RULES=P,L,V says the insert rule is physical, the delete rule is logical, and the replace rule is virtual. The B rule is only applicable for delete. In general, the P rule is the most restrictive, the V rule is least restrictive, and the L rule is somewhere in between.

## Specifying Rules in the Physical DBD

The RULES= parameter is applicable only to segments involved in logical paths, that is, the logical child, logical parent, and physical parent segments. The RULES= parameter is not coded for the virtual logical child.

---

### Insert Rules

The insert rules apply to the destination parent segments, but not to the logical child segment. A destination parent can be a logical or physical parent. The insert rule has no meaning for the logical child segment except to satisfy the RULES= macro's coding scheme. Therefore, any insert rule (P, L, V) can be coded for a logical child. A logical child can be inserted provided:

- The insert rule of the destination parent is not violated
- The logical child being inserted does not already exist (it cannot be a duplicate)

A description of how the insert rules work for the destination parent is as follows:

- When RULES=P is specified, the destination parent can be inserted *only* using the physical path. This means the destination parent must exist before inserting a logical path. A concatenated segment is not needed, and the logical child is inserted by itself. Figure 249 on page 509 shows an example of the physical insert rule.
- When RULES=L is specified, the destination parent can be inserted either using the physical path or concatenated with the logical child and using the logical path. When a logical child/destination parent concatenated segment is inserted, the destination parent is inserted if it does not already exist and the I/O area key check does not fail. If the destination parent does exist, it will remain unchanged and the logical child will be connected to it. Figure 252 on page 510 shows an example of the logical insert rule.
- When RULES=V is specified, the destination parent can be inserted either using the physical path or concatenated with the logical child and using the logical path. When a logical child/destination parent concatenated segment is inserted, the destination parent is replaced if it already exists. If it does not already exist, the destination parent is inserted. Figure 254 on page 510 shows an example of the virtual insert rule.

### The Logical Child Insert Call

To insert the logical child segment, the I/O area in an application program must contain one of the following segments in accordance with the destination parent's insert rule:

- The logical child
- The logical child/destination parent concatenated segment

For all DL/I calls, either an error is detected and an error status code returned (in which case no data is changed), or the required changes are made to all segments effected by the call. Therefore, if the required function cannot be performed for both parts of the concatenated segment, an error status code is returned, and no change is made to either the logical child or the destination parent.

The insert operation is not affected by KEY or DATA sensitivity as specified in a logical DBD or a PCB. This means that if a program is other than DATA sensitive to both the logical child and destination parent of a concatenated segment, and if the insert rule is L or V, the program must still supply both of them in the I/O area when inserting using a logical path. Because of this, maintenance programs that insert concatenated segments should be DATA sensitive to both segments in the concatenation.

## Status Codes

The nonblank status codes that can be returned to an application program after an ISRT call are as follows:

- AM—An insert was attempted and PROCOPTI
- GE—The parent of the destination parent or logical child was not found
- II—An attempt was made to insert a duplicate segment
- IX—The rule specified was P, but the destination parent was not found

One reason for getting an IX status code is that the I/O area key check failed. Concatenated segments must contain the destination parent's key twice—once as part of the logical child's LPCK and once as a field in the parent. These keys must be equal.

Figure 249, Figure 250, and Figure 251 show a physical insert rule example.

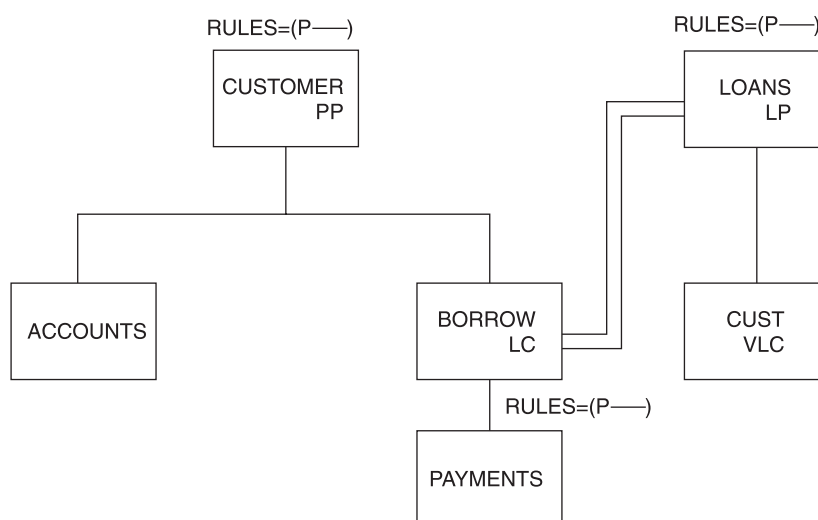


Figure 249. Physical Insert Rule Example

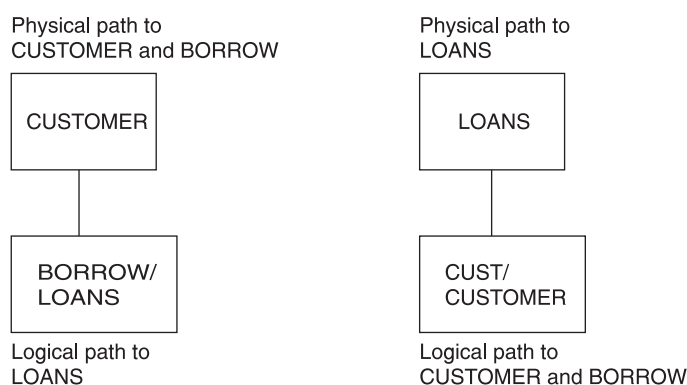


Figure 250. Paths for Physical Insert Rule Example

```

ISRT 'CUSTOMER' STATUS CODE=' '
ISRT 'BORROW' STATUS CODE=' ' ('IX' if LOANS does not exist)

```

Figure 251. ISRT and Status Codes for Physical Insert Rule Example

## Insert Rules

Figure 252 and Figure 253 show a logical insert rule example.

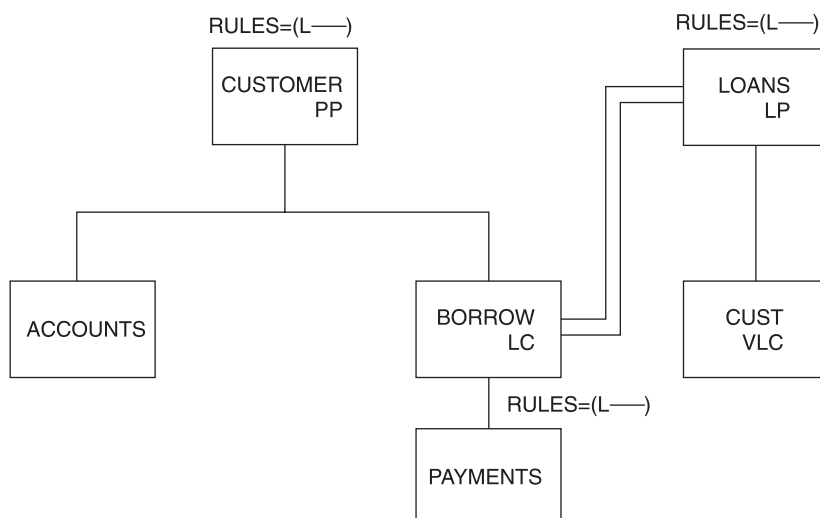


Figure 252. Logical Insert Rule Example

```
ISRT 'LOANS' STATUS CODE=' '
ISRT 'CUST' STATUS CODE='IX'
```

Figure 253. ISRT and Status Codes for Logical Insert Rule Example

The IX status code shown in Figure 253 is the result of omitting the concatenated segment CUST/CUSTOMER in the second call. IMS checked for the key of the CUSTOMER segment (in the I/O area) and failed to find it. With the L insert rule, the concatenated segment must be inserted to create a logical path.

Figure 254 and Figure 255 on page 511 show a virtual insert rule example.

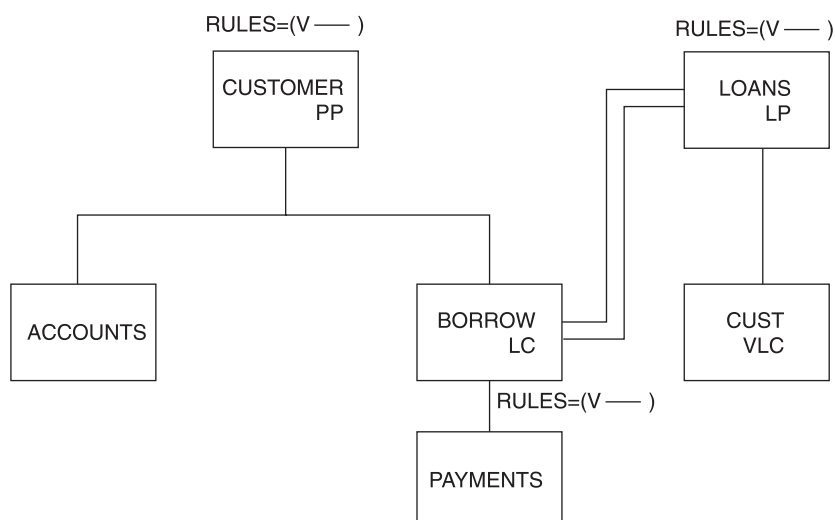


Figure 254. Virtual Insert Rule Example

```
ISRT 'CUSTOMER' STATUS CODE=' '
ISRT 'BORROW/LOANS' STATUS CODE=' '

```

Figure 255. ISRT and Status Codes for Virtual Insert Rule Example

The code shown in Figure 255 will replace the LOANS segment if present, and insert the LOANS segment if not. The V insert rule is a powerful option.

## Insert Rules Summary

Specifying the insert rule as P prevents inserting the destination parent as part of a concatenated segment. A destination parent can only be inserted using the physical path. If the insert creates a logical path, only the logical child needs to be inserted.

Specifying the insert rule as L on the logical and physical parent allows insertion using either the physical path or the logical path as part of a concatenated segment. When inserting a concatenated segment, if the destination parent already exists it remains unchanged and the logical child is connected to it. If the destination parent does not exist, it is inserted. In either case, the logical child is inserted if it is not a duplicate, and the destination parent's insert rule is not violated.

The V insert rule is the most powerful of the three rules. The V insert rule is the most powerful because it will insert the destination parent (inserted as a concatenated segment using the logical path) if the parent did not previously exist, or otherwise replace the existing destination parent with the inserted destination parent.

---

## Replace Rules

The replace rules are applicable to the physical parent, logical parent, and logical child segments of a logical path. The following is a description of how the replace rules work:

- When RULES=P is specified, the segment can only be replaced when retrieved using a physical path. If this rule is violated, no data is replaced and an RX status code is returned. Figure 256 on page 512 shows an example of the physical replace rule.
- When RULE=L is specified, the segment can only be replaced when retrieved using a physical path. If this rule is violated, no data is replaced. However, no RX status code is returned, and a blank status code is returned. Figure 258 on page 513 shows an example of the logical replace rule.
- When RULES=V is specified, the segment can be replaced when retrieved by either a physical or logical path. Figure 260 on page 513 shows an example of the virtual replace rule.

## The Replace Call

A replace operation can be done only on that portion of a concatenated segment to which an application program is data sensitive. If no data is changed in a segment, no data is replaced. Therefore, no replace rule is violated. The replace rule is not checked for a segment that is part of a concatenated segment but is not retrieved.

For all DL/I calls, either an error is detected and an error status code returned (in which case no data is changed), or the required changes are made to all segments affected by the call. Therefore, if the required function cannot be performed for both parts of the concatenated segment, an error status code is returned, and no change is made to either the logical child or the destination parent.

### Replace Rule Status Codes

The status code returned to an application program indicates the first violation of the replace rule that was detected. These status codes are as follows:

- AM—a replace was attempted and PROCOPTR
- DA—the key field of a segment or a non-replaceable field was changed
- RX—the replace rule was violated

Figure 256 and Figure 257 show a physical replace rule example.

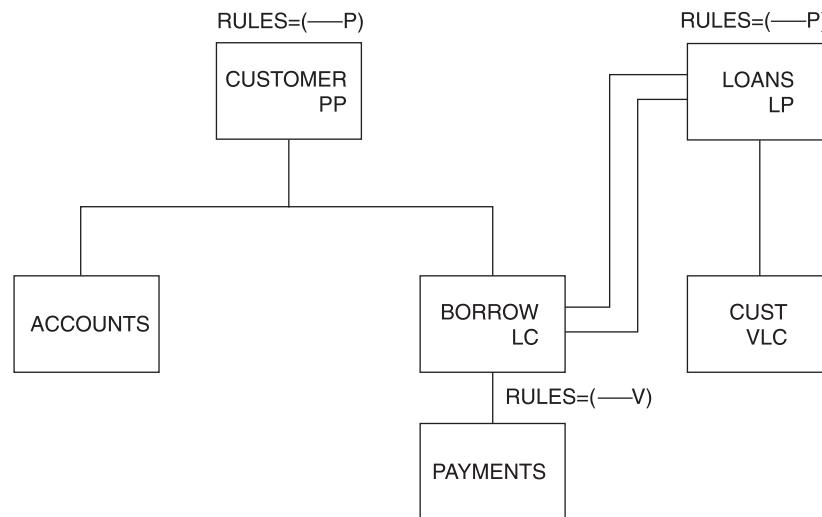


Figure 256. Physical Replace Rule Example

```
GHU 'CUSTOMER' STATUS CODE=' '
REPL STATUS CODE=' '
GHN 'BORROW/LOANS' STATUS CODE=' '
REPL STATUS CODE='RX'
```

Figure 257. Calls and Status Codes for Physical Replace Rule Example

The P replace rule prevents replacing the LOANS segment as part of a concatenated segment. Replacement must be done using the segment's physical path.

Figure 258 on page 513 and Figure 259 on page 513 show a logical replace rule example.



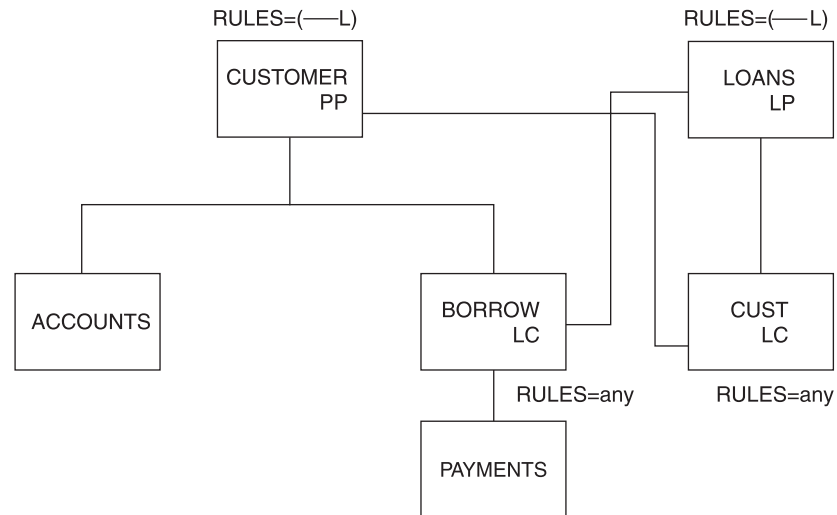


Figure 258. Logical Replace Rule Example

```

GHU 'CUSTOMER'
 'BORROW/LOANS' STATUS CODE=' '
REPL STATUS CODE=' '

```

Figure 259. Calls and Status Codes for Logical Replace Rule Example

As shown in Figure 258, the L replace rule prevents replacing the LOANS segment as part of a concatenated segment. Replacement must be done using the segment's physical path. However, the status code returned is blank. The BORROW segment, accessed by its physical path, is replaced. Because the logical child is accessed by its physical path, it does not matter which replace rule is selected.

The L replace rule allows replacing only the logical child half of the concatenation, and the return of a blank status code.

Figure 260 and Figure 261 on page 514 show a virtual replace rule example.

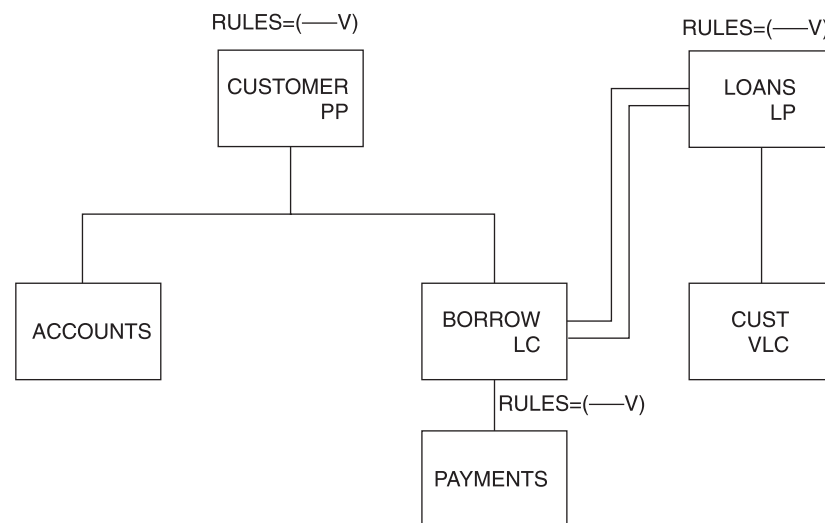


Figure 260. Virtual Replace Rule Example

## Replace Rules

```
GHU 'LOANS'
 'CUST/CUSTOMER' STATUS CODE=' '
REPL STATUS CODE=' '
```

Figure 261. Calls and Status Codes for Virtual Replace Rule Example

As shown in Figure 261, the V replace rule allows replacing the CUSTOMER segment using its logical path as part of a concatenated segment.

## Replace Rules Summary

Specifying the replace rule as P, on any segment in a logical relationship, prevents replacing that segment except when it is retrieved using its physical path. When the replace rule for the logical parent is specified as L, IMS returns a blank status code without replacing any data when the logical parent is accessed concatenated with the logical child. Because the logical child has been accessed by its physical path, its replace rule can be any of the three. So, using the replace rule allows the selective replacement of the logical child half of the concatenation and a blank status code. Specifying a replace rule of V, on any segment of a logical relationship, allows replacing that segment by either its physical or logical path.

Table 34 on page 515 and Table 35 on page 515 show all of the possible combinations of replace rules that can be specified. They show what actions take place for each combination when a call is issued to replace a concatenated segment in a logical database. Table 34 on page 515 and Table 35 on page 515 are based on the databases and logical views shown in Figure 262 and Figure 263.

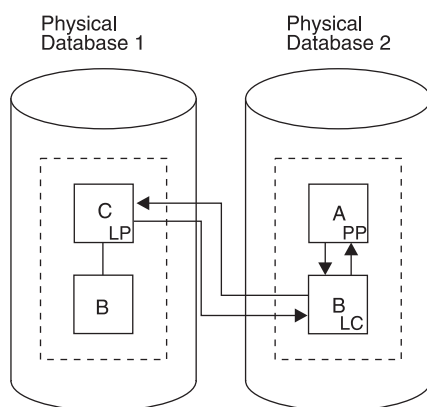


Figure 262. Physical Databases for Replace Rules Tables

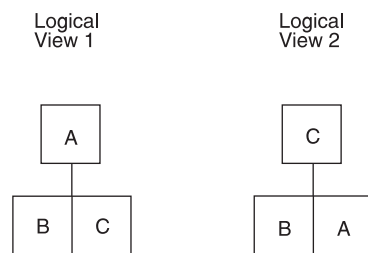


Figure 263. Logical Views for Replace Rules Table

Table 34. Replace Rules for Logical View 1

| Replace Rule Specified |   | Segment Attempting to Replace |   | Status Code | Data Replaced? |   |
|------------------------|---|-------------------------------|---|-------------|----------------|---|
| B                      | C | B                             | C |             | B              | C |
| P                      | P | X                             |   |             | Y              |   |
| P                      | P |                               | X | RX          |                | N |
| P                      | P | X                             | X | RX          | N              | N |
| P                      | L | X                             |   |             | Y              |   |
| P                      | L |                               | X |             |                | N |
| P                      | L | X                             | X |             | Y              | N |
| P                      | V | X                             |   |             | Y              |   |
| P                      | V |                               | X |             |                | Y |
| P                      | V | X                             | X |             | Y              | Y |
| L                      | P | X                             |   |             | Y              |   |
| L                      | P |                               | X | RX          |                | N |
| L                      | P | X                             | X | RX          | N              | N |
| L                      | L | X                             |   |             | Y              |   |
| L                      | L |                               | X |             |                | N |
| L                      | L | X                             | X |             | Y              | N |
| L                      | V | X                             |   |             | Y              |   |
| L                      | V |                               | X |             |                | Y |
| L                      | V | X                             | X |             | Y              | Y |
| V                      | P | X                             |   |             | Y              |   |
| V                      | P |                               | X | RX          |                | N |
| V                      | P | X                             | X | RX          | N              | N |
| V                      | L | X                             |   |             | Y              |   |
| V                      | L |                               | X |             |                | N |
| V                      | L | X                             | X |             | Y              | N |
| V                      | V | X                             |   |             | Y              |   |
| V                      | V |                               | X |             |                | Y |
| V                      | V | X                             | X |             | Y              | Y |

Table 35. Replace Rules for Logical View 2

| Replace Rule Specified |   | Segment Attempting to Replace |   | Status Code | Data Replaced? |   |
|------------------------|---|-------------------------------|---|-------------|----------------|---|
| B                      | A | B                             | A |             | B              | A |
| P                      | P | X                             |   | RX          | N              |   |
| P                      | P |                               | X | RX          |                | N |
| P                      | P | X                             | X | RX          | N              | N |
| P                      | L | X                             |   | RX          | N              |   |
| P                      | L |                               | X |             |                | N |
| P                      | L | X                             | X | RX          | N              | N |
| P                      | V | X                             |   | RX          | N              |   |

## Replace Rules

Table 35. Replace Rules for Logical View 2 (continued)

| Replace Rule Specified |   | Segment Attempting to Replace |   | Status Code | Data Replaced? |   |
|------------------------|---|-------------------------------|---|-------------|----------------|---|
| B                      | A | B                             | A |             | B              | A |
| P                      | V |                               | X |             |                | Y |
| P                      | V | X                             | X | RX          | N              | N |
| L                      | P | X                             |   |             | N              |   |
| L                      | P |                               | X | RX          |                | N |
| L                      | P | X                             | X | RX          | N              | N |
| L                      | L | X                             |   |             | N              |   |
| L                      | L |                               | X |             |                | N |
| L                      | L | X                             | X |             | N              | N |
| L                      | V | X                             |   |             | N              |   |
| L                      | V |                               | X |             |                | Y |
| L                      | V | X                             | X |             | N              | Y |
| V                      | P | X                             |   |             | Y              |   |
| V                      | P |                               | X | RX          |                | N |
| V                      | P | X                             | X | RX          | N              | N |
| V                      | L | X                             |   |             | Y              |   |
| V                      | L |                               | X |             |                | N |
| V                      | L | X                             | X |             | Y              | N |
| V                      | V | X                             |   |             | Y              |   |
| V                      | V |                               | X |             |                | Y |
| V                      | V | X                             | X |             | Y              | Y |

## Using the DLET Call

The DLET call is a request to delete a path of segments, not a request to release the DASD space used by a segment. Delete rules are needed when a segment is involved in a logical relationship, because that segment belongs to two paths: a physical and a logical path. The selection of the delete rules for the logical child and its logical and physical parent (or two logical parents if physical pairing is used) determines whether one or two DLET calls are necessary to delete the two access paths.

## Physical and Logical Deletion

Physically deleting a segment prevents further access to that segment using its physical parents. Physically deleting a segment also physically deletes its physical dependents, however one exception to this exists: If one of the physical parents of the physically deleted segment is a logical child that has been accessed from its logical parent, then the physically deleted segment is accessible from that logical child. The deleted segment is accessible from that logical child because the physical dependents of a logical child are variable intersection data.

Logically deleting a logical child prevents further access to the logical child using its logical parent. Unidirectional logical child segments are assumed to be logically deleted. A logical parent is considered logically deleted when all its logical children

are physically deleted. For physically paired logical relationships, the physical child paired to the logical child must also be physically deleted before the logical parent is considered logically deleted.

## Deleting Concatenated Segments

The following application program can be sensitive to either the concatenated segment—SOURCE=(DATA/DATA), (DATA/KEY), (KEY/DATA)—or the logical child, because it is the logical child that is either physically or logically deleted (depending on the path accessed) in all cases. The concatenated segment relationships are shown in Figure 264.

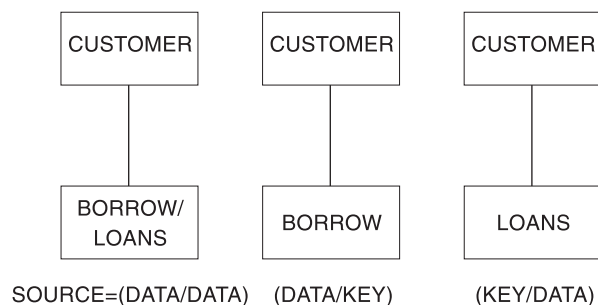


Figure 264. Concatenated Segment Relationships

## The Third Access Path

In Figure 265 on page 518, three paths to the logical child segment SEG4 exist:

- The physical path from its physical parent SEG3
- The logical path from its logical parent SEG7
- A third path from SEG4's physical dependents (SEG5 and SEG6) (because segment SEG6 is a logical parent accessible from its logical child SEG2)

**Related Reading:** See “Possibility of Abnormal Termination” on page 538 for more information on potential abends.

These paths are called “full-duplex” paths, which means accessibility to segments in the paths is in two directions (up and down). Two delete bits that control access along the paths exist, but they are “half-duplex,” which means they only block half of each respective path. No bit that blocks the third path exists. If SEG4 were both physically and logically deleted (in which case the PD and LD bits in SEG4 would be set), SEG4 would still be accessible from the third path, and so would both of its parents.

Neither physical nor logical deletion prevents access to a segment from its physical or logical children. Logically deleting SEG4 prevents access to SEG4 from its logical parent SEG7, and it does not prevent access from SEG4 to SEG7. Physically deleting SEG4 prevents access to SEG4 from its physical parent SEG3, but it does not prevent access from SEG4 to SEG3.

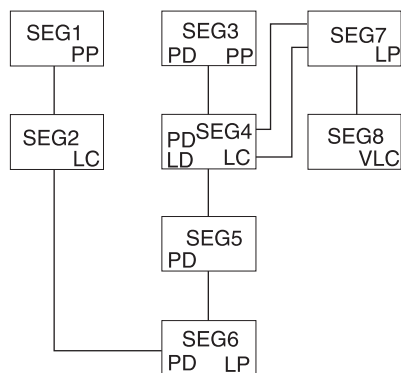


Figure 265. Third Access Path Example

## Use of the Delete Byte

The delete byte is used by IMS to maintain the delete status of segments within a database. The meaning of each bit within the delete byte is in “Bits in the Delete Byte” on page 505. The bit is only meaningful for logical child segments and their logical parents. For segments involved in a logical relationship, the PD and LD bits are set or assumed set as follows:

- If a segment is physically deleted (thereby preventing further access to it from its physical parent), then delete processing scans downward from the deleted segment through its dependents, turns upward, and either releases each segment's DASD space or sets the PD bit. HISAM is the one exception to this process. In HISAM, the delete bit is set in the segment specified by the DLET call and processing terminates.
- If the PD bit is set in a logical parent, the LD bit is set in all logical children that can be reached from that logical parent.
- When physical pairing is used, if the PD bit is set in one of a pair of logical children, the LD bit is set in its paired segment.
- When a virtually paired logical child is logically deleted (thereby preventing further access to it from its logical parent), the LD bit is set in the logical child.
- The LD bit is assumed set in all logical children in unidirectional logical relationships.
- If physical pairing is used, the LD bit is assumed set in a parent if all the paired segments that are physical children of the parent have the PD bit set on.

## Issuing the Delete Call

A DLET call can be issued against a segment defined in either a physical or logical DBD. The call can be issued against either a physical segment or a concatenated segment.

A DLET call issued against a concatenated segment requests deletion of the logical child in the path that is accessed. If a concatenated segment or a logical child is accessed from its logical parent, the DLET call requests logical deletion. In all other cases, a delete call requests physical deletion.

Physical deletion of a segment generates a request for logical deletion of all the segment's logical children and generates a request for physical deletion of all the

segment's physical children. Physical deletion of a segment also generates a request to delete any index pointer segments for which the physically deleted segment is the source segment.

Delete sensitivity must be specified in the PCB for each segment against which a delete call can be issued. The call does not need to be specified for the physical dependents of those segments. Delete operations are not affected by KEY or DATA sensitivity as specified in either the PCB or logical DBD.

## Status Codes

The nonblank status codes that can be returned to an application program after a DLET call are as follows:

- DX—A delete rule was violated
- DA—The key was changed in the I/O area
- AM—The call function was not compatible with the processing option or segment sensitivity

## DASD Space Release

The DLET call is not a request for release of DASD space. Depending on the database organization, DASD space can or cannot be reused when it is released. DASD space for a segment is released when the following conditions are met:

- Space has been released for all physical dependents of the segment.
- The segment is physically deleted (PD bit is set or being set on).
- If the segment is a logical child or logical parent, then it must be physically and logically deleted (PD bit is set or being set on and LD bit is set or assumed set).
- If the segment is a dependent of a logical child (and is variable intersection data) and the DLET call was issued against a physical parent of the logical child, the logical child must be both physically and logically deleted.
- If the segment is a secondary index pointer segment, the space has been released for its target segment.

## Delete Rules

The following is a description of how the delete values work for the logical parent, physical parent, and logical child.

### Logical Parent

- When RULES=P is specified, the logical parent must be logically deleted before a DLET call is effective against it or any of its physical parents. Otherwise, the call results in a DX status code, and no segments are deleted. However, if a delete request is made against a segment as a result of propagation across a logical relationship, then the P rule acts like the L rule that follows.
- When RULES=L is specified, either physical or logical deletion can occur first. When the logical parent is processed by a DLET call, all logical children are logically deleted, but the logical parent remains accessible from its logical children.
- When RULES=V is specified, a logical parent is deleted along its physical path explicitly when deleted by a DLET call. All of its logical children are logically deleted, although the logical parent remains accessible from these logical children.

A logical parent is deleted along its physical path implicitly when it is no longer involved in a logical relationship. A logical parent is no longer involved in a logical relationship when:



## Delete Rules

- It has no logical children pointing to it (its logical child counter is zero, if it has any)
- It points to no logical children (all of its logical child pointers are zero, if it has any)
- It has no physical children that are also real logical children

### Physical Parent (Virtual Pairing Only)

- PHYSICAL/LOGICAL/VIRTUAL is meaningless.
- BIDIRECTIONAL VIRTUAL means a physical parent is automatically deleted along its physical path when it is no longer involved in a logical relationship. A physical parent is no longer involved in a logical relationship when:
  - It has no logical children pointing to it (its logical child counter is zero, if it has one)
  - It points to no logical children (all of its logical child pointers are zero, if it has any)
  - It has no physical children that are also real logical children

### Logical Child

- When RULES=P is specified, the logical child segment must be logically deleted first and physically deleted second. If physical deletion is attempted first, the DLET call issued against the segment or any of its physical parents results in a DX status code, and no segments are deleted. If a delete request is made against the segment as a result of propagation across a logical relationship, or if the segment is one of a physically paired set, then the rule acts like the L rule that follows.
- When RULES=L is specified, deletion of a logical child is effective for the path for which the delete was requested. Physical and logical deletion of the logical child can be performed in any order. The logical child and any physical dependents remain accessible from the non-deleted path.
- When RULES=V is specified, a logical child is both logically and physically deleted when it is deleted through either its logical or physical path (setting either the PD or LD bits sets both bits). If this rule is coded on only one logical child segment of a physically paired set, it acts like the L rule.

**Note:** For logical children involved in unidirectional logical relationships, the meaning of all three rules is the same, so any of the three rules can be specified.

### Examples Using the Delete Rules

Figure 266 through Figure 301 show the use of the delete rules for each of the segment types for which the delete rule can be coded (logical and physical parents and their logical children). Only the rule pertinent to the example is shown in each figure. The explanation accompanying the example applies only to the specific example.

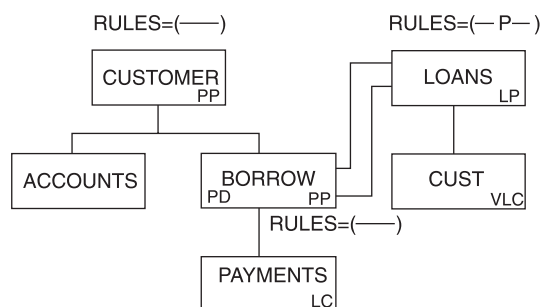


Figure 266. Logical Parent, Virtual Pairing—Physical Delete Rule Example

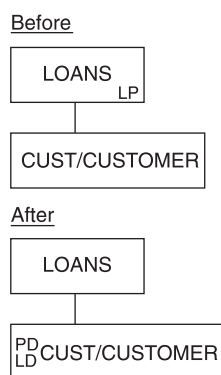


Figure 267. Logical Parent, Physical Pairing—Physical Delete Rule Example: Before and After

```
GHU 'LOANS' STATUS=' '
DLET STATUS=' '

```

Figure 268. Logical Parent, Physical Pairing—Physical Delete Rule Example: Database Calls

The physical delete rule requires that all logical children be previously physically deleted. Physical dependents of the logical parent are physically deleted.

The DLET status code will be 'DX' if all of the logical children were not previously physically deleted. All logical children are logically deleted. The LD bit is set on in the physical logical child BORROW.

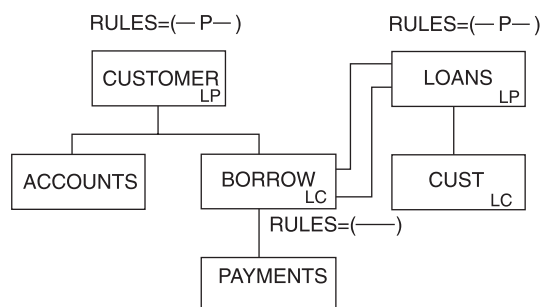


Figure 269. Logical Parent, Physical Pairing—Physical Delete Rule Example

## Delete Rules

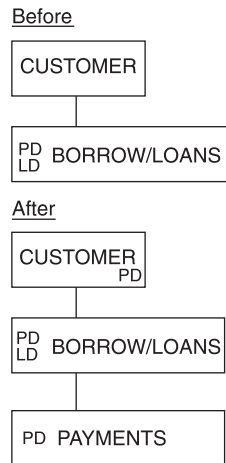


Figure 270. Logical Parent, Physical Pairing—Physical Delete Rule Example: Before and After

```

GHU 'CUSTOMER' STATUS=' '
DLET STATUS=' '

```

Figure 271. Logical Parent, Physical Pairing—Physical Delete Rule Example: Calls and Status Codes

The physical delete rule requires that:

- All logical children be previously physically deleted.
- Physical children paired to the logical child be previously deleted.

CUSTOMER, the logical parent, has been physically deleted. Both the logical child and its pair had previously been physically deleted. (The PD and LD bits are set on the before figure of the BORROW/LOANS.)

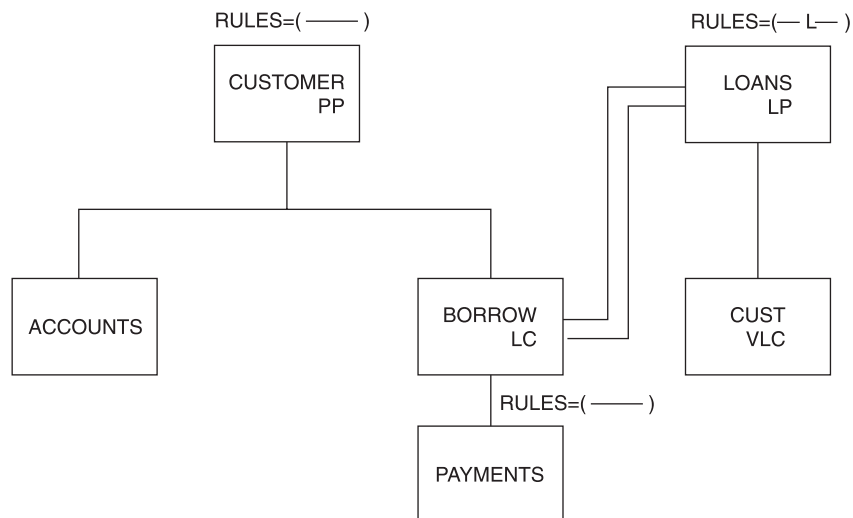


Figure 272. Logical Parent, Virtual Pairing—Logical Delete Rule Example

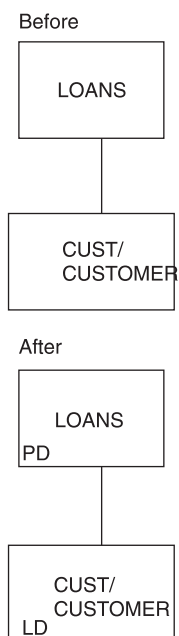


Figure 273. Logical Parent, Virtual Pairing—Logical Delete Rule Example: Before and After

```

GHU 'LOANS' STATUS=' '
DLET STATUS=' '

```

Figure 274. Logical Parent, Virtual Pairing—Logical Delete Rule Example: Calls and Status Codes

The logical delete rule allows either physical or logical deletion first; neither causes the other. Physical dependents of the logical parent are physically deleted.

The logical parent LOANS remains accessible from its logical children. All logical children are logically deleted. The LD bit is set on in the physical child BORROW.

The processing and results shown in Figure 272 on page 522 would be the same if the logical parent LOANS delete rule were virtual instead of logical. The example that follows is an additional one to explain the logical delete rule.

## Delete Rules

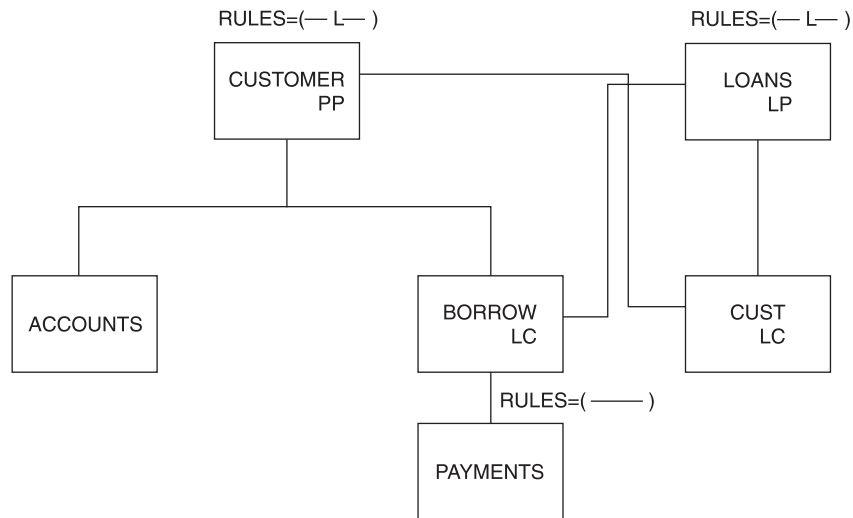


Figure 275. Logical Parent, Physical Pairing—Logical Delete Rule Example




Figure 276. Logical Parent, Physical Pairing—Logical Delete Rule Example: Before and After

```

GHU 'LOANS' STATUS=' '
DLET STATUS=' '

```

Figure 277. Logical Parent, Physical Pairing—Logical Delete Rule Example: Calls and Status Codes

The logical delete rule allows either physical or logical deletion first; neither causes the other. Physical dependents of the logical parent are physically deleted.

The logical parent LOANS remains accessible from its logical children. All physical children are physically deleted. Paired logical children are logically deleted.

The processing and results shown in Figure 275 on page 524 would be the same if the logical parent LOANS delete rule were virtual instead of logical. An additional example to explain the virtual delete rule follows in Figure 278.

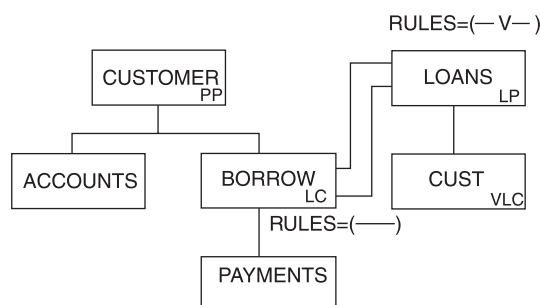


Figure 278. Logical Parent, Virtual Pairing—Virtual Delete Rule Example

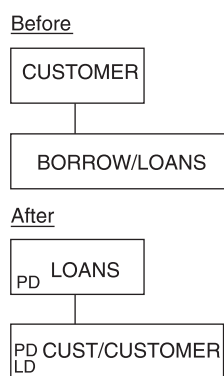


Figure 279. Logical Parent, Virtual Pairing—Virtual Delete Rule Example: Before and After

```
GHU 'CUSTOMER'
 'BORROW/LOANS' STATUS=' '
DLET STATUS=' '

```

Figure 280. Logical Parent, Virtual Pairing—Virtual Delete Rule Example: Calls and Status Codes

The virtual delete rule allows explicit and implicit deletion. Explicit deletion is the same as using the logical rule. Implicit deletion causes the logical parent to be physically deleted when the last logical child is physically deleted.

Physical dependents of the logical child are physically deleted. The logical parent is physically deleted. Physical dependents of the logical parent are physically deleted. The LD bit is set on in the physical logical child BORROW.

## Delete Rules


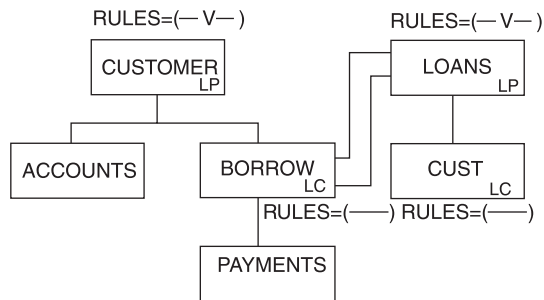


Figure 281. Logical Parent, Physical Pairing—Virtual Delete Rule Example

Before



After




Figure 282. Logical Parent, Physical Pairing—Virtual Delete Rule Example: Before and After

```
GHU 'CUSTOMER'
 'BORROW/LOANS' STATUS=' '
DLET STATUS=' '

```

Figure 283. Logical Parent, Physical Pairing—Virtual Delete Rule Example: Calls and Status

The virtual delete rule allows explicit and implicit deletion. Explicit deletion is the same as using the logical rule. Implicit deletion causes the logical parent to be physically deleted when the last logical child is physically and logically deleted.

The logical parent is physically deleted. Any physical dependents of the logical parent are physically deleted.

**Note:** The CUST segment must be physically deleted before the DLET call is issued. The LD bit is set on in the BORROW segment.

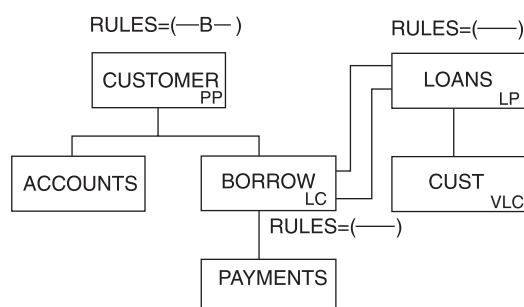


Figure 284. Physical Parent, Virtual Pairing—Bidirectional Virtual Example

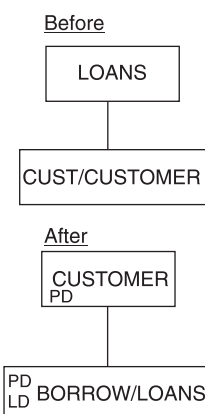


Figure 285. Physical Parent, Virtual Pairing—Bidirectional Virtual Example: Before and After

```
GHU 'LOANS'
 'CUSTOMER' STATUS=' '
DLET STATUS=' '

```

Figure 286. Deleting Last Logical Child Deletes Physical Parent

The bidirectional virtual rule for the physical parent has the same effect as the virtual rule for the logical parent.

When the last logical child is logically deleted, the physical parent is physically deleted. The logical child (as a dependent of the physical parent) is physically deleted. All physical dependents of the physical parent are physically deleted. That is, ACCOUNTS (not shown), BORROW, and PAYMENT are physically deleted.



## Delete Rules

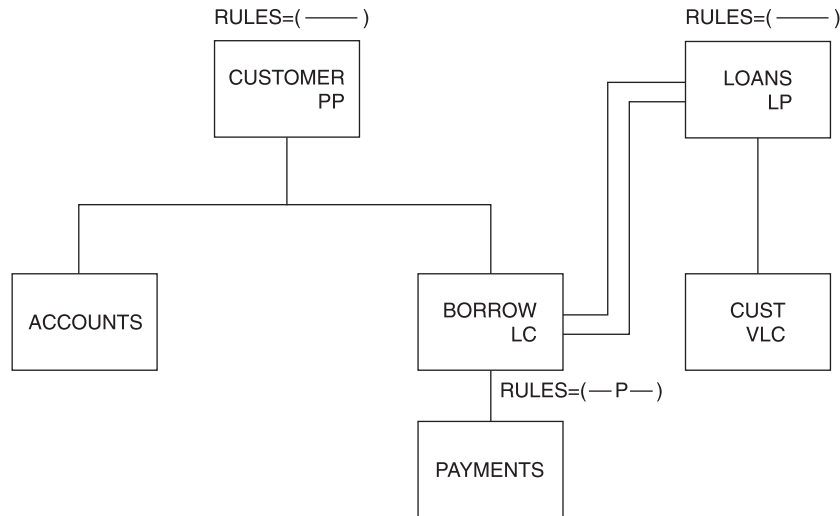


Figure 287. Logical Child, Virtual Pairing—Physical Delete Rule Example

```

GHU 'LOANS' STATUS=' '
 'CUST/CUSTOMER'
DLET STATUS=' '

GHU 'CUSTOMER' STATUS=' '
 'BORROW/LOANS'
DLET STATUS=' '


```

Figure 288. Logical Child, Virtual Pairing—Physical Delete Rule Example: Deleting the Logical Child

The physical delete rule requires that the logical child be logically deleted first. The LD bit is now set in the BORROW segment.

The logical child can be physically deleted only after being logically deleted. After the second delete, the LD and PD bits are both set. The physical delete of the logical child also physically deleted the physical dependents of the logical child. The PD bit is set.

Before



After

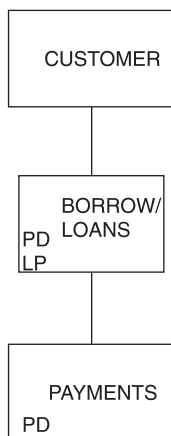


Figure 289. Logical Child, Virtual Pairing—Physical Delete Rule Example: Before and After

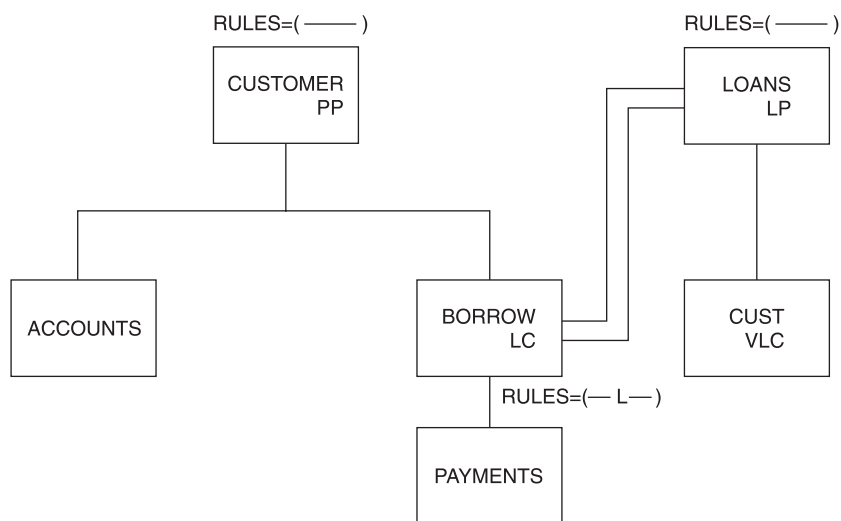


Figure 290. Logical Child, Virtual Pairing—Logical Delete Rule Example

## Delete Rules

```
GHU 'CUSTOMER STATUS=' ' '
 'BORROW/LOANS'
DLET STATUS=' ' '


GHU 'LOANS' STATUS=' ' '
 'CUST/CUSTOMER'
DLET STATUS=' ' '
```

Figure 291. Logical Child, Virtual Pairing—Logical Delete Rule Example: Calls and Status

The logical delete rule allows the logical child to be deleted physically or logically first. Physical dependents of the logical child are physically deleted, but they remain accessible from the logical path that is not logically deleted.

The delete of the virtual logical child sets the LD bit on in the physical logical child BORROW (BORROW is logically deleted).

### Before

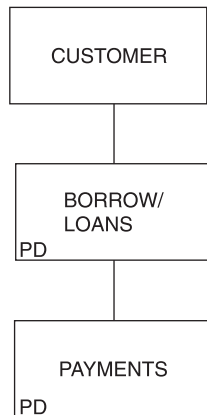

### After




Figure 292. Logical Child, Virtual Pairing—Logical Delete Rule Example: Before and After

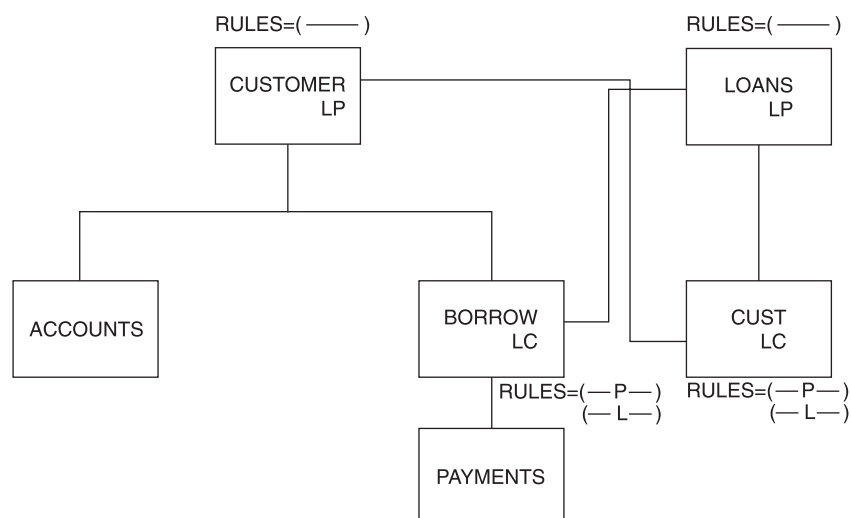


Figure 293. Logical Child, Physical Pairing—Physical or Logical Delete Rule Example

```

GHU 'CUSTOMER STATUS=' '
 'BORROW/LOANS'
DLET STATUS=' '

GHU 'LOANS' STATUS=' '
 'CUST/CUSTOMER'
DLET STATUS=' '

```

Figure 294. Logical Child, Physical Pairing—Physical or Logical Delete Rule Example: Calls and Status

With the physical or logical delete rule, each logical child must be deleted from its physical path. Physical dependents of the logical child are physically deleted, but they remain accessible from the paired logical child that is not deleted.

Physically deleting BORROW sets the LD bit on in CUST. Physically deleting CUST sets the LC bit on in the BORROW segment.

## Delete Rules

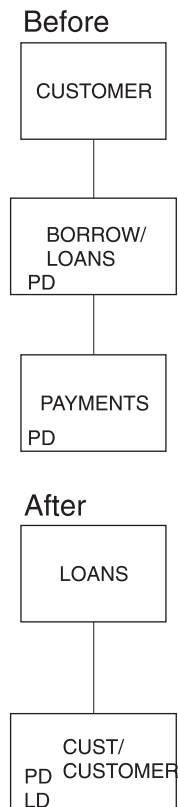


Figure 295. Logical Child, Physical Pairing—Physical or Logical Delete Rule Example: Before and After

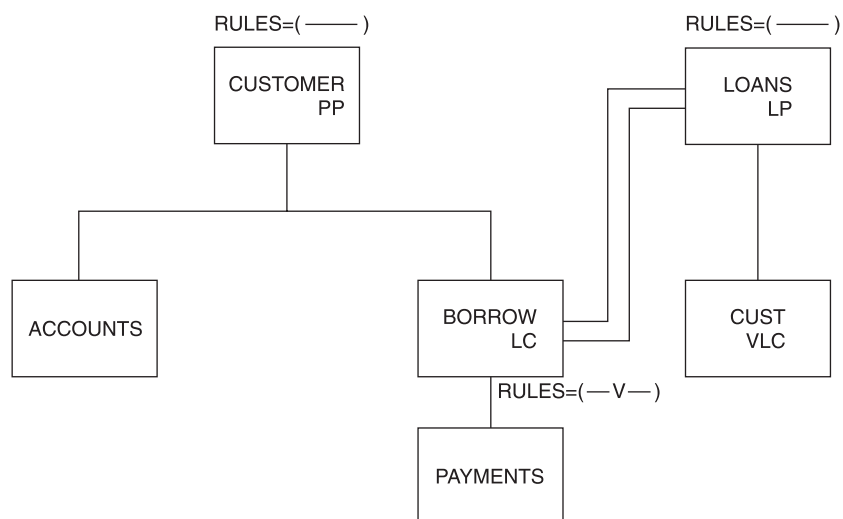


Figure 296. Logical Child, Virtual Pairing—Virtual Delete Rule Example

```

GHU 'CUSTOMER STATUS=' '
 'BORROW/LOANS'
DLET STATUS=' '

GHU 'LOANS' STATUS='GE'
 'CUST/CUSTOMER'


```

Figure 297. Logical Child, Virtual Pairing—Virtual Delete Rule Example: Calls and Status

The virtual delete rule allows the logical child to be deleted physically and logically. Deleting either path deletes both parts. Physical dependents of the logical child are physically deleted.

The previous delete deleted both paths because the delete rule is virtual. Deleting either path deletes both.

### Before

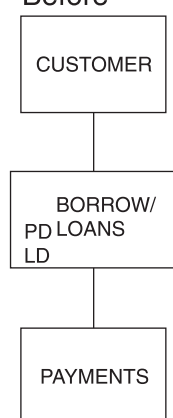

### After




Figure 298. Logical Child, Virtual Pairing—Virtual Delete Rule Example: Before and After

## Delete Rules

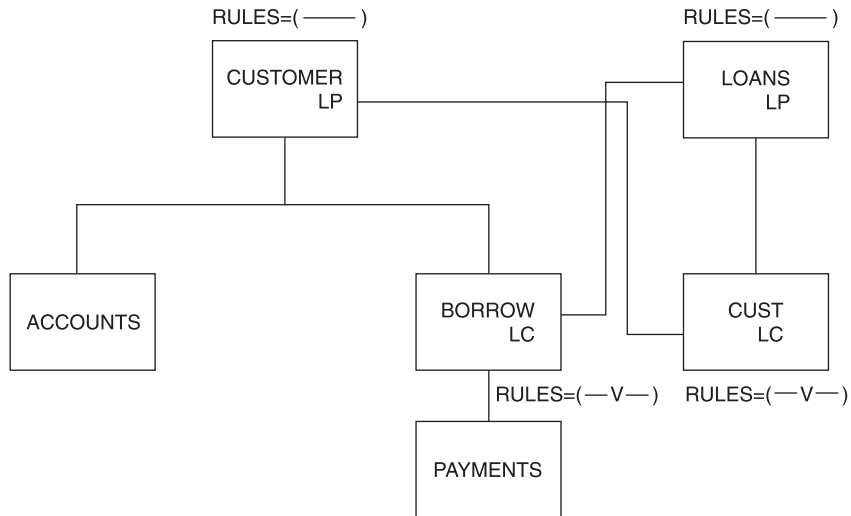


Figure 299. Logical Child, Physical Pairing—Virtual Delete Rule Example

```
GHU 'CUSTOMER STATUS=' '
DLET STATUS=' '

GHU 'LOANS' STATUS='GE'
 'CUST/CUSTOMER'
```

Figure 300. Logical Child, Physical Pairing—Virtual Delete Rule Example: Calls and Status

With the virtual delete rule, deleting either logical child deletes both paired logical children. (Notice the PD and LD bit is set on in both.) Physical dependents of the logical child are physically deleted.

Physical dependents of the logical child are physically deleted.

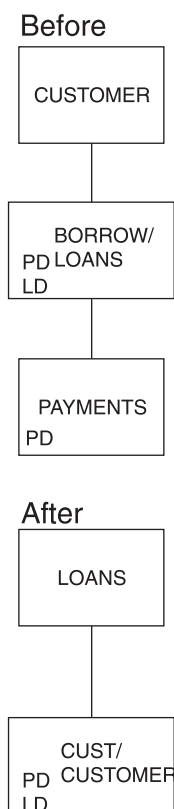


Figure 301. Logical Child, Physical Pairing—Virtual Delete Rule Example: Before and After

### Accessibility of Deleted Segments

A physically deleted segment remains accessible under the following circumstances:

- A physical dependent of the deleted segment is a logical parent accessible from its logical children.
- A physical dependent of the deleted segment is a logical child accessible from its logical parent.
- A physical parent of the deleted segment is a logical child accessible from its logical parent. The deleted segment in this case is variable intersection data in a bidirectional logical relationship.

A logically deleted logical child cannot be accessed from its logical parent.

Neither physical or logical deletion prevents access to a segment from its physical or logical children. Because logical relationships provide for inversion of the physical structure, a segment can be physically or logically deleted or both, and still be accessible from a dependent segment because of an active logical relationship. A physically deleted root segment can be accessed when it is defined as a dependent segment in a logical DBD. The logical DBD defines the inversion of the physical DBD. Figure 302 shows the accessibility of deleted segments.'

When the physical dependent of a deleted segment is a logical parent with logical children that are not physically deleted, the logical parent and its physical parents are accessible from those logical children.



## Delete Rules

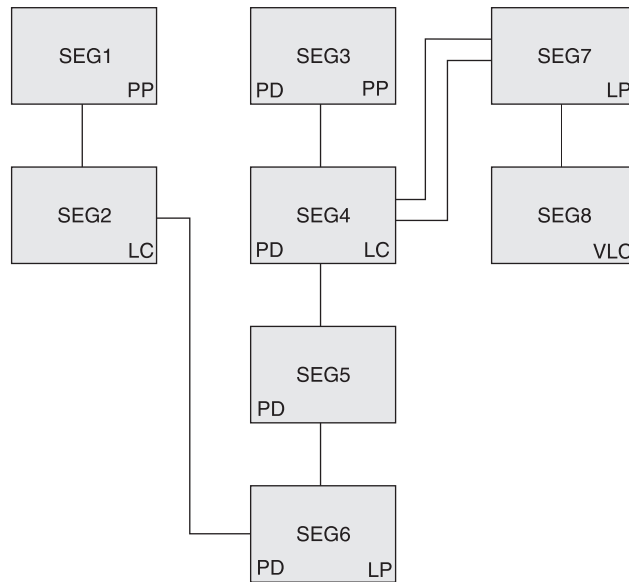


Figure 302. (Part 1 of 5). Example of Deleted Segments Accessibility

The physical structure in Figure 302 shows that SEG3, SEG4, SEG5, and SEG6 have been physically deleted, probably by issuing a DLET call for SEG3. This resulted in all of SEG3's dependents being physically deleted. (SEG6's delete rule is not P, or a 'DX' status code would be issued.)

SEG3, SEG4, SEG5, and SEG6 remain accessible from SEG2, the logical child of SEG6. This is because SEG2 is not physically deleted. However, physical dependents of SEG6 cannot be accessible, and their DASD space is released unless an active logical relationship prohibits

When the physical dependent of a deleted segment is a logical child whose logical parent is not physically deleted, the logical child, its physical parents, and its physical dependents are accessible from the logical parent.

The logical child segment SEG4 remains accessible from its logical parent SEG7 (SEG7 is not physically deleted). Also accessible are SEG5 and SEG6, which are variable intersection data. The physical parent of the logical child (SEG3) is also accessible from the logical child (SEG4).

A physically and logically deleted logical child can be accessed from its physical dependents (Figure 303 on page 537).

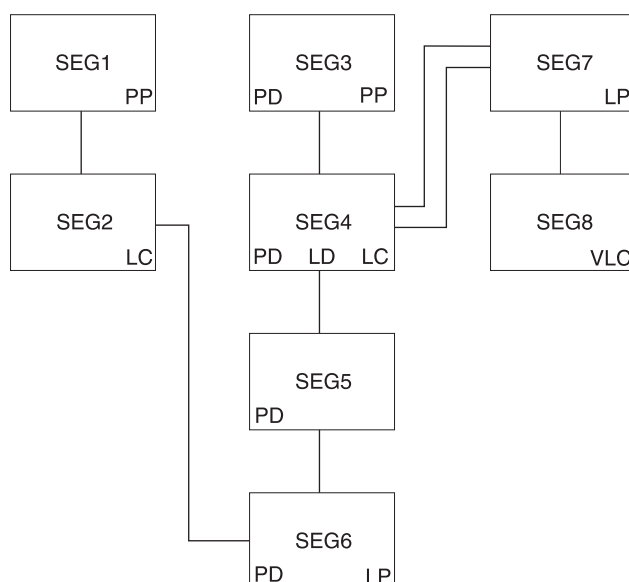


Figure 303. (Part 2 of 5). Example of Deleted Segments Accessibility

The physical structure Figure 303 shows that logical child SEG4 is both physically and logically deleted.

From a previous example (part 1 of 4), we know SEG6 (a logical parent) is accessible from SEG2, if that segment (its logical child) is not physically deleted. We also know that once we've accessed SEG6, its physical parents (SEG5, SEG4, SEG3) are accessible. It doesn't matter that the logical child is logically deleted (which is the only difference between this example and that of part 1 of 4).

The third path cannot be blocked because no delete bit exists for this path. Therefore, the logical child SEG4 is accessible from its dependents even though it is been physically and logically deleted.

When a segment accessed by its third path is deleted, it is physically deleted in its physical data base, but it remains accessible from its third path (Figure 304 and Figure 305 on page 538).

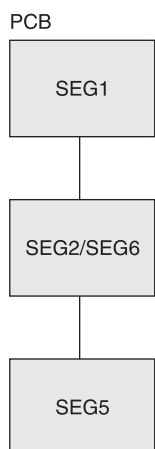


Figure 304. (Part 3 of 5). Example of Deleted Segments Accessibility

## Delete Rules

```
GHU 'SEG5' STATUS=' '
DLET STATUS=' ';
```

Figure 305. (Part 4 of 5). Example of Deleted Segments Accessibility: Database Calls

SEG5 is physically deleted by the DLET call, and SEG 6 is physically deleted by propagation. SEG2/SEG6 has unidirectional pointers, so SEG2 was considered logically deleted before the DLET call was issued. The LD bit is only assumed to be set on (Figure 306).

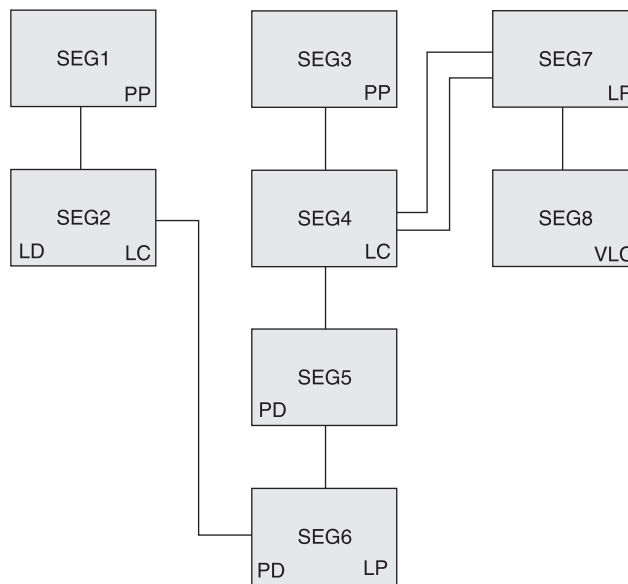


Figure 306. (Part 5 of 5). Example of Deleted Segments Accessibility

The results are interesting. SEG5 is inaccessible from its physical parent path (from SEG4) unless SEG4 is accessed by its logical parent SEG7 (SEG5 and SEG6 are accessible as variable intersection data). SEG5 is still accessible from its third path (from SEG6) because SEG6 is still accessible from its logical child. Thus, a segment can be physically deleted by an application program and still be accessible to that application program, using the same PCB used to delete the segment.

### Possibility of Abnormal Termination

If a logical parent is physically and logically deleted, its DASD space is released. For this to occur, all of its logical children must be physically and logically deleted. However, the DASD space for these logical children cannot be released if the logical children have physical dependents with active logical relationships. Accessing such a logical child from its physical dependents (both the logical child and logical parent have been physically and logically deleted) can result in a user 850 through 859 abnormal termination if one of the following occurs:

- The LPCK is not stored in the logical child
- The concatenation definition is data sensitive to the logical parent

Figure 307 shows an example of abnormal termination.

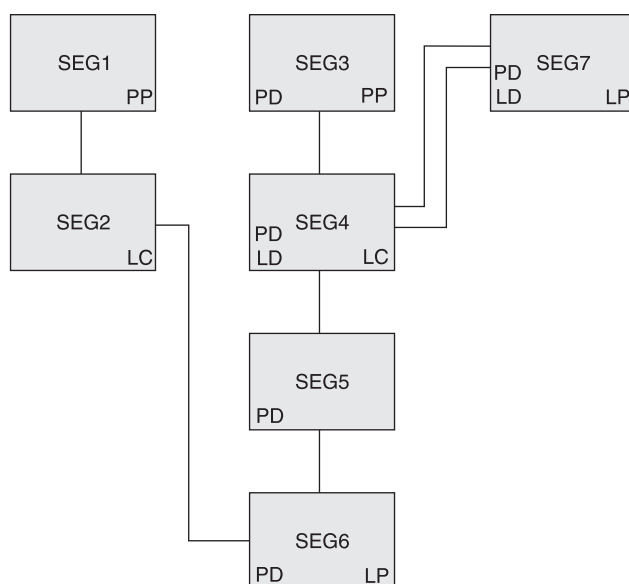


Figure 307. Example of Abnormal Termination

The logical parent SEG7 has been physically and logically deleted (the LD bit is never really set, but is assumed to be set. It is shown only for the purpose of illustration.) All of the logical children of the logical parent have also been physically and logically deleted. However, the logical parent has had its segment space released, whereas the logical child (SEG4) still exists. The logical child still exists because it has a physical dependent that has an active logical relationship that precludes releasing its space.

If an application program accesses SEG4 from its dependents (SEG1 to SEG2/SEG6 to SEG5), IMS must build the logical parent's concatenated key if that key is not stored in the logical child. When IMS attempts to access logical parent SEG7, abnormal termination will occur. The 850 through 859 abnormal termination codes are issued when a pointer is followed that doesn't lead to the expected segment.

### Avoiding Abnormal Termination

You must avoid creating a physically deleted logical child that can be accessed from below in the physical structure (using its third path). A logical child can be accessed from below if any of its physical dependents are accessible through logical paths. Two methods exist in avoiding this situation.

- Method 1

The first method requires that logical paths to dependents be broken before the logical child is physically deleted. Breaking the logical path with method 1 is done using a P rule for the dependents as long as no physical deletes are propagated into the database. Therefore, no V rules on logical children can be allowed at or above the logical child, because, with the V rule, a propagated logical delete causes a physical delete without a P rule violation check. (For more information on this, see "Detecting Physical Delete Rule Violations" on page 540.) The L rule also causes propagation, if the PD bit is already set on, but the dependent's P rule will prevent that case. Similarly, no V rule can be allowed on any logical parent above the logical child, because the logical delete condition would cause the physical delete.

- Method 2

The second method requires breaking the logical path whenever the logical child is physically deleted. Breaking the logical path with this method is done for

## Delete Rules

subordinate logical child segments using the V delete rule. Subordinate logical parent segments need to have bidirectional logical children with the V rule (must be able to reach the logical children) or physically paired logical children with the V rule. This method will not work with subordinate logical parents pointed to by unidirectional logical children.

### Detecting Physical Delete Rule Violations

When a DLET call is issued, the delete routine scans the physical structure containing the segment to be deleted. The delete routine scans the physical structure to determine if any segment in it uses the physical delete rule and whether that rule is being violated. Figure 308 and Figure 309 show an example of violating the physical delete rule.

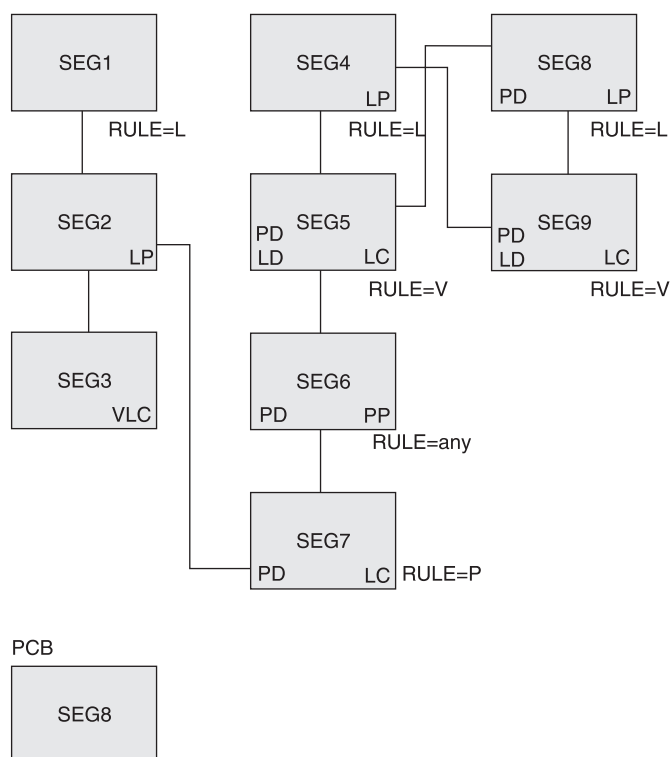


Figure 308. Example of Violation of the Physical Delete Rule

```
GHU 'SEG4' STATUS=' '
DLET STATUS='DX'
```

Figure 309. Example of Violation of the Physical Delete Rule: Database Calls

SEG7 (the logical child of SEG2) uses the physical delete rule and has not been logically deleted (the LD bit has not been set on). Therefore, the physical delete rule is violated. A 'DX' status code is returned to the application program, and no segments are deleted.

### Treating the Physical Delete Rule as Logical

If the delete routine determines that neither the segment specified in the DLET call nor any physical dependent of that segment in the physical structure uses the physical delete rule, any physical rule encountered later (logical deletion propagated to logical child or logical parent causing physical deletion—V rule—in another database) is treated as a logical delete rule. Figure 310 and Figure 311 on page 541

page 539 show an example of treating the physical delete rule as logical.

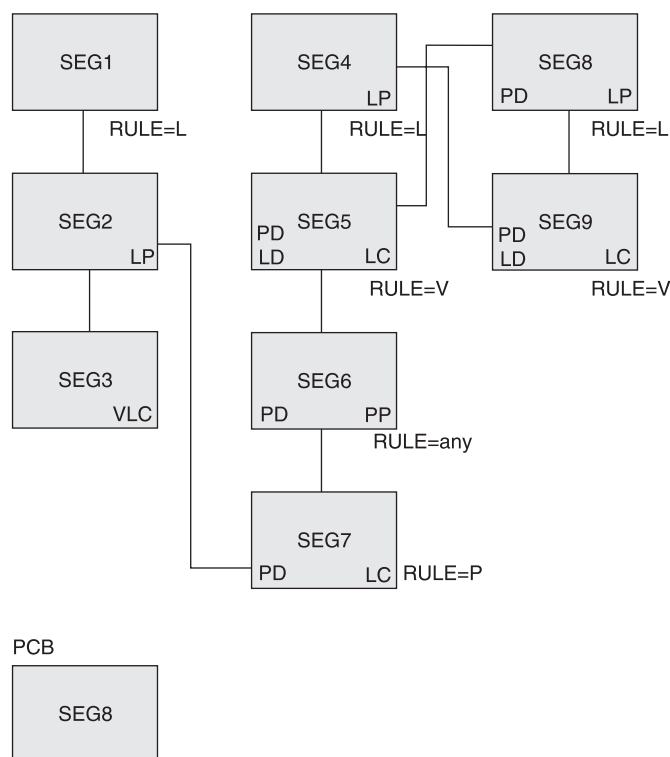


Figure 310. Example of Treating the Physical Delete Rule as Logical

```
GHU 'SEG8' STATUS=' '
DLET STATUS=' '

```

Figure 311. Example of Treating the Physical Delete Rule as Logical: Database Calls

SEG8 and SEG9 are both physically deleted, and SEG9 is logically deleted (V rule). SEG5 is physically and logically deleted because it is the physical pair to SEG9 (with physical pairing setting the LD bit in one set, the PID bit in the other, and vice versa). Physically deleting SEG5 causes propagation of the physical delete to SEG5's physical dependents; therefore, SEG6 and SEG7 are physically deleted.

Note that the physical deletion of SEG7 is prevented if the physical deletion started by issuing a DLET call for SEG4. But the physical rule of SEG7 is treated as logical in this case.

### Inserting Physically and Logically Deleted Segments

When a segment is inserted, a replace operation is performed (space is reused), and existing dependents of the inserted segment remain if:

- The segment to be inserted already exists (same segment type and same key field value for both the physical and logical sequencing)
- The delete bit is set on for that segment along the path of insertion

For HDAM and HIDAM databases, the logical twin chain is established as required, and existing dependents of the inserted segment remain.

## Delete Rules

For HISAM databases, if the root segment is physically and logically deleted before the insert is done, then the first logical record for that root in primary and secondary data set groups is reused. Remaining logical records on any OSAM chain are dropped.

### Delete Rules Summary

#### The DLET Call

A DLET call issued against a concatenated segment (SOURCE=DATA/DATA, DATA/KEY, KEY/DATA) is a DLET call against the logical child only.

A DLET call against a logical child that has been accessed from its logical parent is a request that the logical child be logically deleted.

In all other cases, a DLET call issued against a segment is a request for that segment to be physically deleted.

#### Physical Deletion

A physically deleted segment cannot be accessed from its physical path, however, one exception exists: If one of the physical parents of the physically deleted segment is a logical child that can be accessed from its logical parent, then the physically deleted segment is accessible from that logical child. The physically deleted segments is accessible because the physical dependents of the logical child are variable intersection data.

#### Logical Deletion

By definition, a logically deleted logical child cannot be accessed from its logical parent. Unidirectional logical child segments are assumed to be logically deleted.

By definition, a logical parent is considered logically deleted when all its logical children are physically deleted and all its physical children that are part of a physically paired set are physically deleted.

#### Access Paths

Neither physical nor logical deletion of a segment prevents access to the segment from its physical or logical children, or from the segment to its physical or logical parents. A physically deleted root segment can be accessed only from its physical or logical children.

#### Propagation of Delete

In bidirectional physical pairing, physical deletion of one of the pair of logical children causes logical deletion of its paired segment. Likewise, logical deletion of one causes physical deletion of the other.

Physical deletion of a segment propagates logical deletion requests to its bidirectional logical children. Physical deletion of a segment propagates physical deletion requests to its physical children and to any index pointer segments for which it is the source segment.

#### Delete Rules

Further delete operations are governed by the following delete rules:

##### Logical Parent

When RULES=P is specified, if the segment is not already logically deleted, a DLET call against the segment or any of its physical parents results in a DX status code. No segments are deleted. If a request is made against the segment as a result of propagation across a logical relationship, then the P rule works like the L rule.

When RULES=L is specified, either physical or logical deletion can occur first, and neither causes the other to occur.

When RULES=V is specified, either physical or logical deletion can occur first. If the segment is logically deleted as the result of a DLET call, then it is physically deleted also.

### Physical Parent of a Virtually Paired Logical Child

RULES=P, L, or V is meaningless.

When RULES=B is specified and all physical children that are virtually paired logical children are logically deleted, the physical parent segment is physically deleted.

### Logical Child

When RULES=P is specified, if the segment is not already logically deleted, then a DLET call requesting physical deletion of the segment or any of its physical parents results in a DX status code. No segments are deleted. If a delete request is made against the segment as a result of propagation across a logical relationship or if the segment is one of a physically paired set, then the rule works like the L rule.

When RULES=L is specified, either physical or logical deletion can occur first, and neither causes the other to occur.

When RULES=V is specified, either physical or logical deletion can occur first and either causes the other to occur. If this rule is used on only one segment of a physically paired set, it works like the L rule.

### Space Release

Depending on the database organization, DASD space can or cannot be reused when it is released. DASD space for a segment is released when the following conditions are met:

- Space has been released for all physical dependents of the segment.
- The segment is physically deleted.
- If the segment is a logical child or a logical parent, then it is physically and logically deleted.
- If the segment is a dependent of a logical child (variable intersection data) and the DLET call was issued against a physical parent of the logical child, then the logical child is both physically and logically deleted.
- If the segment is a primary index pointer segment, the space is released for its target segment.

## Insert, Delete, and Replace Rules Summary

Figure 312 summarizes rules by stating a desired result and then indicating the rule that can be used to obtain that result. Table 36 on page 544 lists the rules and how to specify them.



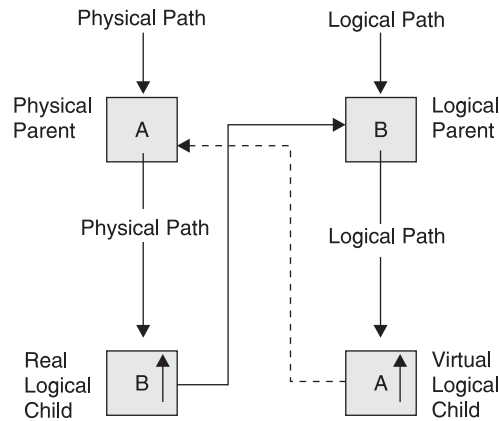


Figure 312. Insert, Delete, and Replace Rules Summary

Table 36. Specifying Insert, Delete, and Replace Rules

| Rule                              | RULES= Specification |
|-----------------------------------|----------------------|
| physical insert rule              | RULES= (P,_,_)       |
| logical insert rule               | RULES= (L,_,_)       |
| virtual insert rule               | RULES= (V,_,_)       |
| physical delete rule              | RULES= (_,P,_)       |
| logical delete rule               | RULES= (_,L,_)       |
| bidirectional virtual delete rule | RULES= (_,B,_)       |
| virtual delete rule               | RULES= (_,V,_)       |
| physical replace rule             | RULES= (_,_,P)       |
| logical replace rule              | RULES= (_,_,L)       |
| virtual replace rule              | RULES= (_,_,V)       |

**Insert Rules for Physical Parent Segment A:** The insert rules for physical parent (PP) segment A control the insert of PP A using the logical path to PP A. The rules are as follows:

- To disallow the insert of PP A on its logical path, use the physical insert rule.
- To allow the insert of PP A on its logical path (concatenated with virtual logical child segment A), use either the logical or virtual rule.

Where PP A is already present, a logical connection is established to the existing PP A segment. The existing PP A can either be replaced or remain unchanged:

- If PP A is to remain unchanged by the insert call, use the logical insert rule.
- If PP A is to be replaced by the insert call, use the virtual insert rule.

**Delete Rules for Physical Parent Segment A:** The delete rules for PP segment A control the deletion of PP A using the logical path to PP A. The rules are as follows:

- To cause PP segment A to be deleted automatically when the last logical connection (through real logical child segment B to PP segment A) is broken, use the bidirectional virtual delete rule.
- The other delete rules for PP A are not meaningful.

**Replace Rules for Physical Parent Segment A:** The replace rules for PP segment A control the replacement of PP A using the logical path to PP A. The rules are as follows:

- To disallow the replacement of PP A on its logical path and receive an 'RX' status code if the rule is violated by an attempt to replace PP A, use the physical replace rule.
- To disregard the replacement of PP A on its logical path, use the logical replace rule.
- To allow the replacement of PP A on its logical path, use the virtual replace rule.

#### **Insert Rules for Logical Parent Segment B:**

**Note:** These rules are identical to the insert rules for PP segment A.

The insert rules for logical parent (LP) segment B control the insert of LP B using the logical path to LP B. The rules are as follows:

- To disallow the insert of LP B on its logical path, use the physical insert rule.
  - To allow the insert of LP B on its logical path (concatenated with virtual segment RLC B) use either the logical or virtual rule.
- Where LP B is already present, a logical connection is established to the existing LP B segment. The existing LP B can either be replaced or remain unchanged:
- If LP B is to remain unchanged by the insert call, use the logical insert rule.
  - If LP B is to be replaced by the insert call, use the virtual insert rule.

**Delete Rules for Logical Parent Segment B:** The delete rules for segment LP B control the deletion of LP B on its physical path. A delete call for a concatenated segment is interpreted as a delete of the logical child only. The rules are as follows:

- To ensure that LP B remains accessible until the last logical relationship path to that occurrence has been deleted, choose the physical delete rule. If an attempt to delete LP B is made while there are occurrences of real logical child (RLC) B pointing to LP B, a 'DX' status code is returned and no segment is deleted.
- To allow segment LP B to be deleted on its physical path, choose the logical delete rule. When LP B is deleted, it is no longer accessible on its physical path. It is still possible to access LP B from PP A through RLC B as long as RLC B exists.
- Use the virtual delete rule to physically delete LP B when it has been explicitly deleted by a delete call or implicitly deleted when all RLC Bs pointing to it have been physically deleted.

#### **Replace Rules for Logical Parent Segment B:**

**Note:** These rules are identical to the replace rules for PP segment A.

The replace rules for LP segment B control the replacement of LP B using the logical path to LP B. The rules are as follows:

- Use the physical replace rule to disallow the replacement of LP B on its logical path and receive an 'RX' status code if the rule is violated by an attempt to replace LP B.
- Use the logical replace rule to disregard the replacement of LP B on its logical path.
- Use the virtual replace rule to allow the replacement of LP B on its logical path.

## Delete Rules

**Insert Rules for Real Logical Child Segment B:** The insert rules do not apply to a logical child.

**Delete Rules for Real Logical Child Segment B:** The delete rules for RLC segment B apply to delete calls using its logical or physical path. The rules are as follows:

- Use the physical delete rule to control the sequence in which RLC B is deleted on its logical and physical paths. The physical delete rule requires that it be logically deleted before it is physically deleted. A violation results in a 'DX' status code.
- Use the logical delete rule to allow either physical or logical deletes to be first.
- Use the virtual delete rule to use a single delete call from either the logical or physical path to both logically and physically delete RLC B.

**Replace Rules for Real Logical Child Segment B:**

**Note:** These rules are identical to the replace rules for PP segment A.

The replace rules for LP B control the replacement of RLC B using the logical path to RLC B. The rules are as follows:

- Use the physical replace rule to disallow the replacement of RLC B on its logical path and receive an 'RX' status code if the rule is violated by an attempt to replace RLC B.
- To disregard an attempt to replace RLC B on its logical path, use the logical replace rule.
- To allow the replacement of RLC B on its logical path, use the virtual replace rule.

---

## Appendix C. Using OSAM as the Access Method

This appendix contains product-sensitive programming interface information.

You need to know the following information about OSAM if your database is using OSAM as an access method:

- OSAM is a special access method supplied with IMS.
- IMS communicates with OSAM using OPEN, CLOSE, READ, and WRITE macros.
- OSAM communicates with the I/O supervisor using the I/O driver interface.
- An OSAM data set can be read using either the BSAM or QSAM access method.
- The number of extents in an OSAM data set is limited by:
  - The maximum length of the data extent block (DEB)
  - The length of the sector number table that is created for rotational position sensing (RPS) devices

The length of a DEB is represented in a single byte that is expressed as the number of double words. The sector number table exists only for RPS devices and consists of a fixed area of eight bytes plus one byte for each block on a track, rounded up to an even multiple of eight bytes. A minimum-sized sector table (7 blocks per track) requires two double words. A maximum-sized sector table (255 blocks per track) requires 33 double words.

In addition, for each extent area (two double words), OSAM requires a similar area that contains device geometry data. Each extent requires a total of four double words. The format and length (expressed in double words) of an OSAM DEB are shown in Table 37.

*Table 37. Length and Format of an OSAM DEB*

| Format                          | Length           |
|---------------------------------|------------------|
| Appendage sector table          | 5                |
| Basic DEB                       | 4                |
| Access method dependent section | 2                |
| Subroutine name section         | 1                |
| Standard DEB extents            | 120 (60 extents) |
| OSAM extent data                | 120              |
| Minimum sector table            | 2                |

With a minimum-sized sector table, the DEB can reflect a maximum of 60 DASD extents. With a maximum-sized sector table, the DEB can reflect a maximum of 52 DASD extents.

- An OSAM data set can be opened for update in place and extension to the end through one data control block (DCB). The phrase “extension to the end” means that records can be added to the end of the data set and that new direct-access extents can be obtained.
- An OSAM data set does not need to be formatted before use.
- An OSAM data set can use fixed-length blocked or unblocked records.

## OSAM as the Access Method

- The maximum size of an OSAM data set depends on the block size of the data set and whether it is a HALDB OSAM data set. The size limits for OSAM data sets are:
  - 8 GB for a non-HALDB OSAM data set that has an even-length block size
  - 4 GB for a non-HALDB OSAM data set that has an odd-length block size
  - 4 GB for a HALDB OSAM data set
- File mark definition is always used to define the current end of the data set. When new blocks are added to the end of the data set, they replace dummy pre-formatted (by OSAM) blocks that exist on a logical cylinder basis. A file mark is written at the beginning of the next cylinder, if one exists, during a format logical cylinder operation. This technique is used as a reliability aid while the OSAM data set is open.
- OSAM EXCP counts are accumulated during OSAM End of Volume (EOV) and close processing.
- Migrating OSAM data sets utilizing ADRDSSU and the DFSMSdss component of z/OS DFSMS: DFSMSdss will migrate the tracks of a data set up to the last block written value (DS1LSTAR) as specified by the DSCB for the volume being migrated. If the OSAM data set spans multiple volumes that have not been pre-allocated, the DS1LSTAR field for each DSCB will be valid and DFSMSdss can correctly migrate the data.

If the OSAM data set spans multiple volumes that have been pre-allocated, the DS1LSTAR field in the DSCB for each volume (except the last) can be zero. This condition will occur during the loading operation of a pre-allocated, multi-volume data set. The use of pre-allocated volumes precludes EOV processing when moving from one volume to another, thereby allowing the DSCBs for these volumes not to be updated. The DSCB for the last volume loaded is updated during close processing of the data set.

DFSMSdss physical DUMP or RESTORE commands with the parameters ALLEXCP or ALLDATA must be used when migrating OSAM data sets that span multiple pre-allocated volumes. These parameters will allow DFSMSdss to correctly migrate OSAM data sets.

**Related Reading:** For more information on the z/OS DFSMSdss component of DFSMS and the ALLEXCP and ALLDATA parameters of the DUMP and RESTORE commands, see the *DFSMSdss Storage Administration Reference*.

Other z/OS access methods (VSAM and SAM) are used in addition to OSAM for physical storage of data.

**Related Reading:** For information about defining OSAM subpools, see *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

---

## Appendix D. Correcting Bad Pointers

Ordinarily, bad pointers should not occur in your database. When they do, the cause is typically:

- Failure to run database backout
- Failure to perform emergency restart
- Omitting a log during backout or recovery

The normal way to correct a bad pointer is to perform recovery. However, some cases exist in which a bad pointer can be corrected through reorganization. A description of the circumstances in which this can or cannot be done is as follows:

- PC/PT pointers. The HD Unload utility issues unqualified GN calls to read a database. If the bad pointer is a PC or PT pointer, DL/I will follow the bad pointer and the GN call will fail. Therefore, reorganization cannot be used to correct PC or PT pointers.
- LP/LT pointers. LP and LT pointers are rebuilt during reorganization. However, DL/I can follow the LP pointer during unload. If the logical child segment contains a direct LP pointer and the logical parent's concatenated key is not physically stored in the logical child segment, DL/I follows the bad LP pointer to construct the logical parent's concatenated key. This causes an ABEND.
- LP pointer. When DBR= is specified for pre-reorganization and the database has direct LP pointers, the HD Unload utility saves the old LP pointer. Bad LP pointers produce an error message (DFS879) saying a logical child that has no logical parent exists.
- LP pointer. When DBIL= is specified for pre-reorganization of a logical child or parent database, the utilities that resolve LP pointers use concatenated keys to match logical parent and logical child segments. New LP pointers are created.



---

## Appendix E. HALDB Partition Definition Utility

The HALDB Partition Definition utility is an ISPF application that allows you to manage the partitions of an IMS HALDB. This utility can be used in place of the DBRC INIT.DB and INIT.PART commands to register the HALDB master in the RECON data set. The HALDB master is registered at the time its first partition is defined.

**Related Reading:** For more information on how HALDBs are maintained in the RECON, see *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

**Important:** The HALDB Partition Definition utility will not impact online IMS subsystems with regard to RECON contention. The RECON is only reserved for the time it takes to process a DBRC request. It is not held for the duration of the utility execution.

To access the HALDB utility:

1. Log on to TSO.
2. Start ISPF.
3. From the ISPF command line, type: `tso %dfshaldb` and press Enter.

The utility consists of several panels and programs that perform various actions on the HALDB and its partitions.

**Important:** The Panel IDs are shown enclosed in parentheses in the caption of each panel image here. To enable Panel IDs to be displayed in the upper left corner of each of your panels; enter `panel id` on the ISPF command line and press Enter.

### In this Appendix:

- “The Partitioned Databases Panel” on page 552
- “Accessing Help Information” on page 553
- “Exiting the Utility” on page 553
- “Displaying the ISPF Member List” on page 554
- “Opening HALDB Partitions” on page 555
- “Defining Data Set Group Information” on page 567
- “Displaying the List of Defined Partitions” on page 568
- “Opening Database Information” on page 576
- “Deleting Database Information” on page 577
- “Exporting Database Information” on page 577
- “Importing Database Information” on page 578
- “Displaying the IMS Concatenation” on page 578
- “Selecting an IMS Configuration Using the Partition Definition Utility” on page 579
- “Using Batch to Export or Import Partition Information” on page 581
- “DSPXRUN Command Syntax” on page 582



### The Partitioned Databases Panel

You define the HALDB that you want to manipulate on the Partitioned Databases panel. Here you specify the type of action to perform, for example: define, modify, or view. The succeeding panels guide you through the processes.

The Partitioned Databases panel has *point-and-shoot* text fields (in turquoise by default). To use the point-and-shoot fields, just position the cursor on the text and press the enter key.

The Figure 313 on page 552 provides space for you to enter a HALDB name, allowing HALDB to gather information about that HALDB. The information can be retrieved from DBDLIB or from RECON depending on the option you select and the current state of the partitions. Following Figure 313 on page 552 are descriptions of the panel fields.

Help

Partitioned Databases

Type a database name and choose an option. Then press Enter.  
 To select a database from a list, type a filter (\*) and press F4.

Configuration . . . : DEFAULT

Database name . . . IVPDB1 +

Option . . . . . —

- 1. OPEN DATABASE partitions
- 2. Open database information
- 3. Delete database information
- 4. Export database definitions
- 5. Import database definitions
- 6. Show IMS DDname concatenation
- 7. Select IMS RECON / DBDLIB libraries

To exit the application, press F3.

Command ==>  
 F1=Help    F3=Exit   F4=Prompt

Figure 313. Partitioned Databases panel (DSPXPAA)

The options in Figure 313 allow you to perform the following actions:

1. Create or change HALDB partitions (see “Opening HALDB Partitions” on page 555 and “Displaying the List of Defined Partitions” on page 568).
2. View or change HALDB information (see “Opening Database Information” on page 576).
3. Delete HALDB information (see “Deleting Database Information” on page 577).
4. Export HALDB information (see “Exporting Database Information” on page 577).
5. Import HALDB information (see “Importing Database Information” on page 578).
6. Show the IMS concatenation (see “Displaying the IMS Concatenation” on page 578).
7. Select an IMS configuration (see “Selecting an IMS Configuration Using the Partition Definition Utility” on page 579).

#### Configuration

The configuration is a name you have specified that identifies a set of DBD

libraries and a set of RECON data sets. If you already have the IMS DD statement allocated from the logon procedure and if you have the IMS.SDFSRESLs allocated to the STEPLIB DD statement, you do not need to use the **Configuration** option. If you do define and select a configuration, those data sets will override the allocations from the logon procedure.

#### Database name

Enter up to 8 alphanumeric characters (the first character must be alphabetic). The HALDB name must be a member from a DBDLIB data set. DBDLIB data sets must be allocated under a DD name of IMS. The database name that you specify is remembered across ISPF sessions.

You can include an asterisk to indicate that you want a member list display. The asterisk can appear alone or as part of the name to limit the list that is displayed. (see “Displaying the ISPF Member List” on page 554)

**Important:** When you include an asterisk as part of the member name, the concatenation for the 'IMS' DD name may contain only up to 4 data sets. This is an ISPF restriction.

#### Option

A numeric value that indicates the type of processing to perform. The number corresponds to one of the actions in the list.

## Accessing Help Information

The Partitioned Databases panel has help information available from the action bar (Figure 314). This information is available from other panels as well.

#### Help

1. Help for Help
2. Extended help
3. Keys help
4. Help Index
5. About

Figure 314. Help Action Bar Choices

Help information can also be obtained by pressing the help key. The help displayed depends on the circumstances and on the placement of the cursor when the help key is pressed.

- If an error message is displayed, more information on the error might be displayed.
- If the cursor is on an input field, information about the field is displayed, otherwise information about the panel is displayed.

**Important:** The F1 key is set to invoke the Help dialogs.

## Exiting the Utility

The panels in the HALDB Partition Definition utility support an exit key (F3) which will return your session to a display of the Figure 313 on page 552. When you use the exit key from Figure 313 your session will exit the HALDB Partition Definition utility altogether. Since you can accidentally press the exit key, a confirmation panel, shown in Figure 315 on page 554, will allow you to continue without losing unsaved changes.

## Exiting the Utility

To exit pull-down panels press the cancel key (F12), then the exit key (F3) if you

Exit Confirmation

—

1. Exit without saving.  
2. Do not exit.

F1=Help F12=Cancel

Figure 315. Exit Confirmation Panel

wish to leave the HALDB Partition Definition utility panels altogether.

## Displaying the ISPF Member List

When you include an asterisk in the database name field, a member list for the members of the IMS DD name concatenation with a name that matches the filter is displayed. A sample member list display is shown in Figure 316.

| File Help                  |          |                 |          |    |                    |    |                     |
|----------------------------|----------|-----------------|----------|----|--------------------|----|---------------------|
| -----                      |          |                 |          |    |                    |    |                     |
| MEMBER LIST                |          | IMSIVP81.DBDLIB |          |    | Row 00001 of 00011 |    |                     |
| Name                       | Size     | TTR             | Alias-of | AC | AM                 | RM | ---- Attributes --- |
| . DBFSAMD1                 | 00000158 | 00013B          |          | 00 | 24                 | 24 |                     |
| . DBFSAMD2                 | 000001A0 | 000143          |          | 00 | 24                 | 24 |                     |
| . DBFSAMD3                 | 000006E0 | 00014B          |          | 00 | 24                 | 24 |                     |
| . DBFSAMD4                 | 000002C8 | 000207          |          | 00 | 24                 | 24 |                     |
| . DI21PART                 | 00000230 | 000133          |          | 00 | 24                 | 24 |                     |
| . IVPDB1                   | 00000138 | 000103          |          | 00 | 24                 | 24 |                     |
| . IVPDB1I                  | 00000138 | 00010B          |          | 00 | 24                 | 24 |                     |
| . IVPDB2                   | 00000130 | 000113          |          | 00 | 24                 | 24 |                     |
| . IVPDB3                   | 00000188 | 00011B          |          | 00 | 24                 | 24 |                     |
| . IVPDB4                   | 00000110 | 000123          |          | 00 | 24                 | 24 |                     |
| . IVPDB5                   | 000000B0 | 00012B          |          | 00 | 24                 | 24 |                     |
| **End**                    |          |                 |          |    |                    |    |                     |
| Command ==>                |          |                 |          |    |                    |    |                     |
| Scroll ==> CSR             |          |                 |          |    |                    |    |                     |
| F1=Help F3=Exit F12=Cancel |          |                 |          |    |                    |    |                     |

Figure 316. ISPF Member List Display (DSPXPAM)

The member list originates from the PDS directories of the IMS concatenation. The members that are displayed can be HALDB or non-HALDB. The member list is a standard ISPF list so there is no IMS-specific information displayed.

From the member list, you can select the HALDB name to process by typing in the far-left column. If the name selected is not for a partitioned database, an error message is displayed. You can select a HALDB name with the slash (/) character and the File action to select the type of actions to perform. The same actions that are shown on Figure 313 on page 552 are available here.

If you specify an option on the Partitioned Databases panel (552), you do not need to use the File Action bar; just press Enter. You can use the File Action bar to override the option that you specified an option on the Partitioned Databases panel.

The list of HALDBs in the Member List panel can be manipulated by using the File action bar (Figure 317 on page 555).

File Help

1. Open partition
2. Open database
3. Delete database
4. Export database
5. Import database

Figure 317. File Action Bar Choices

The options on the File Action bar allow you to perform the following actions:

- Create or change HALDB partitions (see “Opening HALDB Partitions” and “Displaying the List of Defined Partitions” on page 568).
- View or change HALDB information (see “Opening Database Information” on page 576).
- Delete HALDB information (see “Deleting Database Information” on page 577).
- Export HALDB information (see “Exporting Database Information” on page 577).
- Import HALDB information (see “Importing Database Information” on page 578).

## Opening HALDB Partitions

Before you can define the partitions for a HALDB, you must use the DBDGEN process to define the HALDB as a partitioned database.

The first time you choose a HALDB you must set values for the HALDB master; see Figure 318 on page 556. When you press Enter to continue, you set the defaults for the partitions, see Figure 319 on page 558. When you press Enter to continue again, you define partitions using those defaults. You can modify each partition uniquely as they are created or you can modify them later from the list of partitions. Figure 321 on page 564 shows an example of the panel to specify the partition information.

After the initial set of partitions is defined (and whenever you select that HALDB again), you will see the Database Partitions display (see Figure 326 on page 569 in Displaying the List of Defined Partitions).

**Important:** Most of the information initially displayed on the panel in Figure 318 on page 556 is extracted from the DBDLIB member. You can change the displayed information, but that information is not saved back into the DBDLIB member (the definition is saved in the RECON data sets).

Each HALDB can support up to 1001 partitions.

Help

-----

Partitioned Database Information

Type the field values. Then press Enter to continue.

Database name . . . . . : IVPDB1

Master Database values

Part. selection routine . . . DFSIVD1

RSR global service group . . . BKUPGRP1

RSR tracking type . . . . . DBTRACK

Share level . . . . . 0

Database organization . . . : PHDAM

Recoverable? . . . . . Yes

Number of data set groups . : 10

Online Reorganization Capable: Yes

To exit the application, press F3.

Command ==>

F1=Help    F3=Exit    F12=Cancel

Figure 318. Partitioned Database Information (DSPXPOA)

The following are descriptions of the fields on the Partitioned Database information screen:

**Database name**

Enter 1 to 8 alphanumeric characters. This is the name you selected from the previous panel (see Figure 313 on page 552); it is the name of the HALDB that you are defining.

**Part. selection routine**

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is the name of the Partition Selection Exit Routine provided by you.

**RSR global service group**

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is an optional parameter used to specify the RSR global service group that the HALDB is to be assigned to.

**RSR tracking type**

This is an optional parameter you use to specify the type of RSR tracking (shadowing) for a partition assigned to a global service group. The type, RCVTRACK or DBTRACK, cannot be specified without an RSR global service group having been defined for the HALDB master.

- DBTRACK- indicates HALDB readiness tracking is to be done.
- RCVTRACK- indicates recovery readiness tracking is to be done.

DBTRACK is the default.

**Share level**

0, 1, 2, or 3. Share level is an optional parameter you use to specify the level of data sharing that authorized subsystems can share a HALDB at.

Share level 0 is the default.

**Database organization**

This field indicates the type of HALDB organization, you can specify either: PSINDEX, PHIDAM, or PHDAM.

**Recoverable?**

Yes indicates that the HALDB is recoverable. No indicates that the HALDB is not recoverable. Yes is the default. If an RSR global service group is specified, the recoverable field must be Yes.

**Related Reading:** For more information on non-recoverable databases see the *IMS Version 9: Operations Guide*.

**Number of data set groups**

This is the number of data sets in the groups that contain data as specified in the DBDGEN.

**Online Reorganization Capable**

Yes specifies that this HALDB supports online reorganization. No specifies that this HALDB does not support online reorganization. These specifications are stored in the DBRC RECON data set.

**Related Reading:**

- For more information on reorganizing HALDBs online, see “HALDB Online Reorganization” on page 382.
- For more information on DBRC and the RECON data set, see *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

Figure 319 on page 558 shows the partition default information.

```

Help

 Partition Default Information

Type the field values. Then press Enter to continue.

Database name : IVPDB1

 Processing options
Automatic definition No
Input dataset : 'IMS.IVPDB1.KEYS'
Use defaults for DS groups. . No

 Defaults for partitions
Partition name IVPD101
Data set name prefix IMS.DB01.FINANCE.YEAR1998.CURR

Randomizer
Module name DD41DUP2
Anchor 2
High block number. 999
Bytes 2000

Free Space
Free block freq. factor. . 0
Free space percentage. . . 0

 Defaults for data set groups
Block Size 8192

DBRC options
Max. image copies. 2
Recovery period. 0
Recovery utility JCL . . . RECOVJCL
Default JCL.
Image copy JCL ICJCL
Online image copy JCL. . . OICJCL
Receive JCL. RECVJCL
Reusable? No

To exit the application, press F3.

Command ==>
F1=Help F3=Exit F6=Groups F12=Cancel

```

Figure 319. Partition Default Information (DSPXPCHA)

### **Important:**

- The Randomizer section is present only if the HALDB is PHDAM.
- The Defaults for data set groups section is present only if there is only one data set group specified during DBDGEN. If there are multiple data set groups, use F6=Groups to display all data set groups using the dialog described in “Defining Data Set Group Information” on page 567.

The following are descriptions of the fields on the Partition Default Information screen:

#### **Database name**

This is the name you selected from the previous panel (see Figure 313 on page 552), it is the name of the HALDB that you are defining.

#### **Automatic definition**

The value can be Yes or No. Specifying yes will cause the partitions to be defined automatically based on your choices for partition name (that must

include percent sign characters for placeholders. See “Automatic Partition Definition” on page 561) and input data set.

Specifying No allows you to specify unique values for each partition.

Yes is the default.

### Input data set

Provide the name of a z/OS data set. Specify a member name if it is a PDS. Each line of the data set must contain a partition selection string or the high key value to be used during partition definition.

**Related Reading:** See “Automatic Partition Definition” on page 561 and “Manual Partition Definition” on page 562 for more details on defining partitions.

### Use defaults for DS groups

This value can be Yes or No. This option determines if all data set groups are automatically set to the same defaults or if you are prompted to provide values for each group. It can be left blank if *automatic definition* is set to Yes.

### Partition name

Enter 1 to 7 alphanumeric characters (the first character must be alphabetic). The Partition name is used as a prefix to the DDNAMEs of its data sets, and so it must be unique.

**Related Reading:** For automatic definitions, you need to include percent signs (%) as placeholders for an alphanumeric sequence number (A-Z, 0-9). See “Automatic Partition Definition” on page 561 for more details.

### Data set name prefix

Any alphanumeric name that is valid in JCL with a maximum length of 37 characters.

### Module name

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is the name of the randomizing module. A randomizing module controls root segment placement in, or retrieval from, the PHDAM HALDB. This parameter is for PHDAM HALDBs only.

### Anchor

1 to 3 numeric digits, with a range of 1 to 255. Specifies the number of root anchor points desired in each control interval or block in the root addressable area of a PHDAM HALDB. The anchor operand must be an unsigned decimal integer and must not exceed a value of 255. Typical values are from 1 to 5. This parameter is for PHDAM HALDBs only.

The default value of this parameter is 1.

### High block number

A numeric unsigned decimal integer value with a range of 0 to  $2^{24} - 1$ . This value specifies the maximum relative block number value that the user wishes to allow a randomizing module to produce for this HALDB. This parameter is for PHDAM HALDBs only. This value determines the number of control intervals or blocks in the root addressable area of an PHDAM HALDB.

A high block number of zero means that no upper limit check is performed on the RBN created by the randomizing module. That is, it is all root addressable area.

**Bytes** A numeric unsigned decimal integer value with a range of 1 to  $2^{24} - 1$ .



## Opening HALDB Partitions

This value specifies the maximum number of bytes of a HALDB record that can be stored into the root addressable area in a series of inserts unbroken by a call to another HALDB record.

A value of 0 (zero) means that all bytes are addressable. It is equivalent to omitting the bytes parameter from the RMNAME keyword in the DBD macro statement in DBDGEN. This parameter is for PHDAM HALDBs only.

**Related Reading:** For more information on the DBD macro statement in DBDGEN, see *IMS Version 9: Utilities Reference: System*.

### Free block freq. factor

A numeric unsigned decimal integer from 0 to 100, except 1. The free block frequency factor (fbff) specifies that every *n*th control interval or block in this data set group is left as free space during HALDB load or reorganization (where fbff=*n*). The range of fbff includes all integer values from 0 to 100 except fbff=1. The default value for fbff is 0.

### Free space percentage

Two numeric unsigned decimal integer digits with a range from 0 to 99. The *fspf* is the free space percentage factor. It specifies the minimum percentage of each control interval or block that is to be left as free space in this data set group.

The default value for *fspf* is 0.

### Block size

A numeric unsigned even decimal integer with a range from 1 to 32,000. *The block size value is used by OSAM only.* An initial value of 4096 is displayed. If the HALDB is not OSAM, the block size field is not displayed.

**Related Reading:** For more information on the INIT.DBDS command, see *IMS Version 9: Database Recovery Control (DBRC) Guide and Reference*.

### Max. image copies

A required parameter you use to specify the number of image copies that DBRC maintains for the identified DBDS. The value must be a unsigned decimal integer from 2 to 255.

### Recovery period

An optional parameter you use to specify the recovery period of the image copies for the specified DBDS.

Specify an unsigned decimal integer from 0 to 999 that represents the number of days that information about the image copies is kept in RECON. If you specify 0, there is no recovery period. 0 is the default.

### Recovery utility JCL

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is an optional parameter you use to specify the name of a member of a partitioned data set of skeletal JCL. When you issue the GENJCL.RECOV command, DBRC uses this member to generate the JCL to run the Database Recovery utility for the identified DBDS.

RECOVJCL is the default member name.

### Default JCL

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is an optional parameter you use to specify an implicit

skeletal JCL default member for the DBDS. The specified member is used by the GENJCL.IC, GENJCL.OIC, and GENJCL.RECOV commands to resolve keywords that you have defined.

### Image copy JCL

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is an optional parameter you use to specify the name of a member of a partitioned data set that contains skeletal JCL. When you issue the GENJCL.IC command, DBRC uses this member to generate the JCL to run the Database Image Copy utility for the identified DBDS.

ICJCL is the default member name.

### Online image copy JCL

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is an optional parameter you use to specify the name of a member of a partitioned data set that contains skeletal JCL. DBRC uses this member when you issue the GENJCL.OIC command to generate the JCL to run the Online Database Image Copy utility for the identified DBDS.

OICJCL is the default member name.

### Receive JCL

Enter 1 to 8 alphanumeric characters (the first character must be alphabetic). This is an optional parameter you use to specify the name of the skeletal JCL member used by the GENJCL.RECEIVE command.

RECVJCL is the default member name.

### Reusable?

The value is either Yes or No. Specifies whether the Database Image Copy utility, or the Online Database Image Copy utility are to reuse previously defined image copy data sets.

No is the default value.

## Automatic Partition Definition

In the Partition Default Information panel (see Figure 319 on page 558) you can set *Automatic definition* to yes and have your partitions defined without intervention. You must have previously created a data set and it must contain your partition selection strings. Specify the name of the data set in the *input data set* field of the panel depicted in Figure 319 on page 558.

Each line of the input data set must contain a partition selection string or the high key value to be used during partition definition. The file must contain only one value on each line of the file, with the value left-justified. The length of the string is determined by the last non-blank character. Each record must contain only one string.

In the partition name field, include percent signs (%) as placeholders for an alphanumeric sequence number (A-Z, 0-9). If you type a partition name like:

Partition name . . . . . IVPD1%%

The partitions are created in the following sequence:

```
IVPD1AA
IVPD1AB
IVPD1AC
.
.
IVPD1AZ
```

## Opening HALDB Partitions

```
IVPD1A0
IVPD1A1
IVPD1A2
.
.
IVPD1A9
IVPD1BA
IVPD1BB
IVPD1BC
.
.
```

When you press Enter, as many partitions as you have key values in the input data set are automatically generated.

If you want to generate partition names that will allow you to preserve your naming sequence when expanding your database in the future, you can specify a partition name like IVP1%%A. The partitions would then be created in the following sequence:

```
IVP1AAA
IVP1ABA
.
.
IVP1AZA
IVP1A0A
IVP1A1A
.
.
IVP1A9A
IVP1BAA
.
.
```

When automatic definition is processing, a status panel is displayed (Figure 320 on page 562). This automatic definition status panel is updated as new partitions are defined.

|                                         |
|-----------------------------------------|
| Automatic definition status             |
| Partitions defined . . . . . : 3 of 166 |
| Elapsed time . . . . . : 00:02          |

Figure 320. Automatic Definition Status

After automatic definition is complete, in the Database Partitions panel (Figure 326 on page 569) you can see that the partition selection string is filled-in with information from your input data set.

## Manual Partition Definition

On the Partition Default Information panel (Figure 319 on page 558) you can set **Automatic definition** to No so that you can define the partitions serially. You can still use an input data set even though you set **Automatic definition** to No.

- If you specify an input data set, you must have previously created the data set and it must contain your partition selection strings. The partition selection string field (in Figure 321 on page 564) is primed from your input data set. For each partition, the partition selection string is filled-in from a record of the input data set. If you try to define more partitions than there are key values, the last key value from the input data set is displayed on the Change Partition panel (Figure 321 on page 564) and you will have to change it manually.

- If you do not specify an input data set to provide the partition high key values, the partition high key values can be added manually for each partition.
  - If you did not specify a partition selection exit, the partition high key values are required.
  - If you did specify a partition selection exit, the partition selection string values are optional.

After you set the defaults and press the enter key, the partition definition screen is displayed. You can modify the fields and press the enter key to define the partition. After you press the enter key, the partition is defined in RECON and the partition definition panel is displayed again so that you can define more partitions. The partition ID is incremented each time a partition is defined. Press the cancel key (PF12) to prevent the displayed partition from being defined.

When you press PF12 to stop defining new partitions, the Partitioned Databases panel (Figure 313 on page 552) is displayed again. You may also choose to stop defining new partitions by pressing F11=List; a list of defined partitions (see “Displaying the List of Defined Partitions” on page 568) is displayed.

Help

Change Partition

Type the field values. Then press Enter.

Database name . . . . . IVPDB1  
Partition name . . . . . IVPD101  
Partition ID. . . . . 1  
Data set name prefix. . . . IMS.DB01.FINANCE.YEAR1998.CURR  
Partition Status. . . . .

Partition Selection String

|     |          |          |          |          |                  |             |
|-----|----------|----------|----------|----------|------------------|-------------|
| +00 | F2F0F0F3 | 4BF2F2F4 | 40F1F77A | F2F57AF0 | 2003.224         | 17:25:0     |
| +10 | F94BF6F3 | F3F12432 | 00000000 | 00001020 | 9.6331           | .....       |
| +20 | A840C1A5 | 85404040 | 40E28195 | 40D196A2 | y Ave            | San Jos     |
| +30 | 856B40C3 | C14040F9 | F5F1F4F1 | 00100020 | e, CA            | 95141....   |
| +40 | 00050000 | 40F0F34B | F0F3F440 | 00000100 | ....             | 03.034 .... |
| +50 | F1F8F0F0 | C9C2D4E2 | C5D9E540 | 40C9C2D4 | 1800IBMSERV      | IBM         |
| +60 | 40C39699 | 974B4040 | F5F5F540 | C2818993 | Corp.            | 555 Bail    |
| +70 | A840C1A5 | 85404040 | 40E28195 | 40D196A2 | y Ave            | San Jos     |
| +80 | 856B40C3 | C14040F9 | F5F1F4F1 | 00403010 | e, CA            | 95141. ..   |
| +90 | 00010500 | 40F0F34B | F2F4F340 | 00324020 | ....             | 03.243 ..   |
| +A0 | 9201913C | D2FE933D | 913C1F66 | 4360A005 | k.j.K.l.j....    | -..         |
| +B0 | 3233A200 | D996A281 | 6BD785A3 | 85996B40 | ..s.Rosa,Peter,  |             |
| +C0 | 000080D4 | 81A3A3F9 | 71C4C6F8 | F1F4C6C2 | ...Matt9.DF814FB |             |
| +D0 | 9311913C | F6F4F8F6 | 943C1F66 | 4360A005 | l.j.6486m....    | -..         |
| +E0 | 41E3453C | 06000045 | 10110220 | 10416220 | .T.....          |             |
| +F0 | FFFFF900 | 00004920 | 18007410 | 94000300 | ..9.....         | m...        |

Randomizer
Module name . . . . . DD41DUP2  
Anchor . . . . . 2  
High block number. . . . 999  
Bytes . . . . . 2000

Free Space
Free block freq. factor. . 0  
Free space percentage. . . 0

Attributes for data set group A
Block Size . . . . . 8192

DBRC options
Max. image copies. . . . 2  
Recovery period. . . . 0  
Recovery utility JCL . . RECOVJCL  
Default JCL. . . . .  
Image copy JCL . . . . ICJCL  
Online image copy JCL. . OICJCL  
Receive JCL. . . . . RECVJCL  
Reusable? . . . . . No

Command ==>  
F1=Help F3=Exit F5=String F6=Groups F12=Cancel

Figure 321. Change Partition (DSPXPPA)

## Important:

- The Randomizer section is present only if the HALDB is PHDAM.
- The data set group attributes section is present only if there is only one data set group specified during DBDGEN. If there is more than one data set group, use F6=Groups to display all data set groups using the dialog described in “Defining Data Set Group Information” on page 567.

The following are descriptions of the fields on the Change Partition screen:

**Partition ID**

A numeric value between 1 and 32 767, but less than the current high partition ID value for this HALDB. The Partition Definition utility generates the partition ID for you, regardless of whether you create your partitions manually or automatically. DBRC records this number in the RECON data set. Data set names include the partition ID of the partition to which they belong.

After an ID is assigned to a partition, you cannot change it.

**Partition Status**

You can disable a partition by typing `disable` in the **Partition Status** field. Usually, you would only disable a partition prior to deleting it.

To enable a disabled partition, type `enable` in the **Partition Status** field.

**Partition High Key**

The Partition High Key field allows you to specify the highest database record root key that a partition can contain. The partition high key is determined by your installation. IMS treats the partition high key as a hexadecimal value. You must enter a value in the Partition High Key field.

The length of the Partition High Key field is determined by the root key length you specify using the `BYTES=` parameter in the `FIELD` statement during DBD definition. If the length of the partition high key you enter is longer than the root key length, an error message displays and you must reduce the length of the partition high key. If the partition high key length is less than the defined root key length, the Partition Definition utility pads the high key value with hex 'FF's up to the defined root key length. The partition high key values must be unique for each partition within a HALDB.

The Partition High Key field consists of two sections: an editable section on the left that displays the partition high key in hexadecimal format and a view-only section on the right that displays the partition high key in alphanumeric format.

You can enter a hexadecimal value directly in the left section of the Partition High Key field. The Partition Definition utility displays the alphanumeric equivalent of this value in the right section of the Partition High Key field.

You can enter an alphanumeric value directly by using the ISPF editor. To access the ISPF editor, press F5 (If you have already entered something in the hexadecimal section, press F5 twice). Once an alphanumeric value is entered, its hexadecimal equivalent is displayed in the left section of the Partition High Key field.

An alphanumeric value can consist of any character information. If the alphanumeric value contains non-display characters, you must identify these characters using hexadecimal notation. In the ISPF editor, a hexadecimal character string is enclosed by single quotation marks and either prefixed or followed with an `x`, for example: `X'c1f201ffff'`.

**Partition Selection String**

The Change Partition panel displays the **Partition Selection String** field only when you have specified a partition selection routine in the HALDB master definition. A partition selection routine uses the partition selection string in hexadecimal format to distribute records across the partitions in your HALDB.

## Opening HALDB Partitions

Partition selection strings are 256 bytes long. If you enter a partition selection string that is less than 256 bytes in length, the Partition Definition utility fills the remaining bytes with X'00'.

The **Partition Selection String** field consists of two sections: an editable section on the left that displays the partition selection string in hexadecimal format and a view-only section on the right that displays the partition selection string in alphanumeric format.

You can enter a hexadecimal value directly in the left section of the **Partition Selection String** field. The Partition Definition utility displays the alphanumeric equivalent of this value in the right section of the Partition Selection String field.

You can enter the partition selection string in an alphanumeric format by using the ISPF editor. To access the ISPF editor, press F5 (If you have already entered something in the hexadecimal section, press F5 twice). After you enter an alphanumeric string, its hexadecimal equivalent is displayed in the left section of the **Partition Selection String** field.

An alphanumeric string can consist of any character information. If an alphanumeric string contains non-display characters, you must identify these characters using hexadecimal notation. In the ISPF editor, a hexadecimal character string is enclosed by single quotation marks and either prefixed or followed with an x, for example: X'c1f201ffff'.

### F5=String

F5 performs two functions: first, when new data is entered into the hexadecimal section of either the **Partition High Key** or the **Partition Selection String** field, F5 enters the data into the Partition Definition utility and displays the alphanumeric equivalent of the hexadecimal string in the right section of the field. Second, if there is no uncommitted data in the hexadecimal section, it displays the alphanumeric editor. Figure 322 is an example of the editor panel that is displayed for the **Partition Selection String** field.

```
EDIT Partition Selection String

Database name : IVPDB1
Partition name : IVPD101

***** ***** Top of Data *****
=COLS> -----1-----2-----3-----4-----5---
000001 '546787789af'x
***** ***** Bottom of Data *****
Command ==>
 F1=Help F3=Exit
```

Figure 322. Selection String Editor (DSPXPKE)

### F6=Groups

Pressing F6 allows you to display the Data set group dialog that is discussed in “Defining Data Set Group Information” on page 567.

### F11=List

Pressing F11 allows you to display the Database partitions panel that is discussed in “Displaying the List of Defined Partitions” on page 568.

If your definition of the HALDB from DBDLIB only allows one data set group, the **Attributes for data set group A** section is displayed. If multiple groups are

allowed, a reminder to press PF6 to work with the groups is displayed. The data set groups dialog is discussed in “Defining Data Set Group Information” on page 567.

**Related Reading:** For a description of the fields shown in Figure 321 on page 564, see the description for Figure 319 on page 558.

## Defining Data Set Group Information

You can define data set group information by pressing F6 on the Change Partition panel (see Figure 321 on page 564). This section describes how to define the data set group information.

If you have multiple data set groups defined for your HALDB and you do not use automatic definition, use the data set group list that is displayed in Figure 323 on page 567 and Figure 324 on page 568.

From the data set groups list, you can change the attributes for each member by typing over the values in the *list* column. There is a special row in the list that allows you to make changes to an entire column of the list; the *all* row. When you type a value in the *all* row and press Enter, the value you typed is propagated to all of the members of the groups. After your changes are made, the *all* row is blanked out.

**Important:** Press F9 to save your changes and then press F12 to return to the previous panel.

The list contains an *action* column. The only action allowed is to display all information for a particular group. Select the group by typing a slash (/) in the *Act* column. Figure 325 on page 568 is where you can modify the values by typing over the existing data and pressing enter.

Help

-----

Change Dataset GroupsRow 1 to 11 of 11

Select an item by pressing a '/' on the desired line then press Enter.

Database name . . . . . : IVPDB1  
Partition name . . . . . : IVPD101  
Partition ID. . . . . : 1  
Data set name prefix. . . . : IMS.DB01.FINANCE.YEAR1998.CURR

| Act | Group | Block<br>Size | Max Image<br>Copies | Recovery<br>Period | Recovery<br>Util. JCL | Default<br>JCL |
|-----|-------|---------------|---------------------|--------------------|-----------------------|----------------|
| ___ | All   |               |                     |                    |                       |                |
| ___ | A     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | B     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | C     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | D     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | E     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | F     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | G     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | H     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | I     | 8192          | 2                   | 0                  | RECOVJCL              |                |
| ___ | J     | 8192          | 2                   | 0                  | RECOVJCL              |                |

Command ==>>  
F1=Help F3=Exit F7=Backward F8=Forward F9=Save F11=Right F12=Cancel

Figure 323. Change Data Set Groups, Part 1 (DSPXPGA)



## Defining Data Set Group Information

Help

---

Change Dataset Groups Row 1 to 11 of 11

Select an item by pressing a '/' on the desired line then press Enter.

Database name . . . . . : IVPDB1  
Partition name . . . . . : IVPD101  
Partition ID. . . . . : 1  
Data set name prefix. . . . : IMS.DB01.FINANCE.YEAR1998.CURR

| Act | Group | Image<br>Copy JCL | On. Image<br>Copy JCL | Receive<br>JCL | Reusable? |
|-----|-------|-------------------|-----------------------|----------------|-----------|
| ___ | All   |                   |                       |                |           |
| ___ | A     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | B     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | C     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | D     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | E     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | F     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | G     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | H     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | I     | ICJCL             | OICJCL                | RECVJCL        | No        |
| ___ | J     | ICJCL             | OICJCL                | RECVJCL        | No        |

Command ==>  
F1=Help F3=Exit F7=Backward F8=Forward F9=Save F11=Right F12=Cancel

Figure 324. Change Data Set Groups, Part 2 (DSPXPGB)

Help

---

Change a Dataset Group

Enter values, then press Enter.

Attributes for data set group B  
Block size . . . . . 8192

DBRC options  
Max. image copies. . . . 2  
Recovery period. . . . 0  
Recovery utility JCL . . RECOVJCL  
Default JCL. . . . .  
Image copy JCL . . . . ICJCL  
Online image copy JCL. . OICJCL  
Receive JCL. . . . . RECVJCL  
Reusable? . . . . . No

Command ==>  
F1=Help F3=Exit F12=Cancel

Figure 325. Change a Data Set Group (DSPXPGC)

**Related Reading:** For descriptions of the fields on the Change Data Set Groups panels, see the field definitions for Figure 319 on page 558.

## Displaying the List of Defined Partitions

When you choose *Open database partitions* from the Partitioned Databases panel (Figure 313 on page 552), the Database Partitions list is displayed. The list is displayed immediately if there are already partitions defined for the HALDB, or it is displayed after you define partitions for HALDBs that do not already have partitions. See Figure 326 on page 569 for an example of the Database Partitions list. The list is displayed as a table that you can scroll up and down in.

File Edit View Help

Database Partitions

Row 1 to 15 of 166

Select an item by pressing a '/' on the desired line then press Enter.

Database name . . . . . : IVPDB1

| Act | Name    | Id | Data set name prefix    | Status   |
|-----|---------|----|-------------------------|----------|
| —   | IVPD101 | 1  | IMS.DB01.FINANCE.YE2002 |          |
| —   | IVPD102 | 2  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD103 | 3  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD104 | 4  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD105 | 5  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD106 | 6  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD107 | 7  | IMS.AB01.PAYROLL.YE2002 |          |
| —   | IVPD108 | 8  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD109 | 9  | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD110 | 10 | IMS.AB01.PAYROLL.YE2002 | Disabled |
| —   | IVPD111 | 11 | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD112 | 12 | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD113 | 13 | IMS.TP01.PAYROLL.YE2002 |          |
| —   | IVPD114 | 14 | IMS.DB01.PAYROLL.YE2002 |          |
| —   | IVPD115 | 15 | IMS.DB01.FINANCE.YE2002 |          |

Command ==>

F1=Help F3=Exit F7=Backward F8=Forward F11=Right

Figure 326. Database Partitions Panel, Sorted by Partition ID (DSPXPLA)

The Database Partitions list panel has the HALDB name at the top and table information below. Descriptions of the table columns are listed below.

**Act** This is the line command input field where you can invoke commands such as open, copy, and the other commands listed in “The Partition List Line Commands” on page 572.

**Name** The name column contains the partition name that was provided during the definition of the partition. This is the initial sort sequence.

**Related Reading:** For a more detailed description of the partition name, see “Opening HALDB Partitions” on page 555.

**Id** This is the partition ID number. The number does not have to be sequential.

**Related Reading:** For a more detailed description of the partition ID, see “Displaying the List of Defined Partitions” on page 568.

**Data set name prefix**

The data set name prefix contains the name of the data set that was provided during the definition of the partition.

**Related Reading:** For a more detailed description of the data set name prefix, see “Opening HALDB Partitions” on page 555.

**Status** A partition can be disabled by selecting a partition and typing "disable" in the Partition status field of the Change Partition panel. When a partition is disabled, "Disabled" appears in the Status column for that partition in the Database Partitions panel. For enabled partitions, the column remains blank.

From the Database Partitions list panel Figure 326, you can work with individual partitions. To use the File Action bar, type a slash (/) in the *Act* line command column for the partition you want to work with, then put the cursor on the *File* action bar choice and press Enter. Select the action you want to perform by typing the number or by positioning the cursor on the choice then pressing enter again.

## Displaying Partitions List

You can invoke the Database Partitions panel (Figure 327) to show the values by pressing your PF11 key.

File Edit View Help

Database Partitions
Row 1 to 4 of 166

Select an item by pressing a '/' on the desired line then press Enter.

Database name . . . . . : IVPDB1

| Act | Name                                    | Partition Selection String |
|-----|-----------------------------------------|----------------------------|
| —   | IVPD001                                 |                            |
|     | +00 F2F0F0F3 4BF2F2F4 40F1F77A F2F57AF0 | 2003.224 17:25:0           |
|     | +10 F94BF6F3 F3F12432 00000000 00001020 | 9.6331.....                |
|     | +20 A840C1A5 85404040 40E28195 40D196A2 | y Ave San Jos              |
|     | +30 856B40C3 C14040F9 F5F1F4F1 00100020 | e, CA 95141....            |
|     | +40 00050000 40F0F34B F0F3F440 00000100 | ... 03.034 ...             |
|     | +50 F1F8F0F0 C9C2D4E2 C5D9E540 40C9C2D4 | 1800IBMSERV IBM            |
|     | +60 40C39699 974B4040 F5F5F540 C2818993 | Corp. 555 Bail             |
|     | +70 A840C1A5 85404040 40E28195 40D196A2 | y Ave San Jos              |
|     | +80 856B40C3 C14040F9 F5F1F4F1 00403010 | e, CA 95141. ..            |
|     | +90 00010500 40F0F34B F2F4F340 00324020 | ... 03.243 ..              |
|     | +A0 9201913C D2FE933D 913C1F66 4360A005 | k.j.K.l.j.....             |
|     | +B0 3233A200 D996A281 6BD785A3 85996B40 | ..s.Rosa,Peter,            |
|     | +C0 000080D4 81A3A3F9 71C4C6F8 F1F4C6C2 | ..Matt9.DF814FB            |
|     | +D0 9311913C F6F4F8F6 943C1F66 4360A005 | l.j.6486m....              |
|     | +E0 41E3453C 06000045 10110220 10416220 | .T.....                    |
|     | +F0 FFFF900 00004920 18007410 94000300  | ..9.....m...               |
| —   | IVPD002                                 |                            |
|     | +00 F2F0F0F3 4BF2F2F4 40F1F87A F1F27AF0 | 2003.224 18:12:0           |
|     | +10 F94BF6F3 F3F12432 00000000 00001020 | 9.6331.....                |

Command ==>

F1=Help F3=Exit F7=Backward F8=Forward F11=Right

Figure 327. Database Partitions Panel, Sorted by Key (DSPXPLB)

The Database Partitions list panel has the HALDB name at the top and table information below. Descriptions of the table columns for Figure 327 on page 570 are presented below.

**Act** This is the line command input field where you can invoke commands such as open, copy, and the other commands listed on “The Partition List Line Commands” on page 572.

**Name** The name column contains the partition name that was provided during the definition of the partition. This is the initial sort sequence.

**Related Reading:** For a more detailed description of the partition name, see “Opening HALDB Partitions” on page 555.

**Partition Selection String**

The partition selection string is used by the partition selection routine.

**Related Reading:** For a more detailed description of the partition selection string, see “Opening HALDB Partitions” on page 555.

You can invoke the Database Partitions panel to show the Randomizer values by pressing your PF11 key (Figure 328 on page 571).

```

File Edit View Help

 Database Partitions Row 1 to 15 of 166

Select an item by pressing a '/' on the desired line then press Enter.

Database name : IVPDB1

Act Name Module Anchor High block Bytes - Free Space -

___ IVPD101 DD41DUP2 2 999 2000 0 0
___ IVPD102 DD41DUP2 2 999 2000 0 0
___ IVPD103 DD41DUP2 2 999 2000 0 0
___ IVPD104 DD41DUP2 2 999 2000 0 0
___ IVPD105 DD41DUP2 2 999 2000 0 0
___ IVPD106 DD41DUP2 2 999 2000 0 0
___ IVPD107 DD41DUP2 2 999 2000 0 0
___ IVPD108 DD41DUP2 2 999 2000 0 0
___ IVPD109 DD41DUP2 2 999 2000 0 0
___ IVPD110 DD41DUP2 2 999 2000 0 0
___ IVPD111 DD41DUP2 2 999 2000 0 0
___ IVPD112 DD41DUP2 2 999 2000 0 0
___ IVPD113 DD41DUP2 2 999 2000 0 0
___ IVPD114 DD41DUP2 2 999 2000 0 0
___ IVPD115 DD41DUP2 2 999 2000 0 0
___ Command ==>
F1=Help F3=Exit F7=Backward F8=Forward F11=Right

```

Figure 328. Database Partitions Panel, Sorted by Name (DSPXPLC)

**Important:** The Randomizer section is present only if the HALDB is PHDAM.

The Database Partitions list panel has the HALDB name at the top and table information below. Descriptions of the table columns for Figure 328 on page 571 are presented below.

**Act** This is the line command input field where you can invoke commands such as open, copy, and the other commands listed in “The Partition List Line Commands” on page 572.

**Name** The name column contains the partition name provided during the definition of the partition. This is the initial sort sequence.

**Related Reading:** For a more detailed description of the partition name, see “Opening HALDB Partitions” on page 555.

**Module**

The module column contains the module name of the randomizing module.

**Related Reading:** For a more detailed description of the module name see Figure 319 on page 558.

**Anchor**

The anchor column contains the number of root anchor points.

**Related Reading:** For a more detailed description of the anchor see Figure 319 on page 558.

**High block**

The high block column contains the high block number.

**Related Reading:** For a more detailed description of the high block number see Figure 319 on page 558.

**Bytes** For a more detailed description of the bytes field see Figure 319 on page 558.

## Displaying Partitions List

FBFF The FBFF column contains the free block frequency factor.

**Related Reading:** For a more detailed description of the free block frequency factor in Figure 319 on page 558.

FSPF The FSPF column contains the free space percentage factor.

**Related Reading:** For a more detailed description of the free space percentage factor see Figure 319 on page 558.

To use line commands, type the command in the *Act* column to the right of the partition you want to use. You can type multiple line commands (only one per partition, though) on the Database Partitions panel: the commands are executed serially starting from the top.

## The Partition List Line Commands

Line commands will allow you to perform the following actions:

### Delete a partition

Type a D in the line command field and press Enter. A delete confirmation panel is displayed. Type a 1 in the option field and press Enter to confirm the delete or press the cancel key to cancel the delete.

If you are deleting several partitions at once, and wish to accept all of the deletes, you can type a 2 in the option field. It is reset to blank each time the partition list is displayed.

### Copy a partition

Type a C in the line command field to define a new partition using the attributes of the selected partition. The partition name must be unique. You change the partition information using the Change Partition panel (see Figure 321 on page 564).

### Open a partition

Type an O in the line command field to open a partition. You can then change partition information. The partition name and ID cannot be changed. Press Enter to commit or press the cancel key to discard your changes. You change the partition information using the Change Partition panel (see Figure 321 on page 564).

### Print partition information

Type a P in the line command field to print partition information for the selected partition. The information will not be routed to a printer immediately; instead it is added to the ISPF list data set.

## The Partition List Action Bar

The list of partitions in the Database Partitions panel can be manipulated with line commands or by using the File action bar choices (Figure 329).

File Edit View Help

1. New partition . . .
2. Open partition
3. Open dataset groups
4. Print partition information
5. Print partition view

Figure 329. File Action Bar Choices

### New partition

You can create new partitions using the same panels that you used when you initially created partitions. See Figure 319 on page 558.

### Open partition

You can open the selected partitions and modify them as desired. See Figure 321 on page 564.

### Open data set groups

You can manipulate the data set group members using the panels described in “Defining Data Set Group Information” on page 567.

### Print partition information

Information about the selected partitions is written to the ISPF list data set.

### Print partition view

The information in the currently-displayed view is written to the ISPF list data set.

The list of partitions in the Database Partitions can be sorted in various ways using the Edit action bar choice (Figure 330).

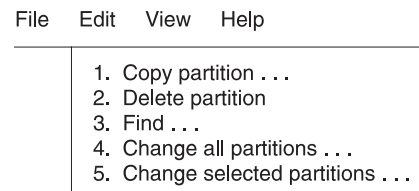


Figure 330. Edit Action Bar Choices

### Copy partition...

Type a slash (/) in the line command field and use the Edit - Copy partition pull-down panel to define a new partition using the attributes of the selected partition. The partition name and the ID must be unique.

The Change Partition panel is then displayed, see Figure 321 on page 564, and you can create new partitions serially. The values shown in the panel are filled-in using the attributes of the selected partition.


### Delete partition

Type a slash (/) in the line command field and use the Edit - Delete a partition pull-down panel to delete partitions. A delete confirmation panel is displayed. You can press Enter to confirm delete or press the cancel key to ignore the delete.

**Find...** You can search the partition list for a selected character string. Only simple character values can be specified. The cursor is placed on the partition that contains the search value.

The search string is not case sensitive. It will search on any field, not just the currently displayed fields on the Database Partitions panels (Figure 331 on page 574).

## Displaying Partitions List

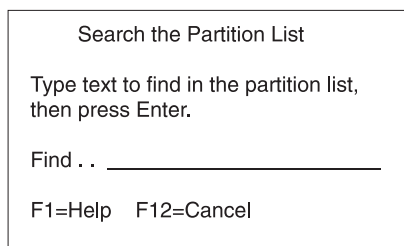

Search the Partition List

Type text to find in the partition list,  
then press Enter.

Find . . \_\_\_\_\_

F1=Help F12=Cancel

Figure 331. Searching the Partition List


### Change all partitions...

Use the Edit - Change all partitions pull-down panel to change individual fields for all of the partitions in the HALDB. The partition name and the ID cannot be changed. See “Change All Partitions.”

### Change selected partitions...

Type a slash (/) in the line command field to change a partition and use the Edit - Change selected partitions pull-down panel to change individual fields for the selected partitions. The partition name and the ID cannot be changed. The process is the same as that described in “Change All Partitions,” but only the selected partitions are changed.

The list of partitions in the Database Partitions can be sorted in various ways by using the View action bar choice (Figure 332).

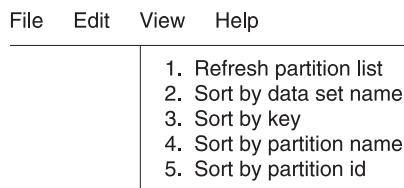

File Edit View Help

- 1. Refresh partition list
- 2. Sort by data set name
- 3. Sort by key
- 4. Sort by partition name
- 5. Sort by partition id

Figure 332. View Action Bar Choices

Help information is available using the Help action bar choice.

## Change All Partitions

Figure 333 on page 575 is an example of the Change Partition panel. The entry fields are blank. Make changes only to the fields that you want to change. The field changes are applied to all of the partitions.

**Important:** The same process is used for Change selected partitions except that the changes are only applied to the partitions selected from the list with a slash (/).

If you want to change a character field to blanks, type a single slash (/) character so that it is the only character in the field.

Help

-----

Change Partition

Press Enter to continue.

Database name. . . . . : IVPDB1

Partition name . . . . . :

Partition ID . . . . . :

Data set name prefix . . . . \_\_\_\_\_

Status. . . . . \_\_\_\_\_

Partition Selection String

+00 \_\_\_\_\_

+10 \_\_\_\_\_

+20 \_\_\_\_\_

+30 \_\_\_\_\_

+40 \_\_\_\_\_

+50 \_\_\_\_\_

+60 \_\_\_\_\_

+70 \_\_\_\_\_

+80 \_\_\_\_\_

+90 \_\_\_\_\_

+A0 \_\_\_\_\_

+B0 \_\_\_\_\_

+C0 \_\_\_\_\_

+D0 \_\_\_\_\_

+E0 \_\_\_\_\_

+F0 \_\_\_\_\_

Randomizer

Module name . . . . . DD41MOD3

Anchor . . . . . \_\_\_\_\_

High block number. . . . . \_\_\_\_\_

Bytes . . . . . \_\_\_\_\_

Free Space

Free block freq. factor. . \_\_\_\_\_

Free space percentage. . . \_\_\_\_\_

Command ==>

F1=Help F3=Exit F5=String F6=Groups F12=Cancel

Figure 333. Change Partition Panel (DSPXPPB)

**Important:**

- The Randomizer section is present only if the HALDB is PHDAM.
- The data set groups section is present only if there is only one data set group specified during DBDGEN. If there is more than one data set group, use F6=Groups to display all data set groups using the dialog described in “Defining Data Set Group Information” on page 567.

Figure 334 on page 576 shows the Change Dataset Groups panel.



## Displaying Partitions List

```
Help

Change Dataset Groups Row 1 to 10 of 10

Select an item by pressing a '/' on the desired line then press Enter.

Database name : IVPDB1
Partition name : IVPD101
Partition ID. : 1
Data set name prefix. . . : IMS.DB01.FINANCE.YEAR1998.CURR

Act Group Block Max Image Recovery Recovery Default
 Group Size Copies Period Util. JCL JCL
--- --- --- --- --- --- ---
 All --- --- --- --- --- ---
 A --- --- --- --- --- ---
 B --- --- --- --- --- ---
 C --- --- --- --- --- ---
 D --- --- --- --- --- ---
 E --- --- --- --- --- ---
 F --- --- --- --- --- ---
 G --- --- --- --- --- ---
 H --- --- --- --- --- ---
 I --- --- --- --- --- ---
 J --- --- --- --- --- ---
Command ==>
F1=Help F3=Exit F7=Backward F8=Forward F9=Save F11=Right F12=Cancel
```

Figure 334. Change Data Set Groups, Part 1 (DSPXPGA)

**Related Reading:** For a description of the fields not listed here, see the description for Figure 318 on page 556.

## Opening Database Information

When you choose Open database information from the Partitioned Databases panel shown in Figure 313 on page 552, you are shown information about the HALDB which was saved when you first defined partitions for the HALDB (Figure 335).

```
Help

Partitioned Database Information

Type the field values. Then press Enter to continue.

Database name : IVPDB1

Master Database values
Part. selection routine . . . DFSIVD1
RSR global service group . . .
RSR tracking type
Share level 0
Database organization . . . : PHDAM
Recoverable? Yes
Number of data set groups . : 1
Online Reorganization Capable: Yes

To exit the application, press F3.

Command ==>
F1=Help F3=Exit F12=Cancel
```

Figure 335. Partitioned Database Information (DSPXPOA)

**Related Reading:** For a description of the fields shown in Figure 335, see the description for Figure 318 on page 556.

You can modify the fields and press Enter to change the values in RECON. If you press cancel or exit, any changes you entered on this panel are discarded.

Deleting Database Information

When you choose to delete database information from Figure 313 on page 552, you are presented with the Delete a Database panel (see Figure 336). You must type a slash (/) character and press Enter to confirm the delete. When you confirm it, the information about the HALDB and about all of its partitions is deleted from RECON.

There is no way to undo the delete. You may wish to perform an export prior to deleting a HALDB from RECON. See “Exporting Database Information” for information about performing an export.

Help

-----

Delete Database Information

Type '/' to confirm the delete of the database information from RECON.  
Then press Enter.

Database name . . . . . : IVPDB1

Confirm database delete . \_\_

Command ==>  
F1=Help    F3=Exit    F12=Cancel

Figure 336. Delete a Database (DSPXPDA)

Exporting Database Information

When you choose to Export database information from Figure 313 on page 552, the information is stored in the partitioned data set that you specify. It is saved as an ISPF table and so must have the attributes of ISPTLIB data sets (record format = fixed block, record length = 80, data set organization = PDS (or PDS/E)). Figure 337 shows the Export a Database panel.

Help

-----

Export a Database

Type a data set name. Then press Enter.

Database Name . . . . . : IVPDB1

Output dataset name. . . . . 'TEST.RSR.PARTS'

Output member name . . . . . IVPDB1

To exit the application, press F3.

Command ==>  
F1=Help    F12=Cancel

Figure 337. Export a Database (DSPXPEA)

Field    Description

Database name  
The HALDB name that was specified in the primary panel.

## Exporting Database Information

### Output data set name

The output data set name is the name of the data set that will contain the partition information.

---

## Importing Database Information

When you choose to Import database information from Figure 313 on page 552 you can specify the name of the PDS or PDS/E that contains the information.

**Important:** Only an exported table can be used for the import.

After you press Enter, the table is read and each partition is defined.

Figure 338 shows the Import a Database panel.

```
Help

 Import a Database

Type a dataset name. Then press Enter.

Database name : IVPDB1
Input dataset name. . . . 'PROD.RSR.PARTS'
Input member name IVPDB1

Processing option _ 1. Stop on first error
 2. Try all partitions

Command ==>
F1=Help F3=Exit F12=Cancel
```

Figure 338. Import a Database (DSPXPJA)

### Database name

The HALDB name that was specified on the primary panel.

### Input data set name

The input data set name is the name of the data set that contains the partition information. The data set must be partitioned.

### Input member name

The input member name is the name of a member within the input data set. The member must have been exported using the HALDB Partition Definition utility .

### Processing option

Each partition in the imported table can be defined in RECON. If there are errors, you can choose to try the remaining partitions or to stop the process.

---

## Displaying the IMS Concatenation

You can look at the concatenation of data sets that are allocated to the IMS DD name. The data sets are displayed using the ISRDDN command that is part of the ISPF product (Figure 339 on page 579).

| Current Data Set Allocations |             |     |                              |                      |                             |  | Line 1 of 2 |  |  |  |  |  |  |  |
|------------------------------|-------------|-----|------------------------------|----------------------|-----------------------------|--|-------------|--|--|--|--|--|--|--|
| Volume                       | Disposition | Act | DDname                       | Data Set Name        | List Actions: B E V F C I Q |  |             |  |  |  |  |  |  |  |
| SYS151                       | SHR,KEEP    | >   | IMS                          | IMSIVP91.DBDLIB      |                             |  |             |  |  |  |  |  |  |  |
| SYS335                       | SHR,KEEP    | >   | IMS                          | IMS91.SANJOSE.DBDLIB |                             |  |             |  |  |  |  |  |  |  |
| -----                        |             |     | End of Allocation List ----- |                      |                             |  |             |  |  |  |  |  |  |  |
| Command ==>                  |             |     |                              |                      | Scroll ==> CSR              |  |             |  |  |  |  |  |  |  |

Figure 339. The IMS Concatenation (ISRDDN)

Use the help (F1) information provided by ISRDDN and in the ISPF manuals to learn more about the ISRDDN utility. When you exit the ISRDDN utility, the HALDB Partition Definition utility panels are displayed again.

## Selecting an IMS Configuration Using the Partition Definition Utility

You can control which RECON data set and which DBDLIB data sets are used. For this purpose, a set of RECON and DBDLIB data sets are considered a configuration.

The configuration is a name that you specify that identifies a set of DBD libraries and a set of RECON data sets. If you already have the IMS ddname allocated from the logon procedure and if you have the IMS.SDFSRESLs allocated to the STEPLIB DD name, you do not need to use the Configuration option. If you do define and select a configuration, those data sets will override the allocations from the logon procedure.

### 1. IMS ddname

The IMS ddname includes the data sets that contain the DBDLIB members. The RECON / DBDLIB Configurations panels re-allocate the IMS ddname.

### 2. RECON allocation

The STEPLIB allocation contains RECON1, RECON2, and RECON3 members that name the actual RECON data sets. IMS uses those members to determine which RECON data sets to use. There is an alternative to using a STEPLIB: use the TSOLIB command to change the search order that TSO/E uses to find commands and programs.

The RECON / DBDLIB Configurations panels re-allocates the IMS ddname and will allocate the RECON1, RECON2, and RECON3 ddnames to explicitly specify the RECON data sets. The STEPLIB concatenation is not modified.

Figure 340 on page 580 shows the RECON/DBDLIB Configurations panel.

## Selecting an IMS Configuration Using the Partition Definition Utility

```

 RECON / DBDLIB Configurations Row 1 to 5 of 5

To create a new configuration, fill in the first line and press Enter.
Select a default by type '/' on the Act column then press Enter.
You can use 'O' to open or 'D' to delete a configuration.

Act Current Name Description

 * SDFSRESL IMS V9R1 datasets
 TESTM Test IMS for Matt
 TESTP Test IMS for Peter
 TESTI Test IMS
***** Bottom of data *****

Command ==>
F1=Help F3=Exit F7=Up F8=Down F12=Cancel

```

Figure 340. User Configurations (DSPXPMB)

A list of configurations can be maintained when you select option 7 from the Partitioned Databases panel. The list is initially empty and it can be added-to by filling in the blank line. The active configuration is identified by an asterisk (\*) in the Current column. Figure 341 shows the Configurations Details panel.

Rows from the list can be deleted by using a line command of d. Only the configuration is deleted from the list. The data sets that are named in the configuration are not deleted.

The data sets named in the configuration are set or changed by using a line command of o for open.

```

 Configuration Details

Type in values in the fields and press Enter to continue.

Configuration name TEST1

Description Test IMSRECON dataset names
 RECON1 dataset 'TEST.PARTS.RECON1'
 RECON2 dataset 'TEST.PARTS.RECON2'
 RECON3 dataset

DBDLIB dataset names
 DBDLIB dataset 1 . . . 'TEST.PARTS.DBDLIB'
 DBDLIB dataset 2 . . .
 DBDLIB dataset 3 . . .
 DBDLIB dataset 4 . . .
 DBDLIB dataset 5 . . .
 DBDLIB dataset 6 . . .
 DBDLIB dataset 7 . . .
 DBDLIB dataset 8 . . .
 DBDLIB dataset 9 . . .
 DBDLIB dataset 10 . . .

Command ==>
F13=Help F15=Exit F19=Up F20=Down F22=Actions

```

Figure 341. Configuration Details Panel (DSPXPMC)

## Selecting an IMS Configuration Using the Partition Definition Utility

The RECON data sets are separately allocated to the RECON1, RECON2, and RECON3 file names.

The DBDLIB data sets are concatenated to the IMS file name.

**Important:** When you specify a generic HALDB name in the Partitioned Database panel; option 6 will only work if you use four (4) or fewer DBD data sets. However, for greater flexibility you can specify up to ten (10) data sets.

---

## Using Batch to Export or Import Partition Information

The output from the export of a HALDB is a member of a PDS. The information about the HALDB is saved in the form of an ISPF table. The ISPF table is used as input for the import process. The import can be done from the ISPF panels or from a batch job.

The batch import of a HALDB can be done by submitting a batch ISPF job similar to the job shown in Figure 342. ISPF is invoked in batch, so all ISPF DDNAMES are required.

```
//DSPXRUN JOB ...
//*
//DSPXRUN EXEC PGM=IKJEFT01,DYNAMNBR=50,REGION=6M
//STEPLIB DD DSN=IMSIVP91.SDFSRESL,DISP=SHR /* IMS.SDFSRESL */
//SYSPROC DD DSN=IMSIVP91.SDFSEEXEC,DISP=SHR /* IMS rexx execs */
//IMS DD DSN=your.local.DBDLIB,DISP=SHR
//RECON1 DD DSN=IMSIVP91.RECON1,DISP=SHR
//RECON2 DD DSN=IMSIVP91.RECON2,DISP=SHR
//RECON3 DD DSN=IMSIVP91.RECON3,DISP=SHR
//ISPPROF DD DSN=&&PROFILE;, /* dummy ISPF profile */
// UNIT=SYSDA,DISP=(NEW,DELETE),
// SPACE=(3200,(30,30,1)),DCB=(RECFM=FB,LRECL=80,BLKSIZE=3200)
//ISPPLIB DD DSN=IMSIVP91.SDFSPLIB,DISP=SHR /* IMS ISPF panels */
//ISPSLIB DD DSN=IMSIVP91.SDFSMLIB,DISP=SHR /* IMS ISPF skeletons */
//ISPMLIB DD DSN=IMSIVP91.SDFSMLIB,DISP=SHR /* IMS ISPF messages */
// DD DSN=ISP.ISPMLIB,DISP=SHR
//ISPTLIB DD DSN=IMSIVP91.SDFSSTLIB,DISP=SHR /* IMS ISPF tables */
// DD DSN=ISP.ISPTLIB,DISP=SHR
//ISPLLOG DD SYSOUT=*,DCB=(RECFM=VA,LRECL=125,BLKSIZE=129)
//SYSPRINT DD SYSOUT=*,DCB=(RECFM=VA,LRECL=125,BLKSIZE=129)
//SYSOUT DD SYSOUT=*

//PARTLOG DD SYSOUT=* /* See note following example */
//SYSPRT DD SYSOUT=*,DCB=(RECFM=F,LRECL=255,BLKSIZE=255)
//SYSTSIN DD *
// ISPSTART CMD(+
// DSPXRUN IMPORT DSN('PROD.RSR.PARTS') +
// DBN(IVPDB1) MEM(IVPDB1) OPT(2))
// *
```

Figure 342. Sample JCL for Batch Import


**Note:** The PARTLOG DD statement is no longer required as of APAR PK34866. The output previously routed to the data set described by the PARTLOG DD statement is now routed to the data set described by the SYSPRINT DD statement. You do not need to remove the PARTLOG DD statement from your existing JCL. If it is present, it is ignored.

The batch job executes the standard ISPF command ISPSTART that sets up the ISPF environment then starts the DSPXRUN command. The DSPXRUN command identifies the HALDB, the import file to use, and the processing options.

### DSPXRUN Command Syntax

The DSPXRUN command can be used to import HALDB information in a batch environment.

The following diagram shows the syntax of the DSPXRUN command:

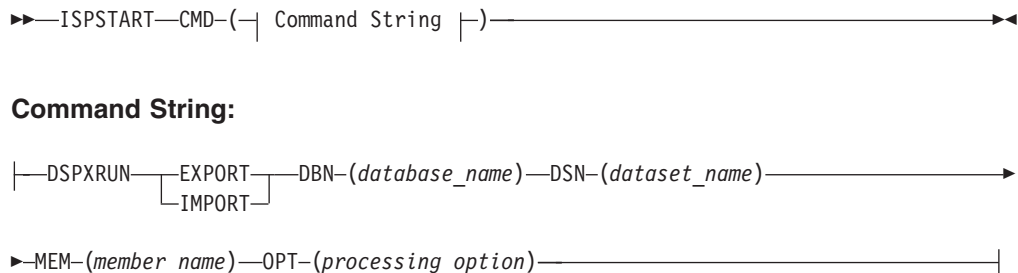

The values are essentially the same as the values required for the foreground import (see “Importing Database Information” on page 578).

#### EXPORT

When you choose to export database information using a batch job, the information is stored in the partitioned data set that you specify. The information is saved as an ISPF table and so it must have the attributes of ISPTLIB data sets: record format = fixed block, record length = 80, and data set organization = PDS (or PDS/E).

**Related Reading:** For more information on ISPTLIB data sets, see *ISPF User's Guide, Volume 1*.

#### IMPORT

When you choose to import database information using a batch job, the partition information is read from a partitioned data set that you specify. The partition information is defined to the RECON data sets.

#### database\_name

The HALDB name that was specified on the primary panel.

#### dataset\_name

The input data set name is the name of the data set that contains the partition information. The data set must be partitioned.

#### member\_name

The input member name is the name of a member within the input data set. The member must have been exported using the HALDB Partition Definition utility.

#### processing\_option

The processing option field lets you determine what the Partition Definition utility does in the event that an error occurs when it processes a partition from the imported table. The Partition Definition utility records each partition it imports in RECON. If there are errors, you can choose to try the remaining partitions or to stop the process. The valid values are 1 or 2:

- 1 Stop on first error (prior imported partitions are retained)
- 2 Try all partitions

The OPT parameter is ignored during export processing.

## DSPXRUN EXPORT Sample Output

Exporting database IVPDB1 using JCL similar to Figure 342 on page 581 would result in the following output:

```
DSPM142I Start export to MEM=IVPDB1 in DSN='PROD.RSR.PARTS'
 from DBN=IVPDB1
DSPM143I The export file contains partition IVPDB11
DSPM143I The export file contains partition IVPDB12
DSPM143I The export file contains partition IVPDB13
DSPM219I Table IVPDB1 was created successfully to dataset
 'PROD.RSR.PARTS'
```

## DSPXRUN IMPORT Sample Output

Importing database IVPDB1 using JCL similar to Figure 342 on page 581 would result in the following output:

```
DSPM283I Start Import to DBN=IVPDB1 from MEM=IVPDB1 in
 DSN='PROD.RSR.PARTS' Options=2
DSPM285I Imports start at 23/22/14 11:55
DSPM284I Import successful for partition IVPDB11
DSPM284I Import successful for partition IVPDB12
DSPM284I Import successful for partition IVPDB13
DSPM282I 3 of a total 3 partitions from table IVPDB1
 were imported to database successfully.
```





---

## Appendix F. Output Data Set Requirements for HALDB Online Reorganization

This appendix describes the detailed requirements and attributes for the output data sets used during online reorganization of HALDB partitions. These requirements are described in the following topics:

- “HALDB Online Reorganization Requirements for Existing Output Data Sets”
- “Attributes of Automatically-Created Output Data Sets”

---

### HALDB Online Reorganization Requirements for Existing Output Data Sets

If an existing output data set does not meet the requirements described in this section, IMS displays an error message and the online reorganization for the HALDB partition does not begin.

An OSAM output data set has the following requirements:

- Must be cataloged
- Must be a DASD data set
- Must not be a VSAM data set, except for the primary index data set of a PHIDAM database
- Must not be a PDS, PDSE, or a member of a PDS or PDSE

A VSAM output data set has the following requirements:

- Must be a VSAM entry-sequenced data set (ESDS), except for the primary index data set of a PHIDAM database
- Must have the REUSE attribute
- Must have a fixed-length record length that is identical to that of the corresponding input data set
- Must have a control interval size that is identical to that of the corresponding input data set
- Must have a SHAREOPTIONS attribute value that is at least as high as that of the corresponding input data set if the database is defined to DBRC with a SHARELVL attribute value of 2 or 3

A primary index data set has the following requirements:

- Must be a VSAM key-sequenced data set (KSDS)
- Must have the same key offset and length as the corresponding input KSDS
- Must have the other required characteristics listed for VSAM output data sets

---

### Attributes of Automatically-Created Output Data Sets

For those output data sets that do not already exist at the beginning of the initialization phase of an online reorganization, IMS creates the data sets with the following attributes:

### **Number of Volumes**

If a particular input data set is SMS-managed, IMS creates the corresponding output data set with the same number of volumes.

If the input data set is not SMS-managed, IMS automatically creates the corresponding output data set only when the input data set resides on a single volume. For a non-SMS-managed input data set that resides on multiple volumes, you must create the corresponding output data set before starting the online reorganization.

### **Location of SMS-managed output data sets**

If a particular input data set is SMS-managed, the corresponding output data set is also SMS-managed, and uses the same storage class as the input data set.

Your site's storage administrator must ensure that this storage class refers to a storage group with sufficient space to hold the output data set, or that the automatic class selection (ACS) routine selects an appropriate storage class for the data set.

### **Location of non-SMS-managed, non-VSAM output data sets**

Regardless of the type of DASD on which the input data set resides, IMS creates the corresponding non-VSAM output data set using the equivalent of a DD statement UNIT=SYSALLDA parameter.

When it creates the output data set, IMS does not request any specific volume serial number, thus allowing the data set to be created on a storage volume or, if no storage volume is available, on a public volume.

### **Location of non-SMS-managed, VSAM output data sets**

IMS creates a VSAM output data set on the same volume as the corresponding input data set. This restriction can limit the usefulness of automatically creating a VSAM data set that is not SMS-managed.

### **Size of output data sets on a single volume**

When the input data set has extents on only one DASD volume, IMS creates the output data set on a single volume using the equivalent of a DD statement VOLUME=(,.,1) parameter.

The amount of primary space for the output data set is derived from the space allocation of the input data set:

- For a non-VSAM data set, the primary space is the total amount of space in the first five extents on the volume.
- For a VSAM data set, the primary space is the primary space allocation used when the input data set was created.

If you specified secondary space amount for the input data set, IMS uses this same secondary amount for the output data set.

To reserve approximately the same amount of space for the output data set as was reserved for the input data set, regardless of the DASD types involved, IMS requests the space for the output data set as a number of OSAM blocks or VSAM records. For input data sets that did not specify a number of OSAM blocks or VSAM records, IMS converts the cylinder or track allocation to an equivalent number of blocks or records.

| An automatically created output data set could have a considerably  
| different amount of available DASD space than was used for the  
| input data set. For example, for an input data set that used  
| secondary allocation, the automatic creation process reserves the  
| primary space for the output data set, but there might not be  
| enough space on the volume for secondary allocation either during  
| the online reorganization or during later database processing.

| **Size of output data sets on multiple volumes (SMS-managed only)**

| IMS automatically creates multiple-volume output data sets only  
| when the input data set (and, therefore, the output data set) is  
| SMS-managed. You can determine the storage class by examining  
| the input data set or the site's ACS routine.

| Although it is not strictly a requirement for SMS-managed  
| multiple-volume output data sets, you should ensure that the  
| storage class specifies the guaranteed-space attribute. By specifying  
| the guaranteed-space attribute, you allow VSAM to use the  
| primary-space allocation for *each* of the volumes when it creates  
| the output data sets. Secondary space is used as needed. However,  
| even with the guaranteed-space attribute, the output data sets  
| might not have the same amount of space as the input data sets,  
| especially if secondary-space allocation was used for the input data  
| sets.

| The requested primary and secondary space is based on the input  
| data set's space allocation on the first DASD volume.



---

## Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing  
Legal and Intellectual Property Law  
IBM Japan, Ltd.  
1623-14, Shimotsuruma, Yamato-shi  
Kanagawa 242-8502 Japan

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:**

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation  
J46A/G4  
555 Bailey Avenue  
San Jose, CA 95141-1003  
U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information is for planning purposes only. The information herein is subject to change before the products described become available.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample

programs are provided "AS IS," without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work, must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. \_enter the year or years\_. All rights reserved.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

---

## Programming Interface Information

This book is intended to help the database administrator manage IMS databases.

This book also documents general-use interface and Associated Guidance Information, Product-sensitive Programming Interface and Associated Guidance Information, and diagnosis, modification or tuning Information provided by IMS.

General-use programming interfaces allow the customer to write programs that obtain the services of IMS.

General-use Programming Interface and Associated Guidance Information is identified where it occurs by an introductory statement to a chapter or section.

Product-sensitive programming interfaces allow the customer installation to perform tasks such as diagnosing, modifying, monitoring, repairing, tailoring, or tuning of IMS. Use of such interfaces creates dependencies on the detailed design or implementation of the IBM software product. Product-sensitive programming interfaces should be used only for these specialized purposes. Because of their dependencies on detailed design and implementation, it is to be expected that programs written to such interfaces may need to be changed in order to run with new product releases or versions, or as a result of service.

Product-sensitive Programming Interface and Associated Guidance Information is identified where it occurs by an introductory statement to a chapter or section.

Diagnosis, modification or tuning information is provided to help the customer diagnose, modify, or tune IMS.

**Attention:** Do not use this Diagnosis, Modification or Tuning Information as a programming interface.

---

## Trademarks

IBM, the IBM logo, and [ibm.com](http://www.ibm.com) are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web in the topic "Copyright and trademark information" at <http://www.ibm.com/legal/copytrade.shtml>.

The following terms are trademarks or registered trademarks of other companies, and have been used at least once in the IMS library:



- Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.
- Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.
- Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.
- Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.
- UNIX is a registered trademark of The Open Group in the United States and other countries.

Other product and service names might be trademarks of IBM or other companies.

## Bibliography

This bibliography lists all of the information in the IMS Version 9 library.

*CICS Transaction Server for z/OS V2.3: CICS RACF Security Guide, SC34-6249*

*Data Extraction, Processing, and Restructuring System Program Description/Operations Manual, SH20-2177*

*DB2 Universal Database for z/OS V8: DB2 Universal Database for z/OS Administration Guide, SC26-9931*

*File Manager for z/OS User's Guide and Reference for IMS Data, SC18-9382.*

*IBM DB2 and IMS Tools: IMS Application Development Facility (ADF) II User's Guide, SH20-6593*

*IBM DB2 and IMS Tools: IMS DataPropagator for z/OS: An Introduction, GC27-1211*

*IBM DB2 and IMS Tools: IMS High Availability Large Database Conversion and Maintenance Aid for z/OS, User's Guide, SC18-7249*

*IBM DB2 and IMS Tools: IMS High Performance Image Copy for z/OS User's Guide, SC18-7617*

*IBM DB2 and IMS Tools: IMS High Performance Load for OS/390 User's Guide, SC27-0938*

*IBM DB2 and IMS Tools: IBM IMS High Performance Pointer Checker for z/OS User's Guide Volume 2, SC18-7258*

*IBM DB2 and IMS Tools: IMS High Performance Unload for OS/390, SC27-0936*

*IBM DB2 and IMS Tools: IMS Index Builder for z/OS User's Guide, SC27-0930*

*IBM Redbooks: The Complete IMS HALDB Guide, SG24-6945*

*VisualAge Generator: VisualAge Generator User's Guide, SH23-0268-01*

*z/OS V1R4: DFSMS Access Method Services for Catalogs, SC26-7394*

*z/OS V1R4: DFSMS: Using Data Sets, SC26-7410*

*z/OS V1R4: DFSMSdss Storage Administration Reference, SC35-0424*

*z/OS V1R4: MVS Setting Up a Sysplex, SA22-7625*

*z/OS V1R4: MVS System Messages, Vol 7 (IEB-IEE), SA22-7637*

## IMS Version 9 Library

| Title                                                                             | Acronym | Order number |
|-----------------------------------------------------------------------------------|---------|--------------|
| <i>IMS Version 9: Administration Guide: Database Manager</i>                      | ADB     | SC18-7806    |
| <i>IMS Version 9: Administration Guide: System</i>                                | AS      | SC18-7807    |
| <i>IMS Version 9: Administration Guide: Transaction Manager</i>                   | ATM     | SC18-7808    |
| <i>IMS Version 9: Application Programming: Database Manager</i>                   | APDB    | SC18-7809    |
| <i>IMS Version 9: Application Programming: Design Guide</i>                       | APDG    | SC18-7810    |
| <i>IMS Version 9: Application Programming: EXEC DLI Commands for CICS and IMS</i> | APCICS  | SC18-7811    |
| <i>IMS Version 9: Application Programming: Transaction Manager</i>                | APTM    | SC18-7812    |
| <i>IMS Version 9: Base Primitive Environment Guide and Reference</i>              | BPE     | SC18-7813    |
| <i>IMS Version 9: Command Reference</i>                                           | CR      | SC18-7814    |
| <i>IMS Version 9: Common Queue Server Guide and Reference</i>                     | CQS     | SC18-7815    |
| <i>IMS Version 9: Common Service Layer Guide and Reference</i>                    | CSL     | SC18-7816    |
| <i>IMS Version 9: Customization Guide</i>                                         | CG      | SC18-7817    |
| <i>IMS Version 9: Database Recovery Control (DBRC) Guide and Reference</i>        | DBRC    | SC18-7818    |
| <i>IMS Version 9: Diagnosis Guide and Reference</i>                               | DGR     | LY37-3203    |
| <i>IMS Version 9: Failure Analysis Structure Tables (FAST) for Dump Analysis</i>  | FAST    | LY37-3204    |
| <i>IMS Version 9: IMS Connect Guide and Reference</i>                             | CT      | SC18-9287    |
| <i>IMS Version 9: IMS Java Guide and Reference</i>                                | JGR     | SC18-7821    |
| <i>IMS Version 9: Installation Volume 1: Installation Verification</i>            | IIV     | GC18-7822    |
| <i>IMS Version 9: Installation Volume 2: System Definition and Tailoring</i>      | ISDT    | GC18-7823    |
| <i>IMS Version 9: Master Index and Glossary</i>                                   | MIG     | SC18-7826    |

| <b>Title</b>                                                                | <b>Acronym</b> | <b>Order number</b> |
|-----------------------------------------------------------------------------|----------------|---------------------|
| <i>IMS Version 9: Messages and Codes, Volume 1</i>                          | MC1            | GC18-7827           |
| <i>IMS Version 9: Messages and Codes, Volume 2</i>                          | MC2            | GC18-7828           |
| <i>IMS Version 9: Open Transaction Manager Access Guide and Reference</i>   | OTMA           | SC18-7829           |
| <i>IMS Version 9: Operations Guide</i>                                      | OG             | SC18-7830           |
| <i>IMS Version 9: Release Planning Guide</i>                                | RPG            | GC17-7831           |
| <i>IMS Version 9: Summary of Commands</i>                                   | SOC            | SC18-7832           |
| <i>IMS Version 9: Utilities Reference: Database and Transaction Manager</i> | URDBTM         | SC18-7833           |
| <i>IMS Version 9: Utilities Reference: System</i>                           | URS            | SC18-7834           |

---

## Supplementary Publications

| <b>Title</b>                                              | <b>Order number</b> |
|-----------------------------------------------------------|---------------------|
| <i>IMS TM Resource Adapter User's Guide and Reference</i> | SC19-1211           |
| <i>IMS Version 9 Fact Sheet</i>                           | GC18-7697           |
| <i>IMS Version 9: Licensed Program Specifications</i>     | GC18-7825           |
| <i>IRLM Messages and Codes</i>                            | GC19-2666           |

---

## Publication Collections

| <b>Title</b>                                                                      | <b>Format</b>   | <b>Order number</b> |
|-----------------------------------------------------------------------------------|-----------------|---------------------|
| <i>IMS Version 9 Softcopy Library</i>                                             | CD              | LK3T-7213           |
| <i>Licensed Bill of Forms (LBOF): IMS Version 9 Hardcopy and Softcopy Library</i> | Hardcopy and CD | LBOF-7789           |
| <i>Unlicensed Bill of Forms (SBOF): IMS Version 9 Unlicensed Hardcopy Library</i> | Hardcopy        | SBOF-7790           |
| <i>z/OS and Software Products DVD Collection</i>                                  | DVD             | SK3T-4271           |

---

## Accessibility Titles Cited in This Library

| <b>Title</b>                                   | <b>Order number</b> |
|------------------------------------------------|---------------------|
| <i>z/OS V1R1.0 TSO Primer</i>                  | SA22-7787           |
| <i>z/OS V1R5.0 TSO/E User's Guide</i>          | SA22-7794           |
| <i>z/OS V1R5.0 ISPF User's Guide, Volume 1</i> | SC34-4822           |

---

# Index

## Special characters

/CK operand 214  
/START AREA usage 467, 469  
/START DATABASE command 467  
/SX operand 214

## A

abnormal termination in logical  
  relationships 538, 540  
ACB (application control block)  
  description 320  
  generation 320  
ACBGEN (Application Control Block  
  Generation) utility 467  
ACBLIB  
  *See* IMS.ACBLIB library  
access methods  
  BSAM (Basic Sequential Access  
    Method) 547  
  converting DL/I access methods 406  
  database  
    hierarchic direct 80  
  DL/I access methods, changing 406  
  hierarchic direct 80  
  HISAM 66  
  IMS access methods 11, 62  
  introduction 11  
  operating system access methods 11  
  OSAM (Overflow Sequential Access  
    Method) 547  
  OSAM (overflow sequential access  
    methods)  
    used by HD 94  
  QSAM (Queued Sequential Access  
    Method) 547  
  VSAM  
    HISAM 66  
  z/OS access methods  
    used by HSAM 62  
accessing segments  
  HDAM (Hierarchical Direct Access  
    Method) 102  
  HIDAM (Hierarchical Indexed Direct  
    Access Method) 102  
  HISAM (Hierarchical Indexed  
    Sequential Access Method) 70  
  HSAM (Hierarchical Sequential Access  
    Method) 64  
  PHDAM (Partitioned Hierarchical  
    Direct Access Method) 102  
  PHIDAM (Partitioned Hierarchical  
    Indexed Direct Access Method) 102  
add programs, use in loading a  
  database 340  
adjusting HDAM options 260  
adjusting PHDAM options 260  
administration  
  database  
    overview 3

aids  
  for test databases  
    Data Extraction, Processing and  
      Restructuring System 325  
    DL/I test program 326  
    VisualAge Generator 325  
AL (available length) field 96  
algorithms  
  Fast Path buffer allocation  
    algorithm 300  
  Fast Path buffer allocation algorithm  
    for BMPs 303  
  Fast Path buffer allocation algorithm  
    for CCTL threads 304  
  first fit  
    assigning VSO DEDB areas to data  
      spaces 160  
  HD space search algorithm 107  
allocation  
  IMS data sets 334  
  OSAM data sets 334  
alternate PCB statement 318  
AM status code 512, 519  
anchor point area 96  
application control block (ACB)  
  description 320  
  generation 320  
Application Control Block Maintenance  
  utility 465  
  building the ACBs 320  
  deleting a data capture exit routine  
    online 467  
application development  
  IMS Application Development Facility  
    II 325  
  VisualAge Generator 325  
application programs  
  basic load program 343  
  BMP  
    database uncommitted updates  
      restriction 319  
    normal partition processing 118  
    parallel partition processing 122  
    partition processing 118  
    selective partition processing 118  
  application requirements, analyzing 4,  
    45, 53  
AREA statement 308  
areas  
  adding online 471  
  copying data sets 131  
  DEDB  
    design guidelines 284  
    opening 127  
    preopening 127  
    reopening 127  
    starting 128  
    stopping 128  
  deleting online 471  
  disabling preopen process 128

areas (*continued*)  
  emergency restart  
    reopening 127  
  FPOPN= 127  
  introduction to DEDB areas 126  
  reopening  
    emergency restart 127  
    replicating data sets 131  
    UOW structural definition 468  
  VSO DEDB  
    defining 151  
Asynchronous Data Capture  
  description 18  
  procedure for adding 461  
  using 461  
auxiliary storage requirements for  
  MSDBs 295  
available length (AL) field 96

## B

background write 277  
backspacing 65  
backup  
  primary indexes 111  
basic initial load program, writing 341  
Basic Sequential Access Method  
  *See* *See* BSAM (Basic Sequential  
    Access Method)  
batch message processing (BMP)  
  application programs  
    database uncommitted updates  
      restriction 319  
batch message processing (BMP)  
  programs  
    Fast Path buffer allocation  
      algorithm 303  
batch message processing programs  
  (BMPs)  
    accessing DEDBs 433  
    and CCTL threads 303  
    data sharing 56  
    DBCTL environment 56  
    normal buffer allocation 302  
    OBA values 432  
    overflow buffer allocation 303  
    updates in a sync interval 434  
BGWRT parameter 277  
bidirectional physically paired logical  
  relationship 171  
bidirectional virtually paired logical  
  relationship 173  
bit map block  
  HALDB partitions 95  
bit maps  
  calculating space 333  
  description 95  
bits in delete byte 505  
block-level data sharing 111  
  CI reclaim 254  
  SHISAM restriction 254

- blocks
    - calculating number needed 330
    - determining size 64
    - determining size of 264
    - HIDAM (Hierarchical Indexed Direct Access Method) 100
    - HISAM (Hierarchical Indexed Sequential Access Method) 67
    - PHIDAM 100
    - recommendations for specifying size 265
  - BMP (batch message processing)
    - application programs
      - database uncommitted updates restriction 319
  - BMP (batch message processing) programs
    - Fast Path buffer allocation
      - algorithm 303
  - BMPs (batch message processing programs)
    - accessing DEDBs 433
    - and CCTL threads 303
    - data sharing 56
    - DBCTL environment 56
    - normal buffer allocation 302
    - OBA values 432
    - overflow buffer allocation 303
    - updates in a sync interval 434
  - BSAM (Basic Sequential Access Method)
    - access to GSAM databases 78
    - access to HSAM databases 62
    - access to OSAM databases 547
    - access to SHSAM databases 77
  - BSIZ parameter 299, 302
  - buffer handler 266
  - buffer pools
    - description 266
    - designing a Fast Path 298
    - Fast Path, use 431
    - in DBCTL environment 302
    - lookaside option 162
    - private
      - description 156
    - size determination for Fast Path 300
    - size for Fast Path determination 304
  - buffers
    - allocation in Fast Path 306
    - choosing options 265
    - description 290
    - description of 270
    - Fast Path buffer allocation
      - algorithm 300
    - Fast Path buffer allocation algorithm for BMPs 303
    - Fast Path buffer allocation algorithm for CCTL threads 304
    - fixing in storage 269, 279
    - Hiperspace buffering for VSAM 267
    - OSAM buffer sizes 268
    - specifying 269
    - system buffer allocation 300, 304
    - use chain 266
    - VSAM buffer sizes 268
  - BWO(TYPEIMS) 280
  - KSDS 280
  - bytes operand 97
  - BYTES parameter 192, 215
- C**
- cache structures
    - defining a cache structure name for VSO DEDB 156
    - registering name with DBRC 157
    - VSO DEDB areas 151
  - calculating space
    - See space calculations
  - calls
    - See also DL/I calls
  - CHKP
    - benefits in GSAM databases 79
    - benefits in SHISAM databases 78
    - UOW size considerations 286
  - GU or GN
    - See DL/I calls
  - ROLB 300, 304
  - SYNC 286
  - CCTL
    - threads
      - Fast Path buffer allocation
        - algorithm 304
  - CCTL threads
    - Fast Path buffer allocation
      - algorithm 304
  - CFRM (coupling facility resource management)
    - estimating CFRM list structure size 167
  - CFRM policy for MADSIOT 166
  - CFSizer
    - estimating CFRM list structure size 167
  - CFSTR1|2 naming convention 156
  - change version numbers
    - HALDB 114
  - changing a randomizing routine 465
  - checkpoints
    - system
      - database uncommitted updates restriction 319
  - child segment, definition 7
  - CHKP call
    - benefits in GSAM databases 79
    - benefits in SHISAM databases 78
    - UOW size considerations 286
  - CI (control interval)
    - calculating number needed 330
    - CI reclaim for VSAM KSDS 254
    - contention 433
    - DEDB (data entry database) 135
    - determining size of 264
    - HIDAM (Hierarchical Indexed Direct Access Method) 100
    - HISAM (Hierarchical Indexed Sequential Access Method) 67
    - number 98
    - overhead 329
    - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method) 100
    - recommendations for specifying size 265
    - SDEP 286
    - size determination in DEDB 285
  - CI (control interval) (*continued*)
    - size, changing 472
    - splits 71
  - CI reclaim
    - block-level data sharing 254
    - deleting records 254
    - introduction 254
    - KSDS reorganization 254
    - VSAM REPRO, using 254
    - XRF environments 254
  - CICS (Customer Information Control System)
    - background write 278
    - database types not supported 12, 56
    - DL/I Test Program 326
    - overview of access to IMS 4
    - security 31
    - sequential buffering
      - benefits 271
      - SB Initialization exit routine 276
      - using 274, 276
      - virtual storage 273
    - VisualAge Generator 325
    - VSAM database buffers 279
  - CICS-DBCTL
    - GSAM 80
    - SHISAM 80
    - SHSAM 80
  - CIDF (control interval definition field) 330
  - CK (/CK) operand 214
  - code inspections 28
  - coexistence considerations for HALDB
    - Online Reorganization 387
  - commands
    - allocating VSAM data sets with
      - DEFINE CLUSTER 334
    - GENJCL.CA for HALDB OLR 399
    - GENJCL.RECOV for HALDB OLR 399
    - modifying and tuning HALDB Online Reorganization 392
    - monitoring HALDB Online Reorganization 392
    - specifying optional VSAM functions with DEFINE CLUSTER 279
    - starting areas with /START AREA 128
    - starting DEDBs with /START DATABASE 128
    - starting HALDB Online Reorganization 391
    - stopping areas with /STOP AREA 128
    - stopping DEDBs with /STOP DATABASE 128
  - common synchronization point process, 434
  - compressing segment data 231
  - compression facility
    - See See segment edit/compression exit routine
  - COMPRTN parameter
    - DBD SEGM statement 466
  - concatenated key
    - converting 462
  - fields 213

- concatenated key (*continued*)
  - in symbolic pointing 207
  - logical parent's 175
- concatenated segments 180, 189
- constant field 212
- CONSTANT parameter 223
- control interval (CI)
  - calculating number needed 330
  - CI reclaim for VSAM KSDS 254
  - contention 433
  - DEDB (data entry database) 135
  - determining size of 264
  - HIDAM (Hierarchical Indexed Direct Access Method) 100
  - HISAM (Hierarchical Indexed Sequential Access Method) 67
  - number 98
  - overhead 329
  - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method) 100
  - recommendations for specifying size 265
  - SDEP 286
  - size determination in DEDB 285
  - size, changing 472
  - splits 71
- control interval definition field (CIDF) 330
- control interval update sequence number (CUSN) 135
- conventions
  - naming
    - general rules 21
    - HALDB (High Availability Large Database) 22
    - HALDB data sets 24
- copying phase of HALDB Online Reorganization 385
- counter
  - in logical relationships 182
- counter area
  - of segment, introduction 15
- coupling facility
  - cache structure 151
  - MADSIOT 166
  - structures 157
  - structures, naming convention 156
- CP (free space chain pointer) field 96
- Cross System Product
  - See* See VisualAge Generator
- crossing a logical relationship 195, 198
- cursor
  - cursor-active status for HALDB Online Reorganization 383
  - HALDB Online Reorganization 386
- cursor-active status
  - recovery, HALDB 398
- CUSN (control interval update sequence number) 135
- Customer Information Control System (CICS)
  - overview of access to IMS 4

## D

- DA status code 512, 519

- DASD
  - contention in Fast Path 431
  - out-of-space for DEDB 434
  - space release 519
- data
  - XML
    - overview of storing in IMS databases 255
- Data Capture exit routine 467
  - adding 467
  - and logical databases 238
  - call functions 237
  - call sequence 235
  - changing 467
  - data capture exit routine 236
  - deleting online 467
  - description 17, 233
  - function 233
  - specifying in DBD 234
  - using 234, 461
- data definition names (ddnames)
  - HALDB naming conventions 23
  - HALDB Online Reorganization 23
- Data Dictionary
  - See* DB/DC Data Dictionary 18
- data elements in segment 15
- data entry database (DEDB)
  - record distribution
    - impact of changes to UOW structure 471
- data entry databases (DEDBs)
  - adding 469
  - and segment edit/compression exit routine 231
  - areas
    - adding online 471
    - deleting online 471
  - areas, copying 131
  - areas, overview 126
  - buffer pools 302
  - CI resource contention 433
  - copying
    - areas 131
  - data sharing 132
  - DBCTL support 56
  - DEDB physical format 126
  - deleting 469
  - designing 283
  - DL/I calls against 143
  - free space algorithm 142
  - HSSP processing of 296
  - insert algorithm 141
  - IOVF
    - extending online 472
  - loading the database 350
  - modifying
    - adding and deleting segments 470
  - overview 125
  - performance considerations 431
  - replicating
    - areas 131
  - segments, adding and deleting 470
  - SSA restrictions 143
  - storage of records 138
  - when to use 125

- Data Extraction, Processing, and Restructuring system 325
- data part of segment 14, 15
- data requirements, analyzing 45, 53
- data sensitivity 202
- data set groups
  - changing the number of 426
  - multiple 18
- data set statement
  - description 308
  - HALDB (High Availability Large Database) 308
- data sets
  - allocation 334
  - contained in partitions 115
  - copying
    - DEDB areas 131
  - DFSVSAMP 71
  - ESDS in HD databases 94
  - ESDS in secondary indexes 210
  - groups
    - changing the number of 426
  - HALDB data sets, modifying 497
  - HALDB Online Reorganization
    - naming conventions 390
    - output data sets 391, 585
  - HALDB partitions
    - maximum number of data sets 315
  - HISAM 67
  - KSDS in secondary indexes 210
  - maximum size
    - OSAM 82, 548
    - VSAM 82
  - modifying HALDB data sets 497
  - MSDBCP1 and MSDBCP2 295
  - MSDBDUMP data set 295
  - naming conventions
    - HALDB (High Availability Large Database) 24
    - HALDB Online Reorganization 390
    - HALDB Online Reorganization overview 23
    - PHIDAM 24
    - PHIDAM 24
    - PSINDEX 24
  - OSAM
    - maximum size 82, 548
  - OSAM in HD databases 94
  - pre-formatting space 280
  - replicating
    - DEDB areas 131
  - VSAM
    - maximum size 82
- data sharing
  - DEDB 132
  - VSO DEDB Areas 161
- data space
  - z/OS
    - accessing for VSO DEDB areas 160
    - acquiring for VSO areas 159
- data structures, developing 45, 53
- database definition
  - HALDB partitions 311



- database definition (*continued*)
  - using the Partition Definition utility 311
- database description (DBD)
  - coding 307
  - introduction 18
  - using dictionary to generate 18
- Database Prefix Resolution utility (DFSURG10) 369
- Database Prefix Update utility (DFSURGP0) 370
- Database Preorganization utility (DFSURPR0) 368
- database records
  - definition 6
  - HDAM (Hierarchical Direct Access Method) 97
  - HIDAM 99
  - HISAM (Hierarchical Indexed Sequential Access Method) 67
  - HSAM (Hierarchical Sequential Access Method) 63
  - introduction to 12
  - locking 109
  - MSDB (main storage database) 146
  - PHDAM (Partitioned Hierarchical Direct Access Method) 97
  - PHIDAM 99
- Database Scan utility (DFSURGS0) 369
- Database Surveyor utility (DFSPRSUR) 373
- database types
  - changing database types 406
  - changing DL/I access methods 406
  - converting database types 406
- databases
  - administration overview 3
  - application program's view 18
  - changing database types 406
  - changing DL/I access methods 406
  - CICS local-DL/I 56
  - converting database types 406
  - DBCTL support 56
  - DEDB description 125
  - defining 18
  - design
    - aids for testing 325
  - designing
    - overview 4
  - developing test databases
    - Data Extraction, Processing, and Restructuring System 325
    - DL/I test program (DFSDDL0) 326
    - File Manager for z/OS for IMS Data 326
    - IMS Application Development Facility II 325
    - Visual Age Generator 325
  - Fast Path
    - design considerations 283
    - initial loads 341
  - full-function
    - design considerations 257
  - GSAM description 78
  - HALDB
    - modifying 474
- databases (*continued*)
  - HALDB (*continued*)
    - scope of changes to HALDB 476
  - HALDB (High Availability Large Database), definition 80
  - HD databases, introduction 80
  - HDAM (Hierarchical Direct Access Method), definition 80
  - HIDAM (Hierarchical Indexed Direct Access Method)
    - primary index, introduction 81
  - HIDAM (Hierarchical Indexed Direct Access Method), definition 80
  - hierarchic direct (HD) databases, introduction 80
  - HSAM description 62
  - implementing
    - overview 5
  - implementing database design 307
  - introduction to 11
  - loading 338
    - Fast Path initial loads 341
    - overview 5
    - restartable load program, using UCF 344
    - sample JCL 343
  - loading, description 327
  - Local-DL/I support 56
  - logical 180
  - modifying 437
    - HALDB 474
    - HALDB scope of changes 476
    - overview 5
  - monitoring 353
    - overview 5
  - MSDB description 144
  - multiple data set groups 252
  - PCB statement 318
  - PHDAM (Partitioned Hierarchical Direct Access Method), definition 80
  - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method)
    - primary index, introduction 81
  - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method), definition 80
  - primary index
    - introduction to HD databases 81
  - protecting during reorganization 361
  - PSINDEX
    - overview 225
  - records
    - calculating size 327
  - recovery
    - overview 5
  - reorganizing 359
    - HALDBs, offline reorganization 400
  - security
    - establishing 31
    - for application programs 18
    - introduction 6
  - SHISAM description 77
  - SHSAM description 77
  - standards and procedures 6
  - testing 5, 323
- databases (*continued*)
  - tuning 359
    - changing the number of data set groups 426
    - overview 5
  - XML
    - overview of storing XML data 255
- DATASET statement
  - example 253
  - in logical DBD 195
- DB/DC Data Dictionary
  - establishing security 33
  - generating DBDs 18
  - generating PSBs 18
  - introduction 18
- DBBF parameter
  - DEDB Buffer Pool in the DBCTL environment 302
  - DEDB or MSDB Buffer Pools 298
- DBCTL
  - accessing from CICS, overview 4
  - CICS applications 56
  - DBBF parameter 302
  - designing DEDB buffer pools 302
- DBD (database description)
  - coding 307
  - introduction 18
  - logical relationships 189
  - specifying use
    - Data Capture exit routine 234
    - field-level sensitivity 239
    - logical relationships 190, 193, 194, 195
    - multiple data set groups 252
    - secondary indexes 223
    - segment edit/compression exit routine 233
    - variable-length segments 228
    - using dictionary to generate 18
- DBD statement 193, 308
- DBDGEN (Database Description Generation) utility 307
- DBDLIB 307
  - member 555
  - selecting for HALDB (High Availability Large Database) 579
- DBFDBMA0 (MSDB Maintenance utility) 145
- DBFUHDR0 (High-Speed DEDB Direct Reorganization utility) 286
- DBFX parameter 299, 302
- DBFX value 301, 305
- DCCTL
  - data sharing 56
  - GSAM (Generalized Sequential Access Method) 80
  - SHISAM (Simple Hierarchical Indexed Sequential Access Method) 80
  - SHSAM (Simple Hierarchical Sequential Access Method) 80
- DDATA parameter 215
- DDNAME
  - HALDB (High Availability Large Database) 315, 554

- ddnames (data definition names), naming conventions
  - HALDB naming conventions 23
  - HALDB Online Reorganization 23
- deactivation, record 130
- decomposed storage of XML data overview 255
- DEDB (data entry database)
  - areas
    - design guidelines 284
    - functions 126
    - record distribution
      - impact of changes to UOW structure 471
- DEDB Area Data Set Create utility (DBFUMRI0)
  - copying area data sets 131
- DEDB areas
  - disabling preopen process 128
  - emergency restart
    - reopening 127
  - FPOPN= 127
  - opening 127
  - preopen
    - concurrent to operation 127
  - preopening 127
  - reopening
    - emergency restart 127
  - restarting
    - after IRLM failure 128
  - starting 128
  - stopping 128
  - UOW structural definition, changing 468
- DEDB CI resource
  - and DBFX value 302, 306
  - determine resource size 264
  - Fast Path Performance 430
  - overhead needed 329
- DEDB segments
  - segment growth 233
- DEDBs (data entry databases)
  - adding using online change 469
  - and segment edit/compression exit routine 231
  - areas
    - adding online 471
    - deleting online 471
  - areas, overview 126
  - buffer pools 302
  - CI resource contention 433
  - data sharing 132
  - DBCTL support 56
  - DEDB physical format 126
  - deleting using online change 469
  - designing 283
  - DL/I calls against 143
  - free space algorithm 142
  - HSSP processing of 296
  - insert algorithm 141
  - IOVF
    - extending online 472
  - loading the database 350
  - modifying
    - adding and deleting segments 470
  - overview 125
- DEDBs (data entry databases) (*continued*)
  - performance considerations 431
  - segments, adding and deleting 470
  - SSA restrictions 143
  - storage of records 138
  - when to use 125
- DEFINE CLUSTER command
  - in access method services 279
  - VSAM data set allocation 334
- defining data set groups
  - HALDB (High Availability Large Database) 315
- delete byte
  - bits 505
  - description 15
  - HDAM 99
  - HISAM 68
  - HSAM 64
  - in logical relationships 518
  - in secondary indexes 212
  - PHDAM (Partitioned Hierarchical Direct Access Method) 99
- delete rules for logical relationships 200, 201, 516, 546
- deleting segments
  - HD databases 107
  - HISAM databases 74
  - HSAM databases 66
- dependent segment, definition 7
- design aids
  - for test databases 325
- design reviews
  - description of 25
  - introduction 4
- destination parent 181, 202
- determining VSAM options 277
- DFPXPMB 580
- DFPXPMB Partition Definition utility panel 579
- DFSCTL data set control statements
  - SB control statement 274
  - SBPARM control statement 274
- DFSDDLTO (DL/I test program) 326
- DFSMTB0 (DB Monitor program) 353
- DFSPRCT1 (Partial Database Reorganization utility) 374
- DFSPPRSUR (Database Surveyor utility) 373
- DFSUOCU0 (Online Change Copy utility)
  - deleting a data capture exit routine 467
- DFSUOCU0 (Online Change utility) 467
  - changing a randomizing routine 465
- DFSURG10 (Database Prefix Resolution utility) 369
- DFSURGL0 (HD Reorganization Reload utility) 367
- DFSURGP0 (Database Prefix Update utility) 370
- DFSURGS0 (Database Scan utility) 369
- DFSURGU0 (HD Reorganization Unload utility) 366
- DFSURPR0 (Database Prereorganization utility) 368
- DFSURRL0 (HISAM Reorganization Reload utility) 366
- DFSURUL0 (HISAM Reorganization Unload utility) 365
- DFSVSAMP data set 71
- DFSVSMxx member of IMS.PROCLIB MADSLOT 166
- dictionary
  - See DB/DC Data Dictionary
- direct access methods
  - HDAM (Hierarchical Direct Access Method) 80
  - HIDAM (Hierarchical Indexed Direct Access Method) 80
  - PHDAM (Partitioned Hierarchical Direct Access Method) 80
  - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method) 80
- direct address pointers 84
- direct dependent segment types (DDEP) 138
- direct pointers
  - logical relationships 174, 176, 178, 202
  - secondary indexes 212, 213
- direct storage method 56
- distribution of database records
  - DEDB 471
- DL/I
  - access methods
    - changing 406
    - changing from HDAM to PHDAM and HIDAM to PHIDAM 413
    - converting 406
    - from PHDAM and PHIDAM to HDAM and HIDAM 415
    - HDAM to HIDAM 411
    - HDAM to HISAM 410
    - HIDAM to HDAM 409
    - HIDAM to HISAM 409
    - HISAM to HDAM 407
    - HISAM to HIDAM 407
  - and ACBs 320
  - calls
    - DEDBs 143
    - HD databases 82
    - HISAM databases 70
    - HSAM databases 64
    - MSDB 147
  - calls in logical relationships
    - delete call 518
    - logical child insert call 508
    - replace call 511
  - DL/I Call Summary report 417
- DL/I access methods
  - changing 406
    - from HDAM to PHDAM and HIDAM to PHIDAM 413
    - from PHDAM and PHIDAM to HDAM and HIDAM 415
    - HDAM to HIDAM 411
    - HDAM to HISAM 410
    - HIDAM to HDAM 409
    - HIDAM to HISAM 409
    - HISAM to HDAM 407
    - HISAM to HIDAM 407
  - converting 406
  - DL/I Call Summary report 417



- DL/I calls
  - DEDBs 143
  - HD databases 82
  - HISAM databases 70
  - HSAM databases 64
  - in logical relationships
    - delete call 518
    - logical child insert call 508
    - replace call 511
  - MSDB 147, 150
- DL/I test program (DFSDDLTO) 326
- DLET call
  - DASD space release 519
- DLIModel utility
  - storing XML data
    - overview 255
- DREF (disabled reference) option
  - for VSO-area data spaces 160
- DSPXPDA 577
- DSPXPEA 577
  - database name 577
  - output data set name 578
- DSPXPJA 578
  - database name 578
  - input data set name 578
  - input member name 578
  - processing option 578
- DSPXPKE panel 566
- DSPXPLA 569
  - act 569
  - data set name prefix 569
  - ID 569
  - name 569
- DSPXPLB 570
- DSPXPOA 576
- DSPXRUN command 582
  - database\_name 582
  - dataset\_name 582
  - member\_name 582
  - processing\_option 582
- dump option 279
- DUMP parameter 279, 281
- duplex paths 517
- duplicate data field 213
- duplicate data in logical
  - relationships 169
- duplicate keys 210
- DX status code 519

## E

- ECNT (extended communications node table) 148
- edit/compression exit routine
  - See* segment edit/compression exit routine
- editing segment data 231
- emergency restart
  - DEDB areas
    - reopening 127
- encoding data
  - See* segment edit/compression exit routine
- encrypting data 33
- END statement 310, 320
- Error Queue Element (EQE) 129

- ESAF
  - See* external subsystem attach facility
- ESCD (extended system contents directory) 148
- ESDS (entry-sequenced data set)
  - HD databases 94
  - HISAM 67
  - secondary indexes 210
- estimating minimum database size 264
- EXIT parameter 234
- exit routines
  - changing, online 465
- HALDB
  - modifying HALDB exit routines 498
  - modifying randomizing modules 500
  - partition selection exit routine, defined 117
- exporting database definitions
  - HALDB (High Availability Large Database) 315
- extended communications node table (ECNT) 148
- extended system contents directory (ESCD) 148
- external subsystem attach facility 57
- EXTRTN parameter 216, 224

## F

- fallback considerations for HALDB
  - Online Reorganization 388
- Fast Path
  - access to DL/I databases 143
  - buffers 431
  - CI contention 357, 433
  - committing updates 165
  - common sync point processing 435
  - control interval 433
  - data sharing
    - DEDB 132
  - databases
    - DEDB overview 125
    - MSDB overview 144
    - overview 125
  - environments 125
  - Fast Path buffer allocation
    - algorithm 300
  - Fast Path buffer allocation algorithm
    - for BMPs 303
  - Fast Path buffer allocation algorithm
    - for CCTL threads 304
  - initial database load 341
  - interpreting analysis reports 357
  - loading the database 349
  - log analysis 355
  - log reduction 356
  - mixed mode 143
  - monitored events 357
  - monitoring and tuning 355
  - output thread 166
  - performance considerations 355
  - Resource Name Hash routine 436
  - selecting transactions 357
  - subset pointers 138, 289

- Fast Path (*continued*)
  - synchronization point
    - processing 165, 434
  - transaction timings 356
  - tuning Fast Path systems 430
  - user hash routine, programming considerations 436
  - using the Log Analysis utility (DBFULTA0) 355
- Fast Path virtual storage option
  - See* virtual storage option
- fbff (free block frequency factor) 258
- FCP (forward chain pointer) 146
- FH status code 129
- FID (fixed intersection data) 183
- FIELD statement
  - definition 214
  - in secondary indexing 225
  - in the DBD 281
  - position in DBD 309
- field-level sensitivity
  - description of 238
  - establishing security 31
  - inserting segments 241
  - introduction 17
  - overlapping paths 242
  - path calls 242
  - replacing segments 241
  - retrieving segments 240
  - specifying in DBD and PSB 239
  - use with variable-length segments 243
  - uses 238
  - using 238
- fields 213
  - AL 96
  - constant 212
  - CP 96
  - definition 6
  - duplicate data 213
  - FSE 96
  - FSEAP 95
  - ID 96
  - in segment 15
  - pointer 212
  - search 212
  - subsequence 212
  - system related 214
- File Action bar 554
- FINISH statement 310
- first fit algorithm to assign VSO DEDB
  - areas to data spaces 160
- fixed intersection data (FID) 183
- fixed-length segments
  - specifying minimum size 233
- fixed-length segments, definition 14
- FLD (Field) call 150
- format
  - CI in DEDB 135
  - DEDB segments 135
  - fixed-length segments 14
  - HD databases 94
  - HDAM segments 99
  - HIDAM index segment 101
  - HIDAM segments 101
  - HISAM segments 68
  - HSAM segments 64

format (*continued*)

- PHDAM segments 99
- PHIDAM index segment 101
- PHIDAM segments 101
- pointer segment 211
- variable-length segments 14

formula

- estimating CFRM list structure size 167
- first fit algorithm 160

formulas for

- calculating buffers for Fast Path 300, 304
- calculating space for MSDBs 295
- calculating storage for MSDB 290
- size of root addressable area 258

forward chain pointer 146

FPOP=

- overview 127

FPRLM=

- restarting DEDB areas 128

FR status code

- for BMP regions 301
- for CCTL threads 305
- in Fast Path buffer allocation 300
- in Fast Path buffer allocation for BMPs 304

free block frequency factor (fbff) 258

free logical record 70

free space

- chain pointer (CP) field 96
- element (FSE) 96
- element anchor point (FSEAP) 95
- HD (Hierarchical Direct) 94
- HIDAM (Hierarchical Direct Access Method) 257
- HIDAM 257
- HIDAM (Hierarchical Indexed Direct Access Method) 100
- KSDS 280
- percentage factor 258
- PHDAM (Partitioned Hierarchical Direct Access Method) 257
- PHIDAM 257
- PHIDAM (Partitioned Hierarchical Indexed Direct Access Method) 100
- space calculations 333

FREESPACE parameter 280

FRSPC parameter 258

FS status code 287

FSE (free space element) 96

FSEAP (free space element anchor point) 95

fspf (free space percentage factor) 258

full-duplex paths 517

full-function segments

- specifying minimum size 233

FW status code

- for CCTL threads 305
- in BMP regions 301
- in Fast Path buffer allocation 300
- in Fast Path buffer allocation for BMPs 304

## G

GC status code 286, 297

GE status code 189

general format of HD databases and use of special fields 333

Generalized Sequential Access Method (GSAM)

- See GSAM (Generalized Sequential Access Method) 76

GPSB (Generated PSB)

- I/O PCB 321
- modifiable alternate response PCB 321

GSAM (Generalized Sequential Access Method) 76, 78, 349

## H

HALDB (High Availability Large Database)

- adding partitions 314, 485
- automatic partition definition 314
- automatic partition definition using Partition Definition utility 561
- batch import 315
- bit map block for partition 95
- Change Partition screen 564
  - F11 566
  - F5 566
  - F6 566
  - Partition high key 565
  - Partition ID field 565
  - Partition Selection String 565

change version numbers 114

changing 474

- changes that affect all partitions 476

HALDB Partition Selection exit routine 499

partition boundaries 477

partition key ranges 477

partition structure modification 480

scope of changes 476

single partitions 477

changing DL/I access methods

changing from HDAM to PHDAM

and HIDAM to PHIDAM 413

from PHDAM and PHIDAM to HDAM and HIDAM 415

changing partitions using the

PDU 312

configuration

list 580

copying partitions 314

creating HALDB (High Availability Large Database) partitions 311

creating with the Partition Definition utility (PDU) 311

data set naming conventions 24, 390

data set statement 308

data sets

maximum per partition 315

data sets, modifying 497

Database Partition list

act 571

HALDB (High Availability Large Database) (*continued*)

Database Partition list (*continued*)

- anchor 571
- bytes 571
- FBFF 572
- File action bar choice 569
- FSFF 572
- high block 571
- module 571
- name 571

Database Partitions list 568

displaying 568

DBDLIB 316

ddnames

naming conventions 23

defining data set groups 315

defining data set groups using

Partition Definition utility 567

defining with the Partition Definition utility (PDU) 311

definition 80

definition process 311

Delete a Database panel using

Partition Definition utility 577

deleting a database 316

deleting partitions 314, 491

disabling partitions 489

DSPXPDA 577

DSPXPEA

See DSPXPEA 577

DSPXPGA 567

DSPXPGB 568

DSPXPGC 568

DSPXPPIA

See DSPXPPIA 578

DSPXPKE panel 566

DSPXPPLA

See DSPXPPLA 568

DSPXPPLB 570

DSPXPPOA 576

DSPXPRUN command 582

enabling partitions 491

exit routines

modifying 498

randomizing modules,

modifying 500

exporting database definitions 315

fallback

to HDAM and HIDAM 415

File Action bar 554

actions 555

finding partitions 314

HALDB (High Availability Large Database), defining 311

HALDB Online Reorganization 382

and offline reorganizations 400

HALDB Partition Definition utility

(%DFSHALDB)

accessing Help 553

exiting the utility 553

main panel 552

main screen 552

Partitioned Databases panel 552

using 551

HALDB Partition Definition utility

(PDU) 311

HALDB (High Availability Large Database) (*continued*)

- HALDB Partition Selection exit routine (DFSPSE00)
  - changing 499
  - modifying 499
  - replacing 499
- ILDS, updating
  - offline reorganization 381
- importing database definitions 315
- importing database information using Partition Definition utility 578
- IMS concatenation
  - displaying using Partition Definition utility 578
- IMS configuration 579
- indirect list data set (ILDS)
  - allocating 316
- indirect list entry (ILE)
  - description 316
- indirect list key (ILK)
  - description 316
- information
  - changing using Partition Definition utility 555
  - deleting using Partition Definition utility 555, 577
  - exporting using Partition Definition utility 555, 577
  - importing using Partition Definition utility 555, 578
  - opening using Partition Definition utility 576
  - viewing using Partition Definition utility 555
- initializing partitions 115
- interfaces
  - HALDB Partition Definition utility (%DFSHALDB) 551
- ISRDDN 578
- LCHILD statement 310
- line commands 572
- logical relationships 201
- manual partition definition 314
- manual partition definition using Partition Definition utility 562
- master
  - values 555
- maximum size 82
- migrating
  - fallback to HDAM and HIDAM 415
  - from HDAM to PHDAM and HIDAM to PHIDAM 413
- modifying 474
  - changes that affect all partitions 476
  - HALDB Partition Selection exit routine 499
  - partition boundaries 477
  - partition key ranges 477
  - partition structure
    - modification 480
  - scope of changes 476
  - single partitions 477
- modifying data set groups 315
- modifying data sets 497

HALDB (High Availability Large Database) (*continued*)

- modifying partitions 314
- naming conventions 22
- normal partition processing 118
- offline reorganization 377
  - overview 377
- reallocating data sets 380
- reloading partitions 381
- unloading partitions 379
- updating ILDS 381
- online reorganization 382
  - ddname naming convention 23
  - naming convention 390
  - naming convention overview 23
- parallel partition processing 122
- partition bit map block 95
- partition definition 311
- Partition Definition utility 311, 563
  - accessing 551
  - high key value 563
  - impact on RECON 551
  - modifying fields 563
  - panels 551
  - selecting the DBDLIB and RECON configuration 579
- Partition Definition utility (PDU) 310
  - Change Partition panel 312
- partition high key 313
- partition initialization 115
- partition processing 118
- partition selection 117
- Partition Selection exit routine
  - record distribution 480
- partition structures, updating 480
- partitioned secondary indexes 225
- partitions
  - about 112
  - changes that affect all partitions 476
  - changing 477
  - changing boundaries 477
  - changing key ranges 477
  - changing using Partition Definition utility 555
  - copying using Partition Definition utility 572
  - creating using Partition Definition utility 555
  - data sets in 115
  - data sets, maximum 315
  - database uncommitted updates
    - restriction 319
  - defining using Partition Definition utility 555
  - deleting using Partition Definition utility 572
  - features of 112
  - ID number 113
  - ID numbers and partition modifications 481
  - ILDS requirement 116
  - indirect list data set (ILDS)
    - requirement 116
  - manual definition using Partition Definition utility 562
  - maximum number 555

HALDB (High Availability Large Database) (*continued*)

- partitions (*continued*)
  - modifying 474, 477
  - modifying key ranges 477
  - name, changing 496
  - names 113
  - names and ID number 112
  - naming conventions 23
  - opening using Partition Definition utility 555, 572
  - overview 112
  - pointers, affect of modifications on 483
  - printing information using Partition Definition utility 572
  - reorganization number 114
  - root anchor points, changing number of 496
  - scope of changes 476
- partitions, adding 485
- partitions, deleting 491
- partitions, disabling 489
- partitions, enabling 491
- partitions, restoring deleted 495
- PHDAM
  - introduction 80
  - randomizing modules,
    - modifying 500
  - root anchor points, changing number in partition 496
- PHIDAM
  - introduction 80
- PHIDAM primary index
  - recovery 111
- pointers
  - self-healing pointer process 401
- printing partitions 314
- PSINDEX
  - adding a PSINDEX 500
  - initializing partitions 501
  - modifying 501
- PSINDEXes 225
- randomizing modules
  - modifying 500
- reallocating data sets
  - offline reorganization 380
- RECON 316
- RECON data set
  - selecting 579
- recovery, cursor-active status 398
- reloading partitions
  - offline reorganization 381
- reorganization number
  - verification 114
- reorganizing 376
  - offline 377
  - reallocating data sets 380
  - reloading partitions 381
  - secondary indexes 382
  - unloading partitions 379
  - updating ILDS 381
- REUSE parameter 334
- root anchor points
  - changing number in PHDAM partition 496
- secondary index, adding 500

- HALDB (High Availability Large Database) (*continued*)
  - secondary index, initializing partitions 501
  - secondary index, modifying 501
  - secondary indexes 225
    - reorganizing 382
  - segments
    - modifying 497
  - selective partition processing 118
  - self-healing pointer process 401
    - performance 404
  - sorting partitions 314
  - types of HALDB databases 80
  - unloading partitions
    - offline reorganization 379
    - viewing DDNAME 315
    - viewing partitions 314
- HALDB (High Availability Large Database) partition definition utility
  - registering OLR capability with DBRC 557
- HALDB Online Reorganization
  - and offline reorganizations 400
  - coexistence considerations 387
  - copying phase 385
  - cursor 386
  - cursor-active status 383
  - Database Change Accumulation utility 399
  - ddname naming convention 23
  - dynamic PSB 384
  - fallback considerations 388
  - FDBR 396
  - GENJCL.CA command 399
  - GENJCL.RECOV command 399
  - image copy utilities 399
  - initialization phase 383
  - locking 397
  - log impact 395
  - migration considerations 387
  - modifying 392
  - monitoring 392
  - naming conventions
    - overview 23
  - output data set requirements 391, 585
  - overview 382
  - RATE parameter of INITIATE OLREORG command 395
  - recovery 398
  - Remote Site Recovery (RSR) 396
  - requirements for output data sets 391, 585
  - restart 395, 396
  - restrictions 389
  - sequential buffering 400
  - starting 391
  - system impact 395
  - termination phase 386
  - tuning 392
  - unit of reorganization 385
  - utilities 397
  - XRF 395
- HALDB Partition Definition utility (%DFSHALDB)
  - accessing Help 553
- HALDB Partition Definition utility (%DFSHALDB) (*continued*)
  - exiting the utility 553
  - main panel 552
    - options 552
  - main screen 552
    - options 552
  - Partitioned Databases panel 552
    - options 552
  - using 551
- HALDB Partition Selection exit routine (DFSPSE00)
  - changing 499
  - modifying 499
  - replacing 499
- half-duplex paths 517
- HB (hierarchic backward) pointers 86
- HD Reorganization Reload utility
  - ILDS
    - control statement specifications 381
    - updating 381
- HD Reorganization Reload utility (DFSURGL0) 367
- HD Reorganization Unload utility (DFSURGU0) 366
- HD space search algorithm 107
- HD Tuning Aid 259
- HDAM
  - adjusting 419
    - options, adjusting 419
- HDAM (Hierarchical Direct Access Method)
  - accessing segments 102
  - calls against 82
  - changing DL/I access methods
    - from HIDAM 409
    - from HISAM 407
    - from PHIDAM 415
    - to HIDAM 411
    - to HISAM 410
    - to PHIDAM 413
  - database records 99
  - database records, locking 109
  - databases, introduction 80
  - deleting segments 107
  - format of database 94
  - inserting segments 103
  - loading the database 349
  - locking 111
  - logical record length 264
  - maximum size 82
  - multiple data set groups 250
  - options available 82
  - OSAM (overflow sequential access methods) used 94
  - overflow area 97
  - pointers in 84
  - randomizing module 259
  - root addressable area 97, 99
  - segment format 99
  - size of root addressable area 258
  - space calculations 327
  - specifying free space 257
  - storage of records 97
  - when to use 83
- HF (hierarchic forward) pointers
  - description 85
- HIDAM
  - primary index recovery 111
- HIDAM (Hierarchical Indexed Direct Access Method)
  - accessing segments 102
  - calls against 82
  - changing DL/I access methods
    - from HIDAM 411
    - from HISAM 407
    - from PHIDAM 415
    - to HIDAM 409
    - to HISAM 409
    - to PHIDAM 413
  - databases, introduction 80
  - deleting segments 107
  - format of database 94
  - index database 99
  - index segment 101
  - inserting segments 103
  - loading the database 349
  - locking 111
  - logical record length 264
  - maximum size 82
  - multiple data set groups 250
  - options available 82
  - pointers in 84
  - primary index, introduction 81
  - RAPs, using 102
  - segment format 101
  - sequential root processing 102
  - space calculations 109, 327
  - specifying free space 257
  - storage of records 99
  - when to use 83
- hierarchic
  - backward pointers 86
- hierarchic forward (HF) pointers
  - description 85
- Hierarchical Direct Access Method
  - See HDAM (Hierarchical Direct Access Method) 334
- Hierarchical Direct Access Method (HDAM)
  - databases, introduction 80
- Hierarchical Indexed Direct Access Method
  - See HIDAM (Hierarchical Indexed Direct Access Method) 334
- Hierarchical Indexed Direct Access Method (HIDAM)
  - databases, introduction 80
  - primary index, introduction 81
- Hierarchical Indexed Sequential Access Method
  - See HISAM (Hierarchical Indexed Sequential Access Method) 334
- Hierarchical Sequential Access Method
  - See HSAM (Hierarchical Sequential Access Method) 334

- Hierarchical Sequential Access Method (HSAM)
  - accessing segments 64
  - calls against 64
- hierarchy
  - concept explained 8
  - definition 7
  - restructuring of with secondary indexes 209
- High Availability Large Database (HALDB)
  - adding partitions 485
  - change version numbers 114
  - changing 474
    - changes that affect all partitions 476
    - scope of changes 476
  - data sets, modifying 497
  - deleting partitions 491
  - disabling partitions 489
  - enabling partitions 491
  - exit routines
    - modifying 498
    - randomizing modules, modifying 500
  - HALDB Online Reorganization and offline reorganizations 400
  - initializing partitions 115
  - logical relationships 201
  - modifying 474
    - changes that affect all partitions 476
    - scope of changes 476
  - modifying data sets 497
  - naming conventions 22
  - normal partition processing 118
  - parallel partition processing 122
  - partition initialization 115
  - partition processing 118
  - partition selection 117
  - Partition Selection exit routine
    - record distribution 480
  - partitioned secondary indexes 225
  - partitions
    - about 112
    - changes that affect all partitions 476
    - data sets in 115
    - database uncommitted updates restriction 319
    - features of 112
    - ID number 113
    - ID numbers and partition modifications 481
    - ILDS requirement 116
    - indirect list data set (ILDS) requirement 116
    - modifying 474
    - name, changing 496
    - names 113
    - names and ID number 112
    - naming conventions 23
    - overview 112
    - reorganization number 114
    - root anchor points, changing number of 496
    - scope of changes 476
- High Availability Large Database (HALDB) (*continued*)
  - partitions, adding 485
  - partitions, deleting 491
  - partitions, disabling 489
  - partitions, enabling 491
  - partitions, restoring deleted 495
  - PHDAM
    - randomizing modules, modifying 500
    - root anchor points, changing number in partition 496
  - PHIDAM primary index recovery 111
  - pointers
    - modifying partitions 483
  - PSINDEX
    - adding a PSINDEX 500
    - initializing partitions 501
    - modifying 501
  - PSINDEXes 225
  - randomizing modules
    - modifying 500
  - record distribution 480
  - recovery, cursor-active status 398
  - reorganization number verification 114
  - root anchor points
    - changing number in PHDAM partition 496
  - secondary index, adding 500
  - secondary index, initializing partitions 501
  - secondary index, modifying 501
  - secondary indexes 225
  - segments
    - modifying 497
  - selective partition processing 118
- high key
  - of HALDB partitions 313
  - value, entering 313
- high keys
  - partition selection 117
- High-Speed DEDB Direct Reorganization utility (DBFUHDR0) 286
- high-speed sequential processing (HSSP)
  - description 296
- hiperspace buffering 421
- HISAM (Hierarchical Indexed Sequential Access Method)
  - access method 66
  - accessing segments 70
  - calls against 70
  - changing DL/I access methods
    - from HDAM 410
    - from HIDAM 409
    - to HDAM 407
    - to HIDAM 407
  - database reorganization procedures 376
  - deleting segments 74
  - description of 66
  - inserting segments 70
  - loading the database 348
  - locking 110
  - logical record format 69
  - logical record length 261, 264
- HISAM (Hierarchical Indexed Sequential Access Method) (*continued*)
  - options available 66
  - performance 71, 76
  - pointers 69
  - replacing segments 76
  - segment format 68
  - space calculations 327
  - storage of records 67
  - when to use 67, 76
- HISAM Reorganization Reload utility (DFSURRL0) 366
- HISAM Reorganization Unload utility (DFSURUL0) 365
- HSAM (Hierarchical Sequential Access Method)
  - accessing segments 64
  - calls against 64
  - deleting segments 66
  - description of 62
  - inserting segments 66
  - options available 62
  - performance 66
  - replacing segments 66
  - segment format 64
  - space calculations 327
  - storage of records 63
  - when to use 63
  - z/OS access methods used 62
- HSSP (high-speed sequential processing)
  - description 296
  - for database recovery 298
  - image-copy option 298
  - limits and restrictions 296
  - private buffer pools 298
  - processing option H 297
  - reasons for choosing 296
  - SETO statement 297
  - SETR statement 297
  - UOW locking 298
  - using 297
- I/O errors
  - ADS 166
  - MADS 166
  - multiple area data sets (MADS) 166
  - single area data sets (ADS) 166
- I/O PCB 321
- ID (task ID) field 96
- IDP and Fast Path 355
- IEFBR14 utility 334
- IEHPROGM program 334
- IFP and MPP regions
  - maintaining continuous availability of 463
- ILDS
  - reorganization updates 381
- ILDS (indirect list data set)
  - allocating 316
  - calculating size 317
  - defining 316
  - required by every partition 116
  - sample JCL 316
  - size, calculating 317
- ILE (indirect list entry) 316



- ILK (indirect list key) 316
- image-copy option 298
- implementing database design 5, 307
- importing database definitions
  - HALDB (High Availability Large Database) 315
- IMS Data Capture exit
  - See Data Capture exit routine
- IMS High Performance Pointer Checker 259
- IMS trace parameters
  - about 279
- IMS.ACBLIB library 321
  - online change procedure 465, 467
- IMS.DBDLIB 307
- IMS.PSBLIB 317
- in physical databases 194
- in the physical DBD 193
- independent overflow part of area (IOVF)
  - description 135
  - extending online 472
- index maintenance exit routine 216
- index segment 101
- indexed databases
  - HIDAM 99
  - HISAM 66
  - PHIDAM 99
- INDICES parameter 219
- indirect list data set (ILDS)
  - allocating 316
  - calculating size 317
  - defining 316
  - required by every partition 116
  - sample JCL 316
  - size, calculating 317
- indirect list entry (ILE) 316
- indirect list key (ILK) 316
- initial load program
  - basic 343
  - Fast Path 341
  - restartable, using UCF 344
  - writing 341
- initialization of partitions 115
- initialization phase of HALDB Online
  - Reorganization 383
- input for DBDGEN utility
  - DBD 307
- INSERT parameter
  - free space for a KSDS 278, 280
  - using in splitting CIs 71
- insert rules for logical relationships 200, 201, 507, 511
- insert strategy
  - choosing 278
- inserting segments
  - DEDB SDEPs 287
  - HD databases 103
  - HISAM databases 70
  - HSAM databases 66
  - MSDB (main storage database) 148
- inspections
  - code inspections 28
  - security inspection 28
- intact storage of XML data
  - overview 256
- intersection data 182, 184
- IOB (input/output block) 279

- IOBF parameter 269
- IOVF
  - See independent overflow part of Area
- IOVF (independent overflow part of area)
  - extending online 472
- IRLM
  - failure
    - restarting DEDB areas 128
- IRLM (internal resource lock manager)
  - block-level data sharing 111
  - failure
    - restarting DEDB areas 128
  - locking protocols 109
- ISPF member list 554
  - display 554
- ISPF panels
  - HALDB Partition Definition utility (%DFSHALDB) 552
- ISPGSTART 582
- ISPTLIB 577
- ISRDDN command 578
- ISRT (insert), loading a database 338
- IWAITS/CALL field 417

## J

- JCL (Job Control Language)
  - for allocating data sets 334
  - for initial load program 348
- Job Control Language
  - See JCL (Job Control Language) 334

## K

- KEY sensitivity 202
- key sequenced data sets (KSDS)
  - CI reclaim 254
- keys
  - ascending sequence 62
  - concatenated 213
  - duplicate 210
  - partition selection using high keys, defined 117
  - unique in secondary indexes 214
- KSDS (key sequenced data sets)
  - CI reclaim 254
- KSDS (key-sequenced data set)
  - HISAM (Hierarchical Indexed Sequential Access Method) 67
  - secondary indexes 210
  - specifying BWO(TYPEIMS) 280
  - specifying free space for 280

## L

- LCF (logical child first) pointer 176
- LCHILD statement
  - description 309
  - HALDB (High Availability Large Database) 310
  - in logical relationships 190, 193
  - in secondary indexing 223
- LCL (logical child last) pointer 176
- level in hierarchy 11
- LGNR 356

- libraries
  - IMS.ACBLIB 321
  - IMS.DBDLIB 307
  - IMS.PSBLIB 317
- list structure
  - defining 166
  - estimating size 167
- LKASID
  - INIT.DBDS and INIT.CHANGE
    - parameter 153
- LOAD (load), description 338
- load program
  - example of initial load program 343
- load program, writing 338
- loading databases
  - description 327
  - introduction 5
  - MSDB (main storage database) 294
  - sample programs 343
- local views, developing a data
  - structure 45
- locking impact of HALDB Online
  - Reorganization 397
- locking protocols 109
- log analysis, Fast Path information 355
- log facility, Fast Path performance 431
- log impact of HALDB Online
  - Reorganization 395
- log reduction 356
- logic
  - for initial load program 343
  - for restartable initial load
    - program 345
- logical child first (LCF) pointer 176
- logical child in logical relationships 170, 174
- logical child last (LCL) pointer 176
- logical databases 180
- logical DBD 194, 201
- logical parent in logical
  - relationships 170, 174
- logical parent pointer
  - See LP (logical parent) pointer 174
- logical parent's concatenated key (LPCK) 175
- logical records
  - HD (Hierarchical Direct) 94
  - HISAM 67, 261, 264
  - overhead 330
  - secondary indexes 211
- logical relationships
  - analyzing requirements 52, 53
  - and Data Capture exit routine 238
  - bidirectional physically paired 171
  - bidirectional virtually paired 173
  - comparison with secondary
    - indexes 226
  - concatenated segments 181
  - counter 182
  - crossing 195, 198
  - delete rule restrictions 238
  - delete rules 200, 516, 546
  - description of 169, 201
  - DLET call
    - DASD space release 519
  - DLET calls 518
  - establishing 184

logical relationships (*continued*)

- HALDB 201
- insert rules 200, 508, 511
- intersection data 182, 184
- ISRT call 508
- loading databases 349
- logical child 170, 174
- logical parent 170, 174
- overview 52
- paths 180, 181
- performance considerations 201, 204
- physical parent 170, 174
- pointers 174, 179
- procedures for adding to existing databases 442
- REPL call 511
- replace rules 200, 511, 514
- requirements, analyzing 52
- restrictions on modifying 457
- rules 546
- rules for defining 193, 194, 195, 201
- secondary indexes, with 221
- sequence fields 188, 189
- specifying in DBD 190, 193, 194, 195
- uses 169
- virtual logical children 189
- logical twin backward (LTB) pointer 178
- logical twin chains 203
- logical twin forward (LTF) pointer 178
- logical twin pointer 549
- long busy 166
- lookaside option
  - for buffer pools 162
- lookaside option for buffer pools, description 162
- lookaside, defining private buffer pools 158
- LP (logical parent) pointer 174
  - correcting bad pointers 549
  - definition 174
  - performance considerations 202
- LPCK (logical parent's concatenated key) 175
- LTB (logical twin backward) pointer 178
- LTERM 144
- LTF (logical twin forward) pointer 178

## M

- macros
  - PCB 307
  - PSB 307
- MADSIOT (Multiple Area Data Set I/O Timing)
  - calculating list structure storage size 167
  - CFRM 166
  - coupling facility 166
  - long busy 166
- main storage database
  - See MSDB (main storage database) 349
- main storage utilization, Fast Path 434
- maintenance
  - databases, planning 281
  - secondary indexes 217

- making keys unique using system related fields 214
- many-to-many mapping 46
- mapping data aggregates 46
- maximum size
  - HALDB (High Availability Large Database) 82
  - HDAM database 82
  - HIDAM database 82
  - PHDAM database 82
  - PHIDAM database 82
- MBR parameter 195
- migrating
  - fallback
    - from HALDB 415
    - from PHDAM and PHIDAM 415
    - to HDAM and HIDAM 415
    - to PHIDAM 413
    - to HALDB 413
  - migration considerations for HALDB Online Reorganization 387
- minimum size
  - specifying for full-function segments 233
- mixed mode 143
- mixing pointers 91
- modifiable alternate response PCB 321
- modifying a database
  - description of 437
  - introduction 5
- modifying data set groups
  - HALDB (High Availability Large Database) 315
- MON parameter 354
- monitoring
  - and tuning Fast Path systems 355
  - description of 353
  - events for Fast Path 357
  - introduction
    - overview 5
  - reports 353
- movement in hierarchy 10
- MSDB (main storage database)
  - calls against 147
  - deleting segments 148
  - description of 144
  - design considerations 290, 298
  - inserting segments 148
  - loading the database 349, 437
- MSDB Maintenance utility (DBFDBMA0) 145
- options available 144
- page fixing 294
- position 149
- restrictions on changing DBD 437
- storage of records 146
- when to use 143, 145

- MSDBCP1 data set 295
- MSDBCP2 data set 295
- MSDBDUMP data set 295
- multi-area structure
  - duplexing 155
- Multiple Area Data Set I/O Timing (MADSIOT)
  - calculating list structure storage size 167

Multiple Area Data Set I/O Timing (MADSIOT) (*continued*)

- CFRM 166
- coupling facility 166
- long busy 166
- multiple area data sets (MADS)
  - I/O errors 166
  - MADSIOT 166
- multiple data set groups
  - description of 248
  - HD databases 250
  - introduction 18
  - specifying in DBD 252
  - storage of records 251
  - uses 249
  - using 248

## N

- NAME parameter
  - in a DBD 195, 223
  - in the SENFLD statement 239
- naming convention
  - examples of defining 157
- naming convention, coupling facility structure 156
- naming conventions 21
  - data definition names (ddnames)
    - HALDBs 23
  - general rules 21
  - HALDB (High Availability Large Database) 22
  - HALDB data sets 24
  - HALDB online reorganization
    - ddnames 23
    - overview 23
  - HALDB partitions 23
- NBA (normal buffer allocation)
  - for CCTL 303
  - in DBCTL environment 302
  - limit 301
  - use of 299
- NBA parameter 290
- NBA/FPB limit 305
- NBRSEGS parameter 294
- NE status code 218
- no free logical record 71
- NOLKASID
  - INIT.DBDS and INIT.CHANGE parameter 154
- non-terminal-related database 144
- NOPROT parameter 218
- normal buffer allocation (NBA)
  - for CCTL 303
  - in DBCTL environment 302
  - use of 299
- NULLVAL parameter 216, 224

## O

- OBA (overflow buffer allocation)
  - for CCTL threads 303
  - in DBCTL environment 303
  - use of 299

- OLR (online reorganization)
  - HALDB (High Availability Large Database)
    - registering OLR capability with DBRC using PDU 557
- one-to-many mapping 46
- online change
  - adding a DEDB 469
  - adding DEDB areas online 471
  - databases 462
  - deleting a DEDB 469
  - deleting DEDB areas online 471
  - exit routines 465
  - randomizing routines 465
- Online Change Copy utility (DFSUOCU0)
  - deleting a data capture exit routine 467
- Online Change utility (DFSUOCU0)
  - changing a randomizing routine 465
- online reorganization
  - HALDB
    - data set naming convention overview 23
    - ddname naming convention 23
    - HALDB naming convention 390
    - HALDB Online Reorganization 382
- online reorganization (OLR)
  - HALDB (High Availability Large Database)
    - registering OLR capability with DBRC using PDU 557
- opening
  - DEDB areas 127
- operands
  - /CK 214
  - /SX 214
  - See parameters
- optional functions
  - Data Capture exit routines 233
  - field-level sensitivity 238
  - GSAM databases 79
  - HD databases 82
  - HISAM databases 66
  - HSAM (Hierarchical Sequential Access Method) 62
  - logical relationships 169, 201
  - MSDB databases 144
  - multiple data set groups 248
  - secondary indexes 204
  - Segment Edit/Compression exit routine 230
  - SHISAM databases 78
  - SHSAM databases 77
  - variable-length segments 227
- OPTIONS statement
  - fixing buffers in VSAM 269
  - for OSAM 281
  - for VSAM 277, 279
  - OSAM 281
  - use in splitting CIs 71
- OSAM
  - data sets
    - maximum size 82
- OSAM (Overflow Sequential Access Method)
  - adjusting buffers 422
  - allocation of data sets 334

- OSAM (Overflow Sequential Access Method) (*continued*)
  - description 270, 547
  - options 281
  - track space used 264
  - used by HD 94
- OSAM data sets
  - maximum size 548
- OSAM Sequential Buffering (SB)
  - See SB (OSAM Sequential Buffering) 270
- output thread 166
- overflow buffer allocation (OBA)
  - See OBA (overflow buffer allocation) 303
- overflow data set 67
- Overflow Sequential Access Method
  - See OSAM (Overflow Sequential Access Method) 547
- overflow space allocation
  - changing 472
- overhead
  - DEDB CI resources 329
  - logical records 330

**P**

- packing density 261
- page fixing MSDBs 294
- parallel partition processing
  - definition 122
- parameters
  - BGWRT 277
  - BSIZ
    - in DB/TM environment 299
    - in the DBCTL environment 302
  - BWO(TYPEIMS) 280
  - BYTES 215
  - CNBA 303
  - CONSTANT 223
  - DB Monitor 354
  - DBBF
    - in DB/TM environment 298
    - in the DBCTL environment 302
  - DBFX
    - in DB/TM environment 299
    - in the DBCTL environment 302
  - DDATA 215
  - DUMP 279, 281
  - EXIT 234
  - EXTRTN 216, 224
  - FPB 303
  - FPOB 303
  - FREESPACE 280
  - FRSPC 258
  - INDICES 219
  - INSERT
    - free space for a KSDS 278, 280
    - using in splitting CIs 71
  - IOBF 269
  - LGNR 356
  - MBR 195
  - MON 354
  - NAME
    - in a DBD 195, 223
    - in the SENFLD statement 239
  - NBA 290

- parameters (*continued*)
  - NBRSEGS 294
  - NOPROT 218
  - NULLVAL 216, 224
  - PARENT 181, 195
    - in logical relationships 192, 195
    - to specify PCF and PCL pointers 89
    - to specify PCF pointers 88
  - PASSWD 33
  - POINTER 193
  - PROCOPT 32, 287
  - PROCSEQ 206, 209
  - PROT 218
  - RECORD 264
  - REPL 240
  - RMNAME 97
    - HDAM options 260
    - PHDAM options 260
    - specifying number of blocks or CIs 259
    - specifying number of RAPS 96
  - RULES 507, 546
  - SEGMENT 223
  - SHARELVL 132
  - SOURCE 193, 202
  - SPEED | RECOVERY 280
  - SRCH 223
  - START 215
  - SUBSEQ 214, 223
  - TYPE 240
  - VERSION 235
  - VSAMFIX 269, 279
  - VSAMPLS 279
- PARENT parameter 88, 181, 192, 195
- parent segment, definition 7
- Partial Database Reorganization utility (DFSPRCT1) 374
- Partition Default information screen
  - anchor 559
  - automatic definition 558, 561
  - block size 560
  - bytes 559
  - data set name prefix 559
  - database name 558
  - default JCL 560
  - free block freq. factor 560
  - free space percentage 560
  - high block number 559
  - image copy JCL 561
  - input data set 559
  - max. image copies 560
  - module name 559
  - online image copy JCL 561
  - partition ID 559
  - receive JCL 561
  - recovery period 560
  - recovery utility JCL 560
  - reusable? 561
  - use defaults for DS groups 559
- partition definition utility
  - HALDB (High Availability Large Database)
    - registering OLR capability with DBRC 557
- Partition Definition utility (PDU)
  - changing partitions 312



- Partition Definition utility (PDU)
  - (continued)
  - creating HALDB partitions 311
  - HALDB functions 310
  - high key value, entering 313
  - partition definition steps 311
  - partition high key value, entering 313
- partition high key 313
  - entering the high key value 313
- partition initialization 115
- partition selection
  - defined 117
  - using high keys, defined 117
- partition selection exit routine
  - defined 117
- partition structure modification 480
- partitioned database
  - information screen
    - database name 556
    - database organization 556
    - number of data set groups 557
    - part. selection routine 556
    - recoverable? 557
    - RSR global service group 556
    - RSR tracking type 556
    - share level 556
- Partitioned Hierarchical Direct Access Method (PHDAM)
  - databases, introduction 80
- Partitioned Hierarchical Indexed Direct Access Method (PHIDAM)
  - databases, introduction 80
  - primary index, introduction 81
- partitioned secondary indexes
  - overview 225
- partitions
  - about 112
  - adding to an existing HALDB 485
  - automatic definition 314
  - bit map block 95
  - change version numbers 114
  - changing 477
    - boundaries 477
    - key ranges 477
    - partition structure
      - modification 480
  - changing with the Partition Definition utility (PDU) 312
  - creating with the Partition Definition utility (PDU) 311
  - data sets in 115
  - data sets, maximum 315
  - database uncommitted updates
    - restriction 319
  - databases, types of 80
  - defining
    - automatically 314
    - manually 314
  - deleting 491
  - disabling 489
  - enabling 491
  - features of 112
  - high key 313
  - high key value 313
  - ID numbers 112, 113
- partitions (continued)
  - ID numbers and partition
    - modifications 481
  - ILDS requirement 116
  - initializing 115
  - manual definition 314
  - modifying 477
    - affect on pointers 483
    - boundaries 477
    - key ranges 477
    - partition structure 480
  - name, changing 496
  - names 112, 113
  - naming conventions 23
  - naming sequences 113
  - normal partition processing 118
  - offline reorganization
    - reallocating data sets 380
    - reloading 381
    - unloading 379
    - updating ILDS 381
  - parallel partition processing 122
  - partition definition process 311
  - partition high key 313
  - partition processing 118
  - Partition Selection exit routine
    - record distribution 480
  - partition selection exit routine, defined 117
  - partition selection using high keys, defined 117
  - partition selection, defined 117
  - partition structure modification 481
  - PHDAM
    - root anchor points, changing
      - number in partition 496
  - pointers
    - modifying partitions 483
  - reallocating data sets
    - offline reorganization 380
  - record distribution
    - Partition Selection exit routine 480
  - reloading
    - offline reorganization 381
  - reorganization number 114
  - reorganization number verification
    - enabling 114
    - introduction 114
  - restoring deleted partitions 495
  - root anchor points
    - changing number of 496
  - selective partition processing 118
  - unloading
    - offline reorganization 379
  - updating ILDS
    - offline reorganization 381
- PASSWD parameter 33
- password protection 33
- paths
  - full duplex 517
  - half duplex 517
  - in hierarchy 8
  - in logical relationships 180
  - third access 517
- PCB (program communication block)
  - alternate PCB statement 318
- PCB (program communication block)
  - (continued)
  - coding 317
  - database PCB statement 318
  - introduction 18
  - maximum number of database PCBs in a PSB 318
- PCBs (program control blocks)
  - DB
    - database uncommitted updates
      - restriction 319
- PCF (physical child first) pointers
  - correcting 549
  - description 87
- PCL (physical child last) pointers
  - correcting 549
  - description 88
- PDS directory 554
- performance
  - avoiding split segments 232
  - CI reclaim for KSDSs 254
  - comparison of databases 80
  - discussion 257, 283
  - HISAM 71, 76
  - HSAM 66
  - logical relationships 201
  - monitoring 353
  - tuning a database 359
- PHDAM
  - adjusting 419
  - options, adjusting 419
- PHDAM (partitioned Hierarchical Direct Access Method)
  - RAPs (root anchor points) 96
- PHDAM (Partitioned Hierarchical Direct Access Method)
  - access methods 11
  - accessing segments 102
  - calls against 82
  - changing DL/I access methods
    - from HDAM 413
    - to HDAM 415
  - counter area of segments, introduction 15
  - data set naming conventions 24
  - database
    - reorganizing 376
  - database records 99
  - database records, locking 109
  - databases, introduction 80
  - DBCTL support 56
  - deleting segments 107
  - format of database 94
  - inserting segments 103
  - loading the database 349
  - locking 111
  - logical record length 264
  - multiple data set groups 250
  - options available 82
  - overflow area 97
  - pointer area of segments, introduction 15
  - pointers in 84
  - randomizing module 259
  - root addressable area 97, 99
  - segment format 99
  - size of root addressable area 258

- PHDAM (Partitioned Hierarchical Direct Access Method) (*continued*)
    - space calculations 327
    - specifying free space 257
    - storage of records 97
  - PHIDAM
    - access methods 11
    - primary index recovery 111
  - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method)
    - accessing segments 102
    - calls against 82
    - changing DL/I access methods
      - from HIDAM 413
      - to HIDAM 415
    - counter area of segments, introduction 15
    - data set naming conventions 24
    - database
      - reorganizing 376
    - databases, introduction 80
    - DBCTL support 56
    - deleting segments 107
    - format of database 94
    - index database 99
    - index segment 101
    - inserting segments 103
    - loading the database 349
    - locking 111
    - logical record length 264
    - maximum size 82
    - multiple data set groups 250
    - options available 82
    - pointer area of segments, introduction 15
    - pointers in 84
    - primary index, introduction 81
    - segment format 101
    - space calculations 109, 327
    - specifying free space 257
    - storage of records 99
    - when to use 83
  - physical block size 264
  - physical child first pointers 87, 549
  - physical child last pointers 88, 549
  - physical parent in logical relationships 170, 174
  - physical parent pointer
    - See PP (physical parent) pointer 177
  - physical twin backward pointers 90, 549
  - physical twin forward pointers 89, 549
  - physically adjacent 62, 66
  - PI (program isolation), lock protocols 109
  - pointer area
    - of segment, introduction 15
  - pointer field 212
  - POINTER parameter 193
  - pointer segment 206, 211
  - pointers
    - correcting 549
    - FCP (forward chain pointer) 146
    - HALDB self-healing pointer
      - process 401
      - performance 404
    - HB (hierarchic backward) 86
    - HD 84
  - pointers (*continued*)
    - hierarchic forward (HF) 85
  - HISAM (Hierarchical Indexed Sequential Access Method) 69
    - in HD databases 80
    - in logical relationships 179
    - in secondary indexes 212, 213
  - LCF 176
  - LCL 176
  - logical relationships 174
  - logical twin 549
  - LP (logical parent) 174, 549
  - LTB 178
  - LTF 178
  - mixing types 91
  - PCF (physical child first) 87
  - PCL (physical child last) 88
  - PP 177
  - PTB 90
  - PTF 89
  - self-healing pointer process 401
    - performance 404
  - sequence in a segment's prefix 93, 182
  - symbolic 207, 212
  - types 409
- position
  - hierarchy 10
  - MSDB 149
- post-implementation review 29
- PP (physical parent) pointer 177
- pre-formatting data set space 280
- preallocated CIs 286
- prefix descriptor byte 505
- prefix part of segment 14
- Prefix Resolution utility (DFSURG10) 369
- Prefix Update utility (DFSURGP0) 370
- preopen
  - disabling for DEDB areas 128
- preopening
  - DEDB areas 127
- Prereorganization utility (DFSURPR0) 368
- primary data set, defined 67
- primary index
  - introduction to HD databases 80
- primary indexes
  - backup and recovery 111
- private buffer pool
  - description 156
- procedures
  - adding logical relationships 442
  - adding secondary indexes 459
  - adding segment edit/compression exit routine 460
  - adding segment types 438
  - adding variable-length segments 459
  - Asynchronous Data Capture 461
  - calculating database size 327
  - changing DASD 418
  - changing hierarchic structure
    - changing sequence of segment types 416
    - combining segments 417
  - changing segment size 440
  - converting concatenated keys 462
- procedures (*continued*)
  - deleting segment types 439
  - description of 19
  - introduction 6
  - modifying a database 437
  - reorganization
    - HD database 376
    - HISAM database 376
    - primary index 376
- processing option H 297
- processing option P
  - and NBA limit 301
  - and NBA/FPB limit 305
  - in determining the size of the UOW 287
- processing, mixed mode 143
- PROCOPT parameter
  - establishing security 32
  - in HSSP 297
  - option H 297
  - option K 319
  - option P 287
- PROCSEQ parameter 206, 209
- program communication block
  - See PCB (program communication block)
- program communication block (PCB)
  - database PCB statement 318
  - maximum number of database PCBs in a PSB 318
- program control blocks (PCBs)
  - DB
    - database uncommitted updates restriction 319
- program isolation lock manager 109
- program specification block
  - See PSB (program specification block)
- programs
  - DB Monitor 353
  - DB Monitor Report print 353
  - DFSDDL0 326
  - DL/I test 326
  - IEFBR14 utility 334
  - IEHPROGM program 334
  - running 345
  - writing a load program 338, 348
- PROT parameter 218
- PSB (program specification block)
  - as mask over data structure 31
  - coding 317
  - defined 18
  - using dictionary to generate 18
- PSBGEN (Program Specification Block Generation) 320
  - utilities 317, 468
- PSBLIB library 317
- PSINDEX
  - adding a secondary index to a HALDB 500
  - data set naming conventions 24
  - database
    - reorganizing 376
  - initializing partitions 501
  - modifying 501
  - partitions, initializing 501
  - PSINDEX databases overview 225

- PTB (physical twin backward) 549
- PTB (physical twin backward) pointers 90
- PTF (physical twin forward) 549
- PTF (physical twin forward) pointers 89

## Q

- Q command codes, locking 110
- QSAM (Queued Sequential Access Method)
  - access to GSAM databases 78
  - and OSAM data set 547
  - processing HSAM databases 62
  - processing SHSAM databases 77

## R

- randomizing module
  - DEDB design 288
  - in HDAM database records 259
  - in PHDAM database records 259
  - introduction to HD databases 80
- randomizing modules
  - HALDB
    - modifying randomizing modules 500
- randomizing routine
  - changing online 466
  - deleting 466
- randomizing routines
  - DEDB, standard
    - changing RAP space allocation online 472
  - DEDB, two stage
    - changing online 468
  - introduction to changing online 465
- RAP (root anchor point)
  - changing randomizing routines 465
- RAPs (root anchor points)
  - explained 96
  - HIDAM 102
  - number 98
- RATE parameter of INITIATE OLREORG
  - command 395
- RDF (record definition field) 330
- read errors
  - DEDB
    - VSO 163
- real logical child 173, 176, 204
- RECON data set
  - selecting for HALDB (High Availability Large Database) 579
- record deactivation 130
- Record Deactivation 130
- record definition field (RDF) 330
- record distribution
  - DEDB
    - impact of changes to UOW structure on distribution 471
- RECORD parameter 264
- record search argument (RSA) 79
- records
  - recommendations for specifying size 265

- Recoverable Resource Manager Services
  - attachment facility 57
- recovery 280
  - cursor-active status, HALDB 398
  - HALDB Online Reorganization 398
  - overview 5
  - primary indexes 111
- recursive structures 184, 188, 226
- registering databases 167
- relative block number 98
- reload utility (DFSURGL0) 367
- reload utility (DFSURRL0) 366
- Remote Site Recovery (RSR)
  - DBTRACK 556
  - global service group
    - HALDB (High Availability Large Database) 556
  - HALDB Online Reorganization 396
  - RCVTRACK 556
  - shadowing
    - HALDB (High Availability Large Database) 556
  - tracking type
    - HALDB (High Availability Large Database) 556
- reorganization 362
  - online
    - HALDB naming convention 390
- reorganization numbers
  - HALDB partitions 114
  - HALDB reorganization number verification 114
- reorganization utilities
  - See also* utilities
  - introduction to reorganization utilities 361
- reorganizing 360, 549
  - assessing need using Database Surveyor utility 373
  - Database Surveyor utility (DFSRSUR) 373
  - HALDB (High Availability Large Database) 376
    - offline reorganization 377
    - overview of offline reorganization 377
  - reallocating data sets 380
  - reloading partitions 381
  - secondary indexes 382
  - unloading partitions 379
  - updating ILDS 381
- HALDB self-healing pointer process 401
- offline reorganization
  - HALDB (High Availability Large Database) 377
  - reallocating data sets 380
  - reloading HALDB partitions 381
  - unloading HALDB partitions 379
  - updating ILDS 381
- PHDAM database
  - overview of offline reorganization 377
- PHDAM databases 376
- PHIDAM database
  - overview of offline reorganization 377

- reorganizing (*continued*)
  - PHIDAM databases 376
  - reloading HALDB partitions 381
  - secondary indexes
    - HALDB (High Availability Large Database) 382
  - self-healing pointer process for HALDBs 401
  - unloading HALDB partitions 379, 380
  - updating ILDS 381
- REPL parameter 240
- replace rules
  - AM status code 512
  - DA status code 512
  - RX status code 512
  - status codes 512
- replace rules for logical relationships
  - choosing 201
  - description of 511, 514
- replacing segments
  - HISAM databases 76
  - HSAM databases 66
- reports
  - Fast Path Analysis 357
- resolution utility (DFSURG10) 369
- resolving data conflicts 52
- resource allocation for MSDBs 291
- resource contention 292
- restart 78, 79
  - emergency
    - reopening DEDB areas 127
  - HALDB Online Reorganization 395, 396
- restrictions
  - HALDB Online Reorganization 389
  - HSSP, of 296
  - modifying existing logical relationships 457
  - segments 14
  - using secondary indexes with logical relationships 221
- reviews 25
- RMNAME parameter 260
  - specifying number of blocks or CIs 259
  - specifying number of RAPS 96
  - usage 465
- ROLB call 300, 304
- root addressable area 97, 135
- root addressable space
  - changing online, with two stage randomizing routine 468
- root anchor point (RAP)
  - changing randomizing routines 465
- root anchor points
  - See* RAPs (root anchor points) 96
- root processing
  - sequential
    - HIDAM 102
- root segment, definition 7
- RRSAF
  - See* Recoverable Resource Manager Services attachment facility
- RSA (record search argument) 79
- rules
  - defining logical relationships 194

- rules (*continued*)
  - description of 507, 546
  - in logical databases 195, 201
  - in physical databases 193
- fields in a segment 15
- HD with data set groups 250
- secondary indexes with logical relationships 221
- segments 14
- sequence fields 16
- using an SSA 147
- RULES parameter 507, 546
- RX status code 512

## S

- SB (OSAM Sequential Buffering)
  - benefits 271
    - productivity 271
    - programs 271
    - utilities 271
  - buffer handler 273
  - buffer pools 273
  - buffer set 273
  - CICS 271
  - conditional activation 272
  - data set groups 272
  - DB-PCP/DSG pair 272
  - deactivation 272
  - description 270, 271
  - disallowing use 276
  - HALDB Online Reorganization 400
  - overlapped I/O 271, 273
  - periodical evaluation 272
  - random read 270
  - requesting use 274, 277
  - sequential read 270
  - virtual storage 273
- scan utility (DFSURGS0) 369
- SCD (system contents directory) 148
- SDEP (sequential dependent)
  - CI preallocation 286
- SDFSRESL 467
- search field 212
- secondary data structure 210
- secondary indexes
  - HALDB
    - adding a secondary index to a HALDB 500
    - initializing PSINDEX partitions 501
    - modifying a secondary index 501
  - HALDB (High Availability Large Database)
    - reorganizing 382
  - PSINDEX
    - adding a PSINDEX to a HALDB 500
    - initializing partitions 501
    - modifying 501
  - PSINDEX, overview 225
  - reorganizing
    - HALDB (High Availability Large Database) 382
- secondary indexing
  - analyzing requirements 52

- secondary indexing (*continued*)
  - comparison with logical relationships 226
  - description of 204
  - index maintenance exit routine 216
  - INDICES parameter 219
  - introduction 17
  - loading databases 349
  - locking 111
  - maintenance 217
  - making keys unique 214
  - pointer segment 211
  - procedure for adding 459
  - processing as separate database 218
  - restructured hierarchy 209
  - segments 206
  - sharing 219
  - sparse indexing 216
  - specifying in DBD 223
  - storage 210
  - suppressing index entries 216
  - system related fields 214
  - use
    - logical relationships 221
    - variable-length segments 222
  - uses 204
  - utility unload 371
- secondary processing sequence 210
- security
  - establishing 31
  - field-level sensitivity 239
  - introduction 6, 18
- security inspection 29
- SEGM statement 193
  - description 309
  - example 195
  - in secondary indexing 225
  - in the physical DBD 190
  - specifying insert, delete, and replace rules 507
  - specifying variable-length segments 228
- segment
  - data
    - compressing 231
    - editing 231
- segment code
  - description 14
  - HDAM 99
  - HISAM 68
  - HSAM 64
  - PHDAM 99
- Segment compression routine
  - adding 466
  - changing 466
  - deleting 466
- segment deletion 143
- segment edit/compression exit routine
  - avoiding split segments 232
  - introduction 17
  - procedure for adding 460
  - specifying minimum segment size 232
  - specifying the use of 233
- Segment Edit/Compression exit routine
  - description of 230
  - uses 231

- Segment Edit/Compression facility
  - See See segment edit/compression exit routine
- SEGMENT parameter 223
- segment search argument
  - See SSA (segment search argument) 213
- segments
  - accessing
    - HDAM databases 102
    - HIDAM databases 102
    - HISAM databases 70
    - HSAM databases 64
    - PHDAM databases 102
    - PHIDAM databases 102
  - adding to DEDB 470
  - calculating frequency 328
  - calculating size 327
  - changing position of data 441
  - changing segment name 442
  - changing size 440
  - child, definition 7
  - counter area 15
  - data elements 15
  - DEDB
    - segment growth 233
  - definition 6
  - deleting
    - HD databases 107
    - HISAM databases 74
    - HSAM databases 66
    - MSDB (main storage database) 148
  - deleting from DEDB 470
  - dependent, definition 7
  - fields 15
  - fixed-length 14
  - fixed-length segments
    - specifying minimum size 233
  - full-function
    - avoiding split segments 232
    - specifying minimum size 232, 233
  - HALDB, modifying
    - root anchor points, changing number in partition 497
  - inserting
    - HD databases 103
    - HISAM databases 70
    - HSAM databases 66
    - MSDB 148
  - introduction to 14
  - logical child 181
  - moving segment types 440
  - occurrence, definition 7
  - parent, definition 7
  - pointer 206
  - pointer area 15
  - procedure for adding to database 438
  - procedure for deleting from database 439
  - replacing
    - HISAM databases 76
    - HSAM databases 66
  - root, definition 7
  - rules 14
  - source 207

- segments (*continued*)
  - target 207
  - twin, definition 8
  - type, definition 7
  - variable length 14
  - variable-length 227
  - variable-length segments
    - specifying minimum size 233
- selective partition processing
  - definition 118
- self-healing pointer process 401
- performance 404
- SENFLD statement 239, 319
- SENSEG statement
  - description 319
  - field-level sensitivity 239
  - restricting data access 31
- sequence field
  - See also* keys
  - HIDAM 100
  - HISAM 66
  - HSAM (Hierarchical Sequential Access Method) 62
  - introduction to 15
  - logical relationships 188, 189
  - PHIDAM (Partitioned Hierarchical Indexed Direct Access Method) 100
  - unique, definition 16
- sequencing in hierarchy 9
- sequencing logical twin chains 203
- sequential access methods
  - HISAM 66
  - HSAM 62
- sequential buffering (SB)
  - See* SB (OSAM Sequential Buffering) 270
- sequential dependent part of area 135
- sequential randomizing module 259
- sequential root processing
  - HIDAM 102
- sequential storage method 56
- SETO statement 297
- SETR statement 297
- shared secondary indexes 219
- SHARELVL 132
- SHISAM (Simple Hierarchical Indexed Sequential Access Method) 76, 349
  - CI reclaim restriction 254
  - VSAM REPRO, using 254
- SHSAM (Simple Hierarchical Sequential Access Method) 76, 77
- Simple Hierarchical Indexed Sequential Access Method (SHISAM)
  - See* SHISAM (Simple Hierarchical Indexed Sequential Access Method) 76
- Simple Hierarchical Sequential Access Method (SHSAM)
  - See* SHSAM (Simple Hierarchical Sequential Access Method) 76
- single area data sets (ADS)
  - Fast Path I/O toleration 166
  - I/O errors 166
- size
  - maximum
    - HALDB (High Availability Large Database) 82
- size (*continued*)
  - maximum (*continued*)
    - HIDAM database 82
    - PHIDAM database 82
    - PHIDAM database 82
  - size calculations
    - See* space calculations 327
  - size field in variable-length segments 228
  - size of DEDB estimation 286
  - SOURCE parameter 193, 202
  - source segment 207
  - space calculations
    - CIs or blocks needed for
      - database 330
      - database size 327
      - overhead for DEDB CI resources 329
  - space management fields, updating 104
  - space management in HD databases 94
  - space release in logical relationships 519
  - space search algorithm
    - HD databases 107
  - sparse indexing 216
  - SPEED | RECOVERY parameter 280
  - SRCH parameter 223
  - SSA (segment search argument)
    - restrictions for DEDBs 143
    - secondary indexes 213
  - standards and procedures
    - description of 19
    - introduction 6
  - START parameter 215
  - statements
    - AREA 308
    - data set
      - description of 308
    - DATASET
      - example of 253
      - specifying DDNAMEs for data sets 195
    - DBD 225, 308
    - DBDGEN 310
    - END 310, 320
    - FIELD
      - definition of 214
      - in the DBD 281
      - position in DBD 309
    - FINISH 310
    - LCHILD in logical relationships 190, 193, 223, 309
    - OPTIONS
      - fixing buffers in VSAM 269
      - for OSAM 281
      - for VSAM 277, 279
      - OSAM 281
      - use in splitting CIs 71
    - PSBGEN 320
    - SEGM
      - description of 309
      - example of 195, 225
      - in secondary indexing 225
      - in the physical DBD 190, 193
      - specifying insert, delete, and replace rules 507
      - specifying variable-length segments 228
    - SENFLD 239, 319
- statements (*continued*)
  - SENSEG
    - description of 319
    - field-level sensitivity 239
    - restricting data access 31
  - XDFLD
    - description of 214
    - in secondary indexing 223
    - restrictions in use 310
    - specifying sparse indexing 216
- status codes
  - AM
    - in a delete call 519
    - in an insert call 509
  - DA 519
  - DX 519
  - FH 129
  - for replace rules 512
  - FR
    - for BMP regions 301
    - for CCTL threads 305
    - in Fast Path buffer allocation 300
    - in Fast Path buffer allocation for BMPs 304
  - FW
    - for CCTL threads 305
    - in BMP regions 301
    - in Fast Path buffer allocation 300
    - in Fast Path buffer allocation for BMPs 304
  - GC 286
  - GE 189, 509
  - II 509
  - IX 509
  - NE 218
- storage of data
  - DEDBs 138
  - HDAM databases 97
  - HIDAM databases 99
  - HISAM databases 67
  - HSAM databases 63
  - introduction 6
  - MSDB (main storage database) 146, 295
  - multiple data set groups 251
  - PHIDAM databases 97
  - PHIDAM databases 99
  - variable-length segments 228
- SUBSEQ parameter 214
- subsequence field 212
- subset pointers 138, 289
- suppressing index entries 216
- Surveyor utility (DFSPPRSUR) 373
- SX (/SX) operand 214
- symbolic checkpoint call 78, 79
- symbolic pointers
  - logical relationships 175, 202
  - secondary indexes 207, 213
- SYNC (Synchronization Point) call 286
- sync point processing for Fast Path 165
- synchronization point
  - Fast Path 165, 301, 305
  - output thread 166
  - processing 165, 434
- synonyms 99
- syntax diagram
  - how to read xxi



- system checkpoints
  - database uncommitted updates restriction 319
- system contents directory (SCD) 148
- system related fields 214

## T

- tape, magnetic 62
- target segment 207
- task ID field 96
- terminal-related database 144
- termination phase of HALDB Online Reorganization 386
- test databases 323
  - developing
    - Cross System Product 325
    - Data Extraction, Processing, and Restructuring System 325
    - DL/I test program (DFSDDL0) 326
    - File Manager for z/OS for IMS Data 326
    - IMS Application Development Facility II 325
    - VisualAge Generator 325
- testing a database
  - introduction 5
- testing, application programs 324
- third access path 517
- tools
  - Data Extraction, Processing, and Restructuring System 325
  - for test databases 325
    - DL/I test program 326
    - VisualAge Generator 325
- trace parameters
  - using 279
- track space used 264
- transaction timings, Fast Path 356
- tuning a database
  - description of 359
  - Fast Path 355
  - introduction 5
- two stage randomizing routine
  - changing root addressable space 468
- TYPE parameter 240

## U

- UCF (utility control facility)
  - described 373
  - restartable initial database load program 344
  - running restartable load program under 345
- unique sequence fields
  - HISAM (Hierarchical Indexed Sequential Access Method) 66
  - introduction 16
- unit of reorganization for HALDB Online Reorganization 385
- units of work (UOW) 135
- Unload utility (DFSURGU0) 366
- unload utility (DFSURUL0) 365
- UOW (unit of work) 135, 286

- UOW locking 298
- UOW structural definition 468
- use chain 266
- user data field in pointer segment 214
- utilities
  - Application Control Block Maintenance utility
    - building the ACBs 320
  - Database Change Accumulation 399
  - database image copy 399
  - Database Prefix Resolution utility (DFSURG10) 369
  - Database Prefix Update utility (DFSURGP0) 370
  - Database Preorganization utility (DFSURPR0) 368
  - Database Scan utility (DFSURGS0) 369
  - Database Surveyor (DFSURSUR) 373
  - DBDGEN 307
  - DBFDBMA0 145
  - DBFUHDR0 286
  - DFSPRCT1 374
  - DFSPRSUR 373
  - DFSUCF00 373
  - DFSURG10 369
  - DFSURGL0 367
  - DFSURGP0 370
  - DFSURGS0 369
  - DFSURGU0 366
  - DFSURPR0 368
  - DFSURRL0 366
  - DFSURUL0 365
  - for unload and reloading secondary indexes 371
  - HALDB Online Reorganization 397
  - HD Reorganization Reload 367
  - HD Reorganization Unload 366
  - High-Speed DEDB Direct Reorganization (DBFUHDR0) 286
  - HISAM Reorganization Reload 366
  - HISAM Reorganization Unload 365
  - MSDB Maintenance 145
  - Partial Database Reorganization 374
  - PSBGEN 317
  - reorganization 361
  - UCF 373
  - Unload 366
- utility control facility
  - See UCF (utility control facility)

## V

- variable intersection data (VID) 183
- variable-length segments
  - definition 14
  - description of 228
  - introduction 17
  - procedure for adding 459
  - replace operations 229
  - specifying in DBD 228
  - specifying minimum size 233
  - storage 228
  - use with secondary indexes 222
  - uses 230
  - using 227

- variable-length segments (*continued*)
  - what application programmers need to know 230
- VERSION parameter 235
- VID (variable intersection data) 183
- virtual logical child 173
- Virtual Storage Access Method (VSAM)
  - HISAM databases 66
- virtual storage option
  - introduction 151
- VisualAge Generator 325
- VSAM
  - data sets
    - maximum size 82
- VSAM (Virtual Storage Access Method)
  - access to GSAM databases 78
  - adjusting buffers 420
  - adjusting options 424, 425
  - and Hiperspace buffering 267
  - changing access methods 426
  - changing space allocation 425
  - CIDF (control interval definition field) 330
  - ESDS in HD databases 94
  - HISAM databases 66
  - local shared resource pools
    - assigning data sets 279
    - defining 279
    - index and data subpools 279
    - subpools of same size 266
  - options 277
  - passwords 33
  - RDF (record definition field) 330
  - storage of secondary indexes 210
  - track space used 264
- VSAMFIX parameter 269, 279
- VSAMPLS parameter 279
- VSO DEDB (virtual storage option data entry database)
  - checkpoint processing 164
  - data sharing 161
  - defining a VSO DEDB area 152
  - defining a VSO DEDB cache structure name 156
  - emergency restart 164
  - I/O error processing 163
    - read errors 163
    - write errors 163
  - input processing 162
  - locking 160
  - options across restart 164
  - output processing 162
  - PRELOAD option 163
  - resource control 160
  - using data spaces 159
  - with XRF 165
- VSO DEDB areas
  - block-level sharing of 154
  - defining
    - CHANGE.DBDS 151
    - INIT.DBDS 151
  - virtual storage
    - coupling facility cache structure 151
    - data space 151

## W

write errors, DEDB VSO 163

## X

XDFLD statement  
    description 214  
    in secondary indexing 223  
    restrictions in use 310  
    specifying sparse indexing 216

### XML

    decomposed storage  
        overview 255  
    intact storage  
        overview 256  
    overview of storing in IMS  
        databases 255  
    schema  
        overview of storing XML  
        data 255

## Z

z/OS access methods  
    used by HSAM 62







Program Number: 5655-J38

Printed in USA

SC18-7806-04



Spine information:



IMS

Administration Guide: Database Manager

Version 9