

IMS



# HALDB Online Reorganization Guide and Reference

*Version 9*



IMS



# HALDB Online Reorganization Guide and Reference

*Version 9*

**Note**

Before using this information and the product it supports, be sure to read the general information under "Notices" on page 99.

**Quality Partnership Program (QPP) Edition (December 2003) (Softcopy Only)**

This QPP edition applies to Version 9 of IMS (product number 5655-J38) and to all subsequent releases and modifications until otherwise indicated in new editions.

**© Copyright International Business Machines Corporation 2003. All rights reserved.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

# Contents

<b>Figures</b> . . . . .	vii
<b>Tables</b> . . . . .	ix
<b>About This Book</b> . . . . .	xi
Summary of Contents . . . . .	xi
Prerequisite Knowledge . . . . .	xi
Terminology of HALDB OLR . . . . .	xii
How to Read Syntax Diagrams . . . . .	xiii
Syntax Diagram Example . . . . .	xiv
How to Send Your Comments . . . . .	xv
Change Indicators . . . . .	xv
<b>Summary of Changes</b> . . . . .	xvii
Changes to the Current Edition of This Book for IMS Version 9 . . . . .	xvii
Library Changes for IMS Version 9 . . . . .	xvii
New and Revised Titles . . . . .	xvii
Terminology Changes . . . . .	xvii
Accessibility Enhancements . . . . .	xvii

---

## Part 1. Understanding HALDB OLREORG . . . . . 1

<b>Chapter 1. Overview of HALDB OLR</b> . . . . .	3
How HALDB OLR Functions . . . . .	3
When HALDB OLR Begins - Initialization and IMS Subsystem Ownership . . . . .	3
What Happens to Automatically-Created Data Sets When HALDB OLR Initialization Fails . . . . .	4
After HALDB OLR Initialization Completes - During the Copying Process . . . . .	4
After the HALDB OLR Copying Process Completes - <b>OLREORG</b> <i>Cursor-Active</i> Status is Reset . . . . .	6
Naming Conventions for HALDB OLR Data Sets . . . . .	6
DBRC Changes to Support HALDB OLR . . . . .	8
<b>Chapter 2. Considerations for HALDB OLR</b> . . . . .	9
Migration . . . . .	9
Coexistence . . . . .	9
Fallback . . . . .	10
Restrictions . . . . .	10
Performance Considerations for HALDB OLR . . . . .	11
Global Locking . . . . .	11
Restart, XRF, and RSR with HALDB OLR . . . . .	12
Logging Effects of Reorganization . . . . .	13
Reorganization Processing Time . . . . .	13
Activating Sequential Buffering for OLR . . . . .	14
Recovery . . . . .	14
Database and Data Set Recovery . . . . .	14
Remote Site Recovery . . . . .	16
DBRC Considerations . . . . .	17
GENJCL.IC and GENJCL.OIC Considerations . . . . .	17
NOTIFY.IC and NOTIFY.UIC Considerations . . . . .	18
DBRC RECON HALDB OLR Information . . . . .	18
RSR Tracking System . . . . .	20
Recovery Related Records . . . . .	20

Online Reorganization Execution . . . . .	20
Offline Reorganization . . . . .	21
Utilities . . . . .	21
HALDB Index/ILDS Rebuild - DFSPREC0 . . . . .	21
Database Change Accumulation - DFSUCUM0 . . . . .	22
Database Recovery - DFSURDB0 . . . . .	22
Database Image Copy - DFSUDMP0 . . . . .	22
Batch Backout - DFSBBO00 . . . . .	22

---

## Part 2. Using HALDB OLR . . . . . 25

<b>Chapter 3. The Data Sets of HALDB OLR . . . . .</b>	<b>27</b>
Output Data Set Creation . . . . .	27
Required Characteristics for Existing Output Data Sets . . . . .	27
Characteristics for Automatically-Created Output Data Sets . . . . .	28
Number of Volumes: . . . . .	28
Location, SMS-Managed Case: . . . . .	28
Location, Non-SMS-Managed, Non-VSAM Data Set Case: . . . . .	28
Location, Non-SMS-Managed, VSAM Data Set Case: . . . . .	28
Size, Single-Volume Case: . . . . .	28
Size, Multiple-Volume Case (SMS-Managed Only): . . . . .	29
The Disposition of the Output Data Sets When Initialization Fails . . . . .	30
The Inactive Data Sets at Successful Completion of the Reorganization	
Process- Data Set Deletion . . . . .	30
<b>Chapter 4. Setting Up HALDB OLR . . . . .</b>	<b>31</b>
INITIATE OLREORG Command . . . . .	31
/INITIATE OLREORG Command . . . . .	31
Format of the INITIATE OLREORG Command . . . . .	31
Environments, Keywords, and Parameters of the INITIATE OLREORG	
Command . . . . .	32
Usage of the INITIATE OLREORG Command . . . . .	32
Examples of INITIATE OLREORG Input and Output . . . . .	35
INIT.DB. . . . .	37
Format of INIT.DB. . . . .	37
INIT.DB Command Usage . . . . .	38
NOTIFY.REORG . . . . .	38
Format of NOTIFY.REORG . . . . .	38
NOTIFY.REORG Command Usage . . . . .	39
<b>Chapter 5. Monitoring HALDB OLR . . . . .</b>	<b>41</b>
QUERY OLREORG Command . . . . .	41
Format of the QUERY OLREORG Command. . . . .	41
Environments, Keywords, and Parameters of the QUERY OLREORG	
Command . . . . .	41
Usage of the QUERY OLREORG Command . . . . .	42
Example of QUERY OLREORG Input and Output . . . . .	44
/DISPLAY DATABASE Command HALDB OLR Support . . . . .	45
Example of /DISPLAY DB Output with HALDB OLR . . . . .	45
/DISPLAY DB OLR Command . . . . .	46
QUERY DATABASE STATUS(OLR) Command . . . . .	47
<b>Chapter 6. Modifying and Tuning HALDB OLR . . . . .</b>	<b>49</b>
TERMINATE OLREORG COMMAND. . . . .	49
/TERMINATE OLREORG Command . . . . .	51
Format of the TERMINATE OLREORG Command . . . . .	51

Environments, Keywords, and Parameters of the TERMINATE OLREORG Command . . . . .	51
Usage of the TERMINATE OLREORG Command . . . . .	52
Examples of TERMINATE OLREORG Input and Output . . . . .	54
UPDATE OLREORG Command . . . . .	55
/UPDATE OLREORG Command . . . . .	56
Format of the UPDATE OLREORG Command . . . . .	57
Environments, Keywords, and Parameters of the UPDATE OLREORG Command . . . . .	57
Usage of the UPDATE OLREORG Command . . . . .	57
Examples of UPDATE OLREORG Input and Output . . . . .	60
/START DB Command HALDB OLR Support . . . . .	62
/DBRecovery Command HALDB OLR Support . . . . .	62
/RECover Command HALDB OLR Support . . . . .	62
CHANGE.DB . . . . .	62
Format of CHANGE.DB. . . . .	62
CHANGE.DB Command Usage. . . . .	63
<b>Part 3. Diagnosing HALDB OLR . . . . .</b>	<b>65</b>
<b>Chapter 7. Messages and Codes of HALDB OLR . . . . .</b>	<b>67</b>
HALDB OLR DFS Series Messages . . . . .	67
HALDB OLR DSP Series Messages . . . . .	82
HALDB OLR Abends and Codes . . . . .	84
<b>Chapter 8. Log Records of HALDB OLR. . . . .</b>	<b>85</b>
DFSDLOG - Database Change Log Records . . . . .	85
DFSLOG20 - Database Open and Close (X'20' and X'21') Log Records . . . . .	85
DFSLOG27 - Database Extension (X'27) Log Records . . . . .	85
DFSLOG53 - CI/CA and Space Manager (X'53) Log Records. . . . .	85
Log Records: X'29' OLR Event Log Records . . . . .	85
X'2910': Ownership Established. . . . .	86
X'2920': UPDATE OLREORG Command . . . . .	86
X'2930': Output Data Set Information. . . . .	86
X'2940': Cursor-Active Status . . . . .	86
X'2950': Cursor Movement . . . . .	86
X'2970': Cursor-Active Status Reset . . . . .	86
X'2990': Ownership Relinquished . . . . .	86
<b>Part 4. Appendixes. . . . .</b>	<b>87</b>
<b>RECON Listing HALDB OLR Support. . . . .</b>	<b>89</b>
HALDB MASTER RECORD . . . . .	89
PARTITION DB RECORD . . . . .	89
DBDS Record . . . . .	90
REORG RECORD . . . . .	92
<b>Index . . . . .</b>	<b>93</b>
<b>Notices . . . . .</b>	<b>99</b>
Trademarks. . . . .	101
<b>Bibliography . . . . .</b>	<b>103</b>
IMS Version 9 Library . . . . .	103





---

## Figures

1.	Relationship between Input and Output Data Sets at a Point During Reorganization . . . . .	5
2.	Normal Processing Flow of a HALDB OLR . . . . .	6
3.	/DISPLAY DB PVHDJKC POIHDKD output for databases (2 with OLRs in progress) . . . . .	46
4.	/DISPLAY DB OLR output . . . . .	46
5.	HALDB OLR Process with a TERMINATE OLREORG . . . . .	50
6.	HALDB OLR Process with an UPDATE OLREORG . . . . .	56



## Tables

1. How to Read Syntax Diagrams . . . . .	xiii
2. HALDB Data Set Name Examples . . . . .	8
3. DSID DCB Numbers for the A-J and X and the M-V and Y data sets . . . . .	18
4. Data Sharing Between the Releases . . . . .	19
5. Valid Environments for the INITIATE OLREORG command Keywords, and Parameters . . . . .	32
6. Output Fields for INITIATE OLREORG Command . . . . .	35
7. Return and Reason Code for the INITIATE OLREORG Command . . . . .	35
8. Completion Codes for the INITIATE OLREORG Command . . . . .	35
9. Valid Environments for the QUERY OLREORG command Keywords, and Parameters . . . . .	42
10. Output Fields of QUERY OLREORG . . . . .	43
11. Return and Reason Code for the QUERY OLREORG Command . . . . .	44
12. Completion Codes for the QUERY OLREORG Command . . . . .	44
13. Valid Environments for the TERMINATE OLREORG Command, Keywords, and Parameters . . . . .	51
14. Output Fields for TERMINATE OLREORG Command . . . . .	53
15. Return and Reason Code for the TERMINATE OLREORG Command . . . . .	53
16. Completion Codes for the TERMINATE OLREORG Command . . . . .	54
17. Valid Environments for the UPDATE OLREORG Command Keywords and Parameters . . . . .	57
18. Output Fields for UPDATE OLREORG Command . . . . .	60
19. Return and Reason Code for the UPDATE OLREORG Command . . . . .	60
20. Completion Codes for the UPDATE OLREORG Command . . . . .	60
21. Reason Codes, Environments, and Errors Detected for Message DFS2991I . . . . .	77
22. X'29' OLR Event Log Record Subtypes . . . . .	86



---

## About This Book

This softcopy book is available only in PDF and BookManager® formats. This book is available on the IMS™ Version 9 Licensed Product Kit (LK3T-7213). To get the most current versions of the PDF and BookManager formats, go to the IMS Web site at [www.ibm.com/ims](http://www.ibm.com/ims) and link to the Library page.

This reference information is intended to supply you with as much IMS HALDB Online Reorganization information as possible in a single place.

Licensed information on HALDB Online Reorganization has been excluded from this reference information and can be found in the *IMS Version 9: Diagnosis Guide and Reference*.

---

## Summary of Contents

This information unit is presented in three parts:

- Part 1. contains concepts including an overview of how HALDB Online Reorganization (OLR) functions and the considerations for using HALDB OLR.
- Part 2. contains HALDB OLR usage information including:
  - Initiation and management of HALDB OLR that can be done by issuing the INITIATE, TERMINATE, UPDATE OLREORG commands. These commands are described in Chapter 4, “Setting Up HALDB OLR,” on page 31 and in Chapter 6, “Modifying and Tuning HALDB OLR,” on page 49.
  - HALDB OLR can be monitored by issuing the QUERY OLREORG, /DISPLAY OLR, or QUERY DB commands. These commands are described in Chapter 6, “Modifying and Tuning HALDB OLR,” on page 49.
- Part 3. contains HALDB OLR diagnostic information including IMS messages, codes, abends, and log records.
- Part 4. contains the RECON listings for HALDB OLR support.

---

## Prerequisite Knowledge

The following prerequisites are needed for you to use HALDB OLR support:

- A working knowledge of database management, HALDBs, and DBRC.
- An understanding of the HALDB Online Reorganization terminology is needed. See “Terminology of HALDB OLR” on page xii for more information.
- An understanding that HALDB OLR can only be run for HALDBs defined in RECON as online reorganization capable (OLRCAP). For more information on the OLRCAP parameter, see “INIT.DB” on page 37 or “CHANGE.DB” on page 62..
- A working knowledge of the IMS Common Service Layer and an understanding of Operations Manager (OM) and Structured Call Interface (SCI) is required.

### Related Reading:

- See the *IMS Version 9: Common Service Layer Guide and Reference* for more information on the OM and SCI.
- See the *IMS Version 9: DBRC Guide and Reference* for more information on DBRC.

---

## Terminology of HALDB OLR

**active set of data sets**

In cursor-active status, the paired input and output sets of data sets that the data is being copied from and to respectively. Otherwise, the single set of data sets that comprise the partition.

**cursor**

The point within a partition that delineates the end of the database records that have been copied.

**cursor-active status**

Paired sets of data sets are active. OLREORG ACTIVE=YES is displayed in the RECON listing.

**HALDB OLR**

Non-disruptive reorganization of HALDB PHDAM and PHIDAM partitions. Synonymous with online reorganization and HALDB Online Reorganization, OLR, OLREORG, and HALDB OLREORG.

**HALDB OLREORG**

See HALDB OLR.

**HALDB Online Reorganization**

See HALDB OLR.

**inactive set of data sets**

The old input set of data sets that the data was copied from.

**OLR** See HALDB OLR.**OLR ACTIVE HARD COUNT**

Represents the number of HALDB OLR cursor active calls that are pending in the tracking RECON.

**OLR INACTIVE HARD COUNT**

Represents the number of HALDB OLR cursor inactive calls that are pending in the tracking RECON.

**OLREORG**

See HALDB OLR.

**online reorganization**

See HALDB OLR.

**owned**

Status during which an IMS subsystem has exclusive control over a HALDB OLR.

**SHAREPLEX**

As used in this document, SHAREPLEX is defined as the IMS Data Sharing within the boundaries of one set of DBRC RECONS. As such, this differs from MVS™ SYSPLEX and also from the term, IMSplex or OM API which is sometimes used in an IMS Shared Queues environment.

**unit of reorganization**

One or more HALDB records (root segment and all of its dependent segments) that are reorganized within one commit boundary.

## How to Read Syntax Diagrams

Each syntax diagram in this book begins with a double right arrow and ends with a right and left arrow pair. Lines that begin with a single right arrow are continuation lines. You read a syntax diagram from left to right and from top to bottom, following the direction of the arrows.

Conventions used in syntax diagrams are described in Table 1:

*Table 1. How to Read Syntax Diagrams*






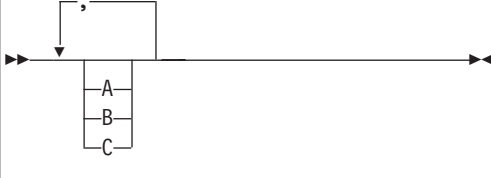

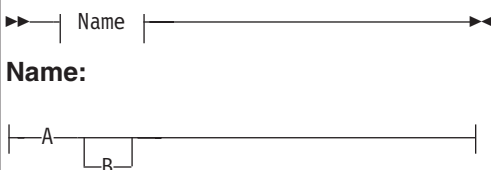
Convention	Meaning
	You must specify values A, B, and C. Required values are shown on the main path of a syntax diagram.
	You have the option to specify value A. Optional values are shown below the main path of a syntax diagram.
	You must specify value A, B, or C.
	You have the option to specify A, B, C, or none of these values.
	You have the option to specify A, B, C, or none of these values. If you don't specify a value, A is the default.
	You have the option to specify one, more than one, or none of the values A, B, or C. Any required separator for multiple or repeated values (in this example, the comma) is shown on the arrow.
	You have the option to specify value A multiple times. The separator in this example is optional.

Table 1. How to Read Syntax Diagrams (continued)


Convention	Meaning
 <p><b>Name:</b></p>	Sometimes a diagram must be split into fragments. The syntax fragment is shown separately from the main syntax diagram, but the contents of the fragment should be read as if they are on the main path of the diagram.
Punctuation marks and numbers	Enter punctuation marks (slashes, commas, periods, parentheses, quotation marks, equal signs) and numbers exactly as shown.
Uppercase values	Keywords, their allowable synonyms, and reserved parameters, appear in uppercase letters for z/OS. Enter these values exactly as shown.
Lowercase values without italics	Keywords, their allowable synonyms, and reserved parameters, appear in lowercase letters for UNIX. Enter these values exactly as shown.
Lowercase values in italics (for example, <i>name</i> )	Supply your own text or value in place of the <i>name</i> variable.
b	A b symbol indicates one blank position.

Other conventions include the following:

- When entering commands, separate parameters and keywords by at least one blank if there is no intervening punctuation.
- Footnotes are shown by a number in parentheses, for example, (1).
- Parameters with number values end with the symbol #.
- Parameters that are names end with 'name'.
- Parameters that can be generic end with the symbol \*.

## Syntax Diagram Example

Here is an example syntax diagram that describes the **hello** command.



**Name:**



**Greeting:**





**Notes:**

- 1 You can code up to three names.
- 2 Compose and add your own greeting (for example, how are you?).

According to the syntax diagram, these are all valid versions of the **hello** command:

```
hello
hello name
hello name, name
hello name, name, name
hello, your_greeting
hello name, your_greeting
hello name, name, your_greeting
hello name, name, name, your_greeting
```

The space before the *name* value is significant. If you do not code *name*, you must still code the comma before *your\_greeting*.

---

## How to Send Your Comments

Your feedback is important in helping us to provide the most accurate and highest quality information. If you have any comments about this book or any other IMS documentation, you can do one of the following:

- Go to the IMS home page at [www.ibm.com/ims](http://www.ibm.com/ims). There you will find an online feedback page where you can enter and submit comments.
- Send your comments by e-mail to [imspubs@us.ibm.com](mailto:imspubs@us.ibm.com). Be sure to include the name of the book, the part number of the book, the version of IMS, and, if applicable, the specific location of the text you are commenting on (for example, a page number or table number).

---

## Change Indicators

This is a new information unit, all information herein is new and is presented without change indicators.



---

## Summary of Changes

---

### Changes to the Current Edition of This Book for IMS Version 9

---

This is a new book that contains new technical information for IMS Version 9.

This softcopy book is available only in PDF and BookManager formats. This edition is a draft version of this book intended for use during the Quality Partnership Program (QPP). Contents of this book are preliminary and under development.

---

### Library Changes for IMS Version 9

Changes to the IMS Library for IMS Version 9 include the addition of new titles, the change of one title, and a major terminology change.

### New and Revised Titles

The following list details the major changes to the IMS Version 9 library:

- *IMS Version 9: HALDB Online Reorganization Guide and Reference*

The library includes a new book: *IMS Version 9: HALDB Online Reorganization Guide and Reference*. This information is available only in PDF and BookManager formats.

- *IMS Version 9: An Introduction to IMS*

The library includes a new book: *IMS Version 9: An Introduction to IMS*.

- The book formerly titled *IMS Version 8: IMS Java User's Guide* is now titled *IMS Version 9: IMS Java Guide and Reference*.

### Terminology Changes

IMS Version 9 introduces new terminology for IMS commands:

#### **type-1 command**

A command, generally preceded by a leading slash character, that can be entered from any valid IMS command source. In IMS Version 8, these commands were called *classic* commands.

#### **type-2 command**

A command that is entered only through the OM API. Type-2 commands are more flexible and can have a broader scope than type-1 commands. In IMS Version 8, these commands were called *IMSpIex* commands or *enhanced* commands.

### Accessibility Enhancements

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products. The major accessibility features in z/OS products, including IMS, enable users to:

- Use assistive technologies such as screen readers and screen magnifier software
- Operate specific or equivalent features using only the keyboard
- Customize display attributes such as color, contrast, and font size

#### **User Assistive Technologies**

Assistive technology products, such as screen readers, function with the IMS user interfaces. Consult the documentation of the assistive technology products for specific information when you use assistive technology to access these interfaces.

**Accessible Documentation**

Online information for IMS Version 9 is available in BookManager format, which is an accessible format. All BookManager functions can be accessed by using a keyboard or keyboard shortcut keys. BookManager also allows you to use screen readers and other assistive technologies. The BookManager READ/MVS product is included with the z/OS base product, and the BookManager Softcopy Reader (for workstations) is available on the IMS Licensed Product Kit (CD), which you can download from the Web at [www.ibm.com](http://www.ibm.com).

**Keyboard Navigation of the User Interface**

Users can access IMS user interfaces using TSO/E or ISPF. Refer to the *z/OS V1R1.0 TSO/E Primer*, the *z/OS V1R1.0 TSO/E User's Guide*, and the *z/OS V1R1.0 ISPF User's Guide, Volume 1*. These guides describe how to navigate each interface, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

## Part 1. Understanding HALDB OLREORG

<b>Chapter 1. Overview of HALDB OLR</b>	3
How HALDB OLR Functions	3
When HALDB OLR Begins - Initialization and IMS Subsystem Ownership	3
What Happens to Automatically-Created Data Sets When HALDB OLR Initialization Fails	4
After HALDB OLR Initialization Completes - During the Copying Process	4
After the HALDB OLR Copying Process Completes - <b>OLREORG</b> <b>Cursor-Active</b> Status is Reset	6
Naming Conventions for HALDB OLR Data Sets	6
DBRC Changes to Support HALDB OLR	8
<b>Chapter 2. Considerations for HALDB OLR</b>	9
Migration	9
Coexistence	9
Fallback	10
Restrictions	10
Performance Considerations for HALDB OLR	11
Global Locking	11
Restart, XRF, and RSR with HALDB OLR	12
Logging Effects of Reorganization	13
Reorganization Processing Time	13
Activating Sequential Buffering for OLR	14
Recovery	14
Database and Data Set Recovery	14
No Database Image Copy Allowed During Reorganization	14
Log-Only Recovery	14
Generic DDNAME for Database Image Copy	16
Remote Site Recovery	16
DBRC Considerations	17
GENJCL.IC and GENJCL.OIC Considerations	17
NOTIFY.IC and NOTIFY.UIC Considerations	18
DBRC RECON HALDB OLR Information	18
RSR Tracking System	20
Recovery Related Records	20
Online Reorganization Execution	20
Offline Reorganization	21
Utilities	21
HALDB Index/ILDS Rebuild - DFSPREC0	21
Database Change Accumulation - DFSUCUM0	22
Database Recovery - DFSURDB0	22
Database Image Copy - DFSUDMP0	22
Batch Backout - DFSBBO00	22



---

## Chapter 1. Overview of HALDB OLR

HALDB (High Availability Large Database) Online Reorganization will be known as HALDB OLR from this point on in this document.

The HALDB OLR function provides non-disruptive reorganization of HALDB PHDAM (Partitioned Hierarchical Direct Access Method) and PHIDAM (Partitioned Hierarchical Indexed Direct Access Method) partitions. HALDB OLR provides 100% continuous availability of the largest supported databases in the world.

Data processing today requires 24 hour a day, 7 day a week data availability. IMS already leads the industry in capabilities regarding data availability. HALDB OLR goes further and addresses the planned data outage time that to date has constituted the largest amount of time that data was unavailable. HALDB OLR also offers significant benefit toward reducing the cost of owning data (for example: reduction in skills needed to maintain data, less personnel needed, reduction in storage costs, and other costs).

### In This Chapter:

- “How HALDB OLR Functions”
  - “When HALDB OLR Begins - Initialization and IMS Subsystem Ownership”
  - “After HALDB OLR Initialization Completes - During the Copying Process” on page 4
  - “After the HALDB OLR Copying Process Completes - **OLREORG Cursor-Active** Status is Reset” on page 6
- “Naming Conventions for HALDB OLR Data Sets” on page 6
- “DBRC Changes to Support HALDB OLR” on page 8

---

## How HALDB OLR Functions

Prior to HALDB OLR support, PHDAM and PHIDAM databases had to be taken offline to be reorganized. The online reorganization of a HALDB PHDAM or PHIDAM partition runs in the DLISAS (Data Language/I separate address space). The online reorganization runs non-disruptively by allowing concurrent IMS updates, including updates by data sharing IMS systems. To accomplish this, the reorganization moves small amounts of data at a time from the original input set of data sets to a separate output set of data sets.

This reorganization process does not support data definitional changes. This process only provides reclustering and space distribution advantages.

## When HALDB OLR Begins - Initialization and IMS Subsystem Ownership

Ownership of the online reorganization by an IMS subsystem is established during initialization and is recorded by DBRC in the RECON. When ownership of an online reorganization is established, no other IMS subsystems are allowed to obtain ownership of that online reorganization. Ownership may be released by this IMS prior to the end of initialization or before the completion of the online reorganization; then another IMS may obtain ownership of and complete the online reorganization.

Before online reorganization starts, there is a single *active* set of data sets for the HALDB partition. The data sets in the other (*inactive*) set contain no useful information, and one or more of these data sets need not even exist before the reorganization is started.

In preparation for their use as the output set of data sets, each of the inactive data sets is evaluated. If one of these data sets does not exist, the initialization process creates it automatically. Each preexisting data set is validated to ensure that it meets certain requirements that are discussed in “Required Characteristics for Existing Output Data Sets” on page 27.

In the final initialization step, the active set of data sets is treated as the input set, and the inactive set becomes the output set. At the end of this initialization process the online reorganization of the HALDB partition is recorded in the RECON with an *OLREORG cursor-active* status: (OLREORG CURSOR ACTIVE=YES).

## What Happens to Automatically-Created Data Sets When HALDB OLR Initialization Fails

During initialization, various error conditions, such as an unacceptable preexisting data set or an insufficient amount of DASD space for an automatically-created data set, can cause the initialization to fail. If any error occurs during or after the data set creation and validation process but before the *OLREORG cursor-active* status of the reorganization has been recorded in the RECON, then any output data sets that were already automatically-created are retained along with any preexisting ones.

Preexisting output data sets must meet certain requirements that are discussed in “Required Characteristics for Existing Output Data Sets” on page 27) and any output data sets that do not already exist are created automatically by IMS as part of initialization.

## After HALDB OLR Initialization Completes - During the Copying Process

When the *OLREORG cursor-active* status has been recorded, and until this reorganization completes or until a batch reorganization reload is done, the HALDB partition is comprised of the pair of A-through-J (and X for PHIDAM format only) set of data sets and the M-through-V (and Y for PHIDAM format only) set of data sets. During this time both sets of data sets must be available for the partition to be used.

Database records are copied from the input to the output data sets in units of reorganization. During the reorganization, other database changes may be made to records that have not yet been copied from the input data sets and to records that have already been copied to the output data sets.

Figure 1 on page 5 illustrates the conceptual relationship between the input and output data sets at a point during the reorganization.



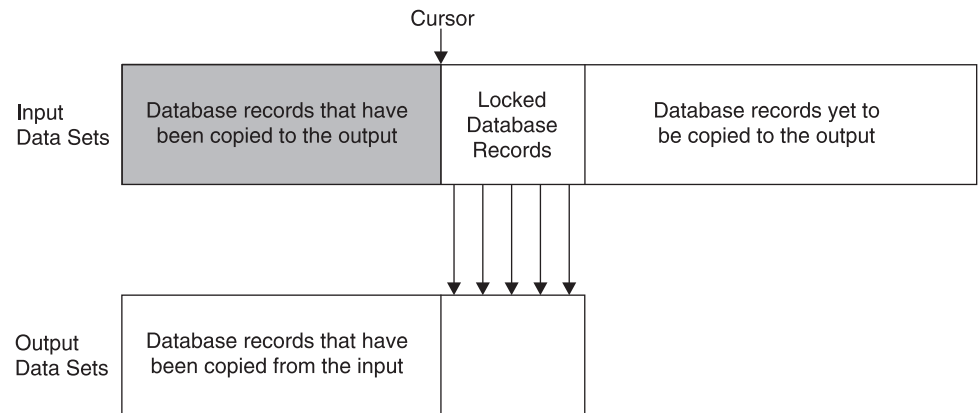


Figure 1. Relationship between Input and Output Data Sets at a Point During Reorganization

Consider the database records for the entire HALDB partition to be ordered from left to right in three categories:

- those that have been copied
- those that are now being copied
- those that are yet to be copied

A cursor marks the point in the partition where the database records have already been copied. As the copying proceeds, this cursor moves forward through the database (from left to right in the diagram).

In the area in the diagram labeled "database records yet to be copied" the database records can be read, replaced, inserted, or deleted. In this case, these changed records are eventually copied to the output data sets. The records that are currently being copied are locked and cannot be accessed or updated by other applications until they have been copied.

When another application running at the same time as HALDB OLR, attempts to access database record that is being reorganized online, the following processing occurs internally. If the database record is located before the HALDB OLR cursor, then IMS determines that it is in the input data sets. If the database record is located after the HALDB OLR cursor, then IMS determines that it is in the output data sets.

For possible recovery of either an input or an output data set, all database changes are logged, including the database records copied from the input to the output data sets.

Figure 2 on page 6 shows the normal processing steps of a successful HALDB OLR with columns depicting flow of control from the User to IMS and the statuses of the sets of data sets as processing events occur.

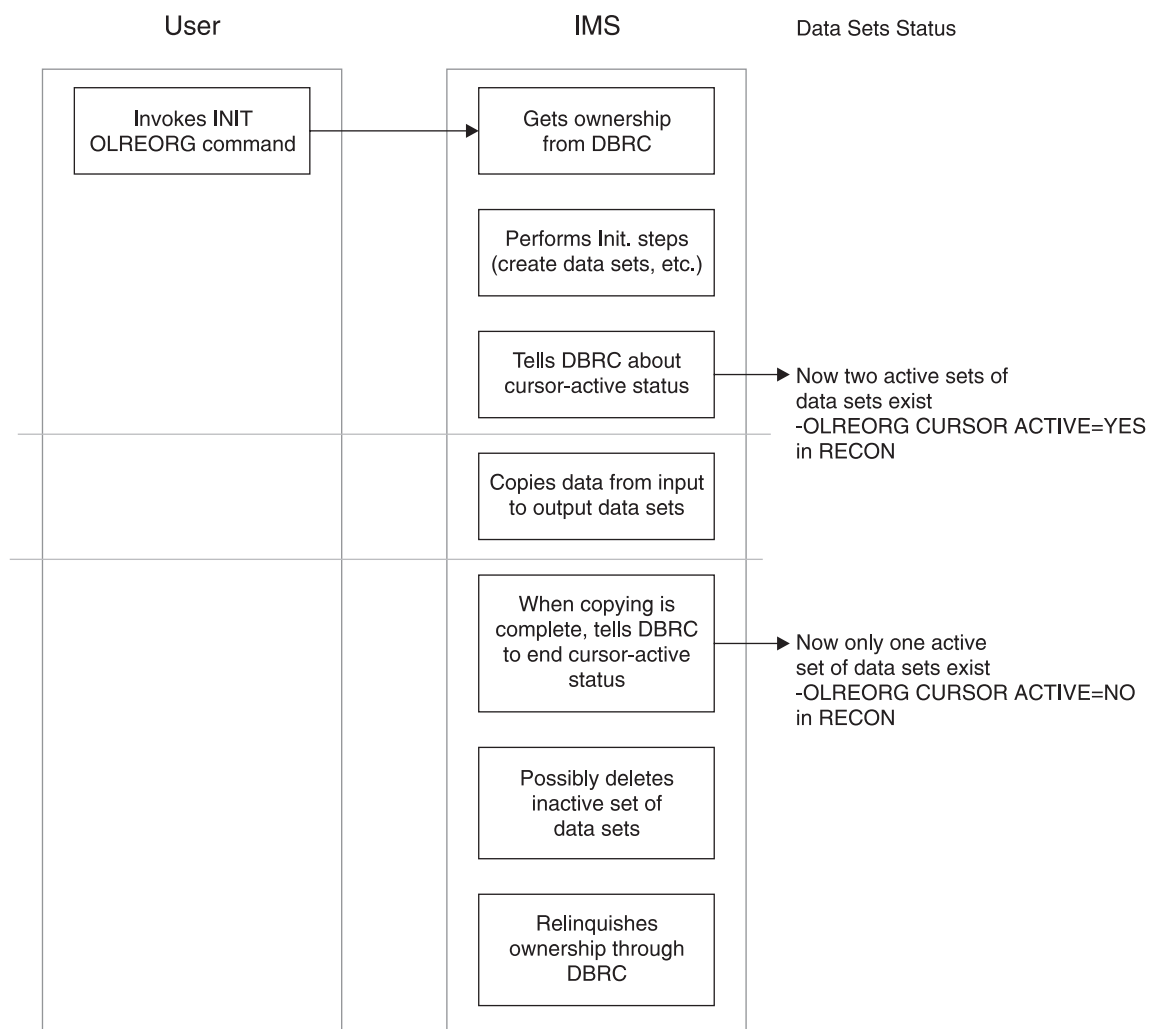


Figure 2. Normal Processing Flow of a HALDB OLR

## After the HALDB OLR Copying Process Completes - *OLREORG* Cursor-Active Status is Reset

At this point in the process, the output data sets become the active set, and the input data sets become the inactive set, possibly to be used as the output in a subsequent reorganization. At this point cursor-active status in the RECON is reset. Unless an initial load or a batch reorganization reload is done, successive online reorganizations for the HALDB partition alternate between the two sets of data sets.

After the OLREORG cursor-active status has been reset, the inactive data sets are deleted if the DEL option is in effect. IMS tells DBRC to relinquish this IMS's ownership of the reorganization.

## Naming Conventions for HALDB OLR Data Sets

HALDB OLR has extended the data definition and data set naming convention established for HALDBs. Multiple data set groups in a HALDB database use the characters A-through-J in the DDNAMEs and data set names of the supported ten data set groups. The primary index for a PHIDAM database uses the character X in

these names. This has been expanded by implementing the characters M-through-V and Y for an alternate (or paired) set of data sets.

HALDB data set names have the following format:

**bbbbbbb.dppppp**

where:

**bbbbbbb**

The data set base name of up to 37 characters (as you have defined it with the HALDB Partition Definition Utility or DBRC batch command). This same base name is used for every data set within a HALDB partition.

**d** An IMS-assigned data set name type character that uniquely identifies a specific data set for a HALDB partition. The single-character values are:

**A, B, ..., or J** where A corresponds to the first (or only) data set group defined in the DBD, B corresponds to the second, and so on.

The data sets in the A-through-J and X set are distinguished from those in the M-through-V and Y set in this way: the initial load or batch reorganization reload of a HALDB partition is always into the A-through-J and X data sets. If the online reorganization has not been run for the HALDB partition since the last initial load or batch reorganization reload, only the A-through-J and X data sets are used.

**M, N, ..., or V** where M corresponds to the first (or only) data set group defined in the DBD, N corresponds to the second, and so on.

The data sets in the M-through-V and Y set are not used until the first time an online reorganization is done for the HALDB partition. The use of the A-through-J and X and M-through-V and Y data sets in the reorganization is discussed in "After HALDB OLR Initialization Completes - During the Copying Process" on page 4

**L** for the ILDS (indirect list data set). The online reorganization does not make a copy of this data set.

**X** for the primary index of a PHIDAM database. This data set is the index for the A-through-J data sets and is replaced by the Y data set when the online reorganization copies the database records from the A-through-J and X data sets into the M-through-V and Y data sets.

**Y** for the primary index of a PHIDAM database. This data set is the index for the M-through-V data sets and is replaced by the X data set when the online reorganization copies the database records from the M-through-V and Y data sets into the A-through-J and X data sets.

**ppppp**

is the 5-digit partition ID assigned by IMS.

Whether you create one of the output data sets, or you let IMS create it automatically, the data set name is identical to that of the corresponding input data

set with the exception of the data set name type character. If the A-through-J and X data sets are the active set prior to this reorganization, the data set name for the output data set is the corresponding data set name in the M-through-V and Y set of data sets, and the opposite is also true. Table 2 shows some data set name examples:

*Table 2. HALDB Data Set Name Examples*

ACTIVE BEFORE REORGANIZATION	DATA SET GROUP OR INDEX	PARTITION ID	INPUT DATA SET NAME	OUTPUT DATA SET NAME
A-through-J and X	1	00003	DH41.A00003	DH41.M00003
A-through-J and X	Index	00065	ACCT.X00065	ACCT.Y00065
M-through-V and Y	2	00005	PAY.MST.N00005	PAY.MST.B00005
M-through-V and Y	8	00001	PAY.EMP.T00001	PAY.EMP.H00001

## DBRC Changes to Support HALDB OLR

Changes have been made to some DBRC commands and to some RECON records to support HALDB OLR. Some RECON records now support HALDB OLR.

### **Related Reading:**

- For more detailed information on the DBRC commands that support HALDB OLR, see “INIT.DB” on page 37, “NOTIFY.REORG” on page 38, “CHANGE.DB” on page 62.
- For more detailed information on the RECON records that support HALDB OLR, see “RECON Listing HALDB OLR Support” on page 89.

---

## Chapter 2. Considerations for HALDB OLR

These sections describe your considerations for HALDB Online Reorganization support.

### In the Chapter:

- “Migration”
- “Coexistence”
- “Fallback” on page 10
- “Restrictions” on page 10
- “Performance Considerations for HALDB OLR” on page 11
- “Recovery” on page 14
- “DBRC Considerations” on page 17
- “Offline Reorganization” on page 21
- “Utilities” on page 21

---

### Migration

These are your migration considerations for HALDB Online Reorganization support.

- When migrating from a prior release, a `CHANGE.RECON UPGRADE` command is used to upgrade the RECON to an IMS Version 9 RECON. At that time, all existing HALDBs are marked to indicate that they are not capable of being reorganized online using HALDB Online Reorganization. Prior to running HALDB Online Reorganization for a partition, a `CHANGE.DB DBD(HALDB_master) OLRCAP` command must be issued on IMS Version 9 to change the status of the HALDB and all its partitions to allow HALDB Online Reorganization. A `CHANGE.DB ALL OLRCAP` command can also be issued to enable OLR for all HALDB databases.
- To allow full data sharing between IMS Version 8 and IMS Version 9 with HALDBs undergoing online reorganization, the IMS Version 8 OLR Coexistence SPE needs to be applied.
- HALDBs marked as capable of running online reorganization are not known to an IMS Version 8 without the IMS Version 8 OLR Coexistence SPE, or to IMS Version 7.
- IMS Version 8 without the IMS Version 8 OLR Coexistence SPE and IMS Version 7 may access HALDBs marked as not capable of running online reorganization.

---

### Coexistence

These are your coexistence considerations for HALDB Online Reorganization support.

- IMS Version 7 systems and IMS Version 8 (without the OLR Coexistence SPE applied) may still access the HALDBs defined as not capable of running Online Reorganization. You can create new applications that exploit Online Reorganization capable HALDBs before all IMS systems have been upgraded to IMS Version 9. IMS Version 8 with the OLR Coexistence SPE applied is also able to access Online Reorganization capable HALDBs.
- As part of DBRC RECON upgrade, existing HALDBs are marked to indicate that they are not capable of being reorganized online using HALDB Online Reorganization.

- The `CHANGE.DB DBD(HALDB master) OLRCAP` command in IMS Version 9 can be used to allow HALDB Online Reorganization.
- HALDBs marked as capable of running online reorganization are not known to an IMS Version 8 without the IMS Version 8 OLR Coexistence SPE, or to IMS Version 7.
- To allow full data sharing between IMS Version 8 and IMS Version 9 with HALDBs undergoing online reorganization, the IMS Version 8 OLR Coexistence SPE needs to be applied.
- IMS Version 9 must always be used to process HALDBs defined as capable of being reorganized online for these utilities:
  - Database Recovery
  - Database Image Copy
  - Database Image Copy 2
  - Database Change Accumulation

The offline reorganization IMS Version 8 utilities in the list above with the IMS Version 8 OLR Coexistence SPE applied, will fail when they encounter a HALDB marked as OLRCAP.

---

## Fallback

These are the fallback considerations for HALDB Online Reorganization support.

**For IMS Version 8 with the OLR Coexistence SPE-** Full data sharing is allowed and no immediate action is necessary. However, if any M-through-V and Y DBDSs are active or online reorganization cursor is active for any partitions, then the IMS Version 9 utilities must be run whenever processing those partitions. The exceptions are Batch Backout, Log Recovery, and Log Archive that must be run on the release of IMS that created them.

You will need to run offline reorganization for any partitions with M-through-V and Y DBDSs active or for any partitions with online reorganization cursor active before falling back to use the IMS Version 8 utilities.

**For IMS Version 8 without the OLR Coexistence SPE and for IMS Version 7-** Databases defined as not capable of being reorganized online are available and no action is required. Databases defined as capable of being reorganized are unavailable until these actions are completed:

- All partitions with the M-through-V and Y data sets active or online reorganization cursor-active must be reorganized using the IMS Version 9 offline reorganization utility (this leaves only the A-through-J and X data sets active).
- DBRC sets databases as incapable of being reorganized online using IMS Version 9 (`CHANGE.DB DBD(HALDB_master) OLRNOCAP`).

Should fallback to a prior version become necessary, you must set DBRC to OLRNOCAP for all HALDBs.

---

## Restrictions

- To activate Online Reorganization using an OM API command, an IMS Common Service Layer that includes Operations Manager and Structured Call Interface is required. See the *IMS Version 9: Common Service Layer Guide and Reference* for details.

- HALDB Online Reorganization only runs in an LSO=S (local storage option-subordinate) environment. An attempt to initiate online reorganization in an LSO=Y (local storage option- yes) IMS environment is rejected.

For more information about the LSO specification, see the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

- This reorganization process only provides reclustering and space distribution advantages. The online reorganization process does not support data definitional changes.
- The HALDB OLR commands do not support keyword synonyms. Only one version of each keyword can be specified for a given command.
- These commands are not allowed to process against a HALDB partition on an IMS system while HALDB OLR is running against that partition on that IMS.
  - /START DB or UPDATE DB NAME(name) START(ACCESS)
  - /DBRECOVERY DB or UPDATE DB NAME(name) STOP(ACCESS)
  - /DBDUMP DB or UPDATE DB NAME(name) STOP(UPDATES)
  - /STOP DB or UPDATE DB NAME(name) STOP(SCHD)

If one of these commands is attempted on a HALDB partition that is actively being online reorganized, error message DFS0488I DBN=database name RC=58 is displayed and the named DL/I partition is not processed by the command.

For a HALDB master, these commands are not allowed:

- /START DB with ACCESS UP or UPDATE DB NAME(name) START(ACCESS)
- /DBRECOVERY DB or UPDATE DB NAME(name) STOP(ACCESS)
- /DBDUMP DB or UPDATE DB NAME(name) STOP(UPDATES)

#### **Related Reading:**

- For more information about message DFS0488I, see Chapter 7, “Messages and Codes of HALDB OLR,” on page 67.
- For more information about these commands see the *IMS Version 9: Command Reference*.
- Online reorganization cannot be started for a partition if it is already running for that partition.
- Image copy is not allowed if online reorganization cursor is active.
- Batch backout must be run using a DLI region type to backout in-flight online reorganization work.
- For requirements of existing output data sets, see “Required Characteristics for Existing Output Data Sets” on page 27.
- You cannot run HALDB OLR on an XRF alternate system or on an RSR tracking system.
- For information on DBRC command restrictions for HALDB OLR, see “GENJCL.IC and GENJCL.OIC Considerations” on page 17 and “NOTIFY.IC and NOTIFY.UIC Considerations” on page 18.

---

## **Performance Considerations for HALDB OLR**

These sections describe performance effects of system restart, XRF, and logging.

### **Global Locking**

To maintain partition integrity and recovery at every step of HALDB OLR processing, logging and locking operations are necessary. The type of locking is

global locking because every IMS in the IMSplex is affected. Global locking involves initiating lock and unlock requests through IRLM lock structure in the CF (coupling facility). The performance overhead for each locking operation consists of the synchronous structure access (during which every micro-second is counted as TCB busy) and MVS XES (cross-system extended services) path length.

Each HALDB OLR running at full speed (RATE(100)) incurs quite a number of IRLM lock structure accesses per second. This is a significant part of configuration capacity planning in implementing HALDB OLR. When the CF is over utilized, necessary CF related operations can be delayed and the whole IMSplex performance can be degraded.

#### **Recommendations:**

- Consider using a second subpool to relieve DB buffer contention for more than 4 concurrent OLRs.
- Use IBM CFSizer<sup>tm</sup> to model the additional CF activities to ensure that your CF configuration is capable of handling the extra load introduced by HALDB OLR.
  - For IRLM 2.1 with PC=N0 specified, each additional 1K of concurrent locks held require 256 KB of ECSA storage.
  - For IRLM 2.2, the additional storage is utilized from IRLM private above the 64-bit line. No increase in ECSA storage is necessary.
- Review your LOGL latch contention rate, OLDS logging rate, IRLM lock structure access, and DBBP (for OSAM) latch contention.

Here is an example of DFSVSNxx:

```
CFNAMES,CFIRLM=IRLM91,CFVSAM=VSAM91
CFNAMES,CFOSAM=OSAM91
OPTIONS,BGWRT=YES,VSAMFIX=(BFR,I0B)
SBONLINE,MAXSB=8000
POOLID=VALL,FIXBLOCK=YES,FIXDATA=YES,STRINGMX=96
VSRBF=2048,2000
VSRBF=4096,2000
VSRBF=8192,1000
VSRBF=12288,400
IOBF=(2048,400,Y,Y)
IOBF=(4096,2000,Y,Y)
IOBF=(8192,1000,Y,Y)
IOBF=(12288,400,Y,Y)
POOLID=CUSA,FIXBLOCK=YES,FIXDATA=YES,STRINGMX=32
VSRBF=4096,1000,D
VSRBF=4096,400,I
IOBF=(8192,1000,Y,Y,CUOA)
DBD=PCUST12(A,CUOA)
DBD=PCUST12(L,CUSA)
DBD=PCUST12(X,CUSA)
DBD=PCUST14(A,CUOA)
DBD=PCUST14(L,CUSA)
DBD=PCUST14(X,CUSA)
DBD=PCUST16(A,CUOA)
DBD=PCUST16(L,CUSA)
DBD=PCUST16(X,CUSA)
DBD=PCUST18(A,CUOA)
DBD=PCUST18(L,CUSA)
DBD=PCUST18(X,CUSA)
OLDSDEF OLDS=(00,01,02,03,04,05,06,07,08,09),BUFNO=400,MODE=DUAL
WADSDEF WADS=(0,1,2)
```

## **Restart, XRF, and RSR with HALDB OLR**

All active HALDB OLRs are suspended before a shutdown checkpoint. They are resumed automatically by IMS at the next restart.



All HALDB OLRs that were active (running) when IMS abnormally terminated will have any uncommitted changes dynamically backed out to the last sync point using the same logic that is used to backout online programs. They will be resumed automatically by IMS at the next restart.

Similarly, when an XRF takeover occurs, the HALDB OLRs are resumed on the new active IMS.

When an emergency restart or warm start occurs, any HALDB OLRs that were active when IMS abnormally terminated or shutdown will be automatically resumed on the new active IMS. In the case of RSR, the HALDB OLRs that were active at the time of RSR takeover will not be automatically resumed at the takeover restart. After the ILDS and primary index data sets are rebuilt by DFSPREC0, issue the INITIATE OLREORG command to resume the HALDB OLRs.

## Logging Effects of Reorganization

The logging volume that is attributable to online reorganization is important to understand because the reorganization of a partition generates x'50' database change log records for all of the data in the partition. Because of a small number of x'29' log records that support HALDB OLR, which reflect the progress of the reorganization and because of the prefix size of the x'50' log record, the total amount of log data from the reorganization is considerably greater than the amount of data in the partition.

The reorganization of multiple partitions in parallel on the same IMS can generate sufficient log data to impact normal transaction processing. The rate of OLDS log switches and their archiving can certainly be affected.

## Reorganization Processing Time

An online reorganization's impact on the system is affected by the available system resources, by total system utilization (including other online reorganizations), by total logging volume, by log contention, and by the intensity at which this reorganization was requested to run. These same factors also affect the speed at which the reorganization runs.

You can use the RATE parameter as a dynamic throttling knob in the INITIATE OLREORG and UPDATE OLREORG commands to control the intensity at which the reorganization runs. This can affect not only the reorganization's speed but also its impact on the rest of the system. The value specified for RATE is the percentage of elapsed time to be devoted to copying records. The remaining time is an intentionally introduced delay in the copying process that minimizes the reorganization's impact on other IMS work and on the whole system.

RATE(100) is the default that allows the online reorganization to run as fast as possible (depending on system resources, system contention, log contention, etc.) with no intentional delays. A RATE value of 50 specifies that 50% of the elapsed time should be spent copying records and the remaining 50% should be spent in a delay. This would cause the reorganization to run approximately twice as long as it would have run with RATE value of 100. A RATE value of 25 would cause the reorganization to take four times as long, and so on. The RATE value can be changed with the UPDATE OLREORG command at any time when adjustments are desired because of the amount of system contention. With higher system contention, the RATE value could be lowered to slow down the online reorganization and minimize its impact on other work. With less system activity, the RATE value could be raised, thus speeding up the reorganization.

## Activating Sequential Buffering for OLR

Online Reorganization of OSAM databases can use Sequential Buffering (SB) to improve performance. SB can be activated by including the SBONLINE statement in DFSVSMxx.

Including the SBONLINE statement loads all SB modules at IMS initialization, and then whenever an Online Reorganization is initiated for an OSAM database, SB is activated and is started immediately. Including the SBONLINE statement eliminates the need to analyze several hundred DLI calls to determine whether SB is suited for this processing, thereby improving performance.

The two forms of the SBONLINE control statement are:

SBONLINE

or

SBONLINE,MAXSB=nnnnn

where nnnnn is the maximum storage (in kilobytes) that can be used for SB buffers.

When the MAXSB limit is reached, IMS stops allocating SB buffers to online applications, including OLR, until terminating online programs and/or OLR release SB buffer space. If you do not specify the MAXSB= keyword, the maximum storage for SB buffers is unlimited. Detailed instructions for coding the SBONLINE control statement are located in the *IMS Version 9: Installation Volume 2: System Definition and Tailoring*.

---

## Recovery

These sections describe the recovery considerations for HALDB Online Reorganization support.

### Database and Data Set Recovery

There are several differences in the management of database backup and recovery both during and after an online reorganization.

**Restriction:** Only the data sets from the active set or sets of data sets can be recovered. This means that while the cursor-active status is in effect, data sets from either the input set or the output set can be recovered, but while the cursor-active status is not in effect, only data sets from the single active set of data sets can be recovered.

#### No Database Image Copy Allowed During Reorganization

While a partition is in cursor-active status, none of the three Database Image Copy utilities can copy any of the data sets for that HALDB partition. Even if the TERMINATE OLREORG command is used to temporarily stop the copying of database records from the input to the output data sets, an image copy still cannot be made for any data set in the HALDB partition.

#### Log-Only Recovery

After the *cursor active* status for the online reorganization is recorded in the RECON, recovery of any of the output data sets with the Database Recovery Utility (DFSURDB0) can be accomplished solely from database change records (type X'50' log records) until the reorganization has completed and a subsequent image copy has been made. An empty output data set is considered to be the starting point from which database change records can be applied.

If recovery of an output data set is required before the online reorganization has completed, then proceed as follows:

1. Ensure that the reorganization has been temporarily stopped. If the reorganization encountered an abend, this is automatic; otherwise, the TERMINATE OLREORG command may have to be used to temporarily stop a currently running reorganization.
2. Enter the /DBR or the UPDATE DB command for the HALDB partition.
3. Run database change accumulation as necessary. The JCL can be created by the DBRC GENJCL.CA command, or the Database Change Accumulation utility can be run from your JCL. The purge time for change accumulation must be the time of the beginning of the reorganization to represent restoring from the initial empty state of the data set. There are further details on the DBRC GENJCL command and on the utility in the paragraphs that follow.
4. Create the output data set that must be recovered, either through a JCL DD statement or with Access Method Services, as appropriate.
5. Recover the database changes. The JCL can be created by the DBRC GENJCL.RECOV command. Alternatively, the Database Recovery utility can be run from your JCL; in this case, the DD statement for DFSUDUMP must specify DUMMY, which indicates that there is no image copy from which to restore.
6. Execute the Batch Backout utility as backout might be required to backout uncommitted data. Note that the operational aspect of online reorganization in this case is very much like an online application program.  
After all data sets of the HALDB partition have been recovered and possibly backed-out proceed to the next step.
7. Enter the /STA or the UPDATE DB command for the HALDB partition.
8. Resume the reorganization using the INITIATE OLREORG command.

It is also possible to recover an output data set after the reorganization has completed but before an image copy has been made. The procedure is similar to the above procedure except that the reorganization need not be terminated or resumed. Although you can recover an output data set using this method, it is *strongly recommended* that you make an image copy of the output data sets as soon as it is practical after the reorganization. Recovering from this image copy is faster than recovering from the database change records logged during the reorganization.

You can also recover an output data set from a point other than the beginning of the reorganization, such as from a full dump of a DASD volume, using existing procedures if the reorganization has been either completed or terminated.

To recover an input data set before the reorganization completes, your only additional consideration is to ensure that the reorganization has been terminated before starting the recovery.

#### **Database Change Accumulation Utility:**

When doing database change accumulation for one of the output data sets, specify a purge time equal to the online reorganization start time on the control statement. This is necessary if change accumulation records (or an input log) involving the output data set span the time that an online reorganization was started. This eliminates database change records from before this point; this is analogous to eliminating database change records from prior to the start time of an image copy.

#### **DBRC GENJCL.CA and GENJCL.RECOV Commands:**

Even though no image copy exists for the output data sets, the RECON reflects the beginning of the reorganization as a starting point from which forward recovery of one of these data sets can be done, even after the reorganization is finished. Until an image copy has been made for an output data set, the DBRC GENJCL.CA command treats this starting point as though it were the most recent image copy and causes changes to the output data set to be accumulated from that point. Similarly, GENJCL.RECOV prepares recovery of an output data set from this point even though no physical image copy exists.

### Generic DDNAME for Database Image Copy

Database Image Copy always copies the currently active data set that is recorded in RECON.

Regardless of whether the A-through-J or the M-through-V data sets are active, the JCL and control statements for the three Database Image Copy utilities need not be changed when the active set of data sets switches from the A-through-J to the M-through-V data sets, or the other way around. You do not need to be aware of which set of data sets is the active set and you need not provide this information for these reasons:

- On the utility control card for the Database Image Copy utility, the DDNAME need not refer to the currently active data set. No matter whether the A-through-J or the M-through-V data sets are active, the specified DDNAME is *automatically understood* by the utility to refer to the corresponding active data set.

For example, assume that the data set for the second data set group defined in the DBD is to be copied and that the partition name is PARTNO3. Regardless of which set of data sets is active, a DDNAME of either PARTNO3B or PARTNO3N may be coded on the control card. If the A-through-J data sets are active, then the data set identified by the DDNAME PARTNO3B is copied. If the M-through-V data sets are active, then the data set identified by the DDNAME PARTNO3N is copied.

- In the JCL statements for the Database Image Copy utility, the DD statement referring to the input data set should be omitted.

Based on whether the A-through-J or the M-through-V data sets are active, the appropriate data set is dynamically allocated. Having a DD statement that refers to a specific data set name can cause the job to fail because of a “Data Set Not Found” condition during job step initiation. This would occur if an inactive data set name was coded in the JCL and it does not exist.

## Remote Site Recovery

Remote Site Recovery (RSR) supports HALDB Online Reorganization in much the same fashion as normal database update processing is supported. Unlike offline reorganization, there is no need for the databases to be brought offline when HALDB Online Reorganization is recognized by the RSR Tracking IMS.

As part of RSR tracking, the tracking site RECON is updated with HALDB Online Reorganization related information in both Recovery Level Tracking (RLT) and Database Level Tracking (DLT) modes. If the tracking IMS is running in the DLT mode and the HALDB partition is defined as DBTRACK in the tracking site RECON, the tracking process includes:

- Creating the output data sets for the shadow partition as needed
- Updating both sets of shadow data sets
- Designating the original input data sets as inactive and designating the output data sets as the single active set in order to track the completion of the reorganization

- Deleting the inactive data sets if OPTION(DEL) was in effect when the reorganization completed at the active site

Just as at the active site, errors can occur during the validation or creation of the output data sets at the beginning of the reorganization. The shadow partition is stopped when this happens, and this has no effect on the continuation of the reorganization at the active site. After you have corrected the problem, start the partition to continue tracking the reorganization's updates in OFR mode.

If the output data sets for the reorganization already exist before the tracking of the reorganization begins, ensure that these data sets have same characteristics (block size, record size, control interval size, and so on) as those at the active site.

- If data set characteristics are manually changed at the active site, they must be manually changed at the tracking site for partitions undergoing online reorganizations.
- After RSR takeover, partitions undergoing online reorganization will be stopped. When the primary index and indirect list data sets have been rebuilt after an RSR takeover, the INITIATE OLREORG command must be issued if previously running online reorganizations need to be resumed.

HALDB OLRs that were active at the time of RSR takeover will not be automatically resumed at the takeover restart. When the ILDS and primary index data sets are being rebuilt by DFSPREC0, the INITIATE OLREORG command must be issued to resume the HALDB OLRs.

---

## DBRC Considerations

The following sections describe the things that must be considered for online reorganization in relation to DBRC (Database Recovery Control).

**Related Reading:** See the *IMS Version 9: DBRC Guide and Reference* for complete information on these DBRC commands that have HALDB OLR support:

- CHANGE.DB
- GENJCL.IC
- GENJCL.OIC
- INIT.DB
- NOTIFY.IC
- NOTIFY.REORG
- NOTIFY.UIC

Some RECON records that contain HALDB OLR information are as follows:

- HALDB Master record
- Partition DB record
- DBDS record
- REORG record

## GENJCL.IC and GENJCL.OIC Considerations

The GENJCL.IC and GENJCL.UIC JCL can be generated in advance and not executed immediately. So, the active set of DBDSs may have changed in the interim time period.

Since dynamic allocation is recommended for the utilities, GENJCL no longer generates DD statements for the HALDB DBDS that is being copied. The SYSIN

control statement identifies which DBDS to copy. This can be either the A-through-J or M-through-V set of data sets. The image copy utility then copies the corresponding active set of data sets, A-through-J or M-through-V.

## NOTIFY.IC and NOTIFY.UIC Considerations

These are the HALDB OLR support modifications for the NOTIFY.IC and NOTIFY.UIC commands.

An image copy cannot be taken while OLR cursor is active. The NOTIFY.IC and NOTIFY.UIC commands fail if they attempt to record an image copy while OLR cursor is active.

## DBRC RECON HALDB OLR Information

The DB record for a HALDB partition contains information for HALDB Online Reorganization:

- A field that indicates whether the database is capable of being reorganized online.
- A field that indicates whether online reorganization cursor is active.
- The SSID of the IMS currently performing an online reorganization.
- A field indicating which set or sets of DBDSs is or are active for the partition.
- Counters showing the number of cursor-active status changes and cursor-inactive status changes that are not yet hardened at the RSR tracking site.

The HALDB Master and Partition DB records contain a new field indicating if the HALDB can be reorganized online.

The M-through-V and Y DBDS records are defined in RECON with the exact same attributes as the corresponding A-through-J and X DBDS records. One difference, in addition to DD and data set names, is the DSID. The DSID of the M-through-V and Y data set is the same as the corresponding A-through-J and X data set with its X'80' bit on. For RECON list purposes, the X'80' bit is ignored.

Table 3. DSID DCB Numbers for the A-J and X and the M-V and Y data sets

DSID / DCB Number	A-J, L, and X Data Sets		M-V and Y Data Sets	
	PHIDAM	PHDAM	PHIDAM	PHDAM
1	A	A	M	M
2				
3	L	L		
4		B		N
5	X	C	Y	O
6	B	D	N	P
7	C	E	O	Q
8	D	F	P	R
9	E	G	Q	S
10	F	H	R	T
11	G	I	S	U
12	H	J	T	V
13	I		U	



Table 3. DSID DCB Numbers for the A-J and X and the M-V and Y data sets (continued)

DSID / DCB Number	A-J, L, and X Data Sets		M-V and Y Data Sets	
	PHIDAM	PHDAM	PHIDAM	PHDAM
14	J		V	

The M-through-V and Y DBDS records are added to the indicated change accumulation group. That is, to the same CAGROUP as the A-through-J and X DBDS.

The M-through-V and Y DBDS records are added to each DBDS group where the A-through-J DBDS records are found.

The REORG record for a HALDB partition DBDS contains new information (stop time) for HALDB Online Reorganization. In order to run an offline reorganization of it, a database must have been taken offline successfully with a /DBR command. So, only the start time of the reorganization is necessary. With online reorganization, the database is online so the duration of the process is important. The stop time of the reorganization is now recorded in the REORG record along with the new indicator showing that this is an online reorganization and whether the online reorganization may be used as input to recovery.

A REORG record is recorded under both the A-through-J and X DBDS and the M-through-V and Y DBDS. The REORG record for the DBDS that was the output data set indicates that it can be used as input for recovery. The REORG record for the DBDS that was the input data set indicates that it cannot be used for recovery after online reorganization has completed.

The online reorganization capability is set at the HALDB Master DB level.

The DB Record header record contains a new field which indicates whether online reorganization is enabled for this partition. Once enabled, sharing of HALDBs with an IMS Version 7, or IMS Version 8 without the OLR Coexistence SPE, is no longer allowed. Full data sharing is allowed for IMS Version 8 with the OLR Coexistence SPE applied. IMS Version 7 or IMS Version 8 without the OLR Coexistence SPE applied are allowed to process databases marked as not capable of being reorganized online. This field is set or reset with the CHANGE.DB DBD(HALDB master) command and is displayed in the LIST.DB output.

Table 4 on page 19 shows whether full data sharing of databases is allowed between these IMS Versions:

- Version 7
- Version 8 (without the OLR Coexistence SPE applied)
- Version 8 (with the OLR Coexistence SPE applied)
- Version 9

The ability to share data is also dependent on whether OLRCAP or OLRNOCAP is specified for a database and this table also depicts those cases.

Table 4. Data Sharing Between the Releases

	Version 7	Version 8 Without SPE Applied	Version 8 With SPE Applied	Version 9
<b>OLRCAP</b>	NO	NO	YES	YES
<b>OLRNOCAP</b>	YES	YES	YES	YES

Resetting the field in the DB record header to disable online reorganization fails if online reorganization cursor is active, or if any of the M-through-V and Y data sets are active. Resetting the field in the DB record header to disable online reorganization also fails if any partition for the HALDB is authorized. If resetting the field is permitted, all of the M-through-V and Y data set information in RECON is deleted.

## RSR Tracking System

Ownership of the HALDB Online Reorganization is not recorded in tracking RECONS so the tracking RECONS do not reflect ownership of online reorganizations.

RECONS at the tracking site will always reflect the current status of the covered databases. New counters keep track of outstanding online reorganizations that have been recorded in RECON at the tracking site but not yet applied to the databases.

## Recovery Related Records

The A-through-J and M-through-V data sets are treated as one logical set of DBDSs. The M-through-V data sets are defined in RECON with the same attributes as their corresponding A-through-J data sets.

The recovery information in the two DBDS headers is maintained as if they are one logical DBDS. For example: GENMAX, RECOVPD, and CAGRP are the same. Any changes that are made to the active DBDS are also made to the inactive DBDS.

There is a one-to-one relationship between each partition data set- for example A-to-M, B-to-N, C-to-O, and so on. Either set of data sets (A-J and X or M-V and Y) can be reorganized online at any time depending on which set is active prior to the start of the online reorganization. So data sets A and M are one logical data set during an online reorganization. After an image copy is taken, DBRC removes any extraneous recovery related records (IMAGE, ALLOC, RECOV, and REORG) from RECON. What is extraneous is determined by the GENMAX and the optional RECOVPD settings for the DBDS. GENMAX and RECOVPD apply to the A-through-J or X data sets and the corresponding M-through-V or Y data sets as if the two data sets were one logical data set.

For example, GENMAX=2 for data set A (and M) and data set A has two image copies. When data set M becomes the active data set and an image copy is taken, image copy cleanup results in deleting the oldest image copy for data set A along with any of its extraneous recovery records. Another image copy of data set M results in the rest of data set A's image copy and recovery records being deleted. Note that data set A would become unrecoverable in this case.

## Online Reorganization Execution

When online reorganization is started, the ID of the IMS responsible for the reorganization is assigned to the partition. Once the cursor-active status is recorded in the RECON and copying begins between the A-through-J and M-through-V data sets these things also happen:

- The DB record for the partition indicates 'OLREORG CURSOR ACTIVE =YES'.
- REORG records are written showing the start of the reorganization (the stop time is zero) indicating online.



- The REORG record under the data set that is the output indicates that it can be used as input for recovery.
- The REORG record under the data set that was the input does not indicate that it can be used for recovery. DBRC uses this record to ensure that recovery of this data set cannot occur after online reorganization is complete.
- The M-through-V and Y data sets are defined in RECON if they do not already exist.
- The M-through-V and Y DBDSs are added to the same change accumulation group as the A-through-J and X DBDSs, if one is assigned.
- The M-through-V and Y DBDSs are added to any DBDS group where the A-through-J and X DBDSs are found.

At this point the online reorganization must either complete or an offline reorganization must be run in order to reset the online reorganization settings.

Online reorganization cannot be started if it is already running for this partition. However, another IMS can take over the reorganization if it is terminated; that is, when there is no IMS ID assigned.

When the entire online reorganization process completes successfully the following things happen:

- The REORG records are updated to include the online reorganization stop time.
- The DB record for the partition is changed to indicate 'OLREORG CURSOR ACTIVE = NO'.
- The status of the active DBDSs is switched to the newly reorganized data sets.
- The online reorganization IMS ID is cleared.

**Attention:** Successful completion of an online reorganization does not require that image copies of the partition's DBDSs be taken. However, it is recommended that you take an image copy as soon as possible to reduce recovery time.

**Restriction:** An image copy of a DBDS cannot be taken while online reorganization cursor is active. DBRC causes image copy to fail in this case.

---

## Offline Reorganization

Offline reorganization can only be run if online reorganization cursor is not active or online reorganization was terminated. Successful completion of an offline reorganization results in the active data sets being reset to A-through-J and the online reorganization status, along with its IMS identifier, being reset. The REORG records for the incomplete online reorganization are deleted.

---

## Utilities

These are the HALDB online reorganization considerations for running these IMS utilities: Primary Index and ILDS Rebuild, Change Accumulation, Recovery, Image Copy, and Batch Backout.

### HALDB Index/ILDS Rebuild - DFSPREC0

DFSPREC0 recovers the PINDEX for both input and output if RECOVTYP=INDEX is specified and will do the same if RECOVTYP=ILE is specified when the index is recovered. If RECOVTYP=BOTH is specified then DFSPREC0 recovers both the X

and Y PINDEX data sets and the ILDS in a single run. There is no way to specify a particular input or output data set but if OLR was active then all of the necessary data sets are allocated and rebuilt.

## Database Change Accumulation - DFSUCUM0

DFSUCUM0 accumulates changes for HALDB partition A-through-J data sets and for M-through-V data sets. A DBO control statement is needed to indicate to the utility that it is to accumulate changes or that it is to purge changes before online reorganization started.

CA ([Database] Change Accumulation) header records (type 25 records) may be created for a corresponding A-through-J and M-through-V data set if the online reorganization checkpoint has not yet completed at the time of the CA.

When doing database change accumulation for one of the output data sets, specify a purge time equal to the online reorganization start time on the control card. This is necessary if change accumulation records (or an input log) involving the output data set span the time that an online reorganization was started. This eliminates database change records from before this point; this is analogous to eliminating database change records from prior to the start time of an image copy.

## Database Recovery - DFSURDB0

**Restriction:** For recovery of a data set using the DFSURDB0 utility IMS expects the data sets to exist and makes no attempt to create them.

For information on the HALDB online reorganization considerations for running the Database Recovery utility, see “Log-Only Recovery” on page 14.

## Database Image Copy - DFSUDMP0

Database Image Copy always copies the currently active data set that is recorded in RECON.

Database Image Copy processing works this way for HALDBs: An image copy of a DBDS cannot be taken while HALDB online reorganization cursor is active on that DBDS. DBRC fails the execution of an image copy in this case.

Database Image Copy inputs remain the same as they were. For each request to copy HALDB partition A-through-J data sets or M-through-V data sets, Database Image Copy issues an error message if HALDB online reorganization is cursor active on the HALDB partition. Database Image Copy also determines if the M-through-V data sets are to be copied instead of the A-through-J data sets.

It is no longer necessary to code a DD statement in the JCL when copying HALDB partition data sets as they will be dynamically allocated.

**Attention:** Successful completion of an online reorganization does not require that image copies of the partition's DBDSs be taken. However, it is recommended that you take an image copy as soon as possible afterward to reduce recovery time.

## Batch Backout - DFSBBO00

During initialization of HALDB online reorganization, a PSB is dynamically built internally and used for the reorganization. The name of the PSB that is built and scheduled is constructed by prefixing the 7-byte HALDB partition name with a numeric character zero ('0'). This PSB does not exist in PSBLIB or ACBLIB and is

explained here for IMS cold start situations. For example, a HALDB partition with the name SSN5603 has a dynamic PSB with the name 0SSN5603 for the reorganization work.

When it is necessary to cold start an IMS system, you would normally run the Log Recovery utility (DFSULTR0) with the option to list the PSBs that require backout. This utility lists these online reorganization dynamic PSBs if there is in-flight reorganization work that requires backout.

Batch Backout (DFSBB000) needs to be run for each of the listed PSB names. Batch Backout recognizes that the named PSB is from online reorganization because it begins with a numeric character (this is not allowed for defined PSBs).

**Restriction:** Batch Backout must be run using a DLI region type to backout in-flight online reorganization work.



## Part 2. Using HALDB OLR

<b>Chapter 3. The Data Sets of HALDB OLR</b>	27
Output Data Set Creation	27
Required Characteristics for Existing Output Data Sets	27
Characteristics for Automatically-Created Output Data Sets	28
Number of Volumes:	28
Location, SMS-Managed Case:	28
Location, Non-SMS-Managed, Non-VSAM Data Set Case:	28
Location, Non-SMS-Managed, VSAM Data Set Case:	28
Size, Single-Volume Case:	28
Size, Multiple-Volume Case (SMS-Managed Only):	29
The Disposition of the Output Data Sets When Initialization Fails	30
The Inactive Data Sets at Successful Completion of the Reorganization	
Process- Data Set Deletion	30
<b>Chapter 4. Setting Up HALDB OLR</b>	31
INITIATE OLREORG Command	31
/INITIATE OLREORG Command	31
Format of the INITIATE OLREORG Command	31
Environments, Keywords, and Parameters of the INITIATE OLREORG	
Command	32
Usage of the INITIATE OLREORG Command	32
Command Responses for /INITIATE OLREORG	34
Command Responses for INITIATE OLREORG from OM API	34
Examples of INITIATE OLREORG Input and Output	35
INIT.DB	37
Format of INIT.DB	37
INIT.DB Command Usage	38
NOTIFY.REORG	38
Format of NOTIFY.REORG	38
NOTIFY.REORG Command Usage	39
<b>Chapter 5. Monitoring HALDB OLR</b>	41
QUERY OLREORG Command	41
Format of the QUERY OLREORG Command	41
Environments, Keywords, and Parameters of the QUERY OLREORG	
Command	41
Usage of the QUERY OLREORG Command	42
QUERY OLREORG Output Fields	43
Return, Reason, and Completion Codes for the QUERY OLREORG	
Command	43
Example of QUERY OLREORG Input and Output	44
Example 1	44
/DISPLAY DATABASE Command HALDB OLR Support	45
Example of /DISPLAY DB Output with HALDB OLR	45
/DISPLAY DB OLR Command	46
Example of /DISLAY DB OLR Output	46
QUERY DATABASE STATUS(OLR) Command	47
<b>Chapter 6. Modifying and Tuning HALDB OLR</b>	49
TERMINATE OLREORG COMMAND	49
/TERMINATE OLREORG Command	51
Format of the TERMINATE OLREORG Command	51

Environments, Keywords, and Parameters of the TERMINATE OLREORG	
Command . . . . .	51
Usage of the TERMINATE OLREORG Command . . . . .	52
Command Responses for /TERMINATE OLREORG . . . . .	52
Command Responses for TERMINATE OLREORG from OM API . . . . .	53
Examples of TERMINATE OLREORG Input and Output . . . . .	54
UPDATE OLREORG Command . . . . .	55
/UPDATE OLREORG Command . . . . .	56
Format of the UPDATE OLREORG Command . . . . .	57
Environments, Keywords, and Parameters of the UPDATE OLREORG	
Command . . . . .	57
Usage of the UPDATE OLREORG Command . . . . .	57
Command Responses for /UPDATE OLREORG. . . . .	59
Command Responses for UPDATE OLREORG from OM API. . . . .	59
Examples of UPDATE OLREORG Input and Output . . . . .	60
/START DB Command HALDB OLR Support . . . . .	62
/DBRecovery Command HALDB OLR Support . . . . .	62
/RECover Command HALDB OLR Support . . . . .	62
CHANGE.DB . . . . .	62
Format of CHANGE.DB. . . . .	62
CHANGE.DB Command Usage. . . . .	63
CHANGE.DB Command HALDB OLR Parameters . . . . .	63

---

## Chapter 3. The Data Sets of HALDB OLR

These sections discuss the details concerning the data sets that are used during a HALDB OLR.

**Restriction:** The data sets used by HALDB OLR must be either PHDAM or PHIDAM type only.

---

### Output Data Set Creation

Creation of the output data sets is considered on a data-set-by-data-set basis. For example: the *M* data set might already exist, while the *N* and *O* data sets need to be created by IMS, and the *P* data set might also already exist. So, in this case, IMS creates the *N* and *O* data sets and uses the existing *M* and *P* data sets.

The DASD space for the output data set may be smaller than, equal to, or larger than the corresponding input data set; whatever is present is used. And because the output data set is completely overwritten, it is of no consequence whether there is already any data in that data set.

---

### Required Characteristics for Existing Output Data Sets

Each pre-existing data set in the output set must meet certain requirements that make it usable as output. If these requirements are not met then one of the messages listed in Chapter 7, "Messages and Codes of HALDB OLR," on page 67 of this document, is displayed and the reorganization does not begin. Here are the major requirements for the different data set types:

**OSAM:** The data set must meet all of these requirements:

- It must be cataloged
- It must be a DASD data set
- It must not be a VSAM data set except for the primary index data set of a PHIDAM database
- It must not be a PDS, PDSE, or a member of a PDS or PDSE

**VSAM:** The data set must have all of these characteristics:

- It must be a VSAM entry-sequenced data set (ESDS) except for the primary index data set of a PHIDAM database
- It must have the REUSE attribute
- It must have a fixed-length record length identical to that of the corresponding input data set
- It must have a control interval size identical to that of the corresponding input data set
- It must have a SHAREOPTIONS attribute value at least as high as that of the corresponding input data set if the database is defined to DBRC with a SHARELVL value of 2 or 3

**PRIMARY INDEX:** The data set must have all of these characteristics:

- It must be a VSAM KSDS (key-sequenced data set)
- It must have the same key offset and length as the corresponding input KSDS
- It must have the other required characteristics listed above under "VSAM:"

---

## Characteristics for Automatically-Created Output Data Sets

These topics discuss the details about size, location, and other characteristics of an automatically-created output data set. If you require further control over any of these characteristics, then create the data set before you issue the INITIATE OLREORG command.

### Number of Volumes:

If a particular input data set is SMS-managed, then the corresponding output data set is created with the same number of volumes.

If the input data set is not SMS-managed, then automatic creation of the corresponding output data set is done only when the input data set resides on a single volume. When a non-SMS-managed input data set resides on multiple volumes, then the corresponding output data set must exist before the HALDB OLR is started. Violation of this restriction causes an error message to be displayed, and the reorganization does not begin.

### Location, SMS-Managed Case:

If a particular input data set is SMS-managed, then the corresponding output data set is also SMS-managed, and the storage class used to create the output data set is that of the input data set. The site's storage administrator must ensure either, that this storage class refers to a storage group with sufficient space to hold the output data set or that the automatic class selection (ACS) routine selects an appropriate storage class for the data set.

### Location, Non-SMS-Managed, Non-VSAM Data Set Case:

Regardless of the type of DASD on which the input data set resides, the corresponding non-VSAM output data set is created as though the following parameter had been specified on its DD statement:

```
UNIT=SYSALLDA
```

The creation of the output data set does not request any specific volume serial number, causing the data set to be created on a storage volume or, if no storage volume is available, on a public volume.

### Location, Non-SMS-Managed, VSAM Data Set Case:

The VSAM output data set is created on the same volume as the corresponding input data set. In many cases this restriction limits the usefulness of automatically creating a VSAM data set that is not SMS-managed.

As already stated automatic output data set creation is not done when the corresponding data set is on multiple-volumes and is not SMS-managed.

### Size, Single-Volume Case:

When the input data set has extents on only one DASD volume, the output data set is also created on a single volume as though the following parameter had been specified on a DD statement:

```
VOLUME=(,,1)
```

The amount of primary space is derived from the space allocation of the input data set.



For a non-VSAM data set, this is the total amount of space in the first five extents on the volume.

For a VSAM data set, this is the primary space allocation used when the input data set was created.

In order to reserve approximately the same amount of space that was reserved for the input data set regardless of the DASD types involved, the output data set's space is requested as a number of OSAM blocks or VSAM records. If the input data set space was not already specified in one of these ways, then based on the input data set's DASD characteristics, the cylinder or track allocation is converted to an equivalent number of blocks or records.

If a secondary space allocation amount is specified for the input data set, then this same secondary amount is used for the output data set. This is converted as necessary from a number of cylinders or tracks to a number of blocks or records.

**Note** that if secondary space for the input data set has been allocated on DASD, then the space for the output data set does not necessarily reflect the amount of space currently allocated or used by the input data set.

The automatically created output data set could have a considerably different amount of available DASD space than was used for the input data set.

For example, for an input data set that has used secondary allocation. The automatic creation reserves the primary space for the output data set, but there may not be enough space on the volume for secondary allocation either during the HALDB OLR or during later database processing.

## Size, Multiple-Volume Case (SMS-Managed Only):

IMS automatically creates multiple-volume output data sets only when the input data set (and therefore the output data set) is SMS-managed. In this case it is highly desirable that the storage class used to create the output data set has the GUARANTEED SPACE attribute. This storage class is either that of the input data set or the one specified by the site's ACS routine.

Using the same considerations as the single-volume case, as already discussed, the requested primary and secondary space is based on the input data set's space allocation on the FIRST volume.

As is the case for a single-volume data set, the automatically created multiple-volume output data set could have a considerably different amount of available DASD space than was used for the input data set. In many cases secondary allocation failures can be avoided if the storage class of the input data set (and thus of the output) has the GUARANTEED SPACE attribute. This causes the primary space allocation to be taken on EACH of the volumes when the output data set is created. Secondary space is then taken later, as needed. However, even this does not guarantee that the output data set gets the same amount of space as the input data set, especially when secondary space was acquired for the input.

Another way to simplify DASD space allocation is to avoid multiple-volume data sets altogether. With the larger DASD that is now available and with the ability to define up to 1001 partitions for a HALDB, the need for multiple-volume data sets is reduced.

---

## The Disposition of the Output Data Sets When Initialization Fails

As discussed in the sections titled, “Required Characteristics for Existing Output Data Sets” on page 27 and “Characteristics for Automatically-Created Output Data Sets” on page 28, any preexisting output data sets must meet certain requirements, and any output data sets that do not exist are created automatically by IMS as part of the initialization of the HALDB OLR. During this process, various error conditions can cause the HALDB OLR initialization to fail. Two error conditions that can occur are: an unacceptable preexisting output data set, or an insufficient amount of DASD space for an automatically created data set.

If any errors occur during the validation, or after the validation and creation of the output data sets, but before the *cursor-active* status of the reorganization has been recorded in the RECON, then any automatically created output data sets are retained along with any preexisting data sets.

---

## The Inactive Data Sets at Successful Completion of the Reorganization Process- Data Set Deletion

As part of the successful completion of the HALDB OLR, all of the input data sets involved in the reorganization become inactive. IMS attempts to delete these data sets automatically regardless of whether they were created by IMS or were pre-existing data sets. This automatic data set deletion can be suppressed by specifying the NODEL option on the INITIATE OLREORG command or on the UPDATE OLREORG command.

This process of data set deletion occurs only after:

1. All the records of the HALDB partition have been copied to the output data sets.
2. The successful completion of the HALDB OLR has been recorded in the RECON, making the output data sets the active ones and the input data sets the inactive ones.
3. All IMS systems, including batch jobs, that are sharing the reorganized partition have been notified that event 2, in this list, has occurred.
4. All of the sharing IMS systems have acknowledged that they have received the notification and that they have closed and deallocated the input data sets (that are now the inactive data sets).

There is the possibility that the acknowledgement from a sharing system could be delayed for a long period of time. This is especially true for a sharing batch job. The IMS system that completed the HALDB OLR attempts to delete the inactive data sets anyway if the acknowledgements are not received within 4.5 minutes. However, in this case, the deletion is likely to fail, but reorganization still completes normally.

## Chapter 4. Setting Up HALDB OLR

HALDB Online Reorganization is included in IMS Version 9 and does not require special installation.

There are two types of command formats available in IMS:

- The type-1 command is preceded by a CRC (command recognition character) usually a / (slash). It is issued from terminals, AOI applications, EMCS consoles, and APPC/OTMA programs.
- The type-2 command is much like type-1 except that it has no preceding CRC and it can be issued and processed through the OM (Operations Manager) API (Application Programming Interface) on multiple databases on multiple IMSs.

Establish type-1 command security with RACF® or in the exit routine, DFSCCMD0 that you set up. The CIMS class for is 3 characters followed by blanks. The command verbs INI, TER, and UPD must be defined in the CIMS class or the command security exit routine, DFSCCMD0. Type-1 commands are valid from OM API and the command security can be set up in OM.

This topic describes how you can do these things:

- How to initiate or resume HALDB OLR.
- How to indicate whether HALDB OLR is allowed to run on a database.
- How to specify whether the reorganization is a HALDB OLR or it is an offline reorganization.

And if it is an online reorganization, how you can also specify whether the HALDB OLR can be used as input for recovery and how you can specify the time that the HALDB OLR completed successfully.

### INITIATE OLREORG Command

To initiate or resume HALDB OLR, issue the type-2 INITIATE OLREORG command from the OM API.

**Related Reading:** For details on the OM API see the *IMS Version 9: Common Service Layer Guide and Reference*.


### /INITIATE OLREORG Command

The type-1 command syntax is the same as the type-2 command syntax, but is preceded by a CRC (command recognition character) usually a / (slash).

The type-1 /INITIATE OLREORG command can be issued from terminals, AOI applications, EMCS consoles, and APPC/OTMA programs. When the command is entered as a type-1 command only one NAME parameter can be specified.

### Format of the INITIATE OLREORG Command

The syntax diagram here illustrates the format of the INITIATE OLREORG command.

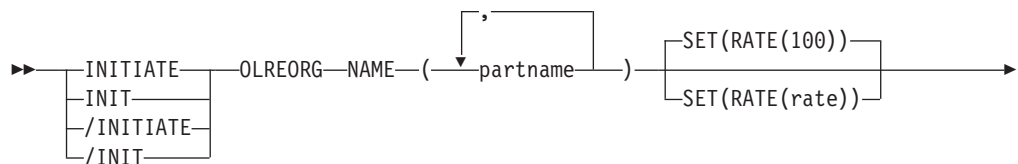



## Environments, Keywords, and Parameters of the INITIATE OLREORG Command

Table 5 below lists the environments, keywords, and parameters of the INITIATE OLREORG command.

This command uses syntax that can distinguish between keywords and resource names, so none of these keywords are reserved keywords. You can have resource names that are the same as the HALDB OLR keywords.

**Restriction:** This command does not support keyword synonyms. Only one version of each keyword can be specified for each command issued.

*Table 5. Valid Environments for the INITIATE OLREORG command Keywords, and Parameters*

Command / Keywords	DB/DC	DBCTL	DCCTL
OLREORG	X	X	
NAME	X	X	
SET	X	X	
OPTION	X	X	

## Usage of the INITIATE OLREORG Command

The INITIATE OLREORG command causes HALDB OLR to begin or resume on the partition or partitions that are specified by *partname*.

The INITIATE OLREORG command might be routed to one or more of the IMSs in the IMSplex depending on the ROUTE specifications. The default for the command is ROUTE=ALL which means that the command is routed to all active DB/DC and DBCTL IMSs in the IMSplex. The first IMS to successfully process the INITIATE OLREORG command owns the online reorganization and the command fails on all of the other IMS subsystems where the command has been routed.

Part of the HALDB OLR processing involves:

- The creation of the output data sets at the beginning of the online reorganization
- The optional deletion of the inactive data sets when the online reorganization completes

If the partition is tracked at an RSR tracker site, the OPTION value (DEL or NODEL) that is in effect at the completion of the HALDB OLR also determines whether the inactive data sets for the shadow partition are deleted at the completion of the tracking of the reorganization.

When HALDB OLR completes, a message indicating that the reorganization has completed is sent to the System Console.

The output for this command is defined in XML and is available to automation programs that communicate with OM if the command is issued as a type-2 command.

**Related Reading:** Refer to the Appendix of the *IMS Version 9: Common Service Layer Guide and Reference* for sample XML for IMS commands.

**NAME()** For the type-2 version of this command, you can specify one or more HALDB partitions to HALDB OLR.

For the type-1 version of the command, you can specify only one NAME keyword for each of these commands that you issue.

**PARTNAME**

The name of a HALDB partition. Only PHDAM or PHIDAM HALDB partition names can be specified. Also, the use of wildcard character (\*), for example DBPART\* or just \*, is NOT allowed.

**SET()** Allows you to specify the RATE option as described here.

**RATE()**

Allows you to specify the RATE at which the HALDB OLR is to be run.

**rate** You can specify a rate value of 1 to 100. An online reorganization's impact on the system is affected by the available system resources, by total system utilization (including other online reorganizations), by total logging volume, by log contention, and by the intensity at which this reorganization was requested to run. These same factors also affect the speed at which the reorganization runs.

A rate value of 50 specifies that 50% of the elapsed time be spent copying records and the remaining 50% be spent in a delay. This causes the reorganization to run approximately twice as long as it would have run with a rate value of 100.

You can use the RATE parameter to control the intensity at which the reorganization runs. This can affect both the reorganization's speed and its impact on the rest of the system. The value you specify for rate is the percentage of elapsed time to be devoted to copying records. The remaining time is to be an intentionally introduced delay in the copying process that minimizes the reorganization's impact on other IMS work and on the whole system.

RATE(100) is the default.

**OPTION()** Allows the specification of the DEL/NODEL options as described here. If the partition is tracked at an RSR tracker site, the OPTION value (DEL or NODEL) in effect at the completion of the online reorganization also determines whether the inactive data sets for the shadow partition are deleted at the completion of the tracking of the reorganization.

**DEL** Indicates the deletion of the inactive data sets is to be

attempted when the online reorganization completes. The attempted deletion occurs regardless of who created the data sets or when the data sets were created. DEL is the default.

### NODEL

Indicates that the deletion of the inactive data sets is *not* to be attempted at online reorganization completion.

**Attention:** If the HALDB OLR is stopped prior to completion, the OPTION(NODEL) if specified is not retained or remembered by IMS. OPTION(NODEL) must be specified on the INITIATE OLREORG command that is issued to resume the stopped online reorganization. OPTION(NODEL) can also be specified on the UPDATE OLREORG command.

### Command Responses for /INITIATE OLREORG

When the /INITIATE OLREORG command is issued as a type-1 command, the command response is returned in a message format.

When the command completes successfully, a DFS0725I message with a completion code of 0 is returned to the system console and master terminal. If the command results in an error, a non-zero completion code or an error message is returned to the master terminal and system console.

If the command results in an error, an error message is returned to the entering terminal. One or more of the following messages might also be returned:

```
DFS0725I INITIATE|UPDATE|TERMINATE OLREORG COMMAND FOR DB dbnamexx COMPLETE.
CC= nn
```

where: dbnamexx is the HALDB partition name entered on the command  
nn is the completion code

```
DFS058 - INITIATE COMMAND IN PROGRESS
DFS107 - REQUIRED KEYWORD NOT PRESENT
DFS110 - COMMAND KEYWORD OLREORG INVALID FOR yyyyyyyy (tracker, XRF alt)
DFS128 - TOO FEW KEYWORDS
DFS136 - COMMAND xxxxxxxxxxxx INVALID FOR yyyyyyyy (tracker, XRF alt)
DFS165 - COMMAND VERB IS INVALID
DFS2026 - NO WKAP STORAGE
DFS2038 - INSUFFICIENT STORAGE AVAILABLE TO PROCESS COMMAND
DFS2262 - TOO MANY DATABASE PARAMETERS
DFS3630 - GENERIC PARAMETER NOT ALLOWED
```

For more complete information about these messages, see Chapter 7, “Messages and Codes of HALDB OLR,” on page 67 and the *IMS Version 9: Messages and Codes, Volume 2*.

### Command Responses for INITIATE OLREORG from OM API

The following sections describe the responses from the OM API for the INITIATE OLREORG command.

#### INITIATE OLREORG Output Fields:

Table 6 on page 35 shows the INITIATE OLREORG output fields. The columns in the table are as follows:

##### Short Label

Contains the short label generated in the XML output.

**Note:** This field does not apply to the /INITIATE or to the /INIT command.

<b>Show Keyword</b>	Identifies keyword on the command that caused the field to be generated. N/A appears for output fields that are always returned.
<b>Meaning</b>	Provides a brief description of the output field.

Table 6. Output Fields for INITIATE OLREORG Command

Short Label	Show Keyword	Meaning
PART	N/A	Partition name.
MBR	N/A	The IMS that processed the command and built the command response line.
CC	N/A	Completion code.

### **Return, Reason, and Completion Codes for the INITIATE OLREORG Command:**

The OM return and reason codes that might be returned as a result of the INITIATE OLREORG command are standard for all commands entered through the OM API. See the *IMS Version 9: Common Service Layer Guide and Reference* for a list of the OM codes and the code meanings.

Table 7 includes the return and reason codes and a brief explanation of the INITIATE OLREORG command. Table 8 includes an explanation of the completion codes. Errors unique to the processing of INITIATE OLREORG command are returned as completion codes. A completion code is returned for each action against a HALDB partition.

Table 7. Return and Reason Code for the INITIATE OLREORG Command

Return Code	Reason Code	Meaning
X'00000000'	X'00000000'	The INITIATE OLREORG command completed successfully.
X'00000010'	X'0000400C'	Command issued on an XRF alternate.
	X'00004014'	Command issued on an RSR tracker.
	X'00004030'	Command Invalid for LSO=Y.
X'00000014'	X'00005000'	A GETMAIN error occurred.

Table 8. Completion Codes for the INITIATE OLREORG Command

Completion Code	Meaning
C' 0'	The INITIATE OLREORG command completed successfully for the partition.
C' 10'	Resource name invalid.
C' 14'	Resource not a partition name.
C' 1C'	Resource is a partitioned secondary index.
C' 20'	HALDB OLR is already in progress.

## **Examples of INITIATE OLREORG Input and Output**

This section provides type-2 and type-1 input and output examples and explanations for the INITIATE OLREORG command.

**EXAMPLE 1:****Entry ET:**

```
/INITIATE OLREORG NAME(HALDBPRT) SET(RATE(50))
```

**Response ET:**

```
DFS058I INITIATE COMMAND IN PROGRESS
```

**System Console/MTO:**

```
DFS0725I INITIATE OLREORG COMMAND FOR DB HALDBPRT COMPLETE. CC= 0
```

**Explanation:**

Issue the INITIATE OLREORG command to start HALDB OLR for partition HALDBPRT at the entering terminal. The DFS058I command response is returned to the entering terminal followed by the DFS0725I message to the system console and MTO.

**Related Reading:** For more information about messages, see the *IMS Version 9: Messages and Codes, Volume 2*.

**EXAMPLE 2:****Entry ET:**

```
/INIT OLREORG NAME(PDHDOKA) SET(RATE(5))
```

**Response ET:**

```
DFS058I INITIATE COMMAND IN PROGRESS
```

**Response MTO/System console:**

```
DFS2970I - OLR STARTED FOR NAME=PDHDOKA
DFS0725I INITIATE OLREORG COMMAND FOR DB PDHDOKA COMPLETE. CC= 0
```

**Explanation:** The INIT OLREORG command for partition PDHDOKA is issued from a terminal, resulting in the message, DFS058I INITIATE COMMAND IN PROGRESS being sent to that entering terminal.

When OLR is started successfully, the DFS0725I and the DFS2970 messages are sent to the system console and to the MTO.

**EXAMPLE 3:****TSO SPOC Input:**

```
INIT OLREORG NAME(PDHDOKA,PDHDOKB) SET(RATE(5))
```

**TSO SPOC Output:**

Partition	MbrName	CC
PDHDOKA	IMSA	0
PDHDOKA	IMS1	C3
PDHDOKB	IMSA	0
PDHDOKB	IMS1	C3

**OM API Input:**

```
CMD (INIT OLREORG NAME(PDHDOKA,PDHDOKB) SET(RATE(5)))
```



**OM API Output:**

```

<imsout>
<ctl>
<omname>OM10M </omname>
<omvsn>1.2.0</omvsn>
<xmlvsn>1 </xmlvsn>
<statime>2003.168 21:19:06.827362</statime>
<stotime>2003.168 21:19:07.036292</stotime>
<staseq>B99629BFEC66256E</staseq>
<stoseq>B99629C01F684F44</stoseq>
<rqsttkn1>USRT005 10141906</rqsttkn1>
<rc>00000000</rc>
<rsn>00000000</rsn>
</ctl>
<cmd>
<master>IMSA </master>
<userid>USRT005 </userid>
<verb>INIT</verb>
<kwd>OLREORG </kwd>
<input>INIT OLREORG NAME(PDHDOKA,PDHDOKB) SET(RATE(5)) </input>
</cmd>
<cmdrsphdr>
<hdr slbl="PART" llbl="Partition" scope="LCL" sort="A" key="1"
  scroll="NO" len="9" dtype="CHAR" align="left" />
<hdr slbl="MBR" llbl="MbrName" scope="LCL" sort="N" key="0" scroll="NO"
  len="8" dtype="CHAR" align="left" />
<hdr slbl="CC" llbl="CC" scope="LCL" sort="N" key="0" scroll="YES"
  len="4" dtype="INT" align="right" />
</cmdrsphdr>
<cmdrspdata>
<rsp> PART(PDHDOKB ) MBR(IMSA ) CC( 0) </rsp>
<rsp> PART(PDHDOKA ) MBR(IMS1 ) CC( C3) </rsp>
<rsp> PART(PDHDOKB ) MBR(IMS1 ) CC( C3) </rsp>
</cmdrspdata>
</imsout>

```

**Explanation:** The INIT OLREORG command is issued from TSO SPOC for partitions PDHDOKA and PDHDOKB. The command is routed to IMSA and IMS1. The command is successful at IMSA for both partitions. The command is not successful for both partitions at IMS1.


---


**INIT.DB**

Use this command to register a database with DBRC and specify the level of database sharing and whether HALDB OLR is allowed to run on the database.

A database must be registered with DBRC before you can initialize a new DBDS, HALDB partition, or DEDB area with the INIT.DBDS command or INIT.PART command.

These are the HALDB OLR support keywords and parameters for the INIT.DB command.

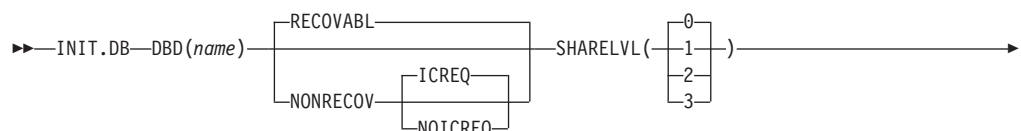**Format of INIT.DB**

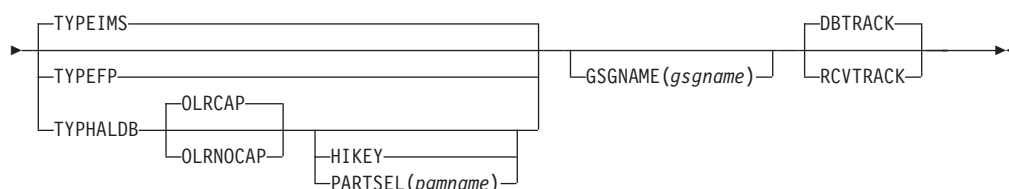

## INIT.DB Command Usage

**Additional parameters valid for HALDB master(type=HALDB) only:**

### OLRCAP | OLRNOCAP

Mutually exclusive, optional parameters used to indicate that HALDB OLR is allowed to run.

**OLRCAP** specifies in the master database record and in the partition database record that HALDB OLR is allowed to run. This is the default.

**OLRNOCAP** specifies in the master database record and in the partition database record that HALDB OLR is not allowed to run.


## NOTIFY.REORG


These are the HALDB OLR support keywords and parameters for the NOTIFY.REORG command.

Use a NOTIFY.REORG command to add a record to RECON about the reorganization of the database to which an identified DBDS belongs.

The information in the reorganization record is used by DBRC to determine which image copy data sets, change accumulation data sets, and log data sets are valid as input to a subsequent recovery of the identified DBDS.

## Format of NOTIFY.REORG

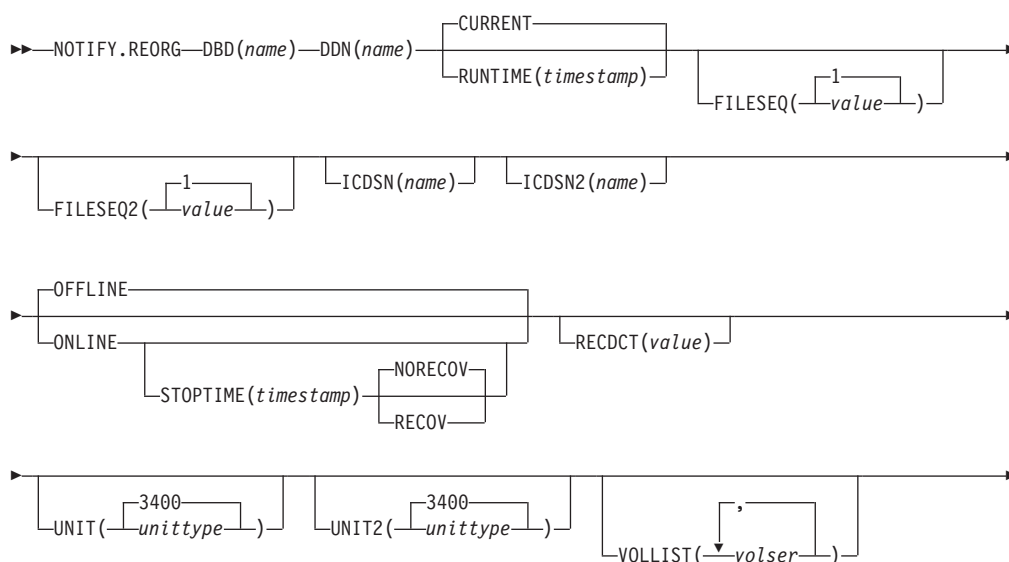



## NOTIFY.REORG Command Usage

**ONLINE | OFFLINE**

Mutually exclusive, optional parameters used to specify whether the reorganization is a HALDB OLR or an offline reorganization.

**ONLINE** specifies that the reorganization is a HALDB OLR

**OFFLINE** specifies that the DBDS was reorganized offline (default)

## RECOV | NORECOV

Mutually exclusive, optional parameters used to specify whether the online reorganization may be used as input for recovery. This parameter is ignored unless specified with the **ONLINE** parameter.

<b>RECOV</b>	specifies that the HALDB OLR may be used as input to recovery
--------------	---

<b>NORECOV</b>	specifies that the HALDB OLR may not be used as input to recovery
----------------	---

**STOPTIME**(*timestamp*)

Optional parameter used to specify the time when a HALDB OLR successfully completed. This parameter can only be specified with the ONLINE keyword.



## Chapter 5. Monitoring HALDB OLR

This section describes how IMS commands allow you to:

- Display status information about cursor active HALDB OLRs in an OM API environment.
- Monitor the status of the specified databases or partitions on the IMS where the command is issued (including those with HALDB OLRs in cursor-active status).
- Display all HALDB partitions that have HALDB OLRs in cursor-active status on the IMS locally.
- Display a list of all databases with HALDB OLR in cursor-active status.

### QUERY OLREORG Command


The QUERY OLREORG command returns status information about active HALDB OLRs in an OM API environment.

The /DISPLAY DB OLR command displays the status of the HALDB OLR in progress locally.

**Related Reading:** For more information on the /DISPLAY DB OLR command see the section entitled, “/DISPLAY DATABASE Command HALDB OLR Support” on page 45.

### Format of the QUERY OLREORG Command

This syntax diagram illustrates the format of the QUERY OLREORG command.

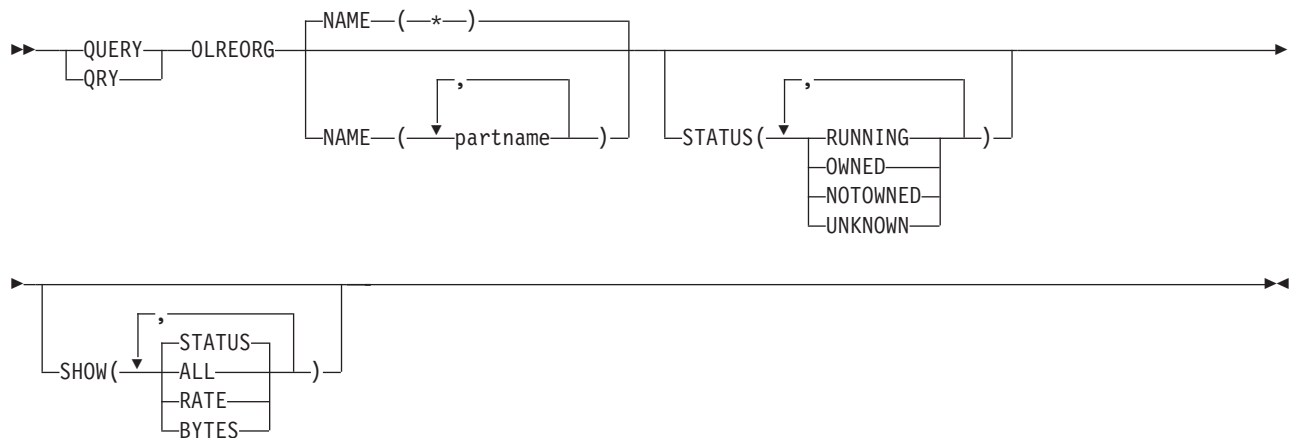

### Environments, Keywords, and Parameters of the QUERY OLREORG Command

Table 9 on page 42 lists the environments, keywords, and parameters of the QUERY OLREORG command.

This command uses syntax that can distinguish between keywords and resource names, so none of these keywords are reserved keywords. You can have resource names that are the same as the HALDB OLR keywords.

Table 9. Valid Environments for the QUERY OLREORG command Keywords, and Parameters

Command / Keywords	DB/DC	DBCTL	DCCTL
OLREORG	X	X	
NAME	X	X	
STATUS	X	X	
SHOW	X	X	

## Usage of the QUERY OLREORG Command

The QUERY OLREORG command is valid only from OM API. Responses from each IMS that the command was routed to are consolidated by OM. If particular names are specified on the NAME parameter, response lines are returned for each partname that was specified. For NAME(\*), response lines are returned only for the HALDB partitions that have online reorganizations in progress at each IMS.

A non-zero return code and non-zero reason code will be returned when the command is routed to an XRF (Extended Restart Facility) alternate system and when the command is routed to an RSR (Remote Site Recovery) tracking system.

**Restriction:** This command does not support keyword synonyms. Only one version of each keyword can be specified for each command issued.

The output for this command is defined in XML and is available to automation programs which communicate with OM.

**Related Reading:** See the Appendix of the *IMS Version 9: Common Service Layer Guide and Reference* for sample IMS command XML.

<b>NAME()</b>	Displays the online reorganization status for the specified HALDB partitions.
<b>PARTNAME</b>	The name of a HALDB PHDAM or PHIDAM partition. The wildcard character (*) is NOT allowed except as NAME(*) for all defined HALDB partitions. NAME(*) is the default.
<b>SHOW()</b>	Specifies the output fields to return. If SHOW is not specified only the partname is returned.
<b>ALL</b>	Returns STATUS, RATE, and BYTES on each response line.
<b>BYTES</b>	Returns the number of bytes that have been moved to the output data set.
<b>RATE</b>	Returns the rate from 1 to 100, at which the HALDB OLR is running.
<b>STATUS</b>	Online reorganization status.
<b>STATUS()</b>	Displays online reorganizations that possess at least one of the specified statuses. If STATUS is not specified then any online reorganization with a status of either RUNNING, OWNED, or NOTOWNED is returned.
<b>NOTOWNED</b>	Specifies that the output is for the online reorganizations that have been temporarily stopped

by the TERMINATE OLREORG command and therefore, are not owned by any IMS.

#### OWNED

Specifies that the output is for HALDB OLRs that are owned by other IMS'. Those owned by this IMS display a STATUS of RUNNING. The OLRs that are running on the IMS where the command is being processed display RUNNING. OLRs running on other IMS subsystems displayed a STATUS of OWNED.

#### RUNNING

Specifies the output is for the HALDB OLRs that are owned by each IMS for the specified *partname* or *partnames*. This option can be used to determine which IMS has an online reorganization running for which *partname*.

#### UNKNOWN

Specifies that the output is for those *partnames* on each IMS where status of the HALDB OLR cannot be determined. This inability to determine the status can be due to situations such as: the HALDB master being taken offline by a /DBR DB command, or the IMS not being authorized to the named *partname* because of an IRLM failure.

### QUERY OLREORG Output Fields

Table 10 shows the QUERY OLREORG output fields. The columns in the table are as follows:

#### Short Label

Contains the short label generated in the XML output.

#### Show Keyword

Identifies the keyword on the command that caused the field to be generated.

N/A appears for output fields that are always returned.

#### Meaning

Provides a brief description of the output field.

Table 10. Output Fields of QUERY OLREORG

Short Label	Show Keyword	Meaning
PART	N/A	Partition name.
MBR	N/A	The IMS from which the command was issued.
CC	N/A	Completion code.
LSTT	STATUS	Status of HALDB OLR.
RATE	RATE	The speed at which HALDB OLR runs. A value of 1 to 100 percent.
BYTES	BYTES	Number of bytes moved.

### Return, Reason, and Completion Codes for the QUERY OLREORG Command

The OM return and reason codes that might be returned as a result of the QUERY OLREORG command are standard for all commands entered through the OM API. See *IMS Version 9: Common Service Layer Guide and Reference* for a list of the OM codes and the code meanings.

Table 7 on page 35 includes the return and reason codes and a brief explanation of the QUERY OLREORG command. Table 12 includes an explanation of the completion codes. Errors unique to the processing of QUERY OLREORG command are returned as completion codes. A completion code is returned for each action against a HALDB partition.

*Table 11. Return and Reason Code for the QUERY OLREORG Command*

Return Code	Reason Code	Meaning
X'00000000'	X'00000000'	The QUERY OLREORG command completed successfully.
X'00000008'	X'00002004'	Invalid command keyword.
X'00000010'	X'00004030'	Command Invalid for LSO=Y.
	X'00004014'	Command issued on an RSR tracker.
	X'0000400C'	Command issued on an XRF alternate.
X'00000014'	X'00005000'	A GETMAIN error occurred.

*Table 12. Completion Codes for the QUERY OLREORG Command*

Completion Code	Meaning
C' 0'	The QUERY OLREORG command completed successfully for the partition.
C' 10'	Resource name invalid.
C' 14'	Resource not a partition name.
C' 1C'	Resource is a partitioned secondary index.
C' 24'	No HALDB OLR is in progress.
C' CB'	Partition not in specified status.

## Example of QUERY OLREORG Input and Output

### Example 1

This section provides type-2 input and output examples and explanations for the QUERY OLREORG command.

#### TSO SPOC Input:

```
QRY OLREORG NAME(*) SHOW(ALL)
```

#### TSO SPOC Output:

Partition	MbrName	CC	LCLSTAT	RATE	BYTES
PDHDOKA	IMSA	0	RUNNING	5	115260
PDHDOKB	IMSA	0	RUNNING	5	634

#### OM API Input:

```
CMD (QRY OLREORG NAME(*) SHOW(ALL))
```

#### OM API Output:

```
<imsout>
<ctl>
<omname>OM10M </omname>
<omvsn>1.2.0</omvsn>
<xm1vsn>1 </xm1vsn>
<statime>2003.168 21:05:23.374319</statime>
<stotime>2003.168 21:05:23.376148</stotime>
<staseq>B99626AE9E0EF969</staseq>
```



```

<stoseq>B99626AE9E8140A4</stoseq>
<rqsttkn1>USRT005 10140523</rqsttkn1>
<rc>00000000</rc>
<rsn>00000000</rsn>
</ctl>
<cmd>
<master>IMSA </master>
<userid>USRT005 </userid>
<verb>QRY </verb>
<kwd>OLREORG </kwd>
<input>QRY OLREORG NAME(*) SHOW(ALL) </input>
</cmd>
<cmdrsphdr>
<hdr slbl="PART" llbl="Partition" scope="LCL" sort="A" key="1"
  scroll="NO" len="9" dtype="CHAR" align="left" />
<hdr slbl="MBR" llbl="MbrName" scope="LCL" sort="N" key="0" scroll="NO"
  len="8" dtype="CHAR" align="left" />
<hdr slbl="CC" llbl="CC" scope="LCL" sort="N" key="0" scroll="YES"
  len="4" dtype="INT" align="right" />
<hdr slbl="LSTT" llbl="LCLSTAT" scope="LCL" sort="NO" key="0"
  scroll="YES" len="*" dtype="CHAR" align="left" />
<hdr slbl="RATE" llbl="RATE" scope="LCL" sort="N" key="0" scroll="YES"
  len="4" dtype="INT" align="right" />
<hdr slbl="BYTES" llbl="BYTES-MOVED" scope="LCL" sort="NO" key="0"
  scroll="YES" len="20" dtype="INT" align="right" />
</cmdrsphdr>
<cmdrspdata>
<rsp> PART(PDHDOKA ) MBR(IMSA ) CC( 0) LSTT(RUNNING ) RATE( 5)
  BYTES( 115260) </rsp>
<rsp> PART(PDHDOKB ) MBR(IMSA ) CC( 0) LSTT(RUNNING ) RATE( 5)
  BYTES( 634) </rsp>
</cmdrspdata>
</imsout>

```

**Explanation:** The QUERY OLREORG command is routed to IMSA. The command is issued to obtain the information on all of the OLRs that are in progress at IMSA. The output that is returned contains the following information:

- The partition name
- The IMS ID
- The status of OLRs in progress
- The rate of OLR
- The number of bytes moved

---

## /DISPLAY DATABASE Command HALDB OLR Support

The /DISPLAY DB command output shows the status of the specified databases or partitions locally. Use the OLR attribute to show all HALDB partitions that have online reorganizations in progress locally.

### Example of /DISPLAY DB Output with HALDB OLR

Here is an example of output that is returned to the originating terminal from a /DISPLAY DB PVHDJCK POIHDKD command.

DATABASE	TYPE	TOTAL	UNUSED	TOTAL	UNUSED	ACC	CONDITIONS
DBVHDJ05	PHDAM					UP	
PVHDJ5C	PART					UP	OLR
DBOHIDK5	PHIDAM					UP	
POIHDKD	PART					UP	OLR

Figure 3. /DISPLAY DB PVHDJ5C POIHDKD output for databases (2 with OLRs in progress)

## /DISPLAY DB OLR Command

The /DISPLAY DB OLR command returns a list and status of all databases that have HALDB OLR in progress locally to the originating terminal. The /DISPLAY DB OLR information is returned with these FIDs:

- Header line with FID D77
- Database information with FID D18

### RESTRICTIONS:

The attribute OLR cannot be specified on the /DISPLAY DB command with any other attributes such as STOPPED or ALLOCS, or others. If additional attributes are specified, the command is rejected and message DFS0135 is displayed.

A /DIS DB OLR command issued on the RSR tracker or the XRF alternate results in the display of this version of message DFS132I - ALL PARAMETERS ARE INVALID.

### Example of /DISLAY DB OLR Output

Here is an example of output returned to the originating terminal from a /DISPLAY DB OLR command.

DATABASE	PART	RATE	BYTES	STATUS
DBOHIDK5	POHIDKD	1	123456789999	RUNNING
DBVHDJ05	PVHDJ5C	50	0	RUNNING

Figure 4. /DISPLAY DB OLR output

### Entry ET:

/DIS DB OLR

### Response ET Output:

DATABASE	PART	RATE	BYTES	STATUS
DBHDOK01	PDHDOKA	5	39348	RUNNING

\*03168/143937\*

Explanation: The /DIS DB OLR command is issued to obtain the information on all OLRs that are in progress. The following information is returned:

- Partition name
- Master database name
- OLR rate
- Number of bytes moved
- Status of the OLR

---

## QUERY DATABASE STATUS(OLR) Command

The QUERY DB command output displays HALDB OLR status. The QUERY DB STATUS(OLR) command returns a list of all databases with HALDB OLR in progress. No rate information is returned. The rate information is returned on the QUERY OLREORG command output.

**Related Reading:** For more information regarding the QUERY DB command, see the *IMS Version 9: Command Reference*.



---

## Chapter 6. Modifying and Tuning HALDB OLR

This section describes how to make these modifications and tuning adjustments:

- Stop HALDB OLRs.
- Change the intensity and impact of HALDB OLRs.
- Specifying whether to delete inactive HALDB OLR data sets when HALDB OLR processing completes.
- Modify the status of a HALDB OLR in the RECON data set.

This section also describes the effects to a HALDB master database that has been taken offline with a /DBRecovery DB command.

---

### TERMINATE OLREORG COMMAND

The TERMINATE OLREORG command is used to stop one or more HALDB OLRs in an OM API environment.

**Restriction:** This command does not support keyword synonyms. Only one version of each keyword can be specified for each command issued.

Figure 5 on page 50 shows the processing steps of a HALDB OLR where you invoke TERMINATE OLREORG to temporarily stop a HALDB OLR during copying and then invoke INITIATE OLREORG to resume the online reorganization. This figure contains columns depicting your (as the user) and IMS control flow and the statuses of the sets of data sets as processing occurs.

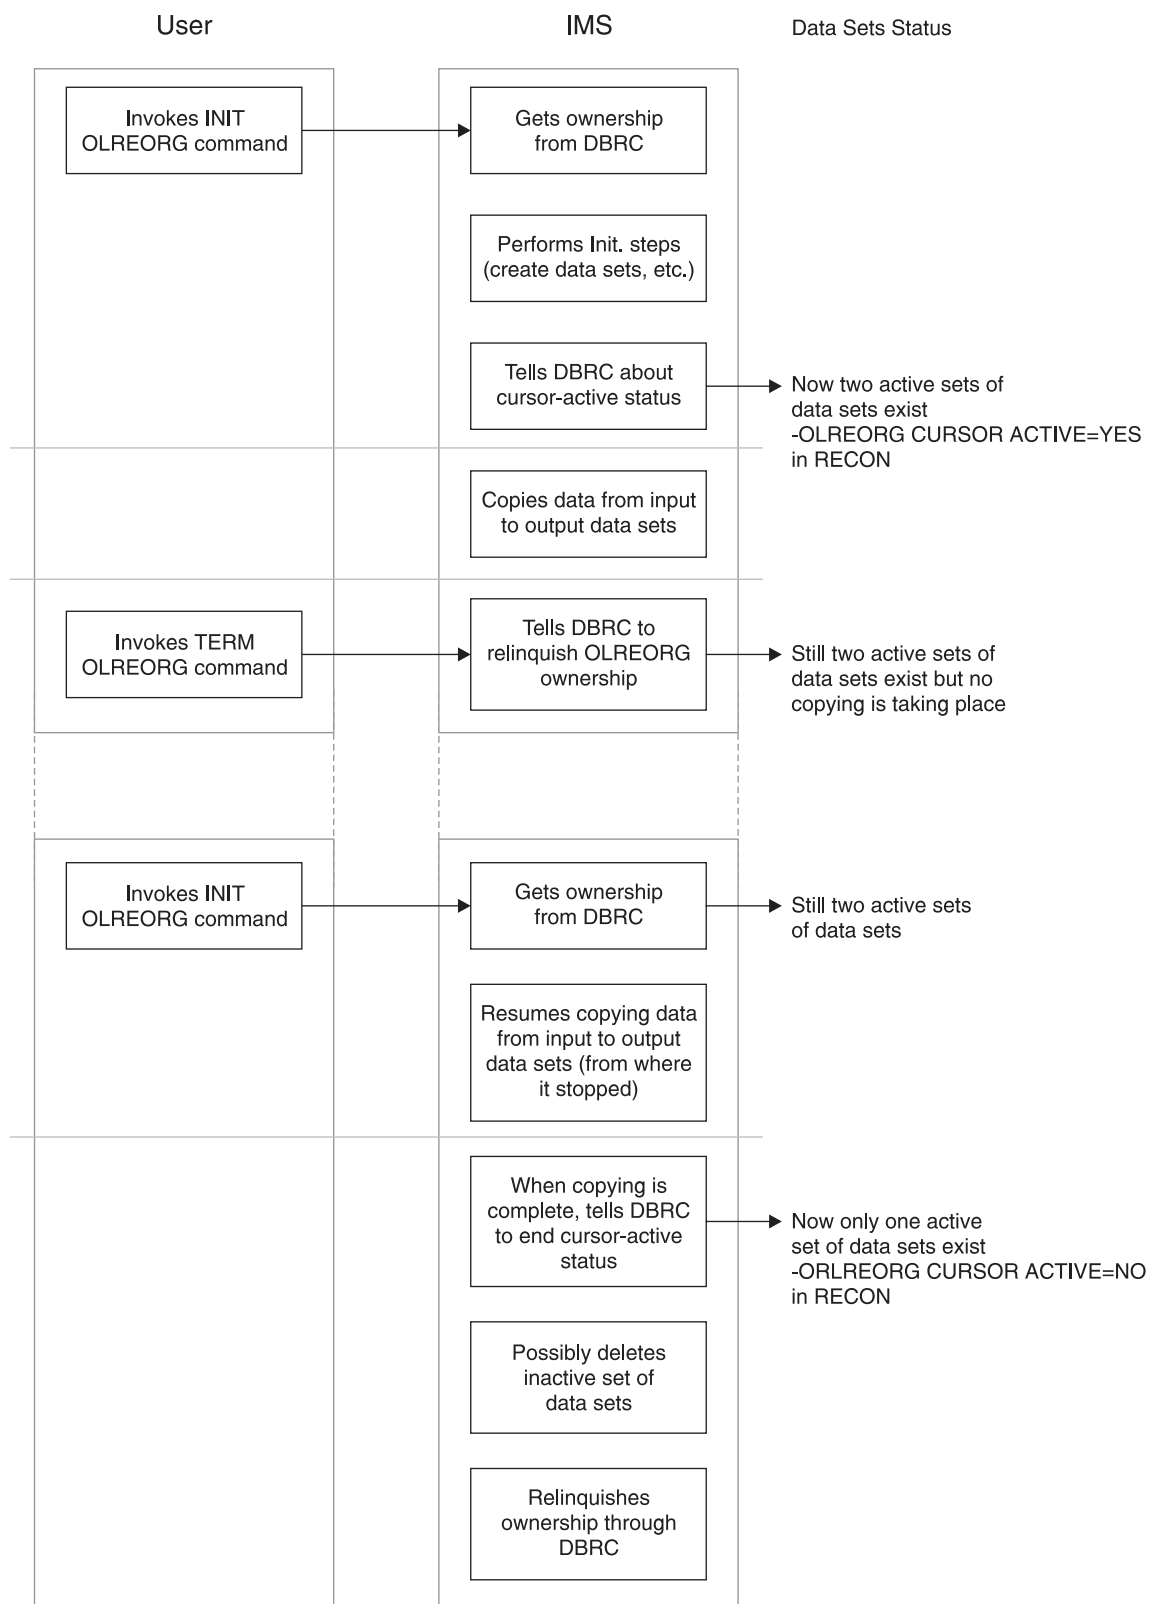


Figure 5. HALDB OLR Process with a TERMINATE OLREORG

## /TERMINATE OLREORG Command

The type-1 command syntax is the same as the type-2 command syntax issued from OM API but is preceded by a CRC (command recognition character) usually a / (slash).

The type-1 format /TERMINATE OLREORG command can be issued from terminals, AOI applications, EMCS consoles, and APPC/OTMA programs. When the command is entered as a type-1 command only one *NAME* parameter can be specified.


When this command is entered as a type-1 command, the command response is returned as a DFS0725I pre-edit message.

### Related Reading:

- See Chapter 7, “Messages and Codes of HALDB OLR,” on page 67 for more information about message DFS0725I.

## Format of the TERMINATE OLREORG Command

The syntax diagram here illustrates the format of the TERMINATE OLREORG command.

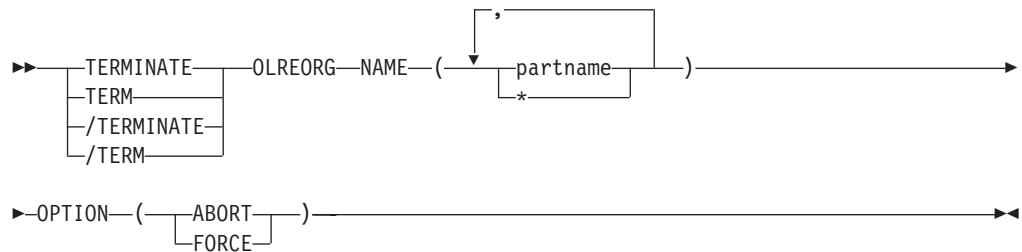

## Environments, Keywords, and Parameters of the TERMINATE OLREORG Command

Table 13 lists the environments, keywords, and parameters of the TERMINATE OLREORG command.

This command uses syntax that can distinguish between keywords and resource names, so none of these keywords are reserved keywords. You can have resource names that are the same as the HALDB OLR keywords.

**Restriction:** This command does not support keyword synonyms. Only one version of each keyword can be specified for each command issued.

*Table 13. Valid Environments for the TERMINATE OLREORG Command, Keywords, and Parameters*

Command / Keywords	DB/DC	DBCTL	DCCTL
OLREORG	X	X	
NAME	X	X	
OPTION	X	X	

## Usage of the TERMINATE OLREORG Command

The TERMINATE OLREORG command causes the HALDB OLR to be stopped for the specified HALDB partitions. After a HALDB OLR has been terminated it is no longer active nor does it have an owning IMS. The partitions remain in OLREORG cursor-active status until the online reorganization is resumed with an INITIATE OLREORG command and completes, or an offline reorganization is run.

The output for this command is defined in XML and is available to automation programs which communicate with OM if the command is issued from an OM API environment and not as a type-1 command.

**Related Reading:** See the Appendix of the *IMS Version 9: Common Service Layer Guide and Reference* for sample XML for IMS commands.

<b>NAME()</b>	<p>For the type-2 version of this command, you can specify one or more HALDB partitions for which HALDB OLR is to be stopped.</p> <p>For the type-1 version of the command, you can specify only one NAME keyword for each of these commands that you issue.</p>
<b>PARTNAME</b>	<p>The name of a HALDB partition. Only PHDAM or PHIDAM HALDB partition names can be specified. Also, the use of the wildcard character (*), for example DBPART*, is <i>not</i> allowed.</p>
*	<p>All defined HALDB partitions.</p>
<b>OPTION()</b>	<p>Allows you to specify the FORCE or ABORT options as described here.</p>
<b>ABORT</b>	<p>Causes the HALDB OLR to be stopped immediately, possibly with a completion code of Abend U0474, without waiting for the current unit of reorganization to complete. Backout may be required depending on the state of the online reorganization at termination.</p>
<b>FORCE</b>	<p>Indicates that the HALDB OLR for the named partname is to be stopped when the next record boundary is encountered. All of the moved data up to that point is committed to DASD and no backout is required.</p>

**Attention:** If the HALDB OLR is stopped prior to completion, the OPTION(NODEL) is *not* retained and must be specified on the INITIATE OLREORG command that is issued to resume the stopped online reorganization or on the UPDATE OLREORG command.

### Command Responses for /TERMINATE OLREORG

When the /TERMINATE OLREORG command is entered as a type-1 command, the command response is returned in a message format.

When the command completes successfully, message DFS0725I with a completion code of 0 is returned to the system console and master terminal. If the command results in an error, a non-zero completion code or an error message is returned to the master terminal and system console.

If the command results in an error, this error message is returned to the entering terminal:



```
DFS0725I INITIATE|UPDATE|TERMINATE OLREORG COMMAND FOR DB dbnamexx COMPLETE.
CC= nn
  where: dbnamexx is the HALDB partition name entered on the command
         nn       is the completion code
```

For more complete information about this message, see “HALDB OLR DFS Series Messages” on page 67.

## Command Responses for TERMINATE OLREORG from OM API

The following sections describe the responses from the OM API for the TERMINATE OLREORG command.

**TERMINATE OLREORG Output Fields:** Table 14 shows the TERMINATE OLREORG output fields. The columns in the table are as follows:

### Short Label

Contains the short label generated in the XML output.

**Note:** This field does not apply to the /TERMINATE or to the /TERM command.

### Show Keyword

Identifies keyword on the command that caused the field to be generated.

N/A appears for output fields that are always returned.

### Meaning

Provides a brief description of the output field.

Table 14. Output Fields for TERMINATE OLREORG Command

Short Label	Show Keyword	Meaning
PART	N/A	Partition name.
MBR	N/A	The IMS that built the command response line.
CC	N/A	Completion code.

## Return, Reason, and Completion Codes for the TERMINATE OLREORG Command:

The OM return and reason codes that might be returned as a result of the TERMINATE OLREORG command are standard for all commands entered through the OM API. See the *IMS Version 9: Common Service Layer Guide and Reference* for a list of the OM codes and the code meanings.

Table 15 includes the return and reason codes and a brief explanation of the TERMINATE OLREORG command. Table 16 on page 54 includes an explanation of the completion codes. Errors unique to the processing of TERMINATE OLREORG command are returned as completion codes. A completion code is returned for each action against a HALDB partition.

Table 15. Return and Reason Code for the TERMINATE OLREORG Command

Return Code	Reason Code	Meaning
X'00000000'	X'00000000'	The TERMINATE OLREORG command completed successfully.
X'00000010'	X'00004014'	Command issued on an RSR tracker.
	X'0000400C'	Command issued on an XRF alternate.
X'00000014'	X'00005000'	A GETMAIN error occurred.

Table 16. Completion Codes for the *TERMINATE OLREORG* Command

Completion Code	Meaning
C' 0'	The <i>TERMINATE OLREORG</i> command completed successfully for the partition.
C' 10'	Resource name invalid.
C' 14'	Resource not a partition name.
C' 1C'	Resource is a partitioned secondary index.
C' 24'	No HALDB OLR is in progress.
C' 28'	NO DMB loaded - need to schedule.

## Examples of *TERMINATE OLREORG* Input and Output

This section provides type-1 and type-2 input and output examples and explanations for the *TERMINATE OLREORG* command.

### **EXAMPLE 1:**

#### **Entry ET:**

```
/TERM OLREORG NAME(PDHDOKA)
```

#### **Response ET:**

```
DFS0725I TERMINATE OLREORG COMMAND FOR DB PDHDOKA COMPLETE. CC= 24
```

#### **Explanation:**

The *TERM OLREORG* command is issued for partition PDHDOKA to stop the OLR in progress. The command is not successful because OLR is not in progress for the partition.

#### **Related Reading:**

- See Chapter 7, “Messages and Codes of HALDB OLR,” on page 67 for more information about message DFS0725I.

### **EXAMPLE 2:**

#### **TSO SPOC Input:**

```
TERM OLREORG NAME(PDHDOKA,PDHDOKC)
```

#### **TSO SPOC Output:**

Partition	MbrName	CC
PDHDOKA	IMSA	0
PDHDOKA	IMS1	24
PDHDOKC	IMSA	24
PDHDOKC	IMS1	24

#### **OM API Input:**

```
CMD ( TERM OLREORG NAME(PDHDOKA,PDHDOKC))
```

#### **OM API Output:**

```
<imsout>
<ctl>
<omname>OM10M </omname>
<omvsn>1.2.0</omvsn>
```

```

<xmlvsn>1 </xmlvsn>
<statime>2003.168 21:31:13.035976</statime>
<stotime>2003.168 21:31:13.038227</stotime>
<staseq>B9962C747D6C8868</staseq>
<stoseq>B9962C747DF93586</stoseq>
<rqsttkn1>USRT005 10143113</rqsttkn1>
<rc>0200000C</rc>
<rsn>00003008</rsn>
</ctl>
<cmderr>
<mbr name="IMSA ">
<typ>IMS </typ>
<styp>DBCTL </styp>
<rc>0000000C</rc>
<rsn>00003000</rsn>
</mbr>
<mbr name="IMS1 ">
<typ>IMS </typ>
<styp>DBDC </styp>
<rc>0000000C</rc>
<rsn>00003004</rsn>
</mbr>
</cmderr>
<cmd>
<master>IMSA </master>
<userid>USRT005 </userid>
<verb>TERM</verb>
<kwd>OLREORG </kwd>
<input>TERM OLREORG NAME(PDHDOKA,PDHDOKC) </input>
</cmd>
<cmdrsphdr>
<hdr slbl="PART" llbl="Partition" scope="LCL" sort="A" key="1"
  scroll="NO" len="9" dtype="CHAR" align="left" />
<hdr slbl="MBR" llbl="MbrName" scope="LCL" sort="N" key="0" scroll="NO"
  len="8" dtype="CHAR" align="left" />
<hdr slbl="CC" llbl="CC" scope="LCL" sort="N" key="0" scroll="YES"
  len="4" dtype="INT" align="right" />
</cmdrsphdr>
<cmdrspdata>
<rsp> PART(PDHDOKA ) MBR(IMSA ) CC( 0) </rsp>
<rsp> PART(PDHDOKC ) MBR(IMSA ) CC( 24) </rsp>
<rsp> PART(PDHDOKA ) MBR(IMS1 ) CC( 24) </rsp>
<rsp> PART(PDHDOKC ) MBR(IMS1 ) CC( 24) </rsp>
</cmdrspdata>
</imsout>

```

**Explanation:** The TERM OLREORG command is issued to stop the OLR for partitions PDHDOKA and PDHDOKC. The command is routed to IMSA and IMS1. The command is successful for partition PDHDOKA at IMSA where OLR is in progress. The command is not successful for PDHDOKC at IMSA because OLR is not in progress for PDHDOKC on IMSA. The command is not successful for either of the two partitions at IMS1 because OLR is not in progress for PDHDOKA and PDHDOKC on IMS1.

---

## UPDATE OLREORG Command

The UPDATE OLREORG command allows you to change the intensity and impact of HALDB OLRs with the RATE option. UPDATE OLREORG also allows you to specify whether to delete inactive HALDB OLR data sets when HALDB OLR processing completes with the DEL or NODEL options.

Figure 6 on page 56 shows the processing steps of a HALDB OLR where you invoke UPDATE OLREORG to change the RATE parameter and set the NODEL option

to ON during copying. This figure contains columns depicting the flow of control between you (as the user) and IMS and the statuses of the sets of data sets as processing events occur.

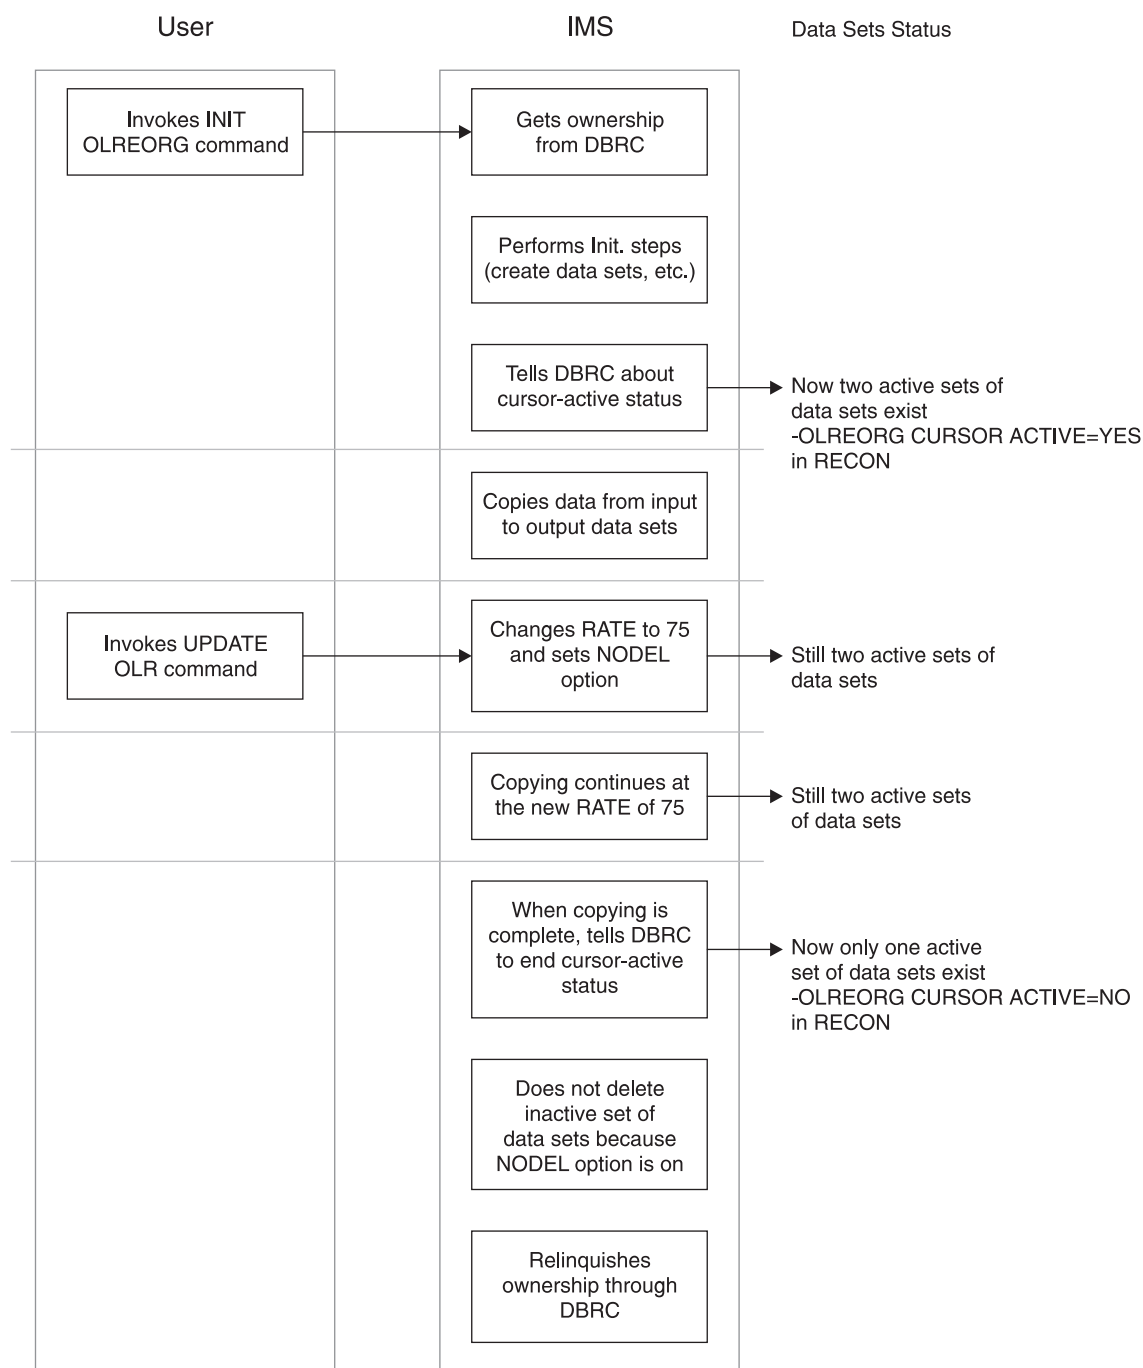


Figure 6. HALDB OLR Process with an UPDATE OLREORG

## /UPDATE OLREORG Command

The type-1 command syntax is the same as the type-2 command syntax issued from OM API but is preceded by a CRC (command recognition character) usually a / (slash).

The type-1 /UPDATE OLREORG command can be issued from terminals, AOI applications, EMCS consoles, and APPC/OTMA programs. When the command is entered as a type-1 command only one NAME parameter can be specified.


When this command is entered as a type-1 command, the command response is returned as a DFS0725I pre-edit message.

**Related Reading:**

- See Chapter 7, “Messages and Codes of HALDB OLR,” on page 67 for more information about message DFS0725I.

## Format of the UPDATE OLREORG Command

The syntax diagram here illustrates the format of the UPDATE OLREORG (update HALDB OLR) command.

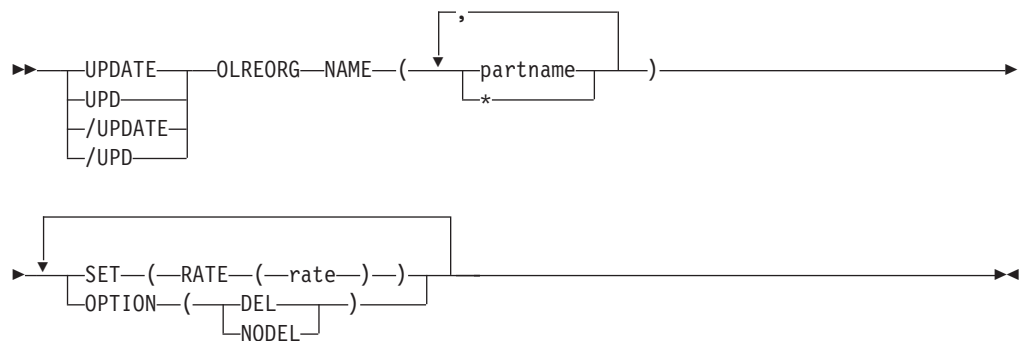

## Environments, Keywords, and Parameters of the UPDATE OLREORG Command

Table 17 lists the environments, keywords, and parameters of the UPDATE OLREORG command.

This command uses syntax that can distinguish between keywords and resource names, so none of these keywords are reserved keywords. You can have resource names that are the same as the HALDB OLR keywords.

**Restriction:** This command does not support keyword synonyms. Only one version of each keyword can be specified for each command issued.

Table 17. Valid Environments for the UPDATE OLREORG Command Keywords and Parameters

Command / Keywords	DB/DC	DBCTL	DCCTL
OLREORG	X	X	
NAME	X	X	
SET	X	X	
OPTION	X	X	

## Usage of the UPDATE OLREORG Command

The UPDATE OLREORG command allows you to change the rate or the DEL or NODEL data set disposition flags of an owned HALDB OLR. See “Reorganization

Processing Time” on page 13 *IMS Version 9: HALDB Online Reorganization Guide and Reference* for performance considerations related to changing the rate at which the online reorganization is run.

The output for this type-2 format command is defined in XML and is available to automation programs that communicate with OM.

**Related Reading:** See the Appendix of the *IMS Version 9: Common Service Layer Guide and Reference* for sample IMS command XML.

<b>NAME()</b>	Allows you to specify one or more HALDB partitions for the UPDATE OLREORG type-2 command.
	For the type-1 version of the command, you can specify only one NAME keyword for each of these commands that you issue.
	<p><b>PARTNAME</b> The name of a HALDB partition. Only PHDAM or PHIDAM HALDB partition names can be specified. Also, the use of the wildcard character (*), for example DBPART*, is <i>not</i> allowed for PARTNAME.</p>
	<p>*</p> <p>All defined HALDB partitions.</p>
<b>SET()</b>	Allows you to specify the RATE option as described below.
	<p><b>RATE()</b></p> <p>Allows you to specify the RATE at which the HALDB OLR is to be run.</p>
	<p><b>rate</b> You can specify a rate value of 1 to 100. An online reorganization’s impact on the system is affected by the available system resources, by total system utilization (including other online reorganizations), by total logging volume, by log contention, and by the intensity at which this reorganization was requested to run. These same factors also affect the speed at which the reorganization runs.</p> <p>A rate value of 50 specifies that 50% of the elapsed time be spent copying records and the remaining 50% be spent in a delay. This causes the reorganization to run approximately twice as long as it would have run with a rate value of 100.</p> <p>You can use the RATE parameter to control the intensity at which the reorganization runs. This can affect both the reorganization’s speed and its impact on the rest of the system. The value you specify for rate is the percentage of elapsed time to be devoted to copying records. The remaining time is to be an intentionally introduced delay in the copying process that minimizes the reorganization’s impact on other IMS work and on the whole system.</p> <p>RATE(100) is the default.</p>
<b>OPTION()</b>	Allows the specification of the DEL or NODEL options as described below. If the partition is tracked at an RSR tracker site, the OPTION value (DEL or NODEL) in effect at the completion of the HALDB

OLR also determines whether the inactive data sets for the shadow partition are deleted at the completion of the tracking of the reorganization.

**Note:** If the HALDB Online Reorganization is stopped prior to completion the DEL or NODEL keyword is *not* remembered and will need to be specified on the INITIATE OLREORG command that is issued to resume the stopped HALDB Online Reorganization.

**DEL** Indicates the deletion of the inactive data sets is to be attempted when the online reorganization completes. The attempted deletion occurs regardless of who created the data sets or when the data sets were created.

**NODEL** Indicates the deletion of the inactive data sets is not to be attempted when the online reorganization completes.

### Command Responses for /UPDATE OLREORG

When the /UPDATE OLREORG command is entered as a type-1 command, the command response is returned in a message format.

When the command completes successfully, message DFS0725I with a completion code of 0 is returned to the system console and master terminal. If the command results in an error, a non-zero completion code or an error message is returned to the master terminal and system console.

If the command results in an error, this error message is returned to the entering terminal:

```
DFS0725I INITIATE|UPDATE|TERMINATE OLREORG COMMAND FOR DB dbnamexx COMPLETE.
CC= nn
  where: dbnamexx is the HALDB partition name entered on the command
         nn       is the completion code
```

For more complete information about this message, see Chapter 7, “Messages and Codes of HALDB OLR,” on page 67.

### Command Responses for UPDATE OLREORG from OM API

The following sections describe the responses from the OM API for the UPDATE OLREORG command.

#### UPDATE OLREORG Output Fields:

Table 18 on page 60 shows the UPDATE OLREORG output fields. The columns in the table are as follows:

**Short Label** Contains the short label generated in the XML output.

#### Show Keyword

Identifies keyword on the command that caused the field to be generated.

N/A appears for output fields that are always returned.

**Meaning** Provides a brief description of the output field.

Table 18. Output Fields for UPDATE OLREORG Command

Short Label	Show Keyword	Meaning
PART	N/A	Partition name.
MBR	N/A	The IMS that built the command response line.
CC	N/A	Completion code.

### ***Return, Reason, and Completion Codes for the UPDATE OLREORG Command:***

The OM return and reason codes that might be returned as a result of the UPDATE OLREORG command are standard for all commands entered through the OM API. See *IMS Version 9: Common Service Layer Guide and Reference* for a list of the OM codes and the code meanings.

Table 7 on page 35 includes the return and reason codes and a brief explanation of the UPDATE OLREORG command. Table 20 includes an explanation of the completion codes. Errors unique to the processing of UPDATE OLREORG command are returned as completion codes. A completion code is returned for each action attempted on a HALDB partition.

Table 19. Return and Reason Code for the UPDATE OLREORG Command

Return Code	Reason Code	Meaning
X'00000000'	X'00000000'	The UPDATE OLREORG command completed successfully.
X'00000008'	X'00002008'	Insufficient number of keywords specified.
X'00000010'	X'0000400C'	Command issued on an XRF alternate.
	X'00004014'	Command issued on an RSR tracker.
X'00000014'	X'00005000'	A GETMAIN error occurred.

Table 20. Completion Codes for the UPDATE OLREORG Command

Completion Code	Meaning
C' 0'	The UPDATE OLREORG command completed successfully for the partition.
C' 10'	Resource name invalid.
C' 14'	Resource not a partition name.
C' 1C'	Resource is a partitioned secondary index.
C' 24'	No HALDB OLR is in progress.

## **Examples of UPDATE OLREORG Input and Output**

This section provides type-1 and type-2 input and output examples and explanations for the UPDATE OLREORG command.

### **EXAMPLE 1:**

#### **Entry ET:**

```
/UPD OLREORG NAME(PDHDOKA) SET(RATE(25))
```

#### **Response ET:**



DFS0725I UPDATE OLREORG COMMAND FOR DB PDHDOKA COMPLETE. CC= 0

### Explanation:

The UPDATE OLREORG command is issued for partition PDHDOKA to change the OLR rate to 25. The command is successful as indicated in the message DSF0725 command response.

### EXAMPLE 2:

#### TSO SPOC Input:

```
UPD OLREORG NAME(PDHDOKA,PDHDOKB) SET(RATE(25))
```

#### TSO SPOC Output:

Partition	MbrName	CC
PDHDOKA	IMSA	0
PDHDOKA	IMS1	24
PDHDOKB	IMSA	0
PDHDOKB	IMS1	24

#### OM API Input:

```
CMD (UPD OLREORG NAME(PDHDOKA,PDHDOKB) SET(RATE(25)))
```

#### OM API Output:

```
<imsout>
<ctl>
<omname>OM10M </omname>
<omvsn>1.2.0</omvsn>
<xm1vsn>1 </xm1vsn>
<statime>2003.168 21:17:57.712194</statime>
<stotime>2003.168 21:17:57.713062</stotime>
<staseq>B996297E02942007</staseq>
<stoseq>B996297E02CA6487</stoseq>
<rqsttkn1>USRT005 10141757</rqsttkn1>
<rc>02000000C</rc>
<rsn>00003000</rsn>
</ctl>
<cmderr>
<mbr name="IMS1 ">
<typ>IMS </typ>
<styp>DBDC </styp>
<rc>00000000C</rc>
<rsn>00003004</rsn>
</mbr>
</cmderr>
<cmd>
<master>IMSA </master>
<userid>USRT005 </userid>
<verb>UPD </verb>
<kwd>OLREORG </kwd>
<input>UPD OLREORG NAME(PDHDOKA,PDHDOKB) SET(RATE(25)) </input>
</cmd>
<cmdrsphdr>
<hdr slbl="PART" llbl="Partition" scope="LCL" sort="A" key="1"
  scroll="NO" len="9" dtype="CHAR" align="left" />
<hdr slbl="MBR" llbl="MbrName" scope="LCL" sort="N" key="0" scroll="NO"
  len="8" dtype="CHAR" align="left" />
<hdr slbl="CC" llbl="CC" scope="LCL" sort="N" key="0" scroll="YES"
  len="4" dtype="INT" align="right" />
</cmdrsphdr>
<cmdrspdata>
```

```

<rsp> PART(PDHDOKA ) MBR(IMSA ) CC( 0) </rsp>
<rsp> PART(PDHDOKB ) MBR(IMSA ) CC( 0) </rsp>
<rsp> PART(PDHDOKA ) MBR(IMS1 ) CC( 24) </rsp>
<rsp> PART(PDHDOKB ) MBR(IMS1 ) CC( 24) </rsp>
</cmdrspdata>
</imsout>

```

### Explanation:

The UPDATE OLREORG command is issued for partitions PDHDOKA and PDHDOKB to update the OLR rate to 25. The command is successful at IMSA where OLR is in progress and not at IMS1 where OLR is not in progress. A completion code of 24 is returned in the IMS1 response.

---

## /START DB Command HALDB OLR Support

See the *IMS Version 9: Command Reference* for information on the /START DB command for HALDB Online Reorganization.

---

## /DBRecovery Command HALDB OLR Support

See the *IMS Version 9: Command Reference* for information on the /DBRecovery DB command for HALDB Online Reorganization.

**Related Reading:** Also see the step-by-step recovery process in the section entitled, "Database Recovery - DFSURDB0" on page 22..

---

## /RECover Command HALDB OLR Support


See the *IMS Version 9: Command Reference* for information on the /RECover command for HALDB Online Reorganization.


---

## CHANGE.DB

These are the HALDB OLR support keywords and parameters for the CHANGE.DB command.

### Format of CHANGE.DB

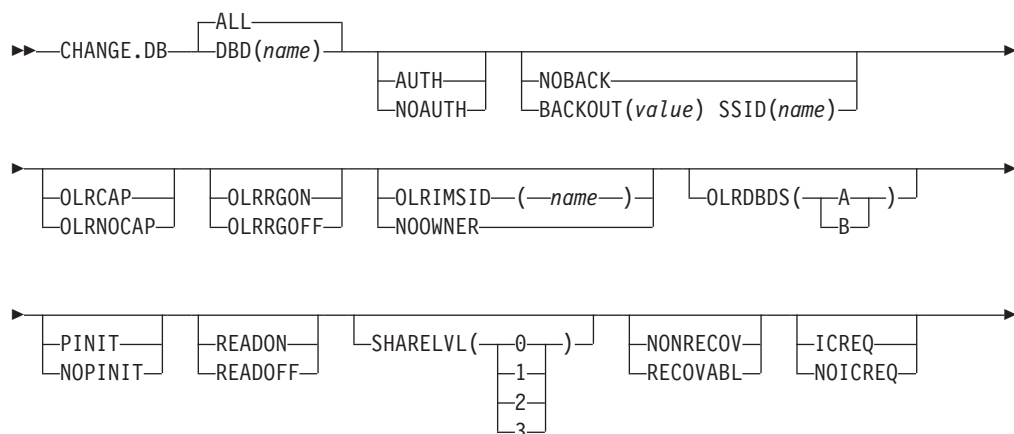



## CHANGE.DB Command Usage

The following keywords are specified when changing the status of a HALDB OLR in the RECON data set. They can only be specified for a HALDB partition (TYPE=PART). Online reorganization must have already been attempted for this partition in order to change the OLRRGOFF or OLRRGON, OLRIMSID or NOOWNER, and OLRDBDS(A or M); so the M-through-V data sets must already exist.

Use of the CHANGE.DB command for these parameters is not necessary for normal operations. The ALL parameter is not allowed when changing the status of an online reorganization, except for CHANGE.DB ALL OLRCAP. All HALDBs that are available to be marked as OLRCAP are marked as OLRCAP. Those unavailable for change (such as HALDBs that are currently authorized) are skipped over and are not marked as OLRCAP.

**Restriction:** A PSINDEX is always OLRCAP.

### CHANGE.DB Command HALDB OLR Parameters

#### OLRRGOFF | OLRRGON

Mutually exclusive, optional parameters used to specify whether HALDB OLR is in progress.

**OLRRGON** Specifies that HALDB OLR is in progress. Both the A-through-J and the M-through-V data sets contain active data.

**OLRRGOFF** Specifies that HALDB OLR has completed and that either the A-through-J set of data sets or the M-through-V set of data sets contain active data. The flag will be changed to indicate that the inactive data sets are now the active data sets. OLREORG CURSOR ACTIVE = NO will be set in the DB record. The OLRIMSID will be cleared.

*Note:* Manual intervention may be needed to either delete the online REORG records or to add a stop time. See the *IMS Version 9: DBRC Guide and Reference* for more information on this and the DELETE.REORG and NOTIFY.REORG commands.

#### OLRIMSID(name) | NOOWNER

Mutually exclusive, optional parameters you use to specify or change the name of the IMS that owns the HALDB OLR.

#### OLRDBDS(A | M)

Optional parameter you use to indicate the active set of DBDSs for this partition is either A-through-J and X or M-through-V and Y.

**A** Specifies that the A-through-J and X data sets are active.

**M** Specifies that the M-through-V and Y data sets are active.

**Valid for HALDB master(type=HALDB) only:**

#### OLRCAP | OLRCAP

Mutually exclusive, optional parameters that specify if the HALDB can be

reorganized online using HALDB OLR. There is no default and these parameters are valid only when the DBD is a HALDB master.

**OLRCAP** Specifies in the master database record and the partition database record that HALDB OLR is allowed to run.

**OLRNOCAP** Specifies in the master database record and the partition database record that HALDB OLR is not allowed to run. The command fails if HALDB OLR cursor is active or if any M-through-V and Y DBDSs are active. In this case the M-through-V and Y DBDSs and all of their associated records are deleted from RECON for all partitions.

## Part 3. Diagnosing HALDB OLR

<b>Chapter 7. Messages and Codes of HALDB OLR</b>	67
HALDB OLR DFS Series Messages	67
HALDB OLR DSP Series Messages	82
HALDB OLR Abends and Codes	84
<b>Chapter 8. Log Records of HALDB OLR</b>	85
DFSDLOG - Database Change Log Records	85
DFSLOG20 - Database Open and Close (X'20' and X'21') Log Records	85
DFSLOG27 - Database Extension (X'27) Log Records	85
DFSLOG53 - CI/CA and Space Manager (X'53) Log Records	85
Log Records: X'29' OLR Event Log Records	85
X'2910': Ownership Established	86
X'2920': UPDATE OLREORG Command	86
X'2930': Output Data Set Information	86
X'2940': Cursor-Active Status	86
X'2950': Cursor Movement	86
X'2970': Cursor-Active Status Reset	86
X'2990': Ownership Relinquished	86



## Chapter 7. Messages and Codes of HALDB OLR

These are the IMS messages that pertain to HALDB OLR.

They also appear in the *IMS Version 9: Messages and Codes, Volume 2* and in the *IMS Version 9: Messages and Codes, Volume 1*.

### In This Section:

- “HALDB OLR DFS Series Messages”
- “HALDB OLR DSP Series Messages” on page 82
- “HALDB OLR Abends and Codes” on page 84

## HALDB OLR DFS Series Messages

These are the IMS DFS series messages that pertain to HALDB OLR.

**DFS047A UNABLE TO OBTAIN AUTHORIZATION FOR DATA BASE xxxxxxxx. REASON CODE = zz. PSB= psbname.**

**Explanation:** IMS was unable to obtain database authorization for the named database which appears in one of the DB PCBs contained in the named PSB during PSB scheduling. The PSB name only appears in the message text if the IMS is an online control region.

### Code (Hex) Meaning

<b>01</b>	The requested state and the current authorization state (see RECON data set) are incompatible. The database is authorized by another active or abnormally terminated IMS subsystem, and its authorization state is incompatible with the current authorization request.
<b>02</b>	The database is not registered in the RECON data set.
<b>03</b>	The database is marked as prohibiting further authorization for one of the following reasons: a global /DBRecovery, a global /STOP, an UPDATE DB STOP, or a CHANGE.DB(NOAUTH) command.
<b>04</b>	The database is authorized only if the requested state is "READ" or "READ-GO" because of a global /DBDUMP or an UPDATE DB STOP(UPDATES) command.
<b>05</b>	The database is marked as needing an image copy.
<b>06</b>	The database is marked as needing recovery.
<b>07</b>	The database is marked as needing backout. In a data sharing

**08**

**09**

**10**

**11**

**12**

**13**

**14**

**15**

**16**

**19**

environment, you can use a LIST.DB command to determine which subsystems require back outs for the named database.

For sharing within a host, the requesting subsystem is not within the authorized host.

One or more subsystems for which the database has been previously authorized are supposed to be active, but the subsystems are not known to IRLM. IRLM=N or another IRLM name might have been specified on the subsystem.

The database has been previously authorized to the subsystem.

An invalid parameter is found during the database usage compatibility evaluation process. Possibly, the database record in the RECON data set is bad.

The current authorization state in DBRC is invalid because of an unauthorization error.

An error occurred in DBRC while trying to process an authorization request.

An error occurred in DBRC while trying to process a change authorization request.

The database is already authorized to an active IMS subsystem.

The area is not marked as needing recovery for the DEDB initialization utility.

The data set name of the database

data set passed to DBRC does not match the data set name in the RECON data set.

- 20 Database authorization failed because the database was not registered with DBRC and the DBRC RECON data sets were initialized with FORCER, which requires that all databases must be registered.

This error might be the result of a mismatch of data set names in the RECON data set and in the dynamic allocation blocks (DFSMDA members).

- 22 The database is currently authorized to another subsystem.

- 23 The database is a recovery-level tracking database.

- 24 There is gap in the log stream received from the RSR active site that can contain update records for the database or area.

- 25 All log records have been applied to the tracking database for the authorizing stream and authorization is not for an OFR stream.

- 26 Records from an earlier update set ID have been received from the RSR active site, but have not been applied to the database.

- 27 The database does not belong to the invoker's global service group (GSG).

- 28 The update set ID (USID) is earlier than the USID of the most recently received image copy.

- 29 One or more tracking database data sets have not been received.

- 30 The database or area is covered but the requesting subsystem is not signed on to the covering GSG.

- 31 The definition of the HALDB has changed. The caller must get the new definition before authorization can be granted.

- 32 The HALDB needs to be initialized.

- 33 An attempt has been made to authorize the HALDB master. Authorization can only be requested at the partition level.

- 34 Partition Initialization is requesting authorization for a partition that does not need to be initialized.

- 35 The DB partition cannot be authorized

until a high key is defined. A key is required because the HALDB master does not use a Partition Selection Routine.

- 36 Image copy not allowed during online reorganization processing.

- 37 Loading into an M-through-V DBDS of a partition database is not allowed.

- 38 Offline reorganization is not allowed when online reorganization is active and the online reorganization is owned by an IMS subsystem.

**System Action:** A batch region (DL/I or DBB region) will terminate with abend 0047. The database is stopped. Dependent regions continue processing, but programs cannot access the database. An attempt to access the database will result in either a 'BA' status code, if the program has issued the INIT call, or in abend U3303, if the program has not issued the INIT call.

**Programmer Response:** Reason codes 01 through 09 and 15 through 19, indicating a temporary authorization failure, can be corrected by one of the following actions:

- Wait for a currently authorized subsystem to terminate or enter a /DBRecovery UPDATE DB STOP(ACCESS) to unauthorize the database from the currently authorized subsystems. Batch backout or an emergency restart might be required for an abnormally terminated subsystem. (RC 01, 08 or 15)
- Verify that the correct log is input to the batch backout utility if DBRC=C is being used. (RC 01)
- Enter a /START DB or UPDATE DB START(ACCESS), a /DBDUMP or UPDATE DB START(UPDATES), or a CHANGE.DB (auth) command. (RC 03)
- Enter a /START DB or UPDATE DB START(ACCESS) command. (RC 04)
- Run the appropriate IMS utility. (RC 05, 06 or 07)
- Run this IMS subsystem on the host where the database is currently authorized. (RC 08)
- Wait for the failed subsystems to complete the emergency restart or database backout. (RC 09)
- Use the DBRC command CHANGE.SUBSYS to indicate that an IMS subsystem is no longer active. (RC 15)
- Use the DBRC CHANGE.DBDS command to mark an area as needing recovery. (RC 16)
- Use the DBRC INIT.DBDS command to register a DBDS or DEDB area to DBRC. (RC 18, 19)
- Check the RECON data set to determine the correct authorization state.

Reason codes 10 through 14 indicate that a system error has occurred. If these problems persist, contact IBM for problem determination assistance.



For reason code 33, check the DBDLIB level of the databases to make sure they match the RECON level.

**Problem Determination:** 35

**Module:** DFSDBAU0

---

**DFS132 ALL DATABASE IAREA PARAMETERS ARE INVALID**

**Explanation:** This message is issued for one of the following reasons:

- The database or area names entered are invalid.
- A parameter is valid, but has failed processing (for example, an allocation error has occurred on the database).
- A valid parameter was specified, but the particular type of IMS you are running does not support that parameter. For example, the /DISPLAY AREA or DB command with the OFR keyword is not valid on an RSR active subsystem.

**System Action:** The command is ignored.

**System Programmer Response:** Reenter the correct database or area names that have been defined to IMS. If the parameter is valid, correct or investigate other error messages and reenter the command. Make sure any command keywords or parameters are valid for the flavor of IMS you are running.

**Module:** DBFCDAR0, DFSDBDR0, DFSICL20, DFSIC430, DFSIDPJ0, DFSIDP50

---

**DFS135 INVALID COMMAND ATTRIBUTE COMBINATION**

**Explanation:** One or more command attributes specified are invalid with another specified.

**System Action:** The command is ignored.

**Operator Response:** Reenter the command with the proper attribute combination.

**Module:** DFSIDP50

---

**DFS0488I DBR | DBD | STA | STO | LOCK | UNLOCK COMMAND COMPLETED. DBN=*database name* RC=*nn*.**

---

**DFS0488I DBR | DBD | STA | STO | VUN COMMAND COMPLETED. DBN | AREA | ADS=*database name* | *areaname* | *adsname* RC=*nn***

---

**DFS0488I UNLOCK COMMAND COMPLETED. RC=*nn***

---

**DFS0488I DBR | DBD | STA | STO COMMAND COMPLETED. KEYWORD ALL**

---

**DFS0488I DBR | DBD | STA | STO COMMAND COMPLETED. DATAGROUP (*groupname*)**

**Explanation:** The /DBRecovery, /DBDUMP, /START, or /STOP, UPDATE command processing is completed. A zero return code indicates that the named database has been successfully processed. The ADS specification is effective only for the /STOP, UPDATE command. The area is only for the /DBRecovery, /START, /STOP, and UPDATE commands. A nonzero return code indicates that an unexpected error was encountered while processing.

If the datagroup contains both full function and fast path databases, you might see a message indicating that the command is complete before seeing any messages indicating fast path areas did not start successfully.

The /VUNLOAD command completed processing for area xxxxxxxx. DFS0488I is only issued for areas for which the /VUNLOAD command failed, along with the reason code. The reason code indicates the result of the command. A final DFS0488I message is issued to indicated the command is completed.

For the second form of the message, the return code *nn* can have the value 00, 04, or 20.

The third and fourth forms of the message are issued to avoid excessive individual messages for successful operations.

When the keyword ALL is specified, one DFS0488I is issued for every database name, area name, or ads name in error, followed by a final DFS0488I DBR|DBD|STA|STO|VUN COMMAND COMPLETED message. DFS0488I is not issued for each database name, area name, or ADS name with return code of 00, (that indicates that the command was successful).

**Return Code (Dec)**

**Meaning**

- |           |   |
|-----------|---|
| <b>01</b> | The requested state and the current authorization state (see the RECON data set) are incompatible. The database is authorized by another active or abnormally terminated IMS subsystem, and its authorization state is incompatible with the current authorization request. |
| <b>02</b> | The global command was not able to synchronize with all data sharing partners. The command was completed on the subsystem that received this message, but the partners need to be interrogated to determine if the command completed successfully.                          |
| <b>03</b> | The database is marked as prohibiting   |

	further authorization for one of the following reasons; a global /DBRrecovery, UPDATE, a global /ST0, or a DBRC CHANGE.DB(NOAUTH) command.		ADS command is terminated. The VUNLOAD, STOP or DBR processing is not done.
04	An error occurred at the close of the database. For detailed information about the reason codes, refer to message DFS730I.  Module DFSMDA00 can also issue return code 4 if dynamic allocation or deallocation failed. This indicates an interface problem between another IMS module and the IMS dynamic allocation module, DFSMDA00. This can also indicate a missing or bad DFSMDA00 member.  For a /VUNLOAD command, the area specified was not found in any data space or coupling facility structure. Verify that the area name is correct. Issue a /DISPLAY FPVIRTUAL command to find which areas are in data spaces or coupling facility structures.  For the second form of the message, this return code indicates that the /UNLOCK SYSTEM command was only partially successful. At least one tolerated block or CI could not be purged. The /UNLOCK SYSTEM command should be entered again at a later time.  Return code 04 can also mean the database is authorized only if the requested state is "READ" or "READ-GO" because of a global /DBD command.	11	An invalid parameter was found during the evaluation process for database-usage compatibility. The database record in the RECON data set might be invalid.
		12	Dynamic allocation or deallocation failed because no storage was available from DFSMDA00.  Return code 12 can also mean that the current authorization state in DBRC is invalid because of an unauthorized error.
		14	The named database cannot be started because of one of the following possible conditions: <ul style="list-style-type: none"> <li>• DBRC has already authorized other READ access users in the other IMS subsystem to access the database. The granted authorization level for the other subsystem is incompatible with the original authorization level for the current subsystem because of the last /DBDUMP command issued. As a consequence, the original authorization level cannot be restored for the current subsystem.</li> <li>• The changed database authorization level has been requested through the /STA DB ACCESS or UPD DB START(ACCESS) SET(ACCTYPE()) command. The request for the change in the ACCESS parameter failed because of the incompatibility of the database with the authorization level currently held in the other IMS subsystem.</li> </ul> Return code 14 can also mean an error occurred in DBRC while trying to process a change authorization request.
05	The database is marked as needing an image copy.		
06	The database is marked as needing recovery.		
07	The database is marked as needing backout.		
08	Dynamic allocation failed (from DFSMDA00). This indicates that the IMS dynamic allocation module (DFSMDA00) received a nonzero return code from MVS dynamic allocation.  For a /VUNLOAD, /STOP AREA GLOBAL, /DBRrecovery AREA GLOBAL, or /STOP ADS command, an attempt to get the VUNLOAD lock for an area in a coupling facility structure failed. The /VUNLOAD, /STOP AREA GLOBAL, /DBRrecovery AREA GLOBAL, or /STOP	15	The duplicate AREA entry on the /DBRrecovery AREA command is ignored. The area was already unauthorized by DBRC.
		16	Dynamic allocation or deallocation failed because of a system error. For detailed information about the reason codes, refer to message DFS2498I.
		20	For the /UNLOCK SYSTEM command, one of the following conditions occurred:

	<ul style="list-style-type: none"><li>• There were no EEEQs to purge.</li><li>• The /UNLOCK command was entered on an IMS system that is not XRF-capable.</li><li>• The /UNLOCK command was entered on an active system that was not a previous alternate system. This command must be entered only on the alternate system.</li><li>• The /UNLOCK command was entered on the alternate system before the alternate system completed the XRF takeover. This command must be entered on the alternate system only after one or more of the following events have occurred:<ul style="list-style-type: none"><li>– the failing active system has terminated</li><li>– the processor containing the failing active system has been reset</li><li>– I/O prevention on the active system is complete</li></ul></li></ul>		<p>is issued to delete any failed persistent connections from a prior failed system. The IXLFORCE command was not able to delete the failed persistent connection. In this case, the following messages are generated:</p> <ul style="list-style-type: none"><li>– DFS2783A UNABLE TO DELETE FAILED-PERSISTENT CONNECTION TO STR: SSS</li></ul>
--	---	--	---

35	A backout error occurred for the database. A /START command for the database is invalid until a /DBRECOVERY command is issued and batch backout is performed.			On a system defined to support Fast Path, the keyword 'MSDB' was entered on a /START, /STOP, or /DBRecovery command. ('MSDB' is allowed on /DBDUMP.) The keyword is ignored and the remainder of the command is processed.
37	One of the following events has occurred:			
	<ul style="list-style-type: none"> <li>A write error occurred for the database. The command issued is invalid until a /DBRECOVERY command is issued.</li> <li>A request for a new dataspace was issued during the open processing for a shared VSO area. Refer to message DFS2444I, that precedes message DFS0488I.</li> </ul>	51		A /DBRecovery command was entered on the RSR tracker for a Fast Path DEDB. The DEDB name is ignored and the remainder of the command is processed.
38	A /START DB or UPDATE DB START(ACCESS) command was not executed because the database was being extended during an IMS XRF takeover, and I/O Prevention was not yet complete. You cannot start the database until IMS knows that I/O Prevention is complete.	52		A /DBRecovery or /START command was entered for a database that was in the process of being recalled from HSM. The command process is not performed at this time. The /DBRecovery command must be entered again after the database is recalled. The /START command will be automatically performed after the recall is complete.
39	A /START DB or UPDATE DB START(ACCESS) command specifying ACCESS=RO or RD is invalid while incomplete, restartable back outs exist for the database. IMS must have update or exclusive access to the database to redo the incomplete back outs. The command is not processed for the specified database.	53		A command specifying a full-function DL/I database was entered on an RSR tracker executing with LSO=Y. Full-function databases are not available to LSO=Y tracker systems, so the command could not be processed for the named database.
41	The area is not loaded into the Coupling Facility. This does not prevent access to the area unless this code is preceded by message DFS2819A.	54		There is a discrepancy between the number of ADS allocated by IMS and the number of ADS known to DBRC. Correct the discrepancy, then reissue the /DBRecovery or /STOP command to deallocate the data sets.
42	The named HALDB partition cannot be processed in response to a /START DB or UPDATE DB START(ACCESS) command due to an error in the Partition Structure Manager. Check the system console for related DFS0415I messages.	55		The command failed because the FF DB or FP area is currently being recovered.
44	When the /STOP ADS command is entered, the ADS of the named ddname is already stopped. This /STOP ADS command is ignored.	56		An error occurred while attempting to open the named database or HALDB partition. Check the System Console for message DFS0730I to determine the reason for the failure.
50	A /DBRECOVERY, /START, or /STOP command was issued with AREAGROUP or DBGROUP, where the AREAGROUP contained a specified database or the DBGROUP contained a specified area. The command is not processed for databases in an AREAGROUP or areas in a DBGROUP.	57		The named database is a HALDB master and is invalid with the OPEN keyword.
		58		The named HALDB partition cannot be processed in response to a /DBDUMP, /DBRECOVERY, /START, or /STOP command. It is still in use by an active Online Reorganization. The command is not processed for the HALDB partition named in the message, but processing continues for any other databases or HALDB partitions specified in the command.

- 60** The command failed because the area has been deleted by Online Change.
- 62** The named database failed directory initialization or the DBB or PSB pool space was not large enough to accommodate the blocks. Check the System Console for messages referencing this database.
- 70** The named database or HALDB partition failed authorization. Check the System Console for messages related to the authorization failure.
- 71** Open keyword processing could not continue for the named HALDB partition because a /DBRECOVERY command has been issued for the HALDB master. Start the HALDB master and then reissue the /START DB or UPDATE DB START(ACCESS) command for the HALDB partition.
- 72** Partition DBM build failed for the named HALDB partition. Check the System Console for DFS0415I messages to determine the reason for the failure.
- 73** DMB build processing failed for the named database or HALDB partition. Check the System Console for DFS0561I or DFS0592I messages to determine the reason for the failure.
- 74** DMB build processing failed for the named database or HALDB partition because the data management block pool (DMB pool) is too small to hold all of the required data management blocks. Change the appropriate parameter to make the pool larger and restart the system. Message DFS0992I might also be issued.
- 75** DMB build processing failed for the named database or HALDB partition. IMS detected a DMB pool shortage while attempting to load the DMB block for the named database or HALDB partition. The size of the DMB pool must be large enough to accommodate all DMBs that are actively being used. Change the appropriate parameter to make the pool larger and restart the system.
- 76** DMB build processing failed for the named database or HALDB partition. Check the System Console for DFS0564I messages to determine the reason for the failure.
- 77** DMB build processing failed for the

named database or HALDB partition. An unexpected return code was received. Check the System Console for any related messages and contact the IBM Support Center.

- 79** The command was issued for a database that is still being processed by Restart Parallel Database Open. Wait for that process to complete and try the command again.
- 80** The named DEDB database cannot be started in a non-FP system.

**System Action:** IMS continues processing.

**Problem Determination:** 6, 11

**Module:** DBFARD10, DBFARD40, DBFARDA0, DFSDBDR0, DFSRDSH0, DBFCVUN0

---

**DFS0725I INITIATE | UPDATE | TERMINATE  
OLREORG COMMAND FOR DB  
dbnamexx COMPLETE.  
CC= nn**

**Explanation:**

**dbnamexx** is the HALDB partition name entered in the command

**nn** is the completion code

The /INITIATE, /UPDATE, or /TERMINATE OLREORG command processing is complete. A zero completion code indicates that the command has been successfully processed. Message DFS2970I is issued after OLR initialization completes to indicate that the online reorganization has started. A nonzero completion code indicates that an unexpected error was encountered during command processing.

**Completion  
Code**

**Meaning**

- |           |   |
|-----------|---|
| <b>0</b>  | REQUEST SUCCESSFUL  |
| <b>10</b> | RESOURCE NAME INVALID   |
| <b>14</b> | RESOURCE NOT A PARTITION NAME                                 |
| <b>1C</b> | RESOURCE IS A PARTITION SECONDARY INDEX                       |
| <b>20</b> | INIT OLREORG ISSUED, OLR IS ALREADY IN PROGRESS               |
| <b>24</b> | NO OLREORG IS IN PROGRESS                                     |
| <b>28</b> | NO DMB LOADED - need to schedule a PSB that references the DB |
| <b>C1</b> | OLREORG DDIR MISSING OR DFSPNT ZERO                           |
| <b>C2</b> | OLREORG ALREADY OWNED   |



<b>C3</b>	OLREORG PARTITION STOPPED, or LOCKED, or DBDUMPED
<b>C4</b>	OLREORG PARTITION BEING RECOVERED
<b>C5</b>	OLREORG PARTITION ACCESS NOT UPDATE/EXCLUSIVE
<b>C6</b>	OLREORG SCHEDULING FAILED - Check HALDB Master status
<b>C7</b>	OLREORG PARTITION NOT AUTHORIZED - Check HALDB Master status
<b>C8</b>	OLREORG MASTER STOPPED, or LOCKED, or DBDUMPED
<b>C9</b>	OLREORG MASTER ACCESS NOT UPDATE or EXCLUSIVE
<b>CA</b>	OLREORG SET OWNERSHIP FAILED
<b>CB</b>	PARTITION NOT IN SPECIFIED STATUS

**System Action:** IMS continues processing.

**Problem Determination:** 6, 11

**Module:** DFSORC10, DFSORP50

---

**DFS0832I ABEND Uwww REASON CODE xxxx  
yyyyyyyyy zzzzzzzz**

**Explanation:** This is an informational message issued to assist you to debug problems that cause abends. This message is issued when an abend condition is detected by module DFSDLA00. This condition can be caused by either:

- A non-zero return code on a partition selection or validation.
- A pseudo-abend set by module DFSDLR00, DFSDDL00, DFSDXMT0, DFSDLD00, or DFSRCHB0.

The value of xxxx is the detected user abend. For these abends the reason code is yyyy and it is related to a problem that was detected while processing a HALDB:

- 0880
- 3303
- 3498

Where:

**www** is the pseudo-abend code

**xxxx** is the reason code for HALDB abends, or N/A for non-HALDB abends

**yyyy** If xxxx (the abend) is not one of the above, the value of yyyy is N/A otherwise it is one of the following reason codes:

**4001** No more partitions are defined

<b>4020</b>	DB authorization error (data unavailable)
<b>4025</b>	DB unload action error
<b>4026</b>	DB initialization action error
<b>4059</b>	The access level is not compatible with the intent level
<b>8001</b>	Target partition requires initialization
<b>8010</b>	Target partition not found
<b>8031</b>	Open DMB failure
<b>8051</b>	User partition selection failed
<b>C001</b>	Non-partitioned DB access
<b>C002</b>	Partitions not active
<b>C003</b>	Partition stopped
<b>C004</b>	Partition structure terminating
<b>C005</b>	Partition structure not initialized
<b>C006</b>	Partition structure rebuild failed
<b>C009</b>	ILDS DSG not provided
<b>C010</b>	Unusual structure status
<b>C030</b>	Invalid authorization reason code
<b>C040</b>	Invalid partition DDIR
<b>C041</b>	Invalid partition set operation
<b>C042</b>	Unable to allocate PSET storage
<b>C043</b>	Invalid partition set selection action
<b>C050</b>	User selection exit not invoked
<b>C060</b>	Invalid function code
<b>C070</b>	Buffer handler byte locate failed
<b>C071</b>	Buffer handler locate by key failed
<b>C073</b>	Buffer handler mark altered failed
<b>C074</b>	Buffer handler byte locate & mark altered failed
<b>C075</b>	IRLM root lock request (GRID) failed
<b>C076</b>	Request to obtain BCB storage (BCBGET) failed

#### **PARTITION | DATABASE**

is PARTITION if HALDB, or DATABASE if non-HALDB

**zzzzzzzz**

is the DBD name for one of these:

- a HALDB partition
- a HALDB master
- a non-HALDB database

or NOTAPPLI if no DBD is available

**System Action:** The application program is terminated.

**Programmer Response:** Correct the situation that caused the application to terminate.

**Module:** DFSDLA00

**DFS2262 TOO MANY DATABASE PARAMETERS**

**Explanation:** Too many database parameters were entered for this command. Only one can be entered.

**System Action:** The command is ignored.

**Operator Response:** Reenter the command with only one database parameter.

**Module:** DFSORC10

**DFS2970I OLR STARTED I RESUMED FOR NAME=partname**

**Explanation:** HALDB Online Reorganization has started or resumed for the named partition.

**System Action:** IMS continues processing.

**Module:** DFSORP00

**Note:** Message DFS2970I is issued after the type-1 or type-2 INIT OLREORG command is processed to the extent that OLREORG ownership is established in RECON. If the online reorganization cursor is active then *RESUMED* is indicated; otherwise, *STARTED* is indicated.

**DFS2971W OLR INITIALIZATION FAILED FOR NAME=partname RC=xx RS=yy****DFS2971W OLR TERMINATED FOR NAME=partname RC=xx RS=yy**

**Explanation:** First format of the message: For the reason indicated by the return and reason codes, the HALDB online reorganization did not complete the OLR initialization process to either start or resume the OLR.

Second format of the message: For the reason indicated by the return and reason codes, the OLR terminated before all records were copied from the input to the output set of data sets.

See the following return and reason codes for the exact cause of the termination:

**Problem Determination:**

Return Code (Hex)	Reason Code (Dec)	Description
04	04	Unexpected return code from ISWITCH
	08	DFSBCB GET for QSAV failed
	12	DFSCWU create work unit failed
	16	IMS was restarted with COLDSYS or COLDBASE
	20	Restart authorization failed
	24	Deferred stop or close due to error during XRF takeover

**Module:** DFSORP00

Return Code (Hex)	Reason Code (Hex)	Description
08	01	GETMAIN for OLR work area failed
	02	Scheduling of the OLR PSB failed
	03	Output data set creation or validation failed
	04	DFSBCB GET for QSAV failed
	05	Timer ITASK creation failed
	06	Database in error because backout failed
0C		Partition selection failed
	8031	Open error for partition
	C030	Authorization failure
	Cxxx	Other partition selection failures
10	abend code	Pseudo-abend during partition selection (decimal value)

**Module:** DFSORP10

Return Code (Hex)	Reason Code (Hex)	Description
14	01	OLR terminated by a TERMINATE OLREORG command
	02	Buffer handler call for PHDAM failed
	03	Buffer handler call for PHIDAM failed
	04	GBIDP lock failure during cursor update
	05	GZIDP lock failure during cursor update
	06	Buffer handler failure during cursor update
	07	Notify failure during cursor update
	abend code	Pseudo-abend during DFSORP20 processing (decimal value)

**Module:** Issued by DFSORP10 for errors detected in DFSORP20

Return Code (Hex)	Reason Code (Hex)	Description
1C	01	Backout failure
	02	OLR terminated by a TERMINATE OLREORG command with the FORCE option
	03	Key with all X'FF' found, or error doing chain maintenance
20	abend code	Pseudo-abend during DFSORP30 processing (decimal value)
24	status code	Unexpected status code from internal DL/I call

**Module:** Issued by DFSORP10 for errors detected in DFSORP30

**System Action:** First format of the message: For an INITIATE OLREORG command that tried to start a new online reorganization, the cursor-active status is not recorded in the RECON. And the database records in the partition are still contained in the original set of data sets that were in use before the command was entered.

For an automatic or command-initiated resumption of an online organization for which the cursor-active status was already recorded in the RECON:

- The cursor-active status is still in effect.
- The database records in the partition are still contained in two sets of data sets, both of which are required for continued use of the partition.
- No additional database records were copied from the input to the output set of data sets.

Second format of the message: The cursor-active status for the partition is already recorded in the RECON, and the database records in the partition are now contained in two sets of data sets, both of which are required for continued use of the partition.

**System Programmer Response:** After the problem is corrected, start or resume the HALDB online reorganization with the INITIATE OLREORG command or else run an offline reorganization.

**Problem Determination:** 1, 6, 27

---

**DFS2973W NO RESPONSE FROM SHARING IMS AFTER ONLINE REORG.**  
**PART=partname**

**Explanation:** HALDB online reorganization has completed for the named HALDB partition and the inactive data sets were to be deleted. Data set deletion was attempted because OPTION(DEL) was specified or defaulted on the INITIATE OLREORG command or was subsequently specified on the UPDATE OLREORG command. However, before data set deletion was attempted, all sharing IMS systems were notified, and they were to indicate that they were no longer using these data sets. One or more of these systems did not respond even after three requests.

**System Action:** To complete the processing, IMS attempts to delete the inactive data sets anyway. An error may result during data set deletion if some job, such as an IMS batch job, has the data sets allocated but is unable to respond within the time allowed for a response. If this happens, one or more of the inactive data sets won't be deleted.

**System Programmer Response:** Check the MVS system console log to determine whether error messages indicate that any of the inactive data sets from the HALDB online reorganization were not deleted. After these data sets are no longer in use, delete them.

**Module:** DFSORP40

---

**DFS2974I OLR COMPLETED FOR NAME=partname**

**Explanation:** HALDB Online Reorganization has completed for the named HALDB partition.

**System Action:** IMS continues processing.

**Module:** DFSORP10

---

**DFS2990E** *macro* **MACRO, RETURN=X'returncode',**  
**[ REASON=X'reasoncode', ],**  
**PART=partname DSN=dsname**

**Explanation:** IMS internally invoked a macro instruction to gather information about the data set dsname for the HALDB partition partname as part of either:

- Starting a HALDB online reorganization for the HALDB partition partname.
- Tracking these changes at the RSR tracking site.

This macro instruction completed with a register 15 return code value of *returncode* and a register 0 value of *reasoncode*. These values were not expected by IMS.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In the first two cases, one or more of the output data sets could have already been created automatically.

**Programmer Response:** Based on the macro indicated in the message, see the appropriate publication in the following table to determine the cause of the error, and follow any recommended actions:

Macro	Publication
DEVTYPE	<i>DFSMS/MVS DFSMSdftp Advanced Services</i>
GETDSAB	<i>z/OS MVS Programming: Authorized Assembler Services Reference, Vol 2</i>
LOCATE	<i>DFSMS/MVS DFSMSdftp Advanced Services</i>
OBTAIN	<i>DFSMS/MVS DFSMSdftp Advanced Services</i>
SWAREQ	<i>z/OS MVS Programming: Authorized Assembler Services Reference, Vol 4</i>
TRKCALC	<i>DFSMS/MVS DFSMSdftp Advanced Services</i>



If the error was detected in processing the INITIATE OLREORG command, reissue the command for partition *partname*.

If the error was detected at the RSR tracking site, issue a /START DB command for the partition in order for OFR (Online Forward Recovery) to continue updating the partition.

**Module:** DFSORA00, DFSORA10

**DFS2991E UNACCEPTABLE DATA SET, REASON CODE** *reasoncode*.  
**PART=***partname* **DSN=***dsname*

**Explanation:** In determining whether to create the data set *dsname* for the HALDB partition *partname*, IMS found either:

- A data set of that same name. However, because of certain characteristics of this preexisting data set, the data set could not be used for the intended purpose.
- No data set of that name when there should have been a preexisting data set.

**Case 1:** In starting a HALDB online reorganization for the HALDB partition *partname*, IMS found that the data set that was to be used as the output of the reorganization either:

- Was not of a type that could be used for the applicable data set.
- Had certain characteristics that did not match those of the corresponding input data set.
- Did not exist.

**Case 2:** On the RSR tracking site, IMS found that in tracking database changes for a HALDB online reorganization for the HALDB partition *partname*, the data set that was to be used as the shadow of an output data set either:

- Was not of a type that could be used for the applicable data set.
- Had certain characteristics that did not match those of the corresponding input data set at the active site.
- Did not exist.

In any case, *reasoncode* is a reason code the specific problem. These reason codes are shown in the following table. The "Environment" column indicates whether the error is detected at the beginning of either the reorganization itself or the tracking of the reorganization at the RSR tracking site.

*Table 21. Reason Codes, Environments, and Errors Detected for Message DFS2991I*

Reason Code	Environment	Errors Detected for Pre-Existing Data Set
1	Both	The data set is not a DASD data set.

*Table 21. Reason Codes, Environments, and Errors Detected for Message DFS2991I (continued)*

Reason Code	Environment	Errors Detected for Pre-Existing Data Set
2	Both	The data set is a VSAM data set, but the I database is defined to use OSAM.
3	Both	The data set is a PDS, PDSE, or a member of a PDS or PDSE.
4	Both	The data set is not a VSAM ESDS, but the database is defined to use VSAM.
5	Both	The VSAM data set does not have the REUSE attribute.
6	Reorganization	The VSAM data set has a different record length than that of the corresponding input data set.
7	Reorganization	The VSAM data set has a different control interval size than that of the corresponding input data set.
8	Reorganization	The VSAM ESDS has a different control interval size than that of the corresponding input data set.
10	Reorganization	The primary index data set of a PHIDAM database (the KSDS), is defined with a different key offset or key length than that of the corresponding input data set.
11	Tracking	The VSAM data set has a different record length than that of the tracked output data set at the active site.
12	Tracking	The VSAM data set has a different control interval size than that of the tracked output data set at the active site.
13	Tracking	The primary index data set of a PHIDAM database (the KSDS), is defined with a different key offset or key length than that of the tracked output data set at the active site.
18	Both	Either: <ul style="list-style-type: none"> <li>• The data set is cataloged but it is not on the volume to which the catalog entry refers.</li> </ul> or <ul style="list-style-type: none"> <li>• The data set was allocated with a DD statement that had a VOLUME parameter, but the data set was not on the referenced volume.</li> </ul>

Table 21. Reason Codes, Environments, and Errors Detected for Message DFS2991I (continued)

Reason Code	Environment	Errors Detected for Pre-Existing Data Set
19	Both	The data set was allocated with a DD statement, but the data set name in the DSNAMES parameter does not follow the data set naming convention defined for this partition's data sets.
20	Tracking, Reorganization	The output data set does not exist, but the corresponding input data set resides on multiple volumes and is not an SMS-managed data set.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In both cases, one or more of the output data sets could have already been created automatically.

#### Programmer Response:

**Case 1:** Before restarting the HALDB online reorganization, either:

- Delete the preexisting output data set, thus allowing IMS to create it automatically. Note that when IMS creates the data set, the size and placement of the data set is determined automatically by IMS, MVS, and DFSMS/MVS, and also by parameters defined by your site's storage administrator. Therefore, do not let IMS create the data set if you need precise control over the data set's size and placement.
- Create a data set that is acceptable as the output of the reorganization:

Ensure that for an OSAM-defined database the output data set for the database segments (one of the A-through-J or the M-through-V data sets):

- Is a DASD data set.
- Is not a VSAM data set.
- Is neither a PDS, PDSE, nor a member of a PDS or PDSE or that for a VSAM-defined database the output data set for the database segments (one of the A-through-J or the M-through-V data sets):
  - Is a VSAM entry-sequenced data set (ESDS).
  - Has the REUSE attribute.
  - Has a fixed-length record length identical to that of the input data set.
  - Has a control interval size identical to that of the input data set or that for a PHIDAM database the output data set for the primary index (the X or Y data set):

- Is a VSAM key-sequenced data set (KSDS).
- Has the same key offset and key length as the corresponding input data set.
- Has the REUSE attribute.

Then reissue the INITIATE OLREORG command to start the HALDB online reorganization for partition *partname*.

**Case 2:** Before restarting the partition at the RSR tracking site, either:

- Delete the preexisting output data set at the tracking site, thus allowing IMS to create it automatically. Note that when IMS creates the data set, the size and placement of the data set is determined automatically by IMS, MVS, and DFSMS/MVS, and also by parameters defined by your site's storage administrator. Therefore, don't let IMS create the data set if you need precise control over the data set's size and placement.
- Create a data set that is acceptable for tracking the output of the reorganization:

Ensure that for an OSAM-defined database the output data set for the database segments (one of the A-through-J or the M-through-V data sets) at the RSR tracking site:

- Is a DASD data set.
- Is not a VSAM data set.
- Is neither a PDS, PDSE, nor a member of a PDS or PDSE or that for a VSAM-defined database the output data set for the database segments (one of the A-through-J or the M-through-V data sets) at the RSR tracking site:
  - Is a VSAM entry-sequenced data set (ESDS).
  - Has the REUSE attribute.
  - Has the same fixed-length record length as the tracked output data set at the active site (as shown in the X'2930' log record).
  - Has the same control interval size as the tracked output data set at the active site (as shown in the X'2930' log record) or that for a PHIDAM database the output data set for the primary index (the X or Y data set) at the RSR tracking site:
    - Is a VSAM key-sequenced data set (KSDS).
    - Has the REUSE attribute.
    - Has the same fixed-length record length as the tracked output data set at the active site (as shown in the X'2930' log record).
    - Has the same key offset and key length as the tracked output data set at the active site (as shown in the X'2930' log record).

Then issue a /START DB command for partition *partname* in order for Online Forward Recovery to continue updating the partition.

**Module:** DFSORA00

---

**DFS2992E** CSI RETURN CODE=4, [ { CATALOG ERROR, | DATA SET ERROR, } ]  
 CATALOG MANAGEMENT RETURN  
 CODE=*cmreturncode* REASON  
 CODE=*cmreasoncode*  
 MODULE=*cmmoduleid* PART=*partname*  
 DSN=*dsname*

---

**DFS2992E** CSI RETURN CODE=*csireturncode* [  
 REASON CODE=*csireasoncode* ]  
 PART=*partname* DSN=*dsname*

**Explanation:** IMS internally invoked the Catalog Search Interface (CSI) to gather information about the data set *dsname* for the HALDB partition *partname* as part of either:

- Starting a HALDB online reorganization for the partition.
- Tracking these changes at the RSR tracking site.

The CSI completed with a CSI return code value as shown in the message text. Information on these CSI return codes is in *DFSMS/MVS Managing Catalogs*.

For the first form of the message (when the CSI return code is 4), a Catalog Management error was detected. In this case, *cmreasoncode*, *cmreturncode*, and *cmmoduleid* are the Catalog Management reason code, return code, and two-character module identification, respectively. Information on this Catalog Management error information is in *z/OS MVS System Messages, V6 (GOS-IEA)* under message IDC300 9I.

For the second form of the message (when the CSI return code, *csireturncode* is other than 4), a CSI error was detected. For CSI return code 8, *csireasoncode* is the CSI reason code. Information on this CSI error information is in *DFSMS/MVS Managing Catalogs*.

These values were not expected by IMS.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In both cases, one or more of the output data sets could have already been created automatically.

**Programmer Response:** Based on value of the CSI return code, refer to the publication indicated above to determine the cause of the error, and follow any recommended actions.

Then if the error was detected in processing the

INITIATE OLREORG command, reissue the command for partition *partname*.

If the error was detected at the RSR tracking site, issue a /START DB command for the partition in order for Online Forward Recovery to continue updating the partition.

**Module:** DFSORA80

---

**DFS2993E** NON-DASD DATA SET. DEVICE  
 CLASS=X'devclass'  
 PART=*partname* DSN=*dsname*

---

**Explanation:** The data set *dsname*, which is an input data set for a HALDB online reorganization of the HALDB partition *partname*, is not a DASD data set. (The device class reported by the internally executed DEVTYPE macro instruction is *devclass* (hexadecimal) rather than X'20'.) This is inconsistent with its use as part of a database.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started. The partition remains accessible, but successful use of it is not likely.

If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

**Module:** DFSORA00

---

**DFS2994E** IDCAMS RETURN CODE *returncode*  
 CREATING AN ONLINE REORG  
 OUTPUT DATA SET. PART=*partname*  
 DSN=*dsname*

---

**Explanation:** IMS tried to create the VSAM output data set *dsname* for the HALDB partition *partname* as part of either:

- Starting a HALDB online reorganization for the partition.
- Tracking these changes at the RSR tracking site.

Access Method Services (IDCAMS) gave a return code of *returncode*.

**System Action:** The message, if any, produced by IDCAMS was displayed prior to this message.

For return code 4, the data set is assumed to have been created. In this case, none of the following actions apply, and processing continues.

If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In both cases, one or more of the output data sets could have already been created automatically.

**Programmer Response:** See the *z/OS MVS System*

*Messages, V6 (GOS-IEA)* to determine the cause of the error, and follow any recommended actions.

Then if the error was detected in processing the INITIATE OLREORG command, reissue the command for partition *partname*.

If the error was detected at the RSR tracking site, issue a /START DB command for the partition in order for Online Forward Recovery to continue updating the partition.

**Module:** DFSORA20

---

**DFS2995E IDCAMS RETURN CODE returncode  
DELETING AN ONLINE REORG INPUT  
DATA SET.  
PART=*partname* DSN=*dsname***

**Explanation:** IMS tried to delete the VSAM input data set *dsname* for the HALDB partition *partname* as part of either:

- Completing a HALDB online reorganization for the partition.
- Completing the tracking of these changes at the RSR tracking site.

Access Method Services (IDCAMS) gave a return code of *returncode*.

**System Action:** The message, if any, produced by IDCAMS was displayed prior to this message.

The reorganization or the tracking of the reorganization at the RSR tracking site is still considered to have completed successfully, and there is now a single new active set of data sets for partition *partname*--either the A-through-J and X or the M-through-V and Y data sets.

**Programmer Response:** See *z/OS MVS System Messages, V6 (GOS-IEA)* to determine the cause of the error, and follow any recommended actions, then delete the data set if it has not already been deleted.

**Module:** DFSORA20

---

**DFS2996E NOT ENOUGH DASD SPACE. ERROR  
REASON='X's99errorcode'  
[ SMS REASON=*s99ersn* ]  
BLOCKS=*blocks* BLKSIZE=*blksize*  
VOLUMES=*volcount*  
{ UNIT=SYSALLDA | STORAGE  
CLASS=*storageclassname* }  
PART=*partname* DSN=*dsname***

**Explanation:** IMS tried to create the OSAM output data set *dsname* for the HALDB partition *partname* as part of either:

- Starting a HALDB online reorganization for the partition.
- Tracking these changes at the RSR tracking site.

The internally executed DYNALLOC macro instruction (SVC 99) that was used for this purpose reported that the data set could not be created because of DASD space or DASD volume constraints. The requested space was *blocks* blocks, each with a block size of *blksize*. There were *volcount* volumes requested.

If the text showing the group name (SYSALLDA) appears in the message text, the attempt was to create a non-SMS-managed data set because the corresponding input data set was not SMS-managed. If the text showing the storage class appears, then the attempt was to create an SMS-managed data set using storage class *storageclassname* because the corresponding input data set was SMS-managed and was created using that storage class.

If the reorganization was being started, these space allocation values were derived from those of the corresponding input data set. On the RSR tracking site, these space allocation values were derived from those of the tracked output data set at the active site where the reorganization occurred.

For further information of this error, see the *z/OS MVS Programming: Authorized Assembler Services Guide*. The value *s99errorcode* is the hexadecimal value of the error reason code (field S99ERROR in the SVC 99 request block) that is provided when the DYNALLOC macro instruction (SVC 99) fails with return code 4. In the SMS case, *s99ersn* is the SMS reason code (field S99ERSN in the SVC 99 request block extension). The SMS reason code corresponds to the message number of an IGD message describing the error. For further information on the IGD message, see the *z/OS MVS System Messages, Vol 8 (IEF-IGD)*.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In both two cases, one or more of the output data sets could have already been created automatically.

**Programmer Response:** Determine whether the requested space (*blocks* blocks of size *blksize*) is really required for the output data set. In some cases, this space allocation request could include space acquired in a secondary allocation for the input data set and might not be required for the reorganized database. Then either:

- Ensure that there is sufficient DASD space on the volumes referenced by the group name SYSALLDA (for the non-SMS-managed case) or referenced by the storage class *storageclassname* (for the SMS-managed case), possibly by scratching unneeded data sets. Note that the primary allocation amount (*blocks* blocks of size *blksize*) must be



available in a total of no more than five extents on a single volume. In the SMS-managed case, if the storage class definition includes the GUARANTEED SPACE attribute, then the primary allocation amount must be available and will be allocated on each of the volumes (rather than on just the first volume).

- Create and catalog this output data set yourself. In this case, you can reserve whatever amount of space you choose, and you can control the number of volumes. See the *IMS Version 9: Administration Guide: Database Manager*, for information on allocating OSAM data sets along with a technique for pre-allocating multi-volume data sets.

Then if the error was detected in processing the INITIATE OLREORG command, reissue the command for partition *partname*.

If the error was detected at the RSR tracking site, issue a /START DB command for the partition in order for OFR to continue updating the partition.

**Module:** DFSORA20

---

**DFS2997E DATA SET ALLOCATED TO ANOTHER JOB AND CANNOT BE CREATED.**  
**PART=partname DSN=dsname**

**Explanation:** IMS tried to create the OSAM output data set *dsname* for the HALDB partition *partname* as part of either:

- Starting a HALDB online reorganization for the partition.
- Tracking these changes at the RSR tracking site.

Creating the data set required that the data set be allocated as though DISP=NEW had been specified on a DD statement through JCL. However, a data set of the same name was already in use by another job, causing the allocation to fail.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In both cases, one or more of the output data sets could have already been created automatically.

**Programmer Response:** Ensure that no other job is using a data set of the name *dsname* even if that data set isn't cataloged and even if that data set is not intended to be the same data set as the output of the reorganization.

Then if the error was detected in processing the INITIATE OLREORG command, reissue the command for partition *partname*.

If the error was detected at the RSR tracking site, issue

a /START DB command for the partition in order for OFR to continue updating the partition.

**Module:** DFSORA20

---

**DFS2998E [ DATA SET CREATION ERROR. I UNALLOCATION FAILURE. ]**  
**RETURN=returncode**  
**[ { INFO. REASON=X's99infocode' | ERROR REASON=X's99errorcode' } ]**  
**[ SMS REASON=s99ersn ]**  
**BLOCKS=blocks BLKSIZE=blksize**  
**VOLUMES=volcount**  
**{ UNIT=SYSALLDA | STORAGE**  
**CLASS=storageclassname }**  
**PART=partname DSN=dsname**

**Explanation:** IMS tried to create the OSAM output data set *dsname* for the HALDB partition *partname* as part of either:

- Starting a HALDB online reorganization for the partition.
- Tracking these changes at the RSR tracking site.

As indicated by the message text, the internally executed DYNALLOC macro instruction (SVC 99) reported one of these two problems:

1. The data set could not be created.
2. The data set that was just created successfully could not be unallocated from the IMS job.

The requested space was *blocks* blocks, each with a block size of *blksize*. There were *volcount* volumes requested.

When the text showing the group name (SYSALLDA) appears in the message text, the attempt was to create a non-SMS-managed data set because the corresponding input data set was not SMS-managed. If the text showing the storage class appears, then the attempt was to create an SMS-managed data set using storage class *storageclassname* because the corresponding input data set was SMS-managed and was created using that storage class.

If the reorganization was being started, these space allocation values were derived from those of the corresponding input data set. On the RSR tracking site, these space allocation values were derived from those of the tracked output data set at the active site where the reorganization occurred.

For the meaning of the various error codes shown in this message, see the *z/OS MVS Programming: Authorized Assembler Services Guide*.

**returncode**

Is the decimal value of the register 15 return code provided by the DYNALLOC macro instruction (SVC 99).

**s99infocode**

Is the hexadecimal value of the information reason code (field S99INFO in the SVC 99 request block).

**s99errorcode**

Is the hexadecimal value of the error reason code (field S99ERROR in the SVC 99 request block).

**s99ersn**

Is, for the SMS case, the SMS reason code (field S99ERSN in the SVC 99 request block extension). The SMS reason code corresponds to the message number of an IGD message describing the error. For further information on the IGD message, see the *z/OS MVS System Messages, Vol 8 (IEF-IGD)*.

**System Action:** If this error occurred in starting the reorganization, then the reorganization is not started, but the partition remains accessible with the original active set of data sets--either the A-through-J and X or

the M-through-V and Y data sets. If this error occurred at the RSR tracking site, then the shadow partition is taken offline.

In the first two cases, one or more of the output data sets could have already been created automatically.

**Programmer Response:** Using the information found in the *z/OS MVS Programming: Authorized Assembler Services Guide*, determine the meaning of returncode, *s99info*, *s99errorcode*, and *s99ersn*, as applicable. Follow any recommended actions to correct the error.

Then if the error was detected in processing the INITIATE OLREORG command, reissue the command for partition *partname*.

If the error was detected at the RSR tracking site, issue a /START DB command for the partition in order for Online Forward Recovery to continue updating the partition.

**Module:** DFSORA20

---

## HALDB OLR DSP Series Messages

These are the IMS DSP series messages that pertain to HALDB OLR. They also appear in the *IMS Version 9: Messages and Codes, Volume 1*.

---

### DSP0197I ONLINE REORG NOTIFICATION NOT VALID FOR DATABASE ORGANIZATION

**Explanation:** A command to update RECON regarding an online reorganization was issued for a database that is not the correct type. Online reorganization is valid for HALDB PHDAM or PHIDAM databases only.

**System Action:** Processing is terminated. The command fails. Review RECON contents and reissue the command appropriately.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

### DSP0198I RECOVERY NOT ALLOWED DURING ONLINE REORGANIZATION

**Explanation:** Recovery when online reorganization is active is not allowed.

**System Action:** Processing is terminated. The command fails. Review RECON contents and reissue the command appropriately.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

### DSP0199I IMAGE COPY RUNTIME COINCIDES WITH ONLINE REORG EXECUTION

**Explanation:** A NOTIFY command to add an image copy was issued. Online reorganization is active.

**System Action:** Processing is terminated. The command fails. Review RECON contents.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

### DSP0292I ONLINE REORG ACTIVE FOR DBD=XXXXXXXX

**Explanation:** A command was issued to add or change information in RECON. The command cannot be processed when online reorganization is active. If online reorganization is active and has an owning IMS which is currently active, parameters OLRRGON I OLRRGOFF, OLRIMSID() I NOOWNER, and OLRDBDS(AIM) are not allowed. Parameter OLRDBDS(AIM) is not allowed if online reorganization is active.

**System Action:** Processing is terminated. The command fails. Review RECON contents.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP0293I    ACTIVE DBDS=M-V FOR  
DBD=XXXXXXX**

**Explanation:** A command was issued to add or change information in RECON. The command cannot be processed when the M-V DBDS data sets are active.

**System Action:** Processing is terminated. The command fails. Review RECON contents.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP0295I    SUBSYSTEM RECORD NOT FOUND IN  
RECON**

**Explanation:** A command was issued to change the owning IMS for a HALDB online reorganization but the subsystem record for OLRIMSID name was not found.

**System Action:** Processing is terminated. The command fails. Review RECON contents. The subsystem record must exist.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP0830I    RECOVERY REQUEST INCONSISTENT  
WITH ONLINE REORG RUNTIME  
TIMESTAMP**

**Explanation:** The requested recovery is invalid due to inconsistent information found in RECON. One of the following occurred: An online reorganization has completed prior to the full recovery and the online reorganization cannot be used as input to recovery or the recovery-to-time falls within an online reorganization and time stamp recoveries are not allowed.

**System Action:** Processing is terminated. The RECON data sets are not updated. If the online reorganization cannot be used as input to recovery, select a time stamp that is valid or recover the active DBDS. Choose a valid time stamp if the recovery-to-time is within an online reorganization.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP0831I    ONLINE REORG INPUT NOT VALID  
FOR RECOVERY**

**Explanation:** A GENJCL.RECOV command specifying USEOLRRG was issued and DBRC determines that an image copy is needed instead.

**System Action:** Processing is terminated. The command fails. Review RECON contents and reissue the command appropriately.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP0832I    FULL RECOVERY NOT ALLOWED FOR  
AN INACTIVE DBDS**

**Explanation:** A full recovery of a DBDS was requested. However, the specified DBDS is an inactive DBDS of a HALDB partition.

**System Action:** The GENJCL.RECOV command or Database Recovery utility terminates processing for the DBDS.

**Programmer Response:** Determine if the GENJCL.RECOV command or the SYSIN control statement is correct. If not, make the correction and rerun the job.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

**Module:** DSPURVIN

---

**DSP0833I    ONLINE REORG INPUT IS BEING USED  
FOR RECOVERY DBD=dbname  
DDN=ddname**

**Explanation:** This message indicates that the recovery for the identified DBDS will be performed using an online reorganization as input.

**System Action:** Processing continues.

**Programmer Response:** None.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

**Module:** DSPURVIN

---

**DSP1077I    THE ACTIVE DBDS IS BEING IMAGE  
COPIED**

**Explanation:** The inactive DBDS data set was requested to be image copied. Only active DBDSs may be image copied. The active DBDS will be image copied.

**System Action:** Processing continues. This is an informational message.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP1078I      INACTIVE M-V DBDS RECORDS FOR  
DBD=XXXXXXXXX DELETED FROM  
RECON**

**Explanation:** A command was issued to change information in RECON. As a result of the command processing, the inactive M-V DBDSs were deleted. If Y DBDSs existed, they were also deleted.

**System Action:** Processing continues. This is an informational message.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

**System Action:** Processing is terminated. The RECON data sets are not updated.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

**DSP1079I      RECON INCONSISTENCY, DBDS  
RECORD CANNOT BE FOUND FOR  
DBD=XXXXXXXXX DBN=XXXXXXXXX**

**Explanation:** An inconsistency was detected in the RECON. A DBDS record for the indicated DBD and DBN is not found.

---

**DSP1080I      Online Reorg with runtime timestamp  
has been reset to active status**

**Explanation:** An unknown command was used to change the status of an online reorganization record.

**System Action:** Informational message.

**Programmer Response:** Contact the IBM Support Center if you require additional assistance.

**Problem Determination:** 2, 3, 8, and listings of the RECON data sets.

---

## HALDB OLR Abends and Codes

The section lists the abends that include HALDB OLR support.

**Abend U0369** This abend is set when the buffer handler router detects an RBA that is inconsistent with the data set characteristics of either the A-through-J or M-through-V set of data sets. If it is on the A-through-J side, the RBA must be even; if it is on the M-through-V side, the RBA must be odd.

**Abend U0474** The ABORT option of the TERMINATE OLREORG command causes the HALDB OLR to be stopped immediately, possibly with a completion code of Abend U0474, without waiting for the current unit of reorganization to complete.

**Abend U381** There are some additional Error Codes for Abend U381.

**Abend U0880** There are some additional user abend reason codes for Abend U0880.

**Related Reading:** For detailed information on these or other abends, see the *IMS Version 9: Messages and Codes, Volume 1* and the *IMS Version 9: Failure Analysis Structure Tables (FAST) for Dump Analysis*.



---

## Chapter 8. Log Records of HALDB OLR

These are the log records that support HALDB OLR.

### **Related Reading:**

- See the topic entitled, "Logging Effects of Reorganization" on page 13 for more important information on performance and logging of HALDB OLR.
- See the *IMS Version 9: Diagnosis Guide and Reference* for more details on these log records.

---

### **DFSDLOG - Database Change Log Records**

During a HALDB OLR, all segments that are copied to the output data sets are logged in X'50' log records for recovery purposes.

DDSID-- Existing data set ID (DCB number). This definition is added within the existing data set ID field:

#### **DDSIDAM**

When this high-order bit (the X'80' bit) is on, then this DCB number represents one of the M-through-V or Y data sets. When this high-order bit (the X'80' bit) is off, then this DCB number represents one of the A-through-J or X data sets.

---

### **DFSLOG20 - Database Open and Close (X'20' and X'21') Log Records**

DOCLOGDC-- Existing data set ID (DCB number). This definition is added within the existing data set ID field:

#### **DOCLOGAM**

When this high-order bit (the X'80' bit) is on, then this DCB number represents one of the M-through-V or Y data sets. When this high-order bit (the X'80' bit) is off, then this DCB number represents one of the A-through-J or X data sets.

---

### **DFSLOG27 - Database Extension (X'27) Log Records**

DFSLOG27 - Database Extension Log Records. When the high-order bit (the X'80' bit) is on in the DBXDCBN field, then the DCB number represents one of the M-through-V or Y data sets. When this high-order bit is off, then the DCB number represents one of the A-through-J or X data sets.

---

### **DFSLOG53 - CI/CA and Space Manager (X'53) Log Records**

DFSLOG53 - CI/CA and Space Manager Log Records. When the high-order bit (the X'80' bit) is on in the SPLDCB field, then the DCB number represents one of the M-through-V or Y data sets. When this high-order bit is off, then the DCB number represents one of the A-through-J or X data sets.

---

### **Log Records: X'29' OLR Event Log Records**

Several X'29' log records reflect the progress of a HALDB OLR.

These log records are created at the indicated points in the online reorganization process.

Table 22. X'29' OLR Event Log Record Subtypes

TYPE or SUB-TYPE	WHY WRITTEN	ISSUING MODULE
X'2910'	Ownership of the reorganization for a partition was established through DBRC.	DFSORP60
X'2920'	The UPDATE OLREORG command updated either the RATE option or the [NO]DEL option for a HALDB partition.	DFSORC00
X'2930'	The output data sets were successfully validated or created. One record includes all output data sets.	DFSORA00 DFSRLBL0
X'2940'	OLREORG Cursor active. Initialization of the reorganization of the partition was completed successfully, two sets of data sets exist, and copying is about to begin. The reorganization is in a cursor-active status.	DFSORP60
X'2950'	The cursor was updated, but the unit of reorganization was not committed.	DFSORP20
X'2970'	OLREORG Cursor inactive. Copying from the input to the output data sets has completed. The output data sets become active, and the input data sets become inactive.	DFSORP60
X'2990'	Ownership of the reorganization for a partition was relinquished. This is followed by the X'07' log record for OLREORG task termination.	DFSORP60

## X'2910': Ownership Established

Ownership of the online reorganization for a partition was established through DBRC.

## X'2920': UPDATE OLREORG Command

The UPDATE OLREORG command was processed. The X'2920' log record is written once for each HALDB partition affected by the UPDATE OLREORG command.

## X'2930': Output Data Set Information

The output data sets have been successfully validated or created. This X'2930' log record contains various characteristics of all of the output data sets, both those that were preexisting and those that were automatically created. There is enough information to recreate any of these output data sets.

## X'2940': Cursor-Active Status

Initialization of the reorganization of the partition was completed successfully, two sets of data sets exist, and copying is about to begin. The reorganization was recorded through DBRC as being in a cursor-active status.

## X'2950': Cursor Movement

The cursor was updated. The X'2950' log record appears before the X'3730' log record that indicates that a unit of reorganization was committed.

## X'2970': Cursor-Active Status Reset

Copying from the input to the output data sets has completed. The reorganization was recorded through DBRC as no longer being in a cursor-active status.

## X'2990': Ownership Relinquished

Ownership of the reorganization for a partition was relinquished through DBRC.

---

## **Part 4. Appendixes**



## RECON Listing HALDB OLR Support

These are the LIST command output (RECON) records that support HALDB OLR.

### HALDB MASTER RECORD

Here is an example of a HALDB Master record listing. The flag for OLREORG CAPABLE = YES | NO is included in the HALDB master DB record and in the partition DB record. This output shows the counters for online reorganization activity not yet reflected in the databases at the RSR tracking site. These counters at the RSR active site are always zero.

```
-----
DB
DBD=DBHIDJ03                      DMB#=2      CHANGE#=2      TYPE=HALDB
SHARE LEVEL=3                      GSGNAME=**NULL**
PSNAME=**NULL**                    CURRENT PARTITION ID=00004
FLAGS:                             COUNTERS:
  RECOVERABLE                      =YES          PARTITIONS              =4
  OLREORG CAPABLE                  =YES          DATA SET GROUP MEMBERS =1
```

### PARTITION DB RECORD

Here is an example of a HALDB Partition record listing, showing the DB record fields for HALDB OLR. Also included in the listing of TYPE=PART databases is information from the partition record (DSPPTNRC). The flag for OLREORG CAPABLE = YES | NO is included in the master HALDB and in the DBD partition record.

This output shows the counters for online reorganization activity not yet reflected in the databases at the tracking site.

These counters at the active site are always zero.

The OLRIMSID field reflects the name of the IMS that owns the online reorganization. OLRIMSID is always null at the tracking site.

The OLREORG CURSOR ACTIVE flag is on when the paired sets of data sets are active. At the tracking site, the flag is on when the output data sets have been validated or created and that validation or creation process occurs within a hardened milestone.

If the OLR cursor is active, ACTIVE DBDS=A-J and M-V or ACTIVE DBDS=M-V and A-J is displayed. The input data set is listed first and the output data set is listed second.

```
-----
DB
DBD=DBHIDJ03                      DMB#=2      CHANGE#=2      TYPE=HALDB
SHARE LEVEL=3                      GSGNAME=**NULL**
PSNAME=**NULL**                    CURRENT PARTITION ID=00004
FLAGS:                             COUNTERS:
  RECOVERABLE                      =YES          PARTITIONS              =4
  OLREORG CAPABLE                  =YES          DATA SET GROUP MEMBERS =1
```

Partition DB record:

```
DB
DBD=POHIDJA  MASTER DB=DBHIDJ03  IRLMID=**NULL  CHANGE#=2      TYPE=PART
USID=0000000003  AUTHORIZED USID=0000000003  HARD USID=0000000003
```

```
RECEIVE USID=0000000003 RECEIVE NEEDED USID=0000000000
DBRCVGRP=**NULL**
DSN PREFIX=IMSTESTS.DBHIDJ03 PARTITION ID=00001
PREVIOUS PARTITION=**NULL** NEXT PARTITION=POHIDJB
OLRIMSID=**NULL** ACTIVE DBDS=A-J
```

FREE SPACE:

```
FREE BLOCK FREQ FACTOR=0    FREE SPACE PERCENTAGE=0
```

PARTITION HIGH KEY/STRING (CHAR): (LENGTH=5 )  
J2000[illegible]

OSAM BLOCK SIZE:

A = 4096  
B = 4096

FLAGS:

```
BACKOUT NEEDED      =OFF
READ ONLY           =OFF
PROHIBIT AUTHORIZATION=OFF
```

COUNTERS:

```
RECOVERY NEEDED COUNT      =0
IMAGE COPY NEEDED COUNT    =0
AUTHORIZED SUBSYSTEMS      =0
HELD AUTHORIZATION STATE=0
EEQE COUNT                  =0
RECEIVE REQUIRED COUNT      =0
OLR ACTIVE HARD COUNT      =0
OLR INACTIVE HARD COUNT    =0
```

```
TRACKING SUSPENDED      =NO
OFR REQUIRED              =NO
PARTITION INIT NEEDED   =NO
OLREORG CURSOR ACTIVE    =NO
PARTITION DISABLED      =NO
OLREORG CAPABLE         =YES
```

The RANDOMIZER values are only listed for PHDAM databases.

If this HALDB uses a partition selection routine: label "PARTITION HIGH KEY:" is listed as "PARTITION SELECTION STRING:". Also, if the high key or selection string contains any unprintable characters, the entire string is listed in hexadecimal format. The key or string is formatted into as many 64-character lines as are necessary. "PARTITION HIGH KEY (HEX):" is listed if the key or string contains hex values.

The OSAM block size information section is only listed if the HALDB is an OSAM database. Sizes are listed for the defined data set group members only.

## DBDS Record

Here is an example of a RECON listing of a HALDB, PARTITION DB, DBDS, ONLINE REORG record listing, showing the DBDS record fields for HALDB online reorganization.

```
DB
DBD=DBOHIDK5                      DMB#=5          CHANGE#=5      TYPE=HALDB
SHARE LEVEL=3                      GSGNAME=IMSGSG1
PSNAME=***NULL** DBORG=PHIDAM      DSORG=OSAM      CURRENT PARTITION ID=00004
FLAGS:                             COUNTERS:
RECOVERABLE                        =YES          PARTITIONS      =4
ONLINE REORG CAPABLE              =YES          DATA SET GROUP MEMBERS =2
```

Partition DB record:

```
DB
DBD=POHIDKA  MASTER DB=DBOHIDK5  IRLMID=*NULL  CHANGE#=2  TYPE=PART
USID=0000000004  AUTHORIZED USID=0000000004  HARD USID=0000000004
RECEIVE USID=0000000004  RECEIVE NEEDED USID=0000000000
DBRCVGRP=**NULL**
```

```
DSN PREFIX=IMSTESTS.DBOHIDK5                                PARTITION ID=00001
PREVIOUS PARTITION=**NULL**      NEXT PARTITION=POHIDKB
OLRIMSID=**NULL**      ACTIVE DBDS=M-V
```

```
FREE SPACE:
  FREE BLOCK FREQ FACTOR=0    FREE SPACE PERCENTAGE=0
```

```
PARTITION HIGH KEY/STRING (CHAR):          (LENGTH=5 )  
      K2000  
PARTITION HIGH KEY/STRING (HEX):  
      D2F2F0F0F04040404040404040404040404040404040404040404040
```

```
OSAM BLOCK SIZE:
  A = 4096
  B = 4096
```

FLAGS:		COUNTERS:	
BACKOUT NEEDED	=OFF	RECOVERY NEEDED COUNT	=0
READ ONLY	=OFF	IMAGE COPY NEEDED COUNT	=0
PROHIBIT AUTHORIZATION	=OFF	AUTHORIZED SUBSYSTEMS	=1
		HELD AUTHORIZATION STATE	=6
DATABASE LEVEL TRACK	=YES	EEQE COUNT	=0
TRACKING SUSPENDED	=NO	RECEIVE REQUIRED COUNT	=0
OFR REQUIRED	=NO	OLR ACTIVE HARD COUNT	=0
PARTITION INIT NEEDED	=NO	OLR INACTIVE HARD COUNT	=0
OLREORG CURSOR ACTIVE	=NO		
PARTITION DISABLED	=NO		
ONLINE REORG CAPABLE	=YES		

ASSOCIATED SUBSYSTEM INFORMATION:

-SSID-	-ACCESS INTENT-	ENCODED	B/O NEEDED	
IMS1	UPDATE	-STATE- 6	-COUNT- 0	-SS ROLE- ACTIVE

The DBDS record now uses the OTHER DDN= xxxxxxxx field. If a partner DBDS exists, this OTHER DDN= xxxxxxxx field points to it.

```
DBDS
DSN=IMSTESTS.DBOHIDK5.A00001                                TYPE=PART
DBD=POHIDKA      DDN=POHIDKAA  DSID=001  DBORG=HIDAM  DSORG=OSAM
CAGRP=**NULL**   GENMAX=2      IC  AVAIL=0      IC USED=1      DSSN=00000004
NOREUSE          RECOVPD=0      OTHER DDN=POHIDKAM
DEFLTJCL=**NULL**  ICJCL=PI CJCL  OICJCL=POICJCL  RECOVJCL=PRECOJCL
RECVJCL=PRECVJCL
FLAGS:
IC NEEDED          =OFF
IC RECOMMENDED    =ON
RECOV NEEDED       =OFF
RECEIVE NEEDED     =OFF
COUNTERS:
EEOE COUNT        =0
```

```

DBDS
DSN=IMSTESTS.DBOHIDK5.M00001                                TYPE=PART
DBD=POHIDKA   DDN=POHIDKAM  DSID=001  DBORG=HIDAM  DSORG=OSAM
CAGRP=**NULL**  GENMAX=2      IC AVAIL=0      IC USED=0      DSSN=00000004
NOREUSE        RECOVPD=0      OTHER DDN=POHIDKAA
DEFLTJCL=**NULL**  ICJCL=PI CJCL  OICJCL=POICJCL  RECOVJCL=PRECOJCL
RECVJCL=PRECVJCL
FLAGS:
IC NEEDED      =OFF
IC RECOMMENDED =ON
RECOV NEEDED   =OFF
RECEIVE NEEDED =OFF
COUNTERS:
EEOE COUNT      =0

```

```

REORG
  RUN    = 03.287 13:16:25.3      *   USID = 0000000004
  STOP   = 03.287 13:16:26.4      ONLINE RECOV = YES

```

---

## REORG RECORD

Here is an example of a REORG record showing a HALDB OLR. STOP= is only present for online reorganizations. STOP= is zero for online reorganizations that have not yet completed.

```
-----  
REORG  
  RUN      = 2002.365 11:59:12.0 -08:00      * RUN USID      = 0000000037  
  STOP     = 2003.001 12:34:56.7 -08:00      ONLINE RECOV=YES  
-----
```



# Index

## Special characters

/DBRecovery DB command 62  
 /DISPLAY DB command 45  
 /DISPLAY DB OLR command 46  
 /EREstart command 13  
 /INITIATE OLREORG 31  
 /RECover command 62  
 /TERMINATE OLREORG command 51  
 /UPDATE OLREORG command 57

## A

A-through-J (and X) data sets 4, 7  
 abends 84  
 ABORT option 84  
 acknowledgement, sharing system 30  
 ACS 28  
 active set of data sets xii, 4, 6  
 ALL parameter 42  
 AOI application 31  
 API, OM 31  
 APPC/OTMA programs 31  
 automatic class selection 28  
 automatically-created data sets 28

## B

backup, database 14  
 block size, OSAM 90  
 buffering, sequential 14  
 BYTES parameter 42

## C

capable, HALDB OLR 9  
 CHANGE.DB command 62  
 CIMS class 31  
 codes  
   completion, INITIATE OLREORG 35  
   completion, QUERY OLREORG 44  
   completion, TERMINATE OLREORG 54  
   completion, UPDATE OLREORG 60  
   reason, INITIATE OLREORG 35  
   reason, QUERY OLREORG 43  
   return, INITIATE OLREORG 35  
   return, QUERY OLREORG 43  
 coexistence SPE 9  
 command recognition character 31  
 command security exit routine, DFSCCMD0 31  
 commands  
   /DBRecovery DB 62  
   /DISPLAY DB 45  
   /DISPLAY DB OLR 46  
   /EREstart 13  
   /INITIATE OLREORG 31  
   /RECover 62  
   /TERMINATE OLREORG 51

commands (*continued*)

/UPDATE OLREORG 57  
 CHANGE.DB 62  
 CHANGE.DB ALL OLRCAP 9  
 database 11  
 DBRC 17  
 format  
   INITIATE OLREORG 31  
   QUERY OLREORG 41  
   TERMINATE OLREORG 51  
   UPDATE OLREORG 57  
 formats 31  
 GENJCL.IC 17  
 GENJCL.OIC 17  
 INIT.DB 37  
 INITIATE OLREORG  
   NAME keyword 33  
   OPTION keyword 33  
   output fields 34  
   SET keyword 33  
 NOTIFY.IC 18  
 NOTIFY.REORG 38  
 NOTIFY.UIC 18  
 QUERY DB STATUS(OLR) 47  
 QUERY OLREORG 41  
   NAME keyword 42  
   output fields 43  
   SHOW keyword 42  
   STATUS keyword 42  
 security 31  
 slash 31  
 START 11  
 STOP 11  
 TERMINATE OLREORG 49  
 the types of 31  
 type-2 31  
 UPDATE OLREORG 55  
   DEL option 6  
   MODEL option 55  
   RATE option 55  
 usage  
   INITIATE OLREORG 32  
   QUERY OLREORG 42  
 completion codes, INITIATE OLREORG 35  
 completion codes, QUERY OLREORG 44  
 completion codes, TERMINATE OLREORG 54  
 completion codes, UPDATE OLREORG 60  
 completion of HALDB OLR 30  
 convention, data set naming 6  
 copying, database records 5  
 CRC 31  
 CRC commands 31  
 cursor xii, 5  
 cursor-active flag 89  
 cursor-active status xii  
 cursor-active status, OLR 4

**D**

## data sets

- A-through- J (and X) 4
  - A-through-J 7
  - active set xii, 6
  - automatically-created 28
  - creating output 27
  - deletion of 30
  - ILDS 7
  - inactive set 6
  - inactive sets of, xii
  - M-through-V 7
  - M-through-V (and Y) 4
  - multiple-volume 29
  - naming convention 6
  - non-SMS-managed 28
  - OSAM 27
  - partition ID 7
  - PHDAM 3
  - PHIDAM 3
  - pre-existing 27
  - primary index 7
  - PRIMARY INDEX 27
  - single volume 28
  - SMS-managed 28
  - VSAM 27
- data sharing 9
- database change log records 85
- Database Recovery utility 14
- DB commands 11
- DBRC commands 17
- DDSID 85
- DDSIDAM 85
- DEL option
- UPDATE OLREORG 6
- DEL parameter 33
- deletion of data sets 30
- DFS messages 67
- DFSCCMD0 31
- DFSCCMD0 command security exit routine 31
- DFSDLOG 85
- DFSORA00 86
- DFSORC00 86
- DFSORP20 86
- DFSORP60 86
- DFSPREC0 17
- DFSRDBL0 86
- DFSVMxx SBONLINE statement 14
- DFSVMNxx 12
- DLISAS 3
- DOCLOGAM 85
- DOCLOGDC 85
- DSP messages 82

**E**

- ECMS console 31
- EMCS console 31
- environments
  - INITIATE OLREORG command 32

environments *(continued)*

- QUERY OLREORG command 41
- TERMINATE OLREORG command 51
- UPDATE OLREORG command 57

## error

- data set allocation 30
- initialization 4

## ESDS 27

## example

- OM API
  - TERMINATE OLREORG 54
- type-1
  - /TERMINATE OLREORG 54

**F**

## failure

- initialization 4, 30

## fallback 10

## format

- INITIATE OLREORG command 31
- QUERY OLREORG command 41
- TERMINATE OLREORG command 51
- UPDATE OLREORG command 57

## formats of commands 31

**G**

- GENJCL.IC command 17
- GENJCL.OIC command 17
- GUARANTEED SPACE attribute 29

**H**

- HALDB master 63
- HALDB Master record 89
- HALDB OLR xii, 3
  - completion of 30
- HALDB OLREORG xii
- hardened data 89
- how to use
  - INITIATE OLREORG 32
  - QUERY OLREORG 42

**I**

- ILDS data set 7
- Image Copy, Database 14
- inactive set of data sets 4, 6
- inactive sets of data sets xii
- INIT.DB command 37
- initialization 3
- INITIATE OLREORG
  - completion codes 35
- INITIATE OLREORG command 31
  - output fields 34
- INITIATE OLREORG command usage 32
- input data sets 4

**K**

## keyword

synonyms 32, 42, 49, 51

## keywords

MAXSB 14

NAME 33, 42

OPTION 33

reserved 32, 41, 51

SET 33

SHOW 42

STATUS 42

KSDS 27

**L**

LIST command output 89

## listing

HALDB Master record 89

Partition record 89

REORG record 92

locking, global 11

## log records

database change 85

x'20' 85

x'21' 85

x'29' 85

x'2910' 86

x'2920' 86

x'2930' 86

x'2940' 86

x'2950' 86

x'2970' 86

x'2990' 86

x'3730' 86

x'50' 85

log-only recovery 14

logging volume 13

**M**

M-through-V (and Y) data sets 4, 7

MAXSB keyword 14

## messages

DFS series 67

DSP series 82

HALDB OLR 67

migrating 9

milestone 89

multiple-volume data sets 29

**N**

NAME keyword 33, 42

naming convention, data set 6

## NODEL option

UPDATE OLREORG 55

NODEL parameter 34

non-SMS-managed data sets 28

NOOWNER parameter 63

NORECOV parameter 39

normal process, HALDB OLR 5

NOTIFY.IC command 18

NOTIFY.REORG command 38

NOTIFY.UIC command 18

NOTOWNED parameter 42

**O**

OFFLINE parameter 39

offline reorganization 10

OLR xii

OLRCAP parameter 38, 63

OLRDBDS parameter 63

OLRIMSID parameter 63, 89

OLRNOCAP parameter 38, 63

OLRRGOFF parameter 63

OLRRGON parameter 63

OM API 31

ONLINE parameter 39

online reorganization xii

See HALDB OLR

OPTION keyword 33

OSAM block size 90

OSAM data sets 27

## output

HALDB Master record 89

LIST command 89

Partition record 89

REORG record 92

output data sets 4

## output fields

INITIATE OLREORG command 34

QUERY OLREORG command 43

owned xii

OWNED parameter 43

ownership, HALDB OLR 3

**P**

paired sets of data sets 4

## parameters

ALL 42

BYTES 42

DEL 33

NODEL 34

NOOWNER 63

NORECOV 39

NOTOWNED 42

OFFLINE 39

OLRCAP 38, 63

OLRDBDS 63

OLRIMSID 63, 89

OLRNOCAP 38, 63

OLRRGOFF 63

OLRRGON 63

ONLINE 39

OWNED 43

PARTNAME 33, 42

RATE 12, 13, 33, 42

RECOV 39

RUNNING 43

parameters (*continued*)

- STATUS 42
- STOPTIME 39
- UNKNOWN 43
- PARTITION HIGH KEY 90
- partition ID 7
- Partition record listing 89
- PARTITION SELECTION STRING 90
- PARTNAME parameter 33, 42
- performance 11
- PHDAM data sets 3
- PHIDAM data sets 3
- preexisting output data sets 4
- primary index 7
- PRIMARY INDEX data set 27
- primary space allocation 29
- process
  - copying 4
  - HALDB OLR, normal 5
- processing
  - UPDATE OLREORG 55
- processing time 13

**Q**

- QUERY DB STATUS(OLR) command 47
- QUERY OLREORG
  - completion codes 44
- QUERY OLREORG command 41
  - output fields 43

**R**

- RACF 31
- RANDOMIZER values 90
- RATE option
  - UPDATE OLREORG 55
- RATE parameter 12, 13, 33, 42
- reason codes
  - INITIATE OLREORG 35
  - QUERY OLREORG 43
- reclustering of data 3
- RECON records 89
- RECOV parameter 39
- recovery, database 14
- recovery, log-only 14
- REORG record listing 92
- reserved keywords 32, 41, 51
- restart, system 11, 12
- restrictions of HALDB OLR 10
- resume online reorganization 31
- return codes
  - INITIATE OLREORG 35
  - QUERY OLREORG 43
- RSR 12
- RUNNING parameter 43

**S**

- SBONLINE statement 14
- secondary space allocation 29

- security 31
- sequential buffering 14
- SET keyword 33
- SHAREPLEX, IMS xii, 3
- sharing system acknowledgement 30
- SHOW keyword 42
- single volume data sets 28
- slash commands 31
- SMS-managed data sets 28
- space allocation
  - primary 29
  - secondary 29
- STATUS keyword 42
- status of OLR, cursor-active 4
- STATUS parameter 42
- status, cursor-active xii
- STOP= 92
- STOPTIME 39
- storage class 29
- storage volumes 28
- syntax
  - INITIATE OLREORG command 31
  - TERMINATE OLREORG command 51
  - UPDATE OLREORG command 57
- system restart 11, 12

**T**

- TERMINATE OLREORG
  - completion codes 54
- TERMINATE OLREORG command 49
- TERMINATE OLREORG command ABORT option 84
- time, processing 13
- type-1 commands 31
- type-2 commands 31
- type=HALDB 63

**U**

- unit of reorganization xii, 4
- UNKNOWN parameter 43
- UPDATE OLREORG
  - completion codes 60
- UPDATE OLREORG command 55
- UPDATE OLREORG command processing 55
- upgrade, DBRC RECON 9
- usage
  - INITIATE OLREORG command 32
  - QUERY OLREORG command 42
- utilities
  - Database Change Accumulation 15, 22
  - Database Image Copy 16
  - Database Recovery 14, 22
  - HALDB Index/ILDS Rebuild 21

**V**

- values, RANDOMIZER 90
- volume, logging 13
- volumes, storage 28
- VSAM data sets 27

## X

x'20' log record 85  
x'21' log record 85  
x'29' log record 85  
x'2910' log record 86  
x'2920' log record 86  
x'2930' log record 86  
x'2940' log record 86  
x'2950' log record 86  
x'2970' log record 86  
x'2990' log record 86  
XRF 11, 12



---

## Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation  
Licensing  
2-31 Roppongi 3-chome, Minato-ku  
Tokyo 106, Japan

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:**

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs

and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation  
J46A/G4  
555 Bailey Avenue  
San Jose, CA 95141-1003  
U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information is for planning purposes only. The information herein is subject to change before the products described become available.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. You may copy, modify, and distribute these sample programs in any form without payment to IBM for the purposes of developing, using, marketing, or distributing application programs conforming to IBM's application programming interfaces.



Each copy or any portion of these sample programs or any derivative work, must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. \_enter the year or years\_. All rights reserved.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

---

## Trademarks

The following terms are trademarks of the IBM Corporation in the United States or other countries or both:

BookManager	IMS
CICS®	MVS
DFSMS	RACF
IBM	z/OS®

Java™ and all Java-based trademarks and logos are trademarks or registered trademarks of Sun Microsystems, Inc., in the United States, other countries, or both.

Other company, product, and service names, which may be denoted by a double asterisk (\*\*), may be trademarks or service marks of others.



## Bibliography

This bibliography includes all the publications cited in this book, including the publications in the IMS library.

- *DFSMS/MVS® DFSMSdfp™ Advanced Services*
- *DFSMS/MVS Managing Catalogs*
- *z/OS MVS Programming: Authorized Assembler Services Guide*
- *z/OS MVS Programming: Authorized Assembler Services Reference, Vol 2*
- *z/OS MVS Programming: Authorized Assembler Services Reference, Vol 4*
- *z/OS MVS System Messages, Vol 6 (GOS-IEA)*
- *z/OS MVS System Messages, Vol 8 (IEF-IGD)*

### IMS Version 9 Library

ZES1-2330	ADB	<i>IMS Version 9: Administration Guide: Database Manager</i>
ZES1-2331	AS	<i>IMS Version 9: Administration Guide: System</i>
ZES1-2332	ATM	<i>IMS Version 9: Administration Guide: Transaction Manager</i>
ZES1-2333	APDB	<i>IMS Version 9: Application Programming: Database Manager</i>
ZES1-2334	APDG	<i>IMS Version 9: Application Programming: Design Guide</i>
ZES1-2335	APCICS	<i>IMS Version 9: Application Programming: EXEC DLI Commands for CICS and IMS</i>
ZES1-2336	APTM	<i>IMS Version 9: Application Programming: Transaction Manager</i>
ZES1-2337	BPE	<i>IMS Version 9: Base Primitive Environment Guide and Reference</i>
ZES1-2338	CR	<i>IMS Version 9: Command Reference</i>
ZES1-2339	CQS	<i>IMS Version 9: Common Queue Server Guide and Reference</i>
ZES1-2340	CSL	<i>IMS Version 9: Common Service Layer Guide and Reference</i>
ZES1-2341	CG	<i>IMS Version 9: Customization Guide</i>
ZES1-2342	DBRC	<i>IMS Version 9: DBRC Guide and Reference</i>
ZES1-2343	DGR	<i>IMS Version 9: Diagnosis Guide and Reference</i>

ZES1-2344	FAST	<i>IMS Version 9: Failure Analysis Structure Tables (FAST) for Dump Analysis</i>
ZES1-2346	OLR	<i>IMS Version 9: HALDB Online Reorganization Guide and Reference</i>
ZES1-2347	JGR	<i>IMS Version 9: IMS Java Guide and Reference</i>
ZES1-2348	IIV	<i>IMS Version 9: Installation Volume 1: Installation Verification</i>
ZES1-2349	ISDT	<i>IMS Version 9: Installation Volume 2: System Definition and Tailoring</i>
ZES1-2350	INTRO	<i>IMS Version 9: An Introduction to IMS</i>
ZES1-2351	MIG	<i>IMS Version 9: Master Index and Glossary</i>
ZES1-2352	MC1	<i>IMS Version 9: Messages and Codes, Volume 1</i>
ZES1-2353	MC2	<i>IMS Version 9: Messages and Codes, Volume 2</i>
ZES1-2354	OTMA	<i>IMS Version 9: Open Transaction Manager Access Guide and Reference</i>
ZES1-2355	OG	<i>IMS Version 9: Operations Guide</i>
GC17-7831	RPG	<i>IMS Version 9: Release Planning Guide</i>
ZES1-2358	URDBTM	<i>IMS Version 9: Utilities Reference: Database and Transaction Manager</i>
ZES1-2359	URS	<i>IMS Version 9: Utilities Reference: System</i>

### Supplementary Publications

GC17-7825	LPS	<i>IMS Version 9: Licensed Program Specifications</i>
ZES1-2357	SOC	<i>IMS Version 9: Summary of Operator Commands</i>

### Publication Collections

LK3T-7213	CD	IMS Version 9 Softcopy Library
LK3T-7144	CD	IMS Favorites
LBOF-7789	Hardcopy and CD	Licensed Bill of Forms (LBOF): IMS Version 9 Hardcopy and Softcopy Library
SBOF-7790	Hardcopy	Unlicensed Bill of Forms (SBOF): IMS Version 9 Unlicensed Hardcopy Library
SK2T-6700	CD	OS/390 Collection
SK3T-4270	CD	z/OS Software Products Collection

**Publication Collections**

SK3T-4271 DVD z/OS and Software Products  
DVD Collection

**Accessibility Titles Cited in this Book**

SA22-7787 z/OS V1R1.0 TSO Primer

**Accessibility Titles Cited in this Book**

SA22-7794 z/OS V1R1.0 TSO/E User's  
Guide  
SC34-4822 z/OS V1R1.0 ISPF User's  
Guide, Volume 1





Program Number: 5655-J38

IBM Confidential  
Printed in USA

ZES1-2346-00



Spine information:



IMS

HALDB Online Reorg. Guide and Reference

Version 9